


2

1

THIS DRAWING AND THE INFORMATION SET FORTH HERE-  
ON ARE THE PROPERTY OF TYCO ELECTRONICS  
AND ARE TO BE HELD IN TRUST AND CONFIDENCE. PUB-  
LICATION, DUPLICATION, DISCLOSURE, OR USE FOR ANY  
PURPOSE NOT EXPRESSLY AUTHORIZED IN WRITING BY  
TYCO ELECTRONICS IS PROHIBITED.

## REVISIONS

| LTR | DESCRIPTION               | DATE      | APPROVED |
|-----|---------------------------|-----------|----------|
| G   | REVISED PER ECO-13-003640 | 03/1/2013 | -        |



### CODE 18 STRAIGHT ADAPTER


## NOTES:

1. THIS PRODUCT IS DESIGNED TO TERMINATE A BRAIDED CABLE SHIELD AND A HEAT SHRINKABLE LIPPED BOOT TO A CONNECTOR.
2. SEE CH00-0250-008 FOR ORDERING INFORMATION, MODIFICATIONS AND ADDITIONAL DIMENSIONS.
3. SEE DRAWING "TR" FOR DETAIL ON TINEL-LOCK RING. RINGS ARE DESIGNED TO BE HEATED ELECTRICALLY. ALL RINGS ARE MARKED WITH THERMOCHROMIC PAINT WHICH CHANGES COLOR WHEN INSTALLATION TEMPERATURE IS REACHED.
4. ADAPTER TO BE PERMANENTLY MARKED WITH CODE IDENT. NO. AND PART NO. LESS RING DESIGNATOR (E.G.: 06090-TXR18AB00-1406). RINGS SHALL BEAR NO MARKING.
5. FOR LARGER ENTRY SIZES, A 2 PIECE ADAPTER (TYPE II) IS SUPPLIED.
6. ADAPTER MATES TO MIL-C-5015D, CLASS A, E & R, MS3100, MS3101 & MS3106. RESILIENT INSERT, SOLDER TYPE & BENDIX 10-214, CANNON CA-RX COMMERCIAL CRIMP TYPE.
7. ADDITIONAL PIECE(S) SUPPLIED WHEN CONNECTOR MANUFACTURER IS UNKNOWN ("D" IN TABLE III) AND ENTRY SIZE DOES NOT EXCEED VALUE IN TABLE I. SEE FIGURE A PAGE 2 OF 4.
8. ALL THREAD SIZES FOR ORDER NO. APPLY.
9. ANTI-ROTATIONAL SET SCREW, 3 THREADED HOLES  $120^\circ \pm 5^\circ$  APART, SINGLE MATING SET SCREW SUPPLIED: AN565DC4H2. NOT REQUIRED FOR TYPE II ADAPTERS.

If this document is printed it becomes uncontrolled. Check for the latest revision

©2005-2013 Tyco Electronics Corporation All rights reserved.

Raychem Adapters  
CUSTOMER DRAWING








|                                                                                                                                 |                                                                                                            |            |          |                                                                                                     |                          |                   |          |
|---------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------------|----------|-----------------------------------------------------------------------------------------------------|--------------------------|-------------------|----------|
| UNLESS OTHERWISE SPECIFIED<br>DIMENSIONS ARE IN INCHES.<br>.XXX ± 0.005<br>.XX ± 0.01<br>.X ± 0.1<br><br>ANGLES<br>.X ± 0.5 DEG | DRAWN                                                                                                      | R. RAMIREZ | 04-19-93 |  TE Connectivity |                          |                   |          |
|                                                                                                                                 | CHECKED                                                                                                    | ---        | ---      |                                                                                                     |                          |                   |          |
|                                                                                                                                 | APPROVED                                                                                                   | W.C.GAY    | 04-19-93 | TITLE<br><br>TINEL-LOCK ADAPTER                                                                     |                          |                   |          |
|                                                                                                                                 | THIRD ANGLE PROJECTION  |            |          |                                                                                                     |                          |                   |          |
| MATERIAL<br><br>—                                                                                                               | CAD NAME: TXR18_CD                                                                                         |            |          | SIZE<br>A                                                                                           | CODE IDENT. NO.<br>06090 | DWG. NO.<br>TXR18 | REV<br>G |
| FINISH<br><br>—                                                                                                                 | RPN:<br>—                                                                                                  |            |          | DO NOT SCALE THIS DRAWING                                                                           |                          |                   |          |
|                                                                                                                                 |                                                                                                            |            |          |                                                                                                     | SHEET 1 OF 4             |                   |          |

2

1

If this document is printed it becomes uncontrolled. Check for the latest revision

SEE SHEET 1 FOR REVISIONS

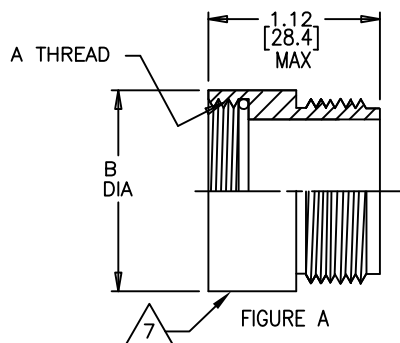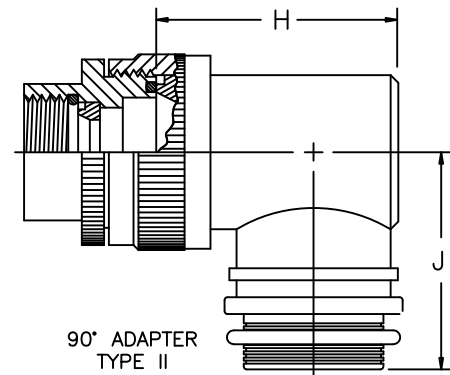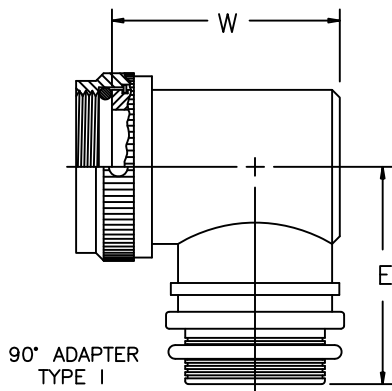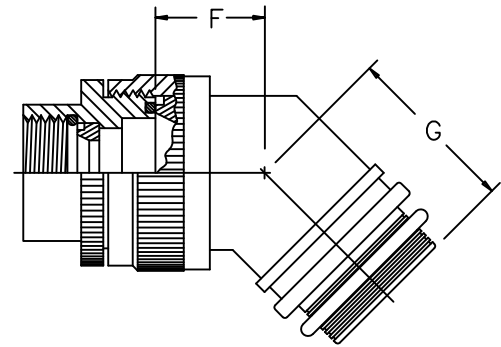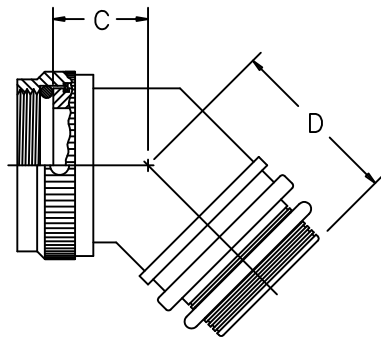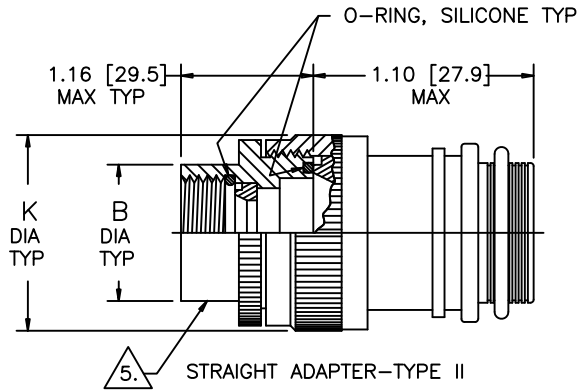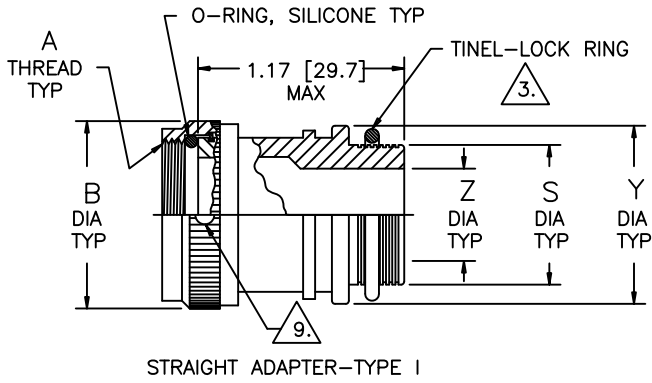

## Raychem Adapters CUSTOMER DRAWING

| SIZE                      | CODE IDENT. NO. | DWG. NO.          | REV          |
|---------------------------|-----------------|-------------------|--------------|
| A                         | 06090           | TXR18             | G            |
| DO NOT SCALE THIS DRAWING |                 | CAD NAME:TXR18_CD | SHEET 2 OF 4 |

TABLE I

| ORDER NO. | SHELL SIZE<br>△ | MFR CODE TABLE III | MAX ENTRY SIZE TYPE I<br>△ | A<br>THREAD CLASS 2B | B<br>DIA MAX | C<br>MAX    | D<br>MAX    | E<br>MAX    | W<br>MAX    |
|-----------|-----------------|--------------------|----------------------------|----------------------|--------------|-------------|-------------|-------------|-------------|
| 08        | 8S              | B                  | 04                         | .375-32 UNEF         | .73 [18.5]   | .80 [20.3]  | .92 [23.4]  | 1.23 [31.2] | .931 [23.6] |
|           |                 | C                  |                            | .438-28 UNEF         |              |             |             |             | .994 [25.2] |
|           |                 | A,R                |                            | .438-27 UNS          |              |             |             |             |             |
|           |                 | D △                |                            | △                    |              |             |             |             |             |
| 10        | 10S             | —                  | 06                         | .500-28 UNEF         | .79 [20.1]   | .83 [21.1]  | .95 [24.1]  | 1.23 [31.2] | 1.06 [26.8] |
| 11        | 10SL            | C                  | 07                         | .562-24 UNEF         | .85 [21.6]   | .83 [21.1]  | .95 [24.1]  | 1.23 [31.2] | 1.12 [28.4] |
|           |                 | A,B,R              |                            | .625-24 UNEF         | .92 [23.4]   |             |             |             | 1.18 [30.0] |
|           |                 | D △                |                            | △                    | .92 [23.4]   |             |             |             | 1.12 [28.4] |
|           |                 | B,C                |                            | .625-24 UNEF         | .92 [23.4]   | .83 [21.1]  | .95 [24.1]  | 1.23 [31.2] | 1.18 [30.0] |
| 12        | 12 & 12S        | A,R                | 08                         | .688-24 UNEF         | .98 [24.9]   | .86 [21.8]  | .98 [24.9]  | 1.30 [33.0] | 1.24 [31.6] |
|           |                 | D △                |                            | △                    | .98 [24.9]   | .86 [21.8]  | .98 [24.9]  | 1.30 [33.0] | 1.18 [30.0] |
|           |                 | —                  |                            | .750-20 UNEF         | 1.04 [26.4]  | .86 [21.8]  | .98 [24.9]  | 1.30 [33.0] | 1.31 [33.2] |
|           |                 | —                  |                            | .875-20 UNEF         | 1.23 [31.2]  | .89 [22.6]  | 1.02 [25.9] | 1.42 [36.1] | 1.43 [36.3] |
| 14        | 14 & 14S        | —                  | 10                         | .750-20 UNEF         | 1.04 [26.4]  | .86 [21.8]  | .98 [24.9]  | 1.30 [33.0] | 1.31 [33.2] |
| 16        | 16 & 16S        | —                  | 12                         | .875-20 UNEF         | 1.23 [31.2]  | .89 [22.6]  | 1.02 [25.9] | 1.42 [36.1] | 1.43 [36.3] |
| 18        | 18              | —                  | 12                         | 1.000-20 UNEF        | 1.35 [34.3]  | .92 [23.4]  | 1.05 [26.7] | 1.48 [37.6] | 1.49 [37.9] |
| 20        | 20              | A,B,C              | 16                         | 1.125-18 UNEF        | 1.48 [37.6]  | .95 [24.1]  | 1.08 [27.4] | 1.55 [39.4] | 1.68 [42.7] |
|           |                 | R                  |                            | 1.125-24 UNS         |              |             |             |             |             |
|           |                 | D △                |                            | △                    |              |             |             |             |             |
|           |                 | —                  |                            | 1.250-18 UNEF        | 1.60 [40.6]  | .98 [24.9]  | 1.11 [28.2] | 1.61 [40.9] | 1.81 [45.9] |
| 22        | 22              | —                  | 18                         | 1.375-18 UNEF        | 1.73 [43.9]  | .98 [24.9]  | 1.11 [28.2] | 1.67 [42.4] | 1.93 [49.0] |
| 24        | 24              | —                  | 20                         | 1.625-18 UNEF        | 2.10 [53.3]  | 1.08 [27.4] | 1.17 [29.7] | 1.86 [47.2] | 2.06 [52.2] |
| 32        | 32              | B,C                | 24                         | 1.875-16 UN          | 2.23 [56.6]  | 1.11 [28.2] | 1.23 [31.2] | 1.92 [48.8] | 2.31 [58.6] |
|           |                 | A,R                |                            | 1.906-18 UN          |              |             |             |             |             |
|           |                 | D △                |                            | △                    |              |             |             |             |             |
|           |                 | —                  |                            | 2.062-16 UNS         |              |             |             |             |             |
| 36        | 36              | R                  | 24                         | 2.062-20 UNS         | 2.48 [63.0]  | 1.23 [31.2] | 1.27 [32.3] | 2.05 [52.1] | 2.56 [64.9] |
|           |                 | C                  |                            | 2.125-16 UN          |              |             |             |             |             |
|           |                 | A                  |                            | 2.125-18 UNS         |              |             |             |             |             |
|           |                 | D △                |                            | △                    |              |             |             |             |             |
| 40        | 40              | B                  | 24                         | 2.312-16 UNS         | 2.73 [69.3]  | 1.27 [32.3] | 1.30 [33.0] | 2.17 [55.1] | 2.81 [71.3] |
|           |                 | A,C,R              |                            | 2.375-16 UN          |              |             |             |             |             |
|           |                 | D △                |                            | △                    |              |             |             |             |             |
|           |                 | —                  |                            | 2.625-16 UN          | 3.23 [82.0]  | 1.34 [34.0] | 1.36 [34.5] | 2.42 [61.5] | 3.06 [77.6] |
| 44        | 44              | C                  | 24                         | 2.812-18 UNS         | 3.23 [82.0]  | 1.34 [34.0] | 1.36 [34.5] | 2.42 [61.5] | 3.31 [84.0] |
|           |                 | A,R                |                            | 2.875-16 UN          |              |             |             |             |             |
|           |                 | D △                |                            | △                    |              |             |             |             |             |
|           |                 | —                  |                            |                      |              |             |             |             |             |

If this document is printed it becomes uncontrolled. Check for the latest revision

## Raychem Adapters CUSTOMER DRAWING

| SIZE                      | CODE IDENT. NO. | DWG. NO.          | REV          |
|---------------------------|-----------------|-------------------|--------------|
| A                         | 06090           | TXR18             | G            |
| DO NOT SCALE THIS DRAWING |                 | CAD NAME:TXR18_CD | SHEET 3 OF 4 |

TABLE II

| ENTRY<br>SIZE | Z<br>+.010<br>-.020 | S<br>DIA                       | Y<br>$\pm .015$<br>[ $\pm 0.38$ ] | F<br>MAX       | G<br>MAX       | J<br>MAX       | H<br>MAX       | K<br>MAX       |
|---------------|---------------------|--------------------------------|-----------------------------------|----------------|----------------|----------------|----------------|----------------|
| 04            | .250<br>[6.35]      | .376 [ 9.56]<br>.370 [ 9.39]   | .550<br>[13.97]                   | N/A            | N/A            | N/A            | N/A            | N/A            |
| 05            | .312<br>[7.92]      | .438 [11.13]<br>.432 [10.97]   | .612<br>[15.54]                   | .77<br>[19.6]  | .93<br>[23.6]  | 1.16<br>[29.5] | 1.19<br>[30.2] | .80<br>[20.3]  |
| 06            | .375<br>[9.52]      | .501 [12.73]<br>.495 [12.57]   | .675<br>[17.14]                   | .77<br>[19.6]  | .93<br>[23.6]  | 1.16<br>[29.5] | 1.19<br>[30.2] | .80<br>[20.3]  |
| 07            | .437<br>[11.09]     | .563 [14.31]<br>.556 [14.12]   | .737<br>[18.71]                   | .80<br>[20.3]  | .95<br>[24.1]  | 1.22<br>[31.0] | 1.38<br>[35.1] | .92<br>[23.4]  |
| 08            | .500<br>[12.70]     | .626 [15.91]<br>.619 [15.72]   | .800<br>[20.32]                   | .80<br>[20.3]  | .95<br>[24.1]  | 1.22<br>[31.0] | 1.38<br>[35.1] | .92<br>[23.4]  |
| 10            | .625<br>[15.87]     | .752 [19.11]<br>.742 [18.84]   | .925<br>[23.49]                   | .84<br>[21.3]  | 1.00<br>[25.4] | 1.35<br>[34.3] | 1.51<br>[38.4] | 1.18<br>[30.0] |
| 12            | .750<br>[19.05]     | .877 [22.28]<br>.867 [22.02]   | 1.050<br>[26.67]                  | .86<br>[21.8]  | 1.01<br>[25.7] | 1.40<br>[35.6] | 1.63<br>[41.4] | 1.35<br>[34.3] |
| 14            | .875<br>[22.23]     | 1.002 [25.46]<br>.991 [25.17]  | 1.175<br>[29.84]                  | .88<br>[22.4]  | 1.04<br>[26.4] | 1.46<br>[37.1] | 1.78<br>[45.2] | 1.41<br>[35.8] |
| 16            | 1.000<br>[25.40]    | 1.127 [28.63]<br>1.116 [28.34] | 1.300<br>[33.02]                  | .91<br>[23.1]  | 1.06<br>[26.9] | 1.53<br>[38.9] | 1.88<br>[47.8] | 1.60<br>[40.6] |
| 18            | 1.125<br>[28.57]    | 1.252 [31.81]<br>1.241 [31.52] | 1.425<br>[36.19]                  | .93<br>[23.6]  | 1.09<br>[27.7] | 1.59<br>[40.4] | 2.01<br>[51.1] | 1.66<br>[42.2] |
| 20            | 1.250<br>[31.75]    | 1.377 [34.98]<br>1.366 [34.69] | 1.550<br>[39.37]                  | .98<br>[24.9]  | 1.13<br>[28.7] | 1.78<br>[45.2] | 2.13<br>[54.1] | 2.04<br>[51.8] |
| 22            | 1.375<br>[34.93]    | 1.502 [38.15]<br>1.488 [37.79] | 1.675<br>[42.55]                  | 1.03<br>[26.2] | 1.38<br>[35.1] | 1.85<br>[47.0] | 2.29<br>[58.2] | 2.23<br>[56.6] |
| 24            | 1.500<br>[38.10]    | 1.627 [41.33]<br>1.613 [40.97] | 1.800<br>[45.72]                  | 1.08<br>[27.4] | 1.44<br>[36.6] | 1.92<br>[48.8] | 2.42<br>[61.5] | 2.23<br>[56.6] |

TABLE III

| MFR<br>CODE | CONNECTOR MANUFACTURER<br>(MS 3100, MS 3101 & MS 3106) |
|-------------|--------------------------------------------------------|
| A           | AMPHENOL—CLASS A                                       |
| B           | BENDIX—CLASS A, E & R                                  |
| C           | CANNON—CLASS A, E & R                                  |
| D           | MFR UNKNOWN, CLASS A, E & R                            |
| R           | AMPHENOL—CLASS R                                       |
| —           | MFR CODE NOT REQUIRED                                  |

# Raychem Adapters CUSTOMER DRAWING

If this document is printed it becomes uncontrolled. Check for the latest revision

| SIZE                      | CODE IDENT. NO. | DWG. NO.          | REV          |
|---------------------------|-----------------|-------------------|--------------|
| A                         | 06090           | TXR18             | G            |
| DO NOT SCALE THIS DRAWING |                 | CAD NAME:TXR18_CD | SHEET 4 OF 4 |



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331