

DIN Rail-Mountable Sockets EMG...-SD and SD-.../(LA)

1. Description

DIN rail-mountable sockets in standard format are just as important in modern control cabinets as in simple power distribution systems.

The socket, mounted in an easily accessed position, provides a quick connection for assembly tools, servicing equipment, and other electrical equipment.

A 90 mm (3.543 in.) double socket is available in addition to the 45 mm (1.772 in.) standard socket to provide more connections in the control cabinet.

This socket stands out due to its compact structure. The connection terminals, which are protected against accidental contact, demonstrate the high standard of quality associated with Phoenix Contact. The mains connection terminals (L1, N, and PE) are provided on one side of the socket for easy connection. In addition, a device ID plate can be mounted on the housing.


The 45 mm (1.772 in.) socket is available with or without a fuse. The fuse is a 6.3 A, 5 x 20 mm (0.197 x 0.787 in.) glass fuse.

In parts of the system where equipment is still powered up after the main switch has been turned off, this equipment should be marked according to DIN VDE 0105-1 and IEC 204-1/EN 60 204-1/ DIN VDE 0113 Part 1 and German accident prevention regulation VBG 4. A socket version in yellow housing is provided for this type of application.



Both 45 mm (1.772 in.) standard and 90 mm (3.543 in.) double housing sockets can be quickly snapped onto the symmetrical DIN rail according to EN 50 022.

The contact protected sockets are available in the following cost-effective versions:

- Screw or spring-cage connection
- With or without LED
- Schuko, Belgian, French or USA version
- Green, yellow or light gray housing

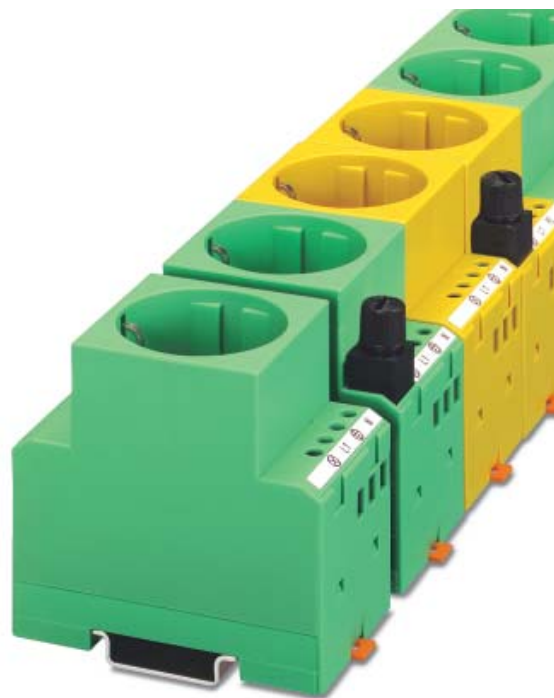

2. Technical Data

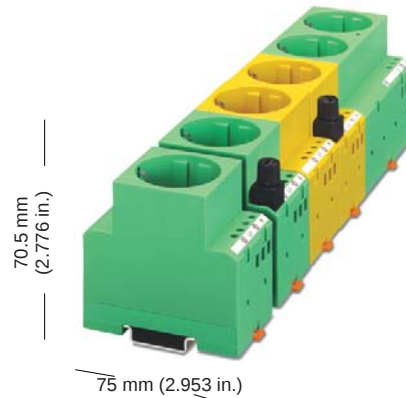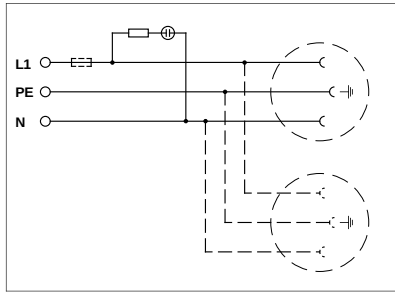

SD-.../LA EMG...SD

Housing width 45 and 90 mm (1.772 and 3.543 in.)

	7 mm (0.28 in.)				
	Solid [mm ²]	Stranded	AWG	I [A]	U [V]
Connection data	0.2 - 4	0.2 - 2.5	25 - 12	*	250
			30 - 12	15	125

* For current, see Technical Data.

▲ (N) only SD-D/SC/LA and EMG 45...
 (N) only SD-US

Description	Housing Width [mm]	Type	Order No.	Pcs. Pkt.
DIN rail-mountable socket with LED, green, yellow (...YE), and gray (...GY) housing (see type description)	45 mm (1.772 in.)	SD-D/SC/LA SD-D/SC/LA/GY SD-D/SC/LA/YE SD-D/SP/LA SD-D/SP/LA/GY SD-D/SP/LA/YE SD-F/SC/LA SD-F/SC/LA/GY SD-F/SC/LA/YE SD-US/SC/LA/GY SD-BR/SC/LA/GY SD-F/SP/LA SD-F/SP/LA/GY	29 64 89 8 29 63 49 1 29 63 40 4 29 63 30 7 29 63 48 8 29 63 47 5 29 63 33 6 29 63 84 4 29 63 90 9 29 63 86 0 29 63 88 6 29 63 34 9 29 63 85 7	5 5 5 5 5 5 5 5 5 10 10 5 5
DIN rail-mountable socket as above. Without LED	45 mm (1.772 in.)	SD-D/SC SD-D/SC/GY SD-D/SC/YE SD-D/SP SD-D/SP/GY SD-D/SP/YE SD-F/SC SD-F/SC/GY SD-F/SP SD-F/SP/GY	29 63 31 0 29 63 81 5 29 63 45 9 29 63 32 3 29 63 50 1 29 63 46 2 29 63 35 2 29 63 82 8 29 63 36 5 29 63 83 1	5 5 5 5 5 5 5 5 5 5
DIN rail-mountable socket, with glow lamp and fuse 5 x 20 mm (0.197 x 0.787 in.) to 6.3 A maximum; green, yellow (...YE) housing	45 mm (1.772 in.)	EMG 45-SD-D/LA/SI EMG 45-SD-D/LA/SI/YE EMG 45-SD-D/LA/SI/2A	29 43 73 8 29 40 82 5 29 63 89 9	5 5 5
DIN rail-mountable double socket, with glow lamp, green housing	90 mm (3.543 in.)	EMG 90-2SD-D/LA	29 41 52 3	1
Device ID plate for sockets in EMG housing	Narrow Normal	EMG-SGKS EMG-GKS	29 47 58 5 29 47 03 5	50 50

Technical Data	SD-.../LA	SD-US/SC/LA...	EMG 45-SD-D/LA/SI
	EMG 90-2SD-D/LA		
Grounding socket	IEC 83/DIN 49 440-1	UL 498	IEC 83/DIN 49 440-1
Connection voltage	250 V AC	125 V AC	250 V AC
Maximum continuous current	10 A DC, 16 A AC	15 A AC	6.3 A AC
Ambient operating temperature range	-20°C to +60°C	-20°C to +60°C	-20°C to +60°C
Contact material	(-4°F to +140°F)	(-4°F to +140°F)	(-4°F to +140°F)
Status indicator	CuZn37	CuZn37	CuZn37
	Glow lamp/LED	LED with	Glow lamp
	with series resistor	series resistor	
Type Description of SD-.../LA Sockets:			
SD - D / SC / LA Country versions D = Germany F = France/Belgium US = USA/Canada Connection method SC = screw (screw terminal block) SP = spring (spring-cage) LED LA = with indicator			



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331