



Patent Pending



SafeSite® LED Linear Fixture - UL 844
for Indoor and Outdoor Hazardous Locations




SafeSite® LED Linear Fixture



Features & Benefits

- L70 rated for > 100,000 hours @ 25°C
- 5 year full performance warranty
- Low power consumption
- Instant on/off operation
- Universal input (100-277V AC or 347 - 480V AC), 50/60Hz
- Mercury free
- Resistant to shock and vibration
- Temperature compensation technology for longer life
- Resistant to water, salt, dust & vibration
- Vibration tested to UL 844 for 35 hours @ 2,000 CPM
- Resistant up to 20 PSI of hose directed water
- Factory Sealed options available

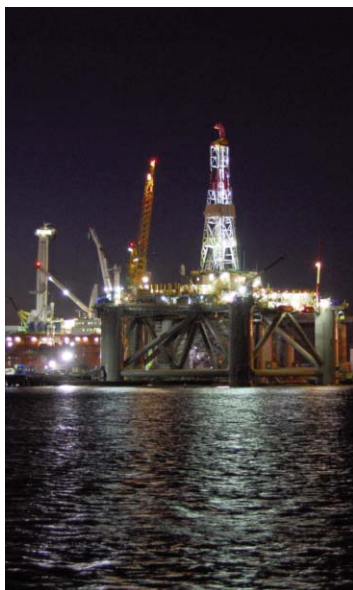

Typical Applications

- Food and Beverage
- Heavy Industrial
- Manufacturing
- Pulp and Paper
- Fuel Pump Canopy
- Cold Storage
- Warehouse

View the full case studies at:

Diamond Pet Foods - www.dialight.com/assets/brochures_and_catalogs/Illumination/mdexmognp001.pdf


Rockline Industries - www.dialight.com/Assets/Brochures_And_Catalogs/Illumination/mdexrkinex001.pdf

Complete your own Return on Investment calculation at: www.dialight.com/tcoCalculator



SafeSite® LED Linear Fixture

Class I, Div. 2 Version

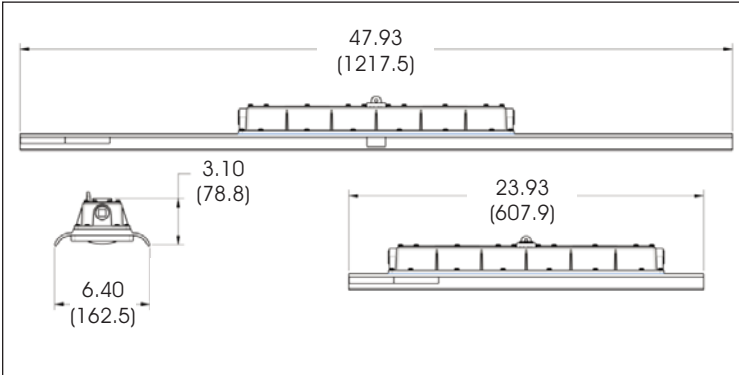

Certifications & Ratings

- Class I Div. 2 Groups A, B, C, D
- Class II Div. 1 Groups E, F, G
- Class II Div. 2 Groups F, G
- Class III Div. 1
- Class III Div. 2
- UL 1598/A
- UL 844
- UL 8750
- CSA 22.2 No.137-M81
- IP 66 rated
- NEMA 4X rated

LSD Models

- ABS Design Assessed: # 12-HS942957-PDA

Application

The first of its kind, Dialight's SafeSite® LED linear fixture replaces HID and fluorescent lighting fixtures in industrial applications and hazardous location applications.

The SafeSite LED Linear fixture's rugged solid state design makes it highly resistant to shock and vibration. Its fully gasketed IP 66 rated enclosure makes it suitable for dust & wet locations, its 1598A rating guarantees added protection from salt water spray. The SafeSite LED Linear's superior design allows for mounting versatility and ease of installation for many lighting applications.

Mechanical Information

Fixture Weight:	17 lbs (7.71 kg) 4' 12 lbs (5.44 kg) 2'
Shipping Weight:	19 lbs (8.62 kg) 4' 14 lbs (6.35 kg) 2'
Mounting:	(3) 3/4" NPT openings Optional swivel bracket - LSXW4
Cabling:	10' (3.5m) SOOW Power cord (for Gx and Cx Models)

Electrical Specifications

Operating Voltage:	100 - 277V AC 50/60Hz or 347 - 480V AC 50/60Hz
Power Consumption:	See ordering information
Operating Temp:	-40°F to +133°F (-40°C to +55°C)
Harmonics:	EC 61000-3-2
Surge Protection	
100 - 277V AC 50/60Hz:	1 kV line to line 2 kV line to ground
347 - 480V AC 50/60Hz:	6 kV line to line 6 kV line to ground
THD:	< 15%
Power Factor:	> 0.9

Power supply equipped with inline fuse

Construction

Body:	Powder coated aluminum
Lens:	Polycarbonate

Photometric Information

CRI:	70
CCT:	6,000K (cool white)
IES Files:	Available upon request


All values typical unless otherwise stated
All lumen values are typical (tolerance +/- 10%)

Temperature Ratings


Ambient Temperature Range
T5 Temperature Code

-40°F to +149°F (-40°C to +65°C)


Conduit Top Mount



Conduit Side Mount




LSXW4

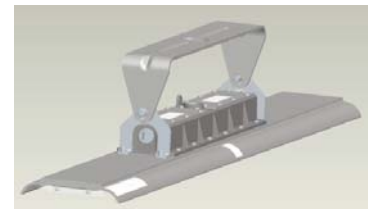



SafeSite® LED Linear Fixture

Class I, Div. 1 Version

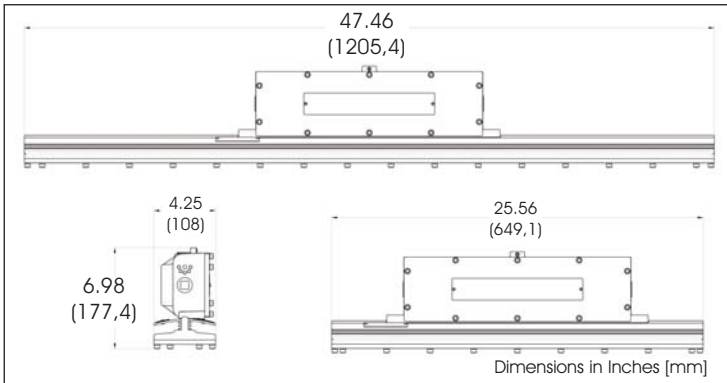

Certifications

- Class I, Div 1 Groups C, D
- UL 844
- UL1598
- CSA 22.2 No.137-M81
- UL 8750
- ABS Design Assessed: # 12-HS942957-PDA
- IP66 rated
- NEMA 4X rated

Application

The first of its kind, the Dialight SafeSite® LED linear luminaire was designed specifically to replace HID and fluorescent lighting fixtures in industrial and hazardous location applications.

The SafeSite LED Linear fixture's rugged solid state design makes it highly resistant to shock and vibration, while its superior design allows for increased mounting versatility and ease of installation.

Mechanical Information

Fixture Weight:	26.0 lbs (11.79 kg) 4' 17.5 lbs (7.94 kg) 2'
Shipping Weight:	28.0 lbs (12.70 kg) 4' 19.5 lbs (8.85 kg) 2'
Mounting:	(1) Threaded 3/4" NPT Side (2) Threaded 3/4" NPT Ends

Electrical specifications:

Operating Voltage:	100 - 277V AC 50/60Hz or 347 - 480V AC 50/60Hz
Power Consumption:	See ordering information
Operating Temp:	-40°F to +133°F (-40°C to +55°C)
Harmonics:	IEC 61000-3-2

Surge Protection

100 - 277V AC 50/60Hz:	1 kV line to line 2 kV line to ground
347 - 480V AC 50/60Hz:	6 kV line to line 6 kV line to ground

THD: < 15%

Power Factor: > 0.9

Construction

Body:	Powder Coated Aluminum
Lens:	Glass

Photometric Information

CRI:	70
CCT:	6,000K (cool white)
IES Files:	Available upon request


All values typical unless otherwise state
All lumen values are typical (tolerance +/- 10%)

Temperature Ratings


LSC3C4M3GEX (4ft) Ambient Temperature Range T4a Temperature Code	LSC3C4D3GEX (2ft) Ambient Temperature Range T5 Temperature Code
-40°F to +149°F (-40°C to +65°C)	-40°F to +149°F (-40°C to +65°C)

Mounting Options


Conduit Top Mount



Conduit Side Mount




LSXW5

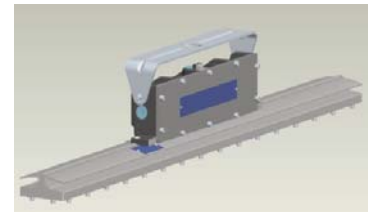



SafeSite® LED Linear Fixture Class I, Div. 2 Battery Backup Version

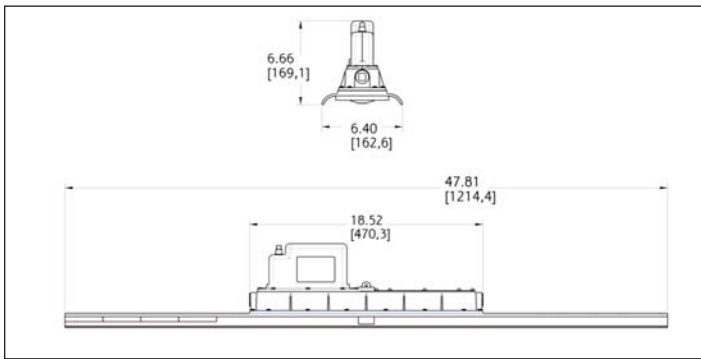

Certifications

- UL1598A
- UL 844
- UL 924
- CSA 22.2 No.137-M81
- UL 8750
- IP66 rated
- NEMA 4X

Features & Benefits

- 3 year full performance warranty
- 450 lumens in battery backup mode consistent throughout life of battery
- Low power consumption
- Battery status indication light
- Instant on/off operation
- Push to test button
- Superior color rendition index compared to HPS, LPS, MV
- Mercury Free
- Resistant to shock and vibration
- Temperature compensation technology for longer life

Application

The first of its kind, the Dialight SafeSite® LED linear luminaire was designed specifically to replace fluorescent lighting fixtures in industrial and hazardous location applications. When main AC power is lost, these lights will continue to operate as they transfer to the integrated battery.

The SafeSite Linear fixture's rugged solid state design makes it highly resistant to shock and vibration, while it's superior design allows for increased mounting versatility and ease of installation.

Mechanical Information

Fixture Weight:	18.0 lbs (8.16 kg)
Shipping Weight:	21.0 lbs (9.53 kg)
Mounting:	(1) Threaded 3/4" NPT Side (2) Threaded 3/4" NPT Ends

Electrical specifications:

Operating Voltage:	100-277V AC 50/60 Hz
Power Consumption:	85W 4' version
Operating Temp:	-29°F to +149°F (-20°C to +65°C)
Battery:	3.6V 10Ah Nimh
Battery Life:	3 years
Battery Duration:	>3 hours
Harmonics:	IEC 61000-3-2
Surge Protection:	1 kV line to line 2 kV line to ground

THD:	< 15%
Power Factor:	> 0.95

Construction

Body:	Powder Coated Aluminum
Lens:	Polycarbonate


Photometric Information

CRI:	70
CCT:	6,000K (cool white)
IES Files:	Available upon request

All values typical unless otherwise state
All lumen values are typical (tolerance +/- 10%)


Temperature Rating
Ambient Temperature Range
T4a Temperature Code
-20°F to +149°F (-29°C to +65°C)

In-line Conduit Mount

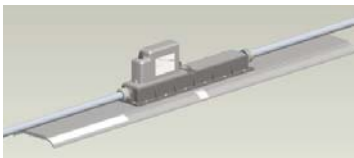


Mounting Options

Overhead Conduit Mount

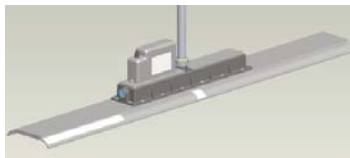

Bracket Mount

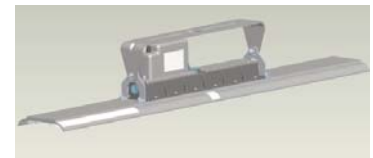

SafeSite® LED Linear Fixture

Class 1 Div. 2 Ordning Information

Part Number	Length	Class I, Div 1	Class I Div 2	Class II, Div 1	Class II, Div 2	Class III, Div 1	Class III, Div 2	Voltage	Lens	Initial Fixture Lumens	Watt	Lumens Per Watt
Class I, Div 2												
LSD3C4M2PHE	4'		A / B / C / D		F / G			100 - 277V AC	Clear	7,000	67	104
LSD3C4M2P	4'		A / B / C / D		F / G			100 - 277V AC	Clear	7,250	78	93
LSD3C4H2D	4'		A / B / C / D		F / G			100 - 277V AC	Diffused	5,600	78	72
LSD3C5M2P	4'		A / B / C / D		F / G			347 - 480V AC	Clear	7,250	78	93
LSD3C5H2D	4'		A / B / C / D		F / G			347 - 480V AC	Diffused	5,600	78	72
LSD3C4D2PHE	2'		A / B / C / D		F / G			100 - 277V AC	Clear	3,500	34	103
LSD3C4D2P	2'		A / B / C / D		F / G			100 - 277V AC	Clear	3,600	39	92
LSD3C4B2D	2'		A / B / C / D		F / G			100 - 277V AC	Diffused	2,800	39	72
LSD3C5D2P	2'		A / B / C / D		F / G			347 - 480V AC	Clear	3,600	39	92
LSD3C5B2D	2'		A / B / C / D		F / G			347 - 480V AC	Diffused	2,800	39	72
LSF3C4D2P	2'		A / B / C / D	E / F / G	F / G	•	•	100 - 277V AC	Clear	3,600	39	92
LSF3C4M2P	4'		A / B / C / D	E / F / G	F / G	•	•	100 - 277V AC	Clear	7,250	78	93
LSF3C5D2P	2'		A / B / C / D	E / F / G	F / G	•	•	347 - 480V AC	Clear	3,600	39	92
LSF3C5M2P	4'		A / B / C / D	E / F / G	F / G	•	•	347 - 480V AC	Clear	7,250	78	93
Class I, Div 2 Battery Backup Version												
² LSD3C4MEP	4'		A / B / C / D		F/G			100 - 277V AC	Clear	7,250	85	85

Notes:

¹Part numbers listed in the above table are cool white. For neutral white version replace the 5th character with **N**. Ex. LSD3C4D2P becomes LSD3N4D2P

²450 Lumens in battery backup mode

Class 1 Div. 2 Wiring Configurations (Optional)



Add one of the following suffixes to the above Part Numbers for factory sealed and installed 10' cable and cable gland:

- GS added for installed on one of the side entries (shown to the left)
- GT added for installed on the top entry (not shown)

Ex. LSD3C4D2P becomes LSD3C4D2P**GS**



Add one of the following suffixes to the above Part Numbers for factory sealed and installed 10' cable and 3/4" conduit fitting.:

- CT added for installed on the top entry (shown to the left)
- CS added for installed on one the side entries (not shown)


Ex. LSD3C4D2P becomes LSD3C4D2P**CT**

Class 1 Div. 1 Ordning Information

Part Number	Length	Class I, Div 1	Class I Div 2	Class II, Div 1	Class II, Div 2	Class III, Div 1	Class III, Div 2	Voltage	Lens	Initial Fixture Lumens	Watt	Lumens Per Watt
Class I, Div 1												
LSC3C4M3GEX	4'	•						100 - 277V AC	Clear	7,250	78	93
LSC3C5M3GEX	4'	•						347 - 480V AC	Clear	7,250	78	93
LSC3C4D3GEX	2'	•						100 - 277V AC	Clear	3,600	39	92
LSC3C5D3GEX	2'	•						347 - 480V AC	Clear	3,600	39	92

SafeSite® LED Linear Fixture

Options and Accessories

	Part Number	Description	Kit Includes
Class I, Div. 2 and Class I, Div 2 Battery Backup			
	LSXW4	Mounting bracket Can be angled at 0°, 30°, 45°, 60° & 90°	Mounting bracket Mounting hardware
	LSXENDCAPKIT	Chain mount brackets	2 Mounting brackets Mounting hardware
	LSXBATREP1	Replacement Battery Kit (for Battery Backup version only)	Batteries Wiring Connector
Class I, Div 1			
	LSXW5	Mounting bracket Can be angled at 0°, 30°, 45°, 60° & 90°	Mounting bracket Mounting hardware
All Models			
	HZXSTAN100S	1.00" Slip-Fit Stanchion Mount Junction Box	Junction box Mounting hardware
	HZXSTAN125S	1.25" Slip-Fit Stanchion Mount Junction Box	
	HZXSTAN150S	1.50" Slip-Fit Stanchion Mount Junction Box	
	HZXSTAN200S	2.00" Slip-Fit Stanchion Mount Junction Box	
	HZXSTAN100T	1.00" NPT Threaded Stanchion Mount Junction Box	
	HZXSTAN125T	1.25" NPT Threaded Stanchion Mount Junction Box	
	HZXSTAN150T	1.50" NPT Threaded Stanchion Mount Junction Box	
	HZXSTAN200T	2.00" NPT Threaded Stanchion Mount Junction Box	
	HZXSAFEKIT	Safety Cable Kit	2 Eyelets 2 53" Safety cables Mounting hardware

Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.dialight.com/Assets/Brochures_And_Catalogs/Illumination/MDTFSLINX001.pdf
Warranty Statement: EXCEPT FOR THE WARRANTY EXPRESSLY PROVIDED FOR [HEREIN/ABOVE/BELOW], DIALIGHT DISCLAIMS ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NONINFRINGEMENT.

SafeSite® LED Linear Fixture
for Indoor and Outdoor Industrial Applications





**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331