

## SERIES 65

### Optical Encoder Interface

#### FEATURES

- Interfaces with all Grayhill and Most Standard Quadrature Optical Encoders
- Power Reduction of Up to 75-90% in Optical Encoder Use Through Power Management Feature
- User Selectable Output Modes: Magnitude/Direction, Up/Down, Standard Quadrature
- Simplified Microprocessor Interface Reduces Design Time
- Debounces Encoder Integral Pushbutton Switch
- Ideal for Battery Powered Applications that Include Optical Encoders



#### DESCRIPTION


The GH65C11-X is designed to receive input from standard quadrature optical encoders. The power management feature allows power to the encoder to be applied only during sampling intervals, thus conserving power

(especially advantageous in battery powered systems). Sample rate is a nominal 4K per second allowing high speed quadrature input. The optical encoder interface can operate in 1 of 3 user-selectable output modes. These

modes are: magnitude and direction, up and down count, and standard quadrature. Debouncing of an integral pushbutton switch within the optical encoder can also be accomplished.

Name	Type*	Description
M0, M1	I	Mode selection input pins
V <sub>DD</sub>	P	3-6 Vdc power source
RES	I	Reset pin, normally connected to V <sub>DD</sub>
V <sub>SS</sub>	P	GND, 0v nominal power return
ØAI, ØBI	I	Phase A and B quadrature input pins
SWI	I	Switch input pin
SWO	O	Debounced switch output pin
NC	O	No connect, this pin must be left unconnected
PW	O	Power source for encoder power management
RC	I/O	RC oscillator pin
ØBO/DN/DR	O	Phase B, down, direction, mode conditional output pin
ØAO/UP/MG	O	Phase A, up, magnitude, mode conditional output pin

\* Pin Types: I = Input, O = Output, P = Power.

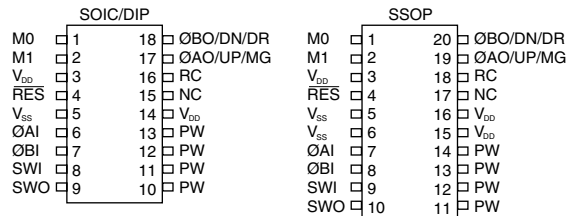

#### ORDERING INFORMATION

##### GH65C11-X-YY

Temperature: \_\_\_\_\_  
 C = Commercial (0° C to 70° C)  
 N = Industrial (-40° C to 85° C)

Packaging: \_\_\_\_\_  
 PD = 18 lead 300 mil wide Plastic DIP  
 SO = 18 lead 300 mil wide gull wing SOIC  
 SS\* = 20 lead SSOP

\* The SS package style is not available in the -40°C to 85°C temperature range.

**Available from your local Grayhill Distributor.** For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

For additional information about the use of the GH65 interface chips with optical encoders request Grayhill Application Note #719.



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331