



## GENERAL DESCRIPTION




The ICS8530 is a low skew, 1-to-16 Differential-to-2.5V LVPECL Fanout Buffer and a member of the HiPerClockS™ family of High Performance Clock Solutions from ICS. The CLK, nCLK pair can accept most standard differential input levels. The high gain differential amplifier accepts peak-to-peak input voltages as small as 150mV, as long as the common mode voltage is within the specified minimum and maximum range.

Guaranteed output and part-to-part skew characteristics make the ICS8530 ideal for those clock distribution applications demanding well defined performance and repeatability.


## FEATURES

- 16 differential 2.5V LVPECL outputs
- CLK, nCLK input pair
- CLK, nCLK pair can accept the following differential input levels: LVDS, LVPECL, LVHSTL, SSTL, HCSL
- Maximum output frequency up to 500MHz
- Translates any single-ended input signal to 2.5V LVPECL levels with a resistor bias on nCLK input
- Output skew: 50ps (maximum)
- Part-to-part skew: 250ps (maximum)
- Propagation Delay: 2ns (maximum)
- 3.3V core, 2.5V output operating supply
- 0°C to 70°C ambient operating temperature
- Industrial temperature information available upon request

## BLOCK DIAGRAM

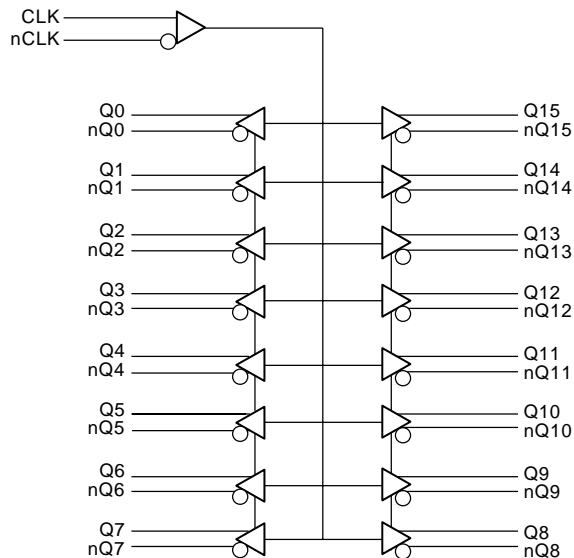

## PIN ASSIGNMENT

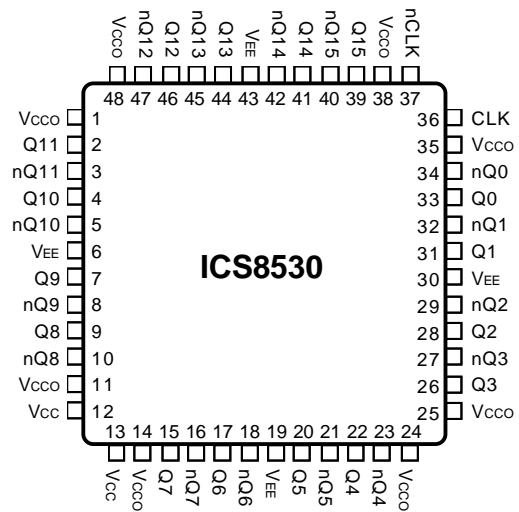

**48-Pin LQFP**  
7mm x 7mm x 1.4mm package body  
**Y Package**  
Top View



**TABLE 1. PIN DESCRIPTIONS**

| Number                           | Name             | Type   |          | Description   |
|----------------------------------|------------------|--------|----------|---|
| 1, 11, 14, 24,<br>25, 35, 38, 48 | V <sub>CCO</sub> | Power  |          | Output supply pins. Connect to 2.5V.                |
| 2, 3                             | Q11, nQ11        | Output |          | Differential output pair. LVPECL interface levels.  |
| 4, 5                             | Q10, nQ10        | Output |          | Differential output pair. LVPECL interface levels.  |
| 6, 19, 30, 43                    | V <sub>EE</sub>  | Power  |          | Negative supply pins. Connect to ground.            |
| 7, 8                             | Q9, nQ9          | Output |          | Differential output pair. LVPECL interface levels.  |
| 9, 10                            | Q8, nQ8          | Output |          | Differential output pair. LVPECL interface levels.  |
| 12, 13                           | V <sub>CC</sub>  | Power  |          | Positive supply pins. Connect to 3.3V.              |
| 15, 16                           | Q7, nQ7          | Output |          | Differential output pair. LVPECL interface levels.  |
| 17, 18                           | Q6, nQ6          | Output |          | Differential output pair. LVPECL interface levels.  |
| 20, 21                           | Q5, nQ5          | Output |          | Differential output pair. LVPECL interface levels.. |
| 22, 23                           | Q4, nQ4          | Output |          | Differential output pair. LVPECL interface levels.  |
| 26, 27                           | Q3, nQ3          | Output |          | Differential output pair. LVPECL interface levels.  |
| 28, 29                           | Q2, nQ2          | Output |          | Differential output pair. LVPECL interface levels.  |
| 36                               | CLK              | Input  | Pulldown | Non-inverting differential clock input.             |
| 37                               | nCLK             | Input  | Pullup   | Inverting differential clock input.                 |
| 39, 40                           | Q15, nQ15        | Output |          | Differential output pair. LVPECL interface levels.  |
| 41, 42                           | Q14, nQ14        | Output |          | Differential output pair. LVPECL interface levels.  |
| 44, 45                           | Q13, nQ13        | Output |          | Differential output pair. LVPECL interface levels.  |
| 46, 47                           | Q12, nQ12        | Output |          | Differential output pair. LVPECL interface levels.  |

NOTE: *Pullup* and *Pulldown* refers to internal input resistors. See Table 2, Pin Characteristics, for typical values.

**TABLE 2. PIN CHARACTERISTICS**

| Symbol                | Parameter               |           | Test Conditions | Minimum | Typical | Maximum | Units |
|-----------------------|-------------------------|-----------|-----------------|---------|---------|---------|-------|
| C <sub>IN</sub>       | Input Capacitance       | CLK, nCLK |                 |         |         | 4       | pF    |
| R <sub>PULLUP</sub>   | Input Pullup Resistor   |           |                 |         | 51      |         | KΩ    |
| R <sub>PULLDOWN</sub> | Input Pulldown Resistor |           |                 |         | 51      |         | KΩ    |

**TABLE 3. CLOCK INPUT FUNCTION TABLE**

| Inputs         |                | Outputs     |               | Input to Output Mode         | Polarity      |
|----------------|----------------|-------------|---------------|------------------------------|---------------|
| CLK            | nCLK           | Q0 thru Q15 | nQ0 thru nQ15 |                              |               |
| 0              | 1              | LOW         | HIGH          | Differential to Differential | Non Inverting |
| 1              | 0              | HIGH        | LOW           | Differential to Differential | Non Inverting |
| 0              | Biased; NOTE 1 | LOW         | HIGH          | Single Ended to Differential | Non Inverting |
| 1              | Biased; NOTE 1 | HIGH        | LOW           | Single Ended to Differential | Non Inverting |
| Biased; NOTE 1 | 0              | HIGH        | LOW           | Single Ended to Differential | Inverting     |
| Biased; NOTE 1 | 1              | LOW         | HIGH          | Single Ended to Differential | Inverting     |

NOTE 1: Please refer to the Application Information section on page 7, Figure 8, which discusses wiring the differential input to accept single ended levels.



**ABSOLUTE MAXIMUM RATINGS**

|  |                           |
|--|---------------------------|
| Supply Voltage, $V_{CCx}$                | 4.6V                      |
| Inputs, $V_I$                            | -0.5V to $V_{CC} + 0.5V$  |
| Outputs, $V_O$                           | -0.5V to $V_{CCO} + 0.5V$ |
| Package Thermal Impedance, $\theta_{JA}$ | 47.9°C/W                  |
| Storage Temperature, $T_{STG}$           | -65°C to 150°C            |

Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These ratings are stress specifications only. Functional operation of product at these conditions or any conditions beyond those listed in the *DC Characteristics* or *AC Characteristics* is not implied. Exposure to absolute maximum rating conditions for extended periods may affect product reliability.

**TABLE 4A. POWER SUPPLY DC CHARACTERISTICS,  $V_{CC} = 3.3V \pm 5\%$ ,  $V_{CCO} = 2.5V \pm 5\%$ ,  $T_A = 0^\circ C$  TO  $70^\circ C$**

| Symbol    | Parameter               | Test Conditions | Minimum | Typical | Maximum | Units |
|-----------|-------------------------|-----------------|---------|---------|---------|-------|
| $V_{CC}$  | Positive Supply Voltage |                 | 3.135   | 3.3     | 3.465   | V     |
| $V_{CCO}$ | Output Supply Voltage   |                 | 2.375   | 2.5     | 2.625   | V     |
| $I_{EE}$  | Power Supply Current    |                 |         |         | 115     | mA    |

**TABLE 4B. DIFFERENTIAL DC CHARACTERISTICS,  $V_{CC} = 3.3V \pm 5\%$ ,  $V_{CCO} = 2.5V \pm 5\%$ ,  $T_A = 0^\circ C$  TO  $70^\circ C$**

| Symbol    | Parameter                               | Test Conditions | Minimum                        | Typical | Maximum         | Units   |
|-----------|---|-----------------|--------------------------------|---------|-----------------|---------|
| $I_{IH}$  | Input High Current                      | CLK             | $V_{CC} = V_{IN} = 3.465V$     |         | 150             | $\mu A$ |
|           |   | nCLK            | $V_{CC} = V_{IN} = 3.465V$     |         | 5               | $\mu A$ |
| $I_{IL}$  | Input Low Current                       | CLK             | $V_{CC} = 3.465V, V_{IN} = 0V$ | -5      |                 | $\mu A$ |
|           |   | nCLK            | $V_{CC} = 3.465V, V_{IN} = 0V$ | -150    |                 | $\mu A$ |
| $V_{PP}$  | Peak-to-Peak Input Voltage              |                 | 0.15                           |         | 1.3             | V       |
| $V_{CMR}$ | Common Mode Input Voltage;<br>NOTE 1, 2 |                 | 0.05                           |         | $V_{CC} - 0.85$ | V       |

NOTE 1: For single ended applications, the maximum input voltage for CLK, nCLK is  $V_{CC} + 0.3V$ .

NOTE 2: Common mode voltage is defined as  $V_{IH}$ .

**TABLE 4C. LVPECL DC CHARACTERISTICS,  $V_{CC} = 3.3V \pm 5\%$ ,  $V_{CCO} = 2.5V \pm 5\%$ ,  $T_A = 0^\circ C$  TO  $70^\circ C$**

| Symbol      | Parameter                         | Test Conditions | Minimum         | Typical | Maximum         | Units |
|-------------|-----------------------------------|-----------------|-----------------|---------|-----------------|-------|
| $V_{OH}$    | Output High Voltage; NOTE 1       |                 | $V_{CCO} - 1.4$ |         | $V_{CCO} - 1.0$ | V     |
| $V_{OL}$    | Output Low Voltage; NOTE 1        |                 | $V_{CCO} - 2.0$ |         | $V_{CCO} - 1.7$ | V     |
| $V_{SWING}$ | Peak-to-Peak Output Voltage Swing |                 | 0.55            |         | 0.93            | V     |

NOTE 1: Outputs terminated with  $50\Omega$  to  $V_{CCO} - 2V$ .



**TABLE 5. AC CHARACTERISTICS**,  $V_{CC} = 3.3V \pm 5\%$ ,  $V_{CCO} = 2.5V \pm 5\%$ ,  $T_A = 0^\circ C$  TO  $70^\circ C$

| Symbol       | Parameter                    | Test Conditions    | Minimum | Typical | Maximum | Units |
|--------------|------------------------------|--------------------|---------|---------|---------|-------|
| $f_{MAX}$    | Maximum Output Frequency     |                    |         |         | 500     | MHz   |
| $t_{PD}$     | Propagation Delay; NOTE 1    | $f \leq 500MHz$    | 1       |         | 2       | ns    |
| $t_{sk(o)}$  | Output Skew; NOTE 2, 4       |                    |         | 26      | 50      | ps    |
| $t_{sk(pp)}$ | Part-to-Part Skew; NOTE 3, 4 |                    |         |         | 250     | ps    |
| $t_R$        | Output Rise Time             | 20% to 80% @ 50MHz | 300     |         | 700     | ps    |
| $t_F$        | Output Fall Time             | 20% to 80% @ 50MHz | 300     |         | 700     | ps    |
| odc          | Output Duty Cycle            |                    | 47      | 50      | 53      | %     |

All parameters measured at 250MHz unless noted otherwise.

NOTE 1: Measured from the differential input crossing point to the differential output crossing point.




NOTE 2: Defined as skew between outputs at the same supply voltage and with equal load conditions. Measured at the output differential cross points.





NOTE 3: Defined as skew between outputs on different devices operating at the same supply voltages and with equal load conditions. Using the same type of inputs on each device, the outputs are measured at the differential cross points.

NOTE 4: This parameter is defined in accordance with JEDEC Standard 65.



## PARAMETER MEASUREMENT INFORMATION

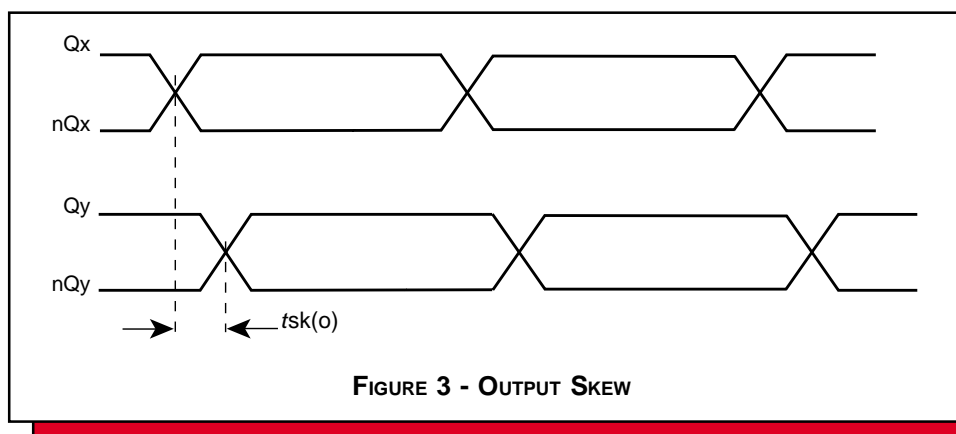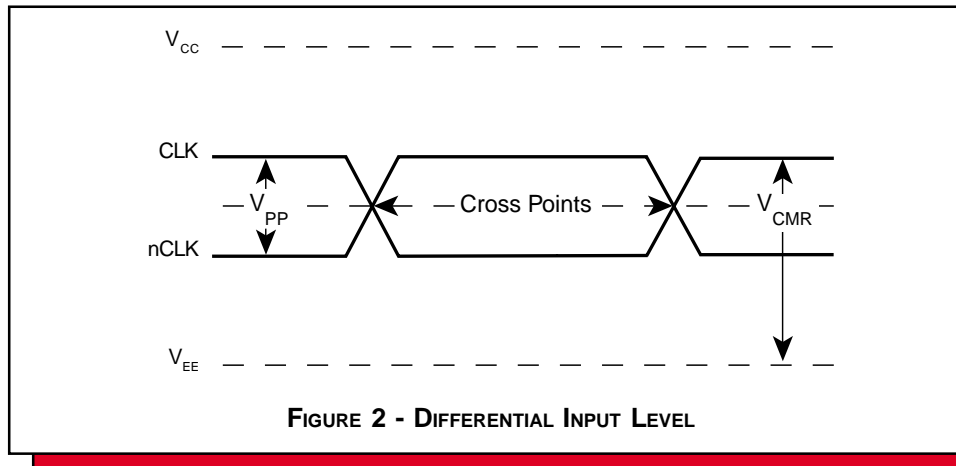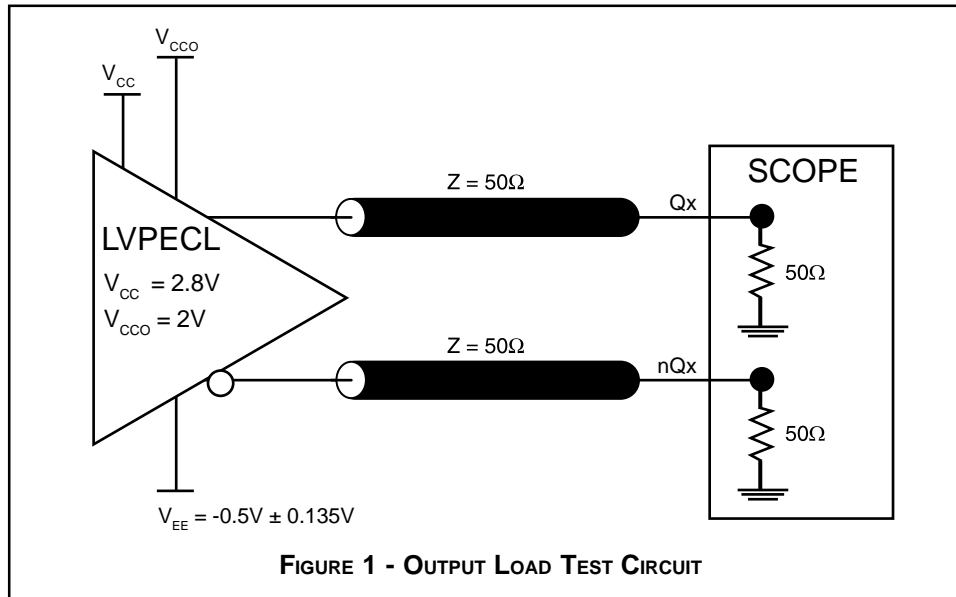

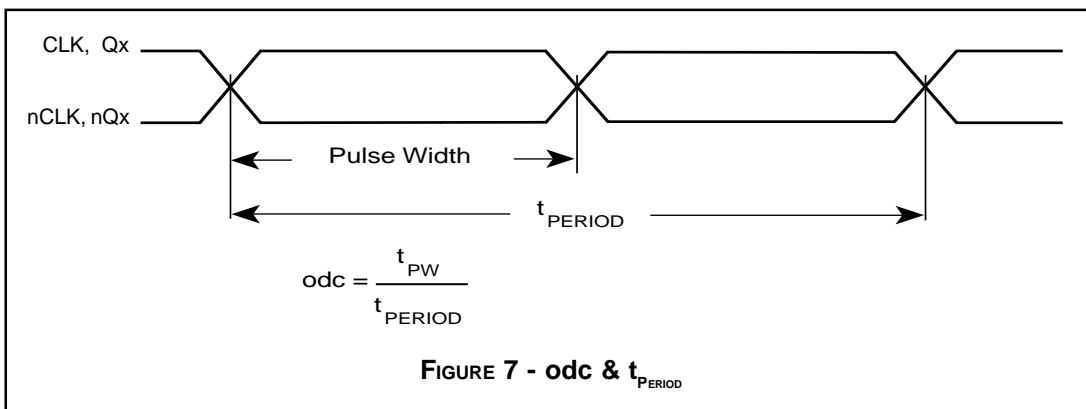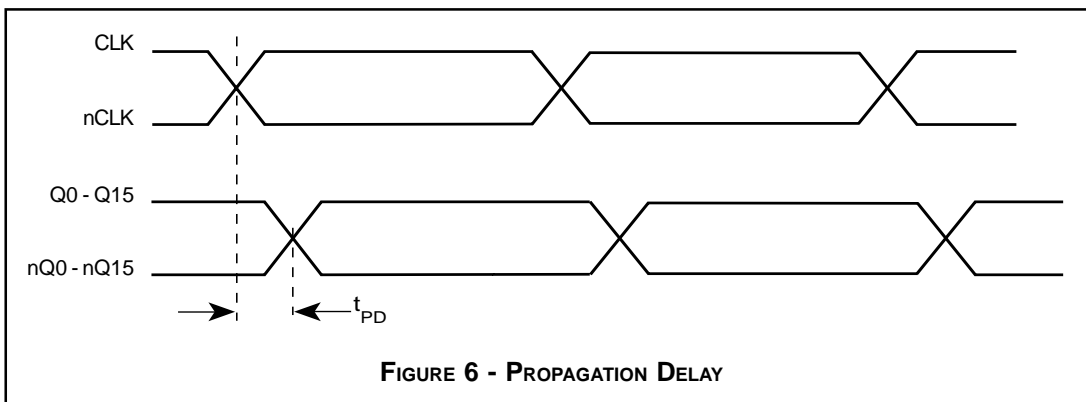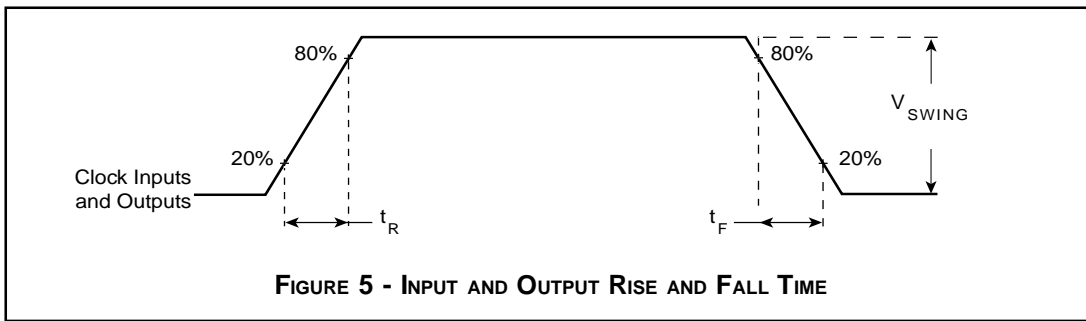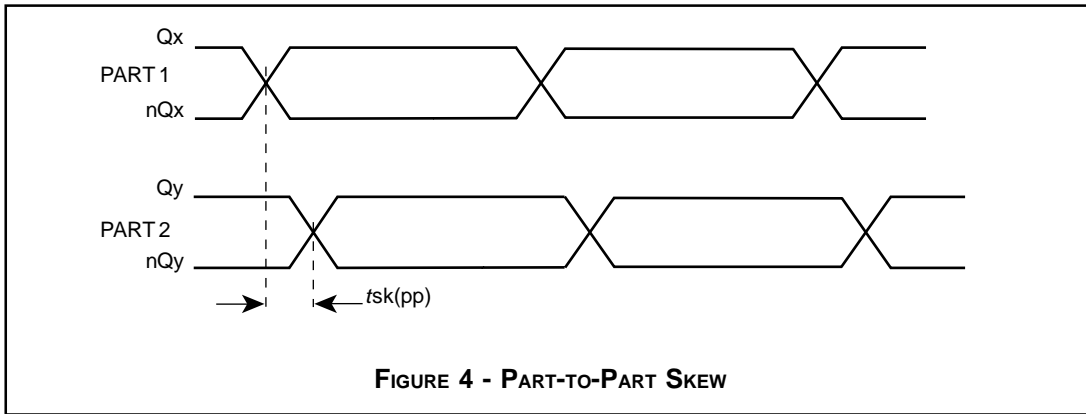




## APPLICATION INFORMATION

### WIRING THE DIFFERENTIAL INPUT TO ACCEPT SINGLE ENDED LEVELS

Figure 8 shows how the differential input can be wired to accept single ended levels. The reference voltage  $V_{REF} \approx V_{CC}/2$  is generated by the bias resistors R1, R2 and C1. This bias circuit should be located as close as possible to the input pin. The ratio of R1 and R2 might need to be adjusted to position the  $V_{REF}$  in the center of the input voltage swing. For example, if the input clock swing is only 2.5V and  $V_{CC} = 3.3V$ ,  $V_{REF}$  should be 1.25V and  $R2/R1 = 0.609$ .

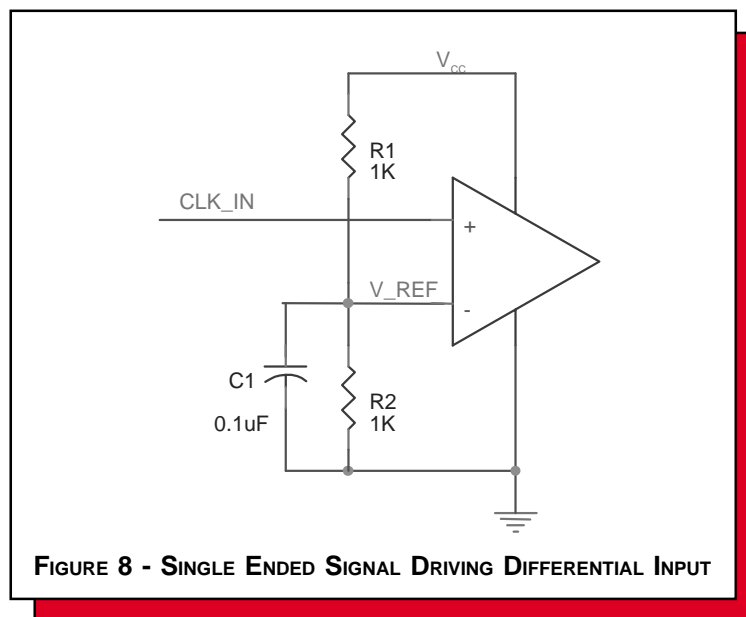



## POWER CONSIDERATIONS

This section provides information on power dissipation and junction temperature for the ICS8530. Equations and example calculations are also provided.

### 1. Power Dissipation.

The total power dissipation for the ICS8530 is the sum of the core power plus the power dissipated in the load(s). The following is the power dissipation for  $V_{CC} = 3.3V + 5\% = 3.465V$ , which gives worst case results.

**NOTE:** Please refer to Section 3 for details on calculating power dissipation in the load.

- Power (core)<sub>MAX</sub> =  $V_{CC\_MAX} * I_{EE\_MAX} = 3.465V * 115mA = 398.5mW$
- Power (outputs)<sub>MAX</sub> = **30.2mW/Loaded Output pair**  
If all outputs are loaded, the total power is  $16 * 30.2mW = 483.2mW$

**Total Power**<sub>MAX</sub> (3.465V, with all outputs switching) =  $398.5mW + 483.2mW = 881.7mW$

### 2. Junction Temperature.

Junction temperature,  $T_j$ , is the temperature at the junction of the bond wire and bond pad and directly affects the reliability of the device. The maximum recommended junction temperature for HiPerClockS™ devices is 125°C.

The equation for  $T_j$  is as follows:  $T_j = \theta_{JA} * Pd\_total + T_A$

$T_j$  = Junction Temperature

$\theta_{JA}$  = junction-to-ambient thermal resistance

$Pd\_total$  = Total device power dissipation (example calculation is in section 1 above)

$T_A$  = Ambient Temperature

In order to calculate junction temperature, the appropriate junction-to-ambient thermal resistance  $\theta_{JA}$  must be used. Assuming a moderate air flow of 200 linear feet per minute and a multi-layer board, the appropriate value is 42.1°C/W per Table 6 below.

Therefore,  $T_j$  for an ambient temperature of 70°C with all outputs switching is:

$70^\circ C + 0.881W * 42.1^\circ C/W = 107.1^\circ C$ . This is well below the limit of 125°C

This calculation is only an example.  $T_j$  will obviously vary depending on the number of loaded outputs, supply voltage, air flow, and the type of board (single layer or multi-layer).

**Table 6. Thermal Resistance  $\theta_{JA}$  for 48-pin LQFP, Forced Convection**

| $\theta_{JA}$ by Velocity (Linear Feet per Minute) |          |          |          |
|--|----------|----------|----------|
|  | 0        | 200      | 500      |
| Single-Layer PCB, JEDEC Standard Test Boards       | 67.8°C/W | 55.9°C/W | 50.1°C/W |
| Multi-Layer PCB, JEDEC Standard Test Boards        | 47.9°C/W | 42.1°C/W | 39.4°C/W |

**NOTE:** Most modern PCB designs use multi-layered boards. The data in the second row pertains to most designs.






### 3. Calculations and Equations.

The purpose of this section is to derive the power dissipated into the load.

LVPECL output driver circuit and termination are shown in *Figure 9*.

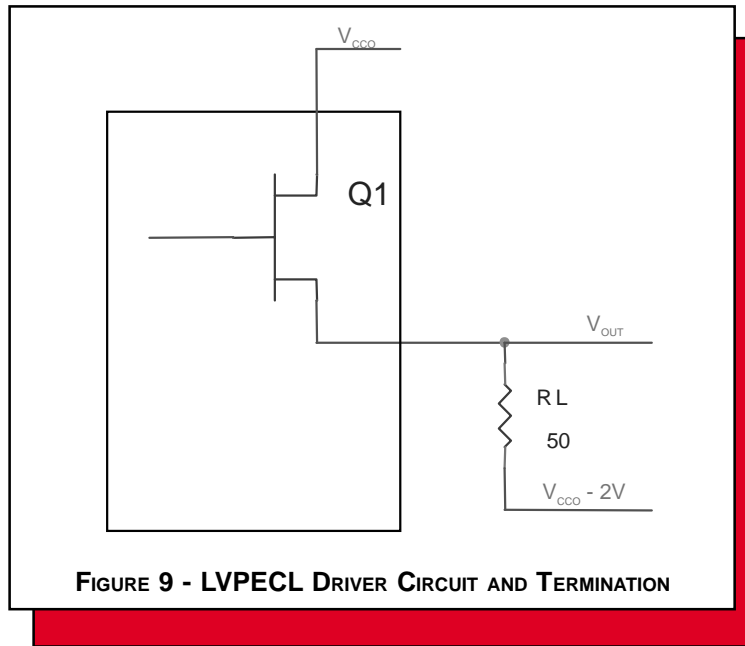

To calculate worst case power dissipation into the load, use the following equations which assume a 50Ω load, and a termination voltage of  $V_{CC} - 2V$ .

$Pd_H$  is power dissipation when the output drives high.  
 $Pd_L$  is the power dissipation when the output drives low.

$$Pd_H = [(V_{OH\_MAX} - (V_{CC\_MAX} - 2V))/R_L] * (V_{CC\_MAX} - V_{OH\_MAX})$$

$$Pd_L = [(V_{OL\_MAX} - (V_{CC\_MAX} - 2V))/R_L] * (V_{CC\_MAX} - V_{OL\_MAX})$$

- For logic high,  $V_{OUT} = V_{OH\_MAX} = V_{CC\_MAX} - 1.0V$   
Using  $V_{CC\_MAX} = 2.625$ , this results in  $V_{OH\_MAX} = 1.625V$
- For logic low,  $V_{OUT} = V_{OL\_MAX} = V_{CC\_MAX} - 1.7V$   
Using  $V_{CC\_MAX} = 2.625$ , this results in  $V_{OL\_MAX} = 0.925V$

$$Pd_H = [(1.625V - (2.625V - 2V))/50 \Omega] * (1V) = \mathbf{20mW}$$

$$Pd_L = [(0.925V - (2.625V - 2V))/50 \Omega] * (1.7) = \mathbf{10.2mW}$$

Total Power Dissipation per output pair =  $Pd_H + Pd_L = \mathbf{30.2mW}$



## RELIABILITY INFORMATION

TABLE 7.  $\theta_{JA}$  VS. AIR FLOW TABLE

| $\theta_{JA}$ by Velocity (Linear Feet per Minute) |          |          |          |
|--|----------|----------|----------|
|  | 0        | 200      | 500      |
| Single-Layer PCB, JEDEC Standard Test Boards       | 67.8°C/W | 55.9°C/W | 50.1°C/W |
| Multi-Layer PCB, JEDEC Standard Test Boards        | 47.9°C/W | 42.1°C/W | 39.4°C/W |

**NOTE:** Most modern PCB designs use multi-layered boards. The data in the second row pertains to most designs.

### TRANSISTOR COUNT

The transistor count for ICS8530 is: 930



PACKAGE OUTLINE - Y SUFFIX

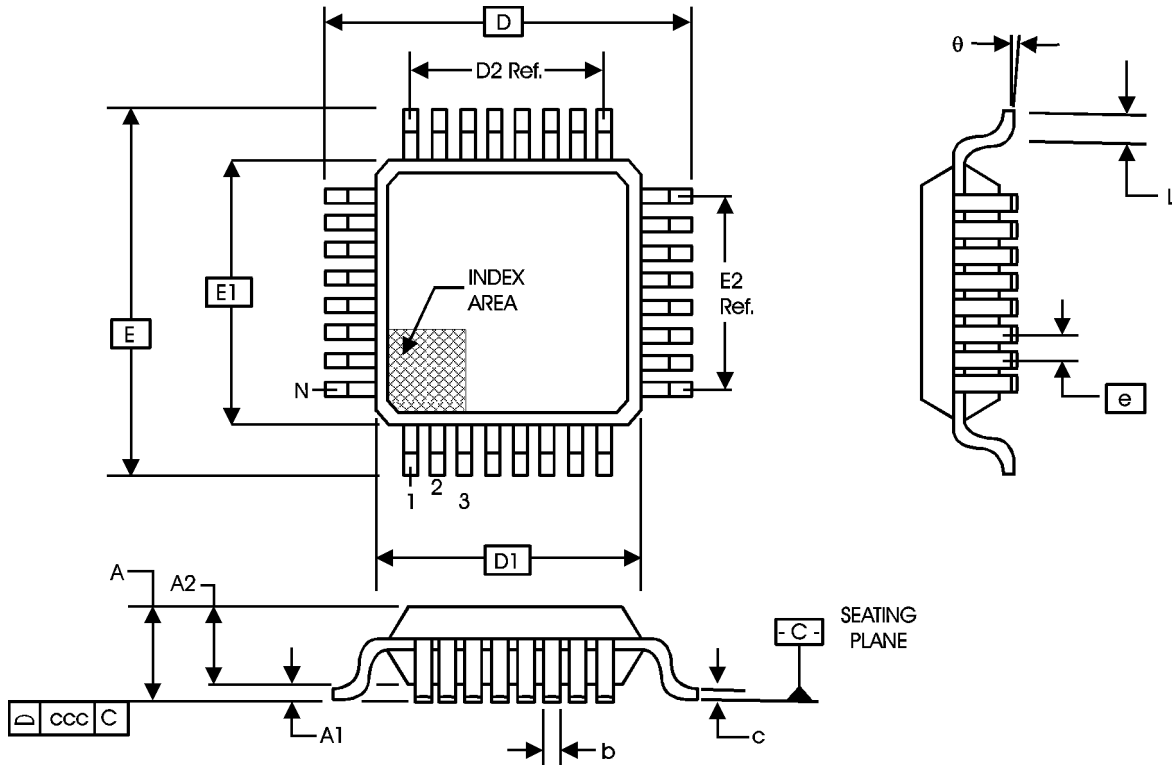


TABLE 8. PACKAGE DIMENSIONS

| JEDEC VARIATION<br>ALL DIMENSIONS IN MILLIMETERS |            |         |         |
|--|------------|---------|---------|
| SYMBOL   | BBC        |         |         |
|  | MINIMUM    | NOMINAL | MAXIMUM |
| N  |            | 48      |         |
| A  | --         | --      | 1.60    |
| A1   | 0.05       | --      | 0.15    |
| A2   | 1.35       | 1.40    | 1.45    |
| b  | 0.17       | 0.22    | 0.27    |
| c  | 0.09       | --      | 0.20    |
| D  | 9.00 BASIC |         |         |
| D1   | 7.00 BASIC |         |         |
| D2   | 5.50 Ref.  |         |         |
| E  | 9.00 BASIC |         |         |
| E1   | 7.00 BASIC |         |         |
| E2   | 5.50 Ref.  |         |         |
| e  | 0.50 BASIC |         |         |
| L  | 0.45       | 0.60    | 0.75    |
| theta  | 0°         | --      | 7°      |
| ccc  | --         | --      | 0.08    |

Reference Document: JEDEC Publication 95, MS-026



Integrated  
Circuit  
Systems, Inc.

**ICS8530**  
LOW SKEW, 1-TO-16  
DIFFERENTIAL-TO-2.5V LVPECL FANOUT BUFFER

**TABLE 9. ORDERING INFORMATION**

| Part/Order Number | Marking   | Package                       | Count        | Temperature |
|-------------------|-----------|-------------------------------|--------------|-------------|
| ICS8530DY         | ICS8530DY | 48 Lead LQFP                  | 250 per tray | 0°C to 70°C |
| ICS8530DYT        | ICS8530DY | 48 Lead LQFP on Tape and Reel | 1000         | 0°C to 70°C |

While the information presented herein has been checked for both accuracy and reliability, Integrated Circuit Systems, Incorporated (ICS) assumes no responsibility for either its use or for infringement of any patents or other rights of third parties, which would result from its use. No other circuits, patents, or licenses are implied. This product is intended for use in normal commercial applications. Any other applications such as those requiring extended temperature range, high reliability, or other extraordinary environmental requirements are not recommended without additional processing by ICS. ICS reserves the right to change any circuitry or specifications without notice. ICS does not authorize or warrant any ICS product for use in life support devices or critical medical instruments.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331