6 Lake Street, Lawrence, MA 01844
1-800-446-1158 / (978) 794-1666 / Fax: (978) 689-0803
Website: http: //www.microsemi.com

TECHNICAL DATA SHEET

400mW ZENER VOLTAGE REGULATOR DIODE

DEVICES

1N3506A through 1N3534A

MAXIMUM RATING AT 25°C

Junction and Storage Temperature: -65°C to +175°C
DC Power Dissipation: 500mW @ T_{EC} = +125°C
Forward Voltage @ 200mA: 1.1 volts maximum

ELECTRICAL CHARACTERISTICS ***(TA = 25°C, unless otherwise specified)***

Zener Type #	Zener Voltage @ Izt		Zener Voltage Tolerance	Max Zener Impedance @ Izt Ohms	Power Rating
	Volts	@ mA			
1N3506A	3.3	20.0	5%	24.0	400mW
1N3507A	3.6	20.0	5%	22.0	400mW
1N3508A	3.9	20.0	5%	20.0	400mW
1N3509A	4.3	20.0	5%	18.0	400mW
1N3510A	4.7	20.0	5%	16.0	400mW
1N3511A	5.1	20.0	5%	14.0	400mW
1N3512A	5.6	20.0	5%	8.0	400mW
1N3513A	6.2	20.0	5%	3.0	400mW
1N3514A	6.8	20.0	5%	3.0	400mW
1N3515A	7.5	10.0	5%	4.0	400mW
1N3516A	8.2	10.0	5%	5.0	400mW
1N3517A	9.1	10.0	5%	6.0	400mW
1N3518A	1.0	10.0	5%	7.0	400mW
1N3519A	11.0	10.0	5%	8.0	400mW
1N3520A	12.0	10.0	5%	10.0	400mW
1N3521A	13.0	5.0	5%	12.0	400mW
1N3522A	15.0	5.0	5%	14.0	400mW
1N3523A	16.0	5.0	5%	16.0	400mW
1N3524A	18.0	5.0	5%	18.0	400mW
1N3525A	20.0	5.0	5%	20.0	400mW
1N3526A	22.0	5.0	5%	35.0	400mW
1N3527A	24.0	5.0	5%	38.0	400mW
1N3528A	27.0	4.0	5%	40.0	400mW
1N3529A	30.0	4.0	5%	48.0	400mW
1N3530A	33.0	3.0	5%	50.0	400mW
1N3531A	36.0	3.0	5%	75.0	400mW

DO-35

6 Lake Street, Lawrence, MA 01844
1-800-446-1158 / (978) 794-1666 / Fax: (978) 689-0803
Website: http: //www.microsemi.com

TECHNICAL DATA SHEET

400mW ZENER VOLTAGE REGULATOR DIODE

ELECTRICAL CHARACTERISTICS (CONT.) ***(TA = 25°C, unless otherwise specified)***

Zener Type #	Zener Voltage @ Izt		Zener Voltage Tolerance	Max Zener Impedance @ Izt Ohms	Power Rating
	Volts	@ mA			
1N3532A	39.0	3.0	5%	100.0	400mW
1N3533A	43.0	2.0	5%	130.0	400mW
1N3534A	47.0	2.0	5%	150.0	400mW

NOTE 1 : Zener Voltage is measured with the device junction in thermal equilibrium at an ambient temperature of $25^oC \pm 3^oC$.

NOTE 2 : Zener impedance is derived by superimposing on I_{ZT} A 60Hz rms a.c. current equal to 10% of I_{ZT}.

NOTE 3 : ΔVZ is the maximum difference between VZ at I_{ZT} and VZ at I_{ZT} measured with the device junction in thermal equilibrium.

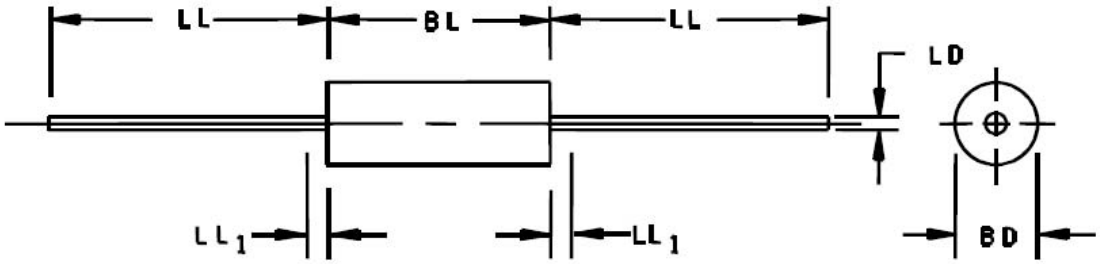

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
BD	.055	.107	1.40	2.72	3
BL	.120	.300	3.05	7.62	3
LD	.018	.022	0.46	0.56	
LL	1.000	1.500	25.40	38.10	
LL_1		.050		1.27	4

NOTES:
1. Dimensions are in inches.
2. Millimeter equivalents are given for general information only.
3. Package contour optional within BD and length BL. Heat slugs, if any, shall be included within this cylinder but shall not be subject to minimum limit of BD. The BL dimension shall include the entire body including slugs.
4. Within this zone lead, diameter may vary to allow for lead finishes and irregularities other than heat slugs.
5. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

DESIGN DATA
CASE: DO-35 Hermetically sealed glass case.
LEAD FINISH : Tin/ Lead
Cathode band denotes polarity

Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331