


# Surge Protection Devices

## SPD2 3P+0 SERIES

Class II/Type 2/Type 1 CA Pluggable Multi-Pole



### Internal Configuration

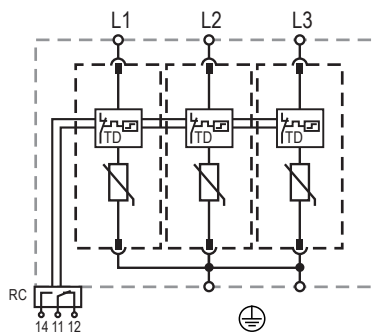

### Legend

|   |                  |    |                       |
|---|------------------|----|-----------------------|
| L | Line             | RC | Remote Contacts       |
| N | Neutral          | TD | Thermal Disconnection |
| ⊕ | Protective Earth |    |                       |

### Description

Surge protection devices (SPDs) provide equipment protection from transient overvoltage events lasting micro-seconds. By limiting the overvoltage to the equipment during these events, costly damage and downtime can be mitigated.

The surge protection devices for the 3+0 configuration are available for 120 V to 600 V nominal voltage sub-distribution board applications.

### Features & Benefits

| FEATURES                                                                        | BENEFITS                                                                                                                                                                  |
|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Capability to clamp and withstand high-energy transients</b>                 | Ensures low-residual voltage during high-energy surge events and higher nominal discharge current to prevent disruption, downtime, and degradation or damage to equipment |
| <b>UL Recognized and VDE-IEC compliant in single part number</b>                | One component can be utilized globally, reducing inventory needs and simplifying allocation of parts                                                                      |
| <b>Interlocking tab mechanism</b>                                               | Secures module to withstand vibration                                                                                                                                     |
| <b>No additional overcurrent protection devices required in UL applications</b> | Reduces the number of components and costs required for protection                                                                                                        |
| <b>Compact footprint</b>                                                        | Increases panel design flexibility                                                                                                                                        |
| <b>Visual life indicator</b>                                                    | Quick visual determines module replacement status to avoid loss of protection                                                                                             |
| <b>Pluggable modules</b>                                                        | Fast and simple to replace, minimizing maintenance and downtime. No tools required                                                                                        |
| <b>Thermal protection</b>                                                       | Eliminates catastrophic failure                                                                                                                                           |
| <b>IP20 protection rating</b>                                                   | Finger-safe design increases worker protection                                                                                                                            |


### Module & Base Ordering Information

| Ordering Number | IEC Electrical                                 |                                                           |                                                       |                                                         |                                            |                                                      |                                     |                                      | UL Electrical                                  |                                 |                                                       |                                     | Single Unit Weight |
|-----------------|------------------------------------------------|-----------------------------------------------------------|-------------------------------------------------------|---------------------------------------------------------|--------------------------------------------|------------------------------------------------------|-------------------------------------|--------------------------------------|------------------------------------------------|---------------------------------|-------------------------------------------------------|-------------------------------------|--------------------|
|                 | Nominal AC Voltage (50/60Hz) (U <sub>n</sub> ) | Maximum Continuous Operating AC Voltage (U <sub>c</sub> ) | Nominal Discharge Current (8/20 μs) (I <sub>n</sub> ) | Maximum Discharge Current (8/20 μs) (I <sub>max</sub> ) | Voltage Protection Level (U <sub>p</sub> ) | Short-Circuit AC Current Rating (I <sub>SCCR</sub> ) | TOV Withstand 5 s (U <sub>T</sub> ) | TOV 120 min (U <sub>T</sub> ) / Mode | Maximum Continuous AC Operating Voltage (MCOV) | Voltage Protection Rating (VPR) | Nominal Discharge Current (8/20 μs) (I <sub>n</sub> ) | Short-Circuit Current Rating (SCCR) |                    |
| SPD2-150-3P0-R  | 120 V                                          | 150 V                                                     | 20 kA                                                 | 50 kA                                                   | 1250 V                                     | 25 kA / 50 kA                                        | 229 V                               | 229 V / Withstand                    | 150 V                                          | 600 V                           | 20 kA                                                 | 200 kA                              | 355 g (0.783 lb)   |
| SPD2-300-3P0-R  | 240 V                                          | 300 V                                                     | 20 kA                                                 | 50 kA                                                   | 1500 V                                     | 25 kA / 50 kA                                        | 337 V                               | 442 V / Safe Fail                    | 300 V                                          | 900 V                           | 20 kA                                                 | 150 kA                              | 376 g (0.829 lb)   |
| SPD2-350-3P0-R  | 277 V                                          | 350 V                                                     | 20 kA                                                 | 50 kA                                                   | 1750 V                                     | 25 kA / 50 kA                                        | 403 V                               | 529 V / Safe Fail                    | 350 V                                          | 1000 V                          | 20 kA                                                 | 200 kA                              | 391 g (0.862 lb)   |
| SPD2-480-3P0-R  | 400 V                                          | 480 V                                                     | 20 kA                                                 | 50 kA                                                   | 2300 V                                     | 25 kA / 50 kA                                        | 581 V                               | 762 V / Safe Fail                    | 480 V                                          | 1500 V                          | 20 kA                                                 | 200 kA                              | 406 g (0.896 lb)   |
| SPD2-550-3P0-R* | 480 V                                          | 550 V                                                     | 20 kA                                                 | 50 kA                                                   | 2500 V                                     | 25 kA / 50 kA                                        | 697 V                               | 915 V / Safe Fail                    | 550 V                                          | 2000 V                          | 20 kA                                                 | 200 kA                              | 414 g (0.913 lb)   |
| SPD2-750-3P0-R  | 600 V                                          | 750 V                                                     | 20 kA                                                 | 35 kA                                                   | 3400 V                                     | 25 kA / 50 kA                                        | 871 V                               | 1143 V / Safe Fail                   | 750 V                                          | 2500 V                          | 20 kA                                                 | 200 kA                              | 454 g (1.001 lb)   |

# Surge Protection Devices

## SPD2 3P+0 SERIES

### Module & Base Part Numbering System

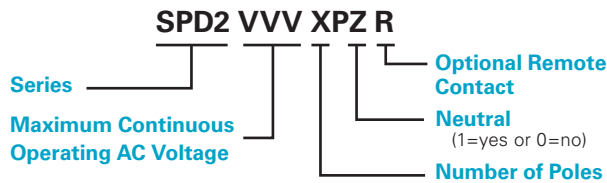

### Module Only Part Numbering System



### Replacement Module Ordering Information

| Ordering Number | IEC Electrical                         |                                                   |                                                    |                                                        |                                    |                                                |                             |                              | UL Electrical                                  |                                 |                                                    |                                     | Single Unit Weight |
|-----------------|----------------------------------------|---------------------------------------------------|----------------------------------------------------|--------------------------------------------------------|------------------------------------|------------------------------------------------|-----------------------------|------------------------------|------------------------------------------------|---------------------------------|----------------------------------------------------|-------------------------------------|--------------------|
|                 | Nominal AC Voltage (50/60Hz) ( $U_n$ ) | Maximum Continuous Operating AC Voltage ( $U_c$ ) | Nominal Discharge Current (8/20 $\mu$ s) ( $I_n$ ) | Maximum Discharge Current (8/20 $\mu$ s) ( $I_{max}$ ) | Voltage Protection Level ( $U_p$ ) | Short-Circuit AC Current Rating ( $I_{scac}$ ) | TOV Withstand 5 s ( $U_t$ ) | TOV 120 min ( $U_t$ ) / Mode | Maximum Continuous AC Operating Voltage (MCOV) | Voltage Protection Rating (VPR) | Nominal Discharge Current (8/20 $\mu$ s) ( $I_n$ ) | Short-Circuit Current Rating (SCCR) |                    |
| SPD2-150-M      | 120 V                                  | 150 V                                             | 20 kA                                              | 50 kA                                                  | 1250 V                             | 25 kA / 50 kA                                  | 229 V                       | 229 V / Withstand            | 150 V                                          | 600 V                           | 20 kA                                              | 200 kA                              | 54 g (0.120 lb)    |
| SPD2-300-M      | 240 V                                  | 300 V                                             | 20 kA                                              | 50 kA                                                  | 1500 V                             | 25 kA / 50 kA                                  | 337 V                       | 442 V / Safe Fail            | 300 V                                          | 900 V                           | 20 kA                                              | 150 kA                              | 61 g (0.135 lb)    |
| SPD2-350-M      | 277 V                                  | 350 V                                             | 20 kA                                              | 50 kA                                                  | 1750 V                             | 25 kA / 50 kA                                  | 403 V                       | 529 V / Safe Fail            | 350 V                                          | 1000 V                          | 20 kA                                              | 200 kA                              | 66 g (0.146 lb)    |
| SPD2-480-M      | 400 V                                  | 480 V                                             | 20 kA                                              | 50 kA                                                  | 2300 V                             | 25 kA / 50 kA                                  | 581 V                       | 762 V / Safe Fail            | 480 V                                          | 1500 V                          | 20 kA                                              | 200 kA                              | 71 g (0.157 lb)    |
| SPD2-550-M*     | 480 V                                  | 550 V                                             | 20 kA                                              | 50 kA                                                  | 2500 V                             | 25 kA / 50 kA                                  | 697 V                       | 915 V / Safe Fail            | 550 V                                          | 2000 V                          | 20 kA                                              | 200 kA                              | 74 g (0.163 lb)    |
| SPD2-750-M      | 600 V                                  | 750 V                                             | 20 kA                                              | 35 kA                                                  | 3400 V                             | 25 kA / 50 kA                                  | 871 V                       | 1143 V / Safe Fail           | 750 V                                          | 2500 V                          | 20 kA                                              | 200 kA                              | 87 g (0.192 lb)    |

### Specifications

|                                                                                  |                                                                                        |
|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| <b>Network Systems</b>                                                           | IT, TT, TN-S                                                                           |
| <b>Mode of Protection</b>                                                        | L-N, N-PE                                                                              |
| <b>Nominal Discharge Current (8/20 <math>\mu</math>s) (<math>I_n</math>)</b>     | 20 kA                                                                                  |
| <b>Maximum Discharge Current (8/20 <math>\mu</math>s) (<math>I_{max}</math>)</b> | Up to 50 kA                                                                            |
| <b>Protective Elements</b>                                                       | High Energy MOV                                                                        |
| <b>Response Time (L-N / N-PE <math>t_A</math>)</b>                               | < 25 ns                                                                                |
| <b>Back-Up Fuse (max)</b>                                                        | 315 A / 250 A Gg                                                                       |
| <b>Number of Ports</b>                                                           | 1                                                                                      |
| <b>Mechanical &amp; Environmental</b>                                            |                                                                                        |
| <b>Operating Temperature Range (<math>T_a</math>)</b>                            | -40 °C to +80 °C (-40 °F to +185 °F)                                                   |
| <b>Permissible Operating Humidity (RH)</b>                                       | 5% to 95%                                                                              |
| <b>Altitude (max)</b>                                                            | 4,000 m (13,123 ft)                                                                    |
| <b>Terminal Screw Torque (<math>M_{max}</math>)</b>                              | 4.5 Nm (39.9 lbf-in)                                                                   |
| <b>Conductor Cross Section (max)</b>                                             | 35 mm <sup>2</sup> (2 AWG) (Solid, Stranded)/<br>25 mm <sup>2</sup> (4 AWG) (Flexible) |
| <b>Mounting</b>                                                                  | 35 mm DIN Rail, EN60715                                                                |
| <b>Degree of Protection</b>                                                      | IP20 (built-in)                                                                        |

|                                                     |                                                                        |
|-----------------------------------------------------|------------------------------------------------------------------------|
| <b>Housing Material</b>                             | Thermoplastic: Extinguishing Degree<br>UL 94 V-0                       |
| <b>Thermal Protection</b>                           | Yes                                                                    |
| <b>Operating State/Fault Indication</b>             | Green Flag/No Green Flag                                               |
| <b>Remote Contact Switching Capacity</b>            | AC: 250 V/1 A, 125 V/1 A;<br>DC: 48 V/0.5 A, 24 V/0.5 A, 12 V/0.5 A    |
| <b>Remote Contact Conductor Cross Section (max)</b> | 1.5 mm <sup>2</sup> (16 AWG) (Solid)                                   |
| <b>Standards Passed*</b>                            | IEC 61643-11:2011<br>EN 61643-11:2012<br>UL 1449, 4th edition; E320116 |

|                               |                                                                                   |
|-------------------------------|-----------------------------------------------------------------------------------|
| <b>Product Dimensions</b>     |                                                                                   |
| <b>3TE Module and Base</b>    | <b>H</b> 90.0 mm (3.54"); <b>W</b> 54.0 mm (2.13");<br><b>D</b> 70.0 mm (2.76")   |
| <b>1TE Replacement Module</b> | <b>H</b> 45.0 mm (1.77"); <b>W</b> 18.0 mm (0.71");<br><b>D</b> 57.2mm (2.25")    |
| <b>Package Dimensions</b>     |                                                                                   |
| <b>3TE Module and Base</b>    | <b>H</b> 102.0 mm (4.01"); <b>W</b> 64.0 mm (2.52");<br><b>D</b> 110.0 mm (4.33") |
| <b>1TE Replacement Module</b> | <b>H</b> 102.0 mm (4.01"); <b>W</b> 28.0 mm (1.10");<br><b>D</b> 110.0 mm (4.33") |

\*SPD2-550-3P0-R and SPD2-550-M are UL Listed only

**Warranty** – Visit [www.littelfuse.com/warranty](http://www.littelfuse.com/warranty) for details.

**Disclaimer Notice** – Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/product-disclaimer](http://www.littelfuse.com/product-disclaimer).



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331