

LOW-NOISE DUAL OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION

The NJM5532C is a high performance dual low noise operational amplifier. This features low noise performance ($5\text{nV}/\sqrt{\text{Hz}}$), and considerably higher Gain Band Width (10MHz), low distortion (0.0003%). This makes the device especially suitable for application in high quality and professional audio.

■ PACKAGE OUTLINE




NJM5532CG
(SOP8)

■ FEATURES


• Equivalent Input Noise Voltage	: $5\text{nV}/\sqrt{\text{Hz}}$ typ. at 1kHz
• Gain bandwidth product	: 10MHz typ.
• Common-Mode Rejection Ratio	: 100dB typ.
• High DC Voltage Gain	: 94dB typ.
• High Slew Rate	: 9V/us typ.
• Wide power supply range	: $\pm 3\text{V}$ to $\pm 22\text{V}$
• Internal ESD protection	
Human body model (HBM)	: $\pm 2000\text{V}$ typ.

■ PIN CONFIGURATION



PIN FUNCTION
1. A OUTPUT
2. A -INPUT
3. A +INPUT
4. V
5. B +INPUT
6. B -INPUT
7. B OUTPUT
8. V ⁺

■ EQUIVALENT CIRCUIT (Each Amplifier)

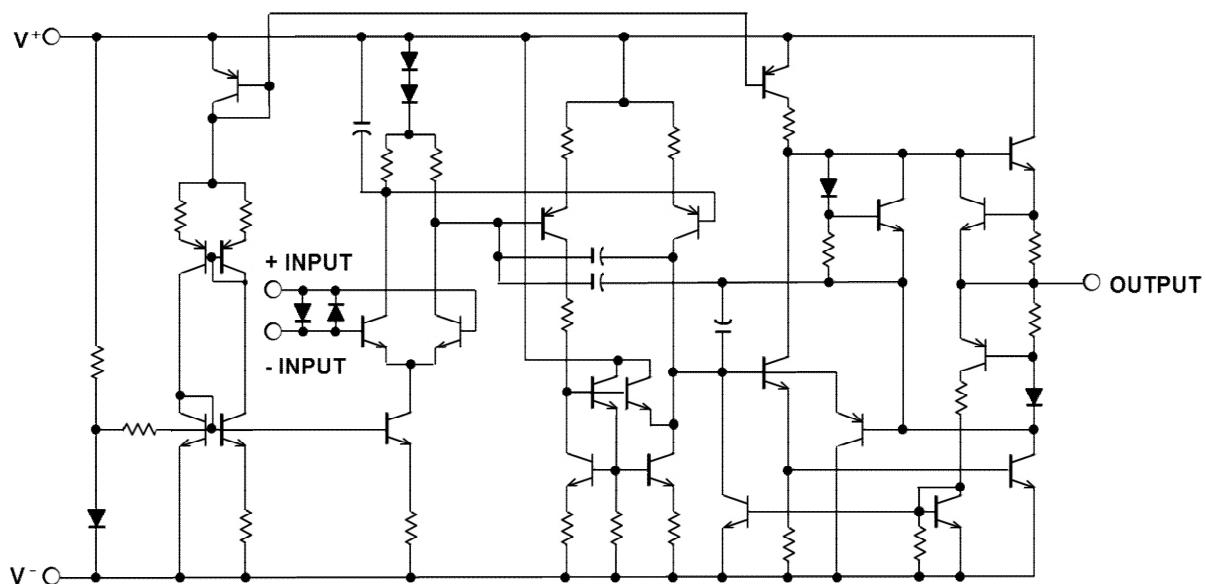

NJM5532C

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply voltage	V ⁺ /V ⁻	±22	V
Input voltage ⁽¹⁾	V _{IN}	V-0.3 to V+44	V
Output terminal input voltage	V _O	V-0.3 to V ⁺ +0.3	V
Differential input voltage ⁽²⁾	V _{ID}	±0.5	V
Input current ⁽³⁾	I _{IN}	±10	mA
Output short-circuit duration ⁽⁴⁾		Infinite	-
Power Dissipation	P _D	690 ⁽⁵⁾ 1000 ⁽⁶⁾	mW
Operating free-air temperature range	T _{opr}	-40 to 85	°C
Storage temperature range	T _{sg}	-65 to +150	°C

(1) Input voltage is the voltage should be allowed to apply to the input terminal independent of the magnitude of V⁺.

The normal operation will establish when any input is within the Common Mode Input Voltage Range of electrical characteristics.

(2) Differential voltage is the voltage difference between +INPUT and -INPUT.

(3) Excessive input current will flow if a differential input voltage in excess of approximately 0.5 V is applied between the inputs, unless some limiting resistance is used.

(4) The output may be shorted to ground or either power supply. Temperature and/or supply voltages must be limited to ensure the maximum dissipation rating is not exceeded.

(5) EIA/JEDEC STANDARD Test board (76.2 x 114.3 x 1.6mm, 2layers, FR-4) mounting

(6) EIA/JEDEC STANDARD Test board (76.2 x 114.3 x 1.6mm, 4layers, FR-4) mounting

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V ⁺ /V ⁻	Ta=25°C	±3	-	±22	V

■ ELECTRICAL CHARACTERISTICS

V⁺/V⁻=±15V, Ta=25°C (unless otherwise noted)

PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V _{IO}	R _S =50Ω Ta=25°C 0°C<Ta<70°C ⁽⁷⁾	- -	0.5 -	4 5	mV
Input Offset Current	I _{IO}	Ta=25°C 0°C<Ta<70°C ⁽⁷⁾	-	10	150 200	nA
Input Bias Current	I _B	Ta=25°C 0°C<Ta<70°C ⁽⁷⁾	- -	200	800 1000	nA
Open Loop Gain 1	A _{v1}	R _L ≥600Ω, V _O =±10V Ta=25°C 0°C<Ta<70°C ⁽⁷⁾	83.5 80	94 -	- -	dB
Open Loop Gain 2	A _{v2}	R _L ≥2kΩ, V _O =±10V Ta=25°C 0°C<Ta<70°C ⁽⁷⁾	88 83.5	100 -	- -	dB
Supply Voltage Rejection Ratio	SVR	R _S ≤10kΩ, V ⁺ /V ⁻ =±9V to ±15V	80	100	-	dB
Supply Current, all amp	I _{CC}	no load	-	8	16	mA
Common mode Input Voltage Range	V _{ICM}		±12	±13	-	V
Common Mode Rejection Ratio	CMR	R _S ≤10kΩ	70	100	-	dB
Short-circuit Output Current ⁽⁸⁾	I _{SC}		20	50	75	mA

PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Maximum Output Voltage	V_{OM}	$R_L \geq 600\Omega$ $R_L \geq 600\Omega, V^+/V^- = \pm 18V$	± 12 ± 15	± 13 ± 16	-	V
Input Resistance	R_{IN}		30	150	-	k Ω
Output Resistance	R_o		-	0.3	-	Ω
Small-signal Voltage Gain	A_v	$f=10\text{kHz}$	-	67	-	dB
Gain Band Width Product	GBP	$R_L = 600\Omega, C_L = 100\text{pF}$	-	10	-	MHz
Powerband Width	W_{PG}	$R_L = 600\Omega, V_o = \pm 10V$ $R_L = 600\Omega, V_o = \pm 14V, V^+/V^- = \pm 18V$	-	140 100	-	kHz
Equivalent Input Noise Voltage1	e_n	$f=30\text{Hz}$ $f=1\text{kHz}$	-	8 5	-	nV/ $\sqrt{\text{Hz}}$
Equivalent Input noise Current	I_n	$f=30\text{Hz}$ $f=1\text{kHz}$	-	2.7 0.7	-	pA/ $\sqrt{\text{Hz}}$
Equivalent Input Noise Voltage2	V_{NI}	$f=20$ to 20kHz	-	0.6	0.8	μV_{rms}
Slew Rate	SR		-	9	-	V/ μs
Overshoot factor	K_{OV}	$G_V=1, V_{IN}=100\text{mV}_{\text{PP}}, C_L=100\text{pF}, R_L=600\Omega$	-	10	-	%
Channel Separation	CS	$f=1\text{kHz}$	-	110	-	dB

(7) This parameter is not 100% test.

(8) Temperature and /or supply voltages must be limited to ensure the maximum dissipation rating is not exceeded.

■ APPLICATION INFORMATION

• Back-to-back Diode Protection

The input terminals of the NJM5532C are protected from excessive differential voltage by back-to-back diodes.

However, When used in voltage follower circuit, the back-to-back diode may break at power on.

Therefore, put a current-limiting resistance to input terminal as shown Fig.1.

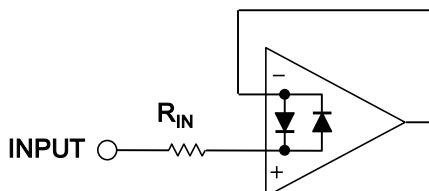



Fig.1

• Caution to Thermal Design

If the NJM5532C junction temperature (T_j) exceeds guaranteed value (150 degree) and the package power dissipation (P_D), there is possibility of the NJM5532C deterioration or breakdown.

The NJM5532C supply current is higher ($I_{CCMAX}=16\text{mA}$ at $V^+/V^- = \pm 15V, Ta=+25^\circ\text{C}$) and has positive temperature coefficient (Refer to Supply Current vs. Temperature characteristic).

Therefore, you should carefully design with due attention to the supply voltage, the internal power dissipation and the ambient temperature.

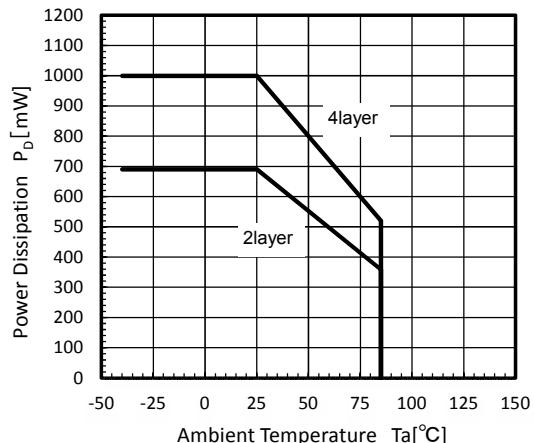

NJM5532C

•Countermeasure to Excess Current by Parasitic Circuit

When the NJM5532C V+ is open (Fig.2), the NJM5532C may be burnt flowing the excess current by internal parasitic circuit(Fig.3).The excess current generating condition is following:

- / Between input terminal and V- voltage difference is higher.
- / Between input terminal and GND impedance is small.
- / V+ terminal is connected with low impedance. (letc is higher)

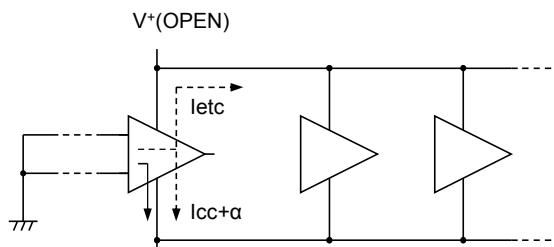


Fig.2

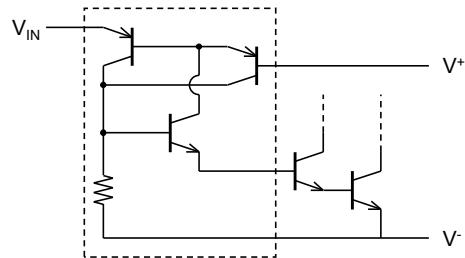


Fig.3

For countermeasure to excess current by parasitic circuit, NJRC recommends the following method.

- / prevent operating of a parasitic circuit by inserting a diode (Fig.4-1/4-2).
- / limiting a parasitic circuit operation by inserting a resistance (1kΩ or more) (Fig.5).

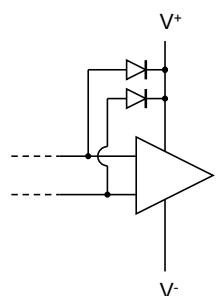


Fig.4-1

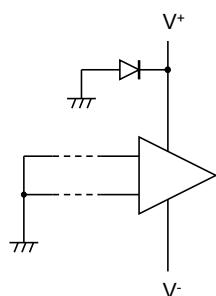


Fig.4-2







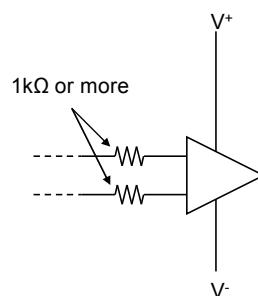








Fig.5

■ TYPICAL CHARACTERISTICS

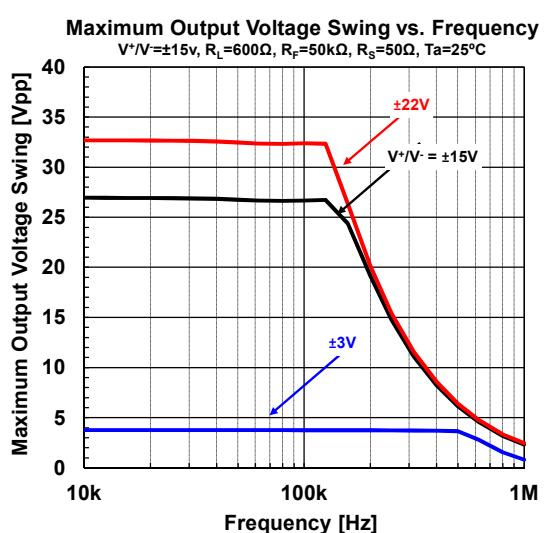
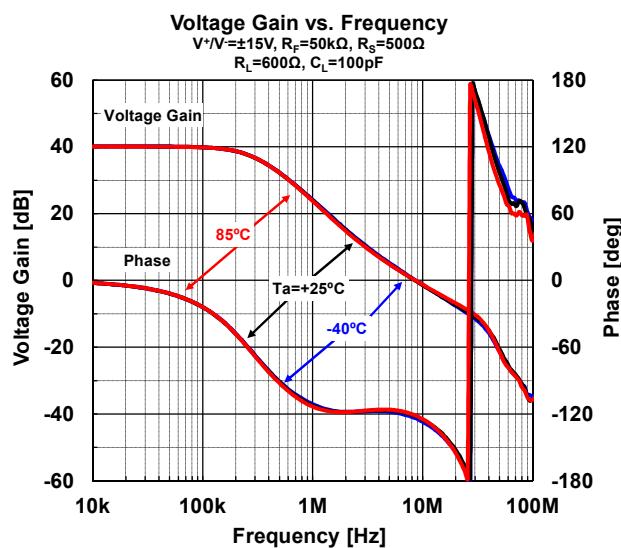
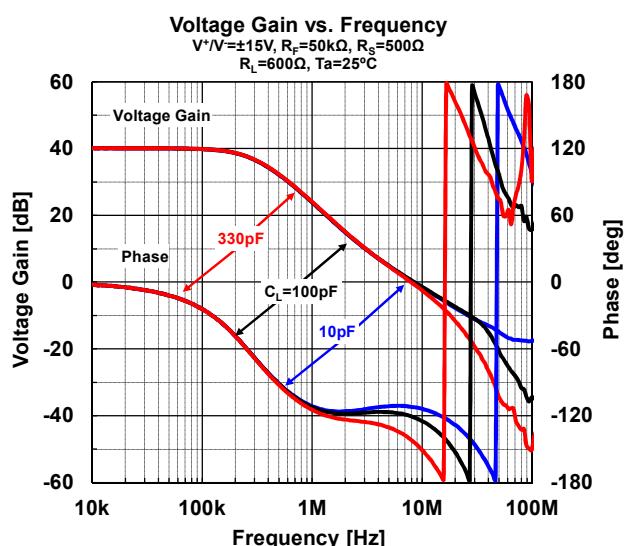
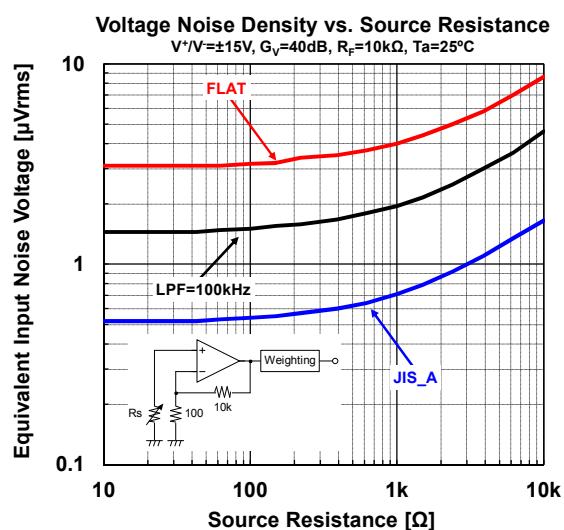
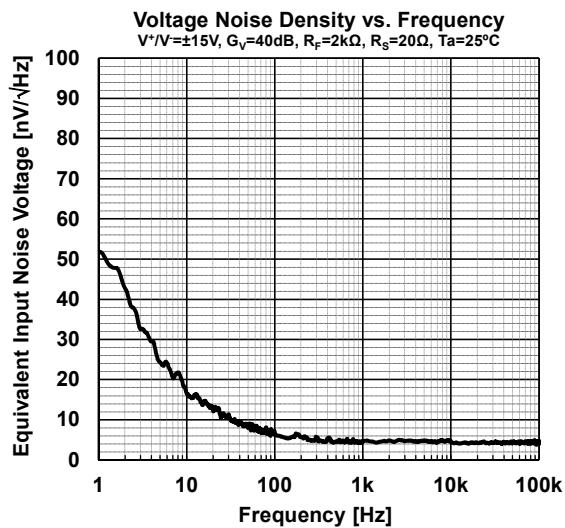
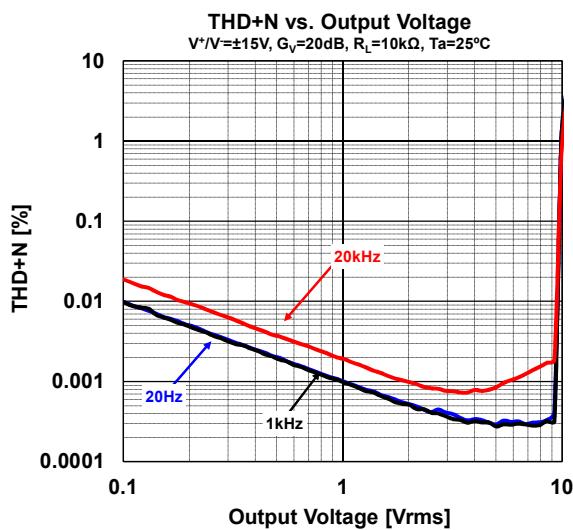


NJM5532C

■ TYPICAL CHARACTERISTICS

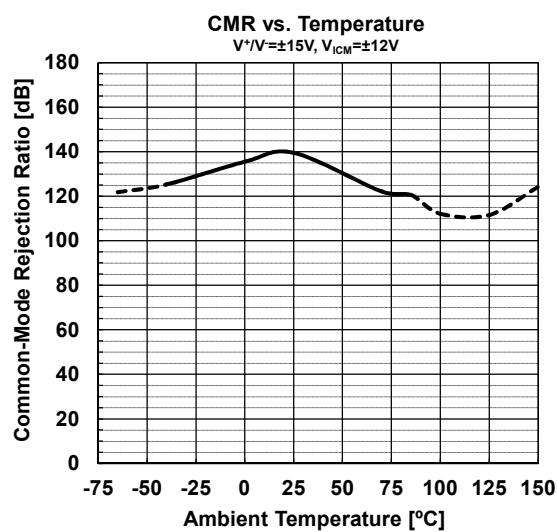
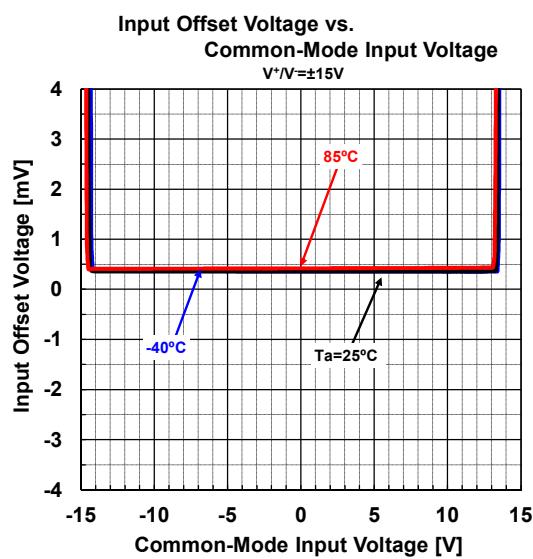
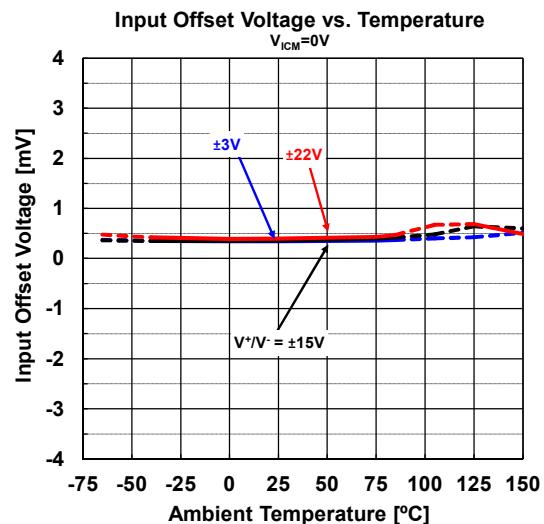
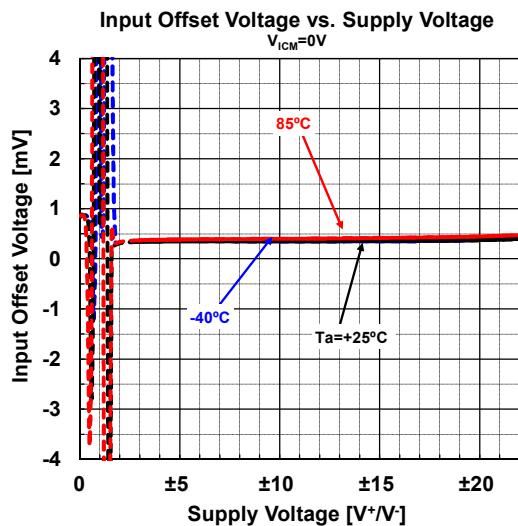
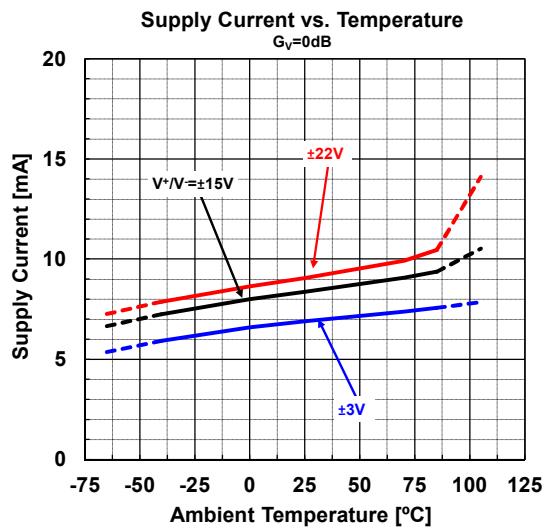
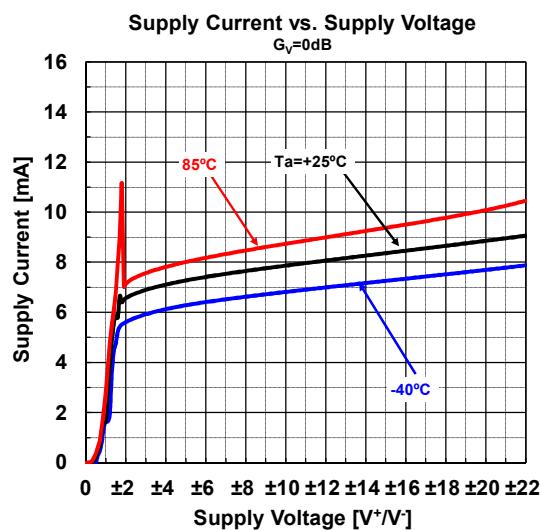


■ TYPICAL CHARACTERISTICS

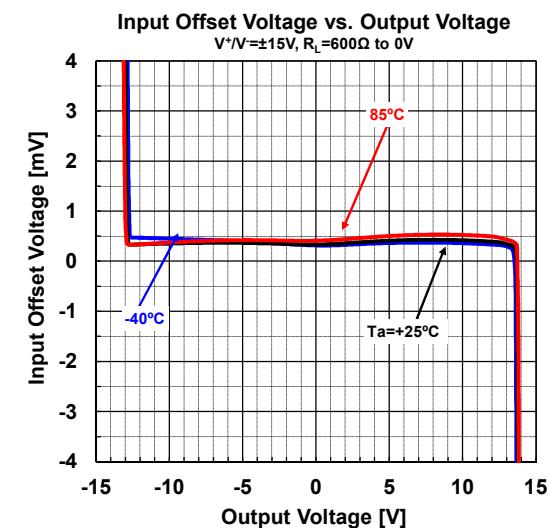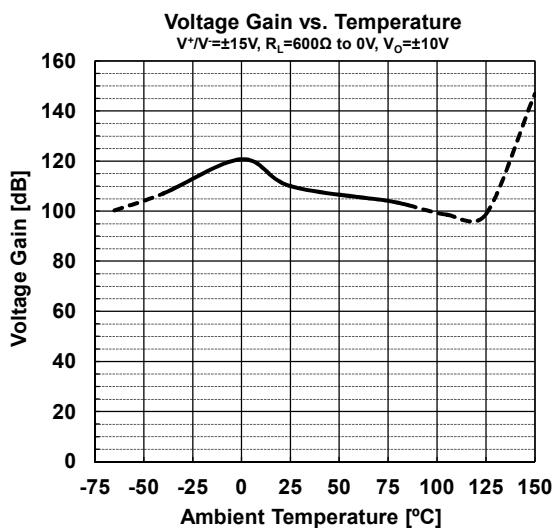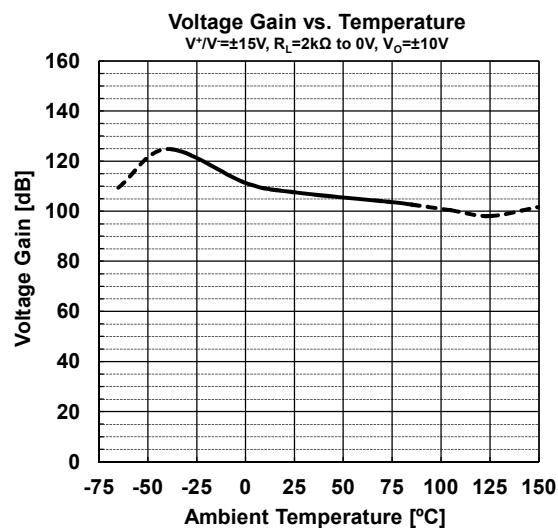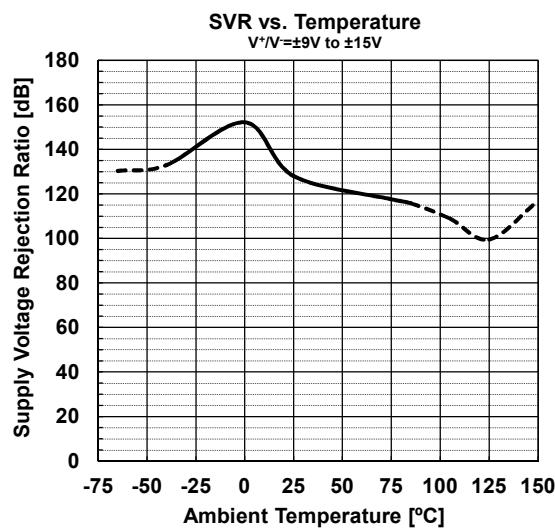
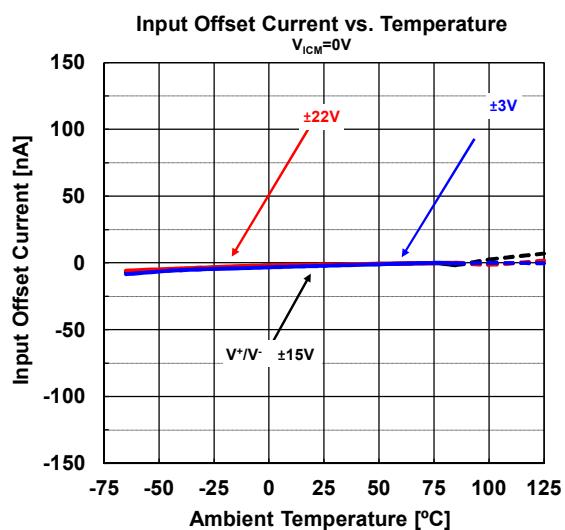
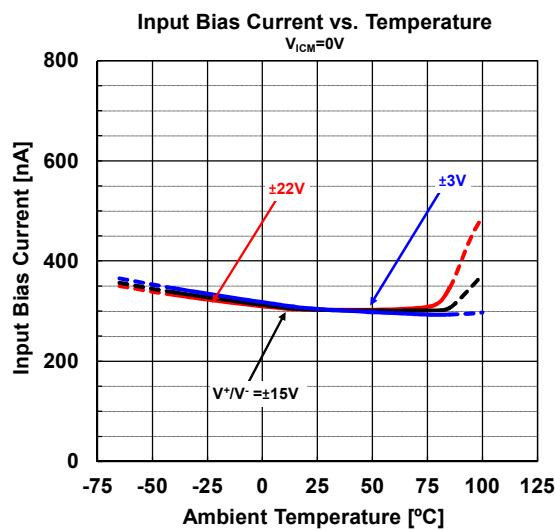


NJM5532C

■ TYPICAL CHARACTERISTICS

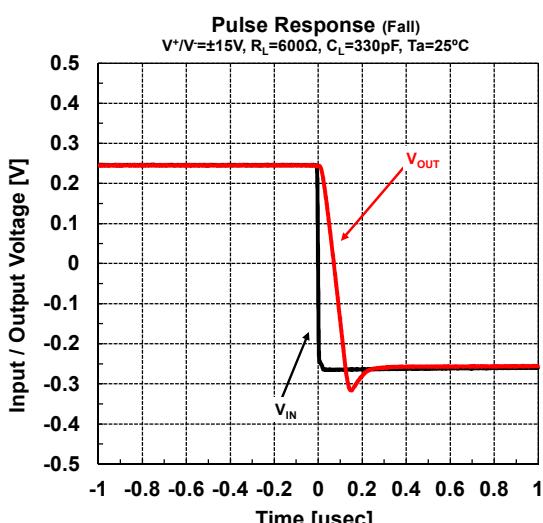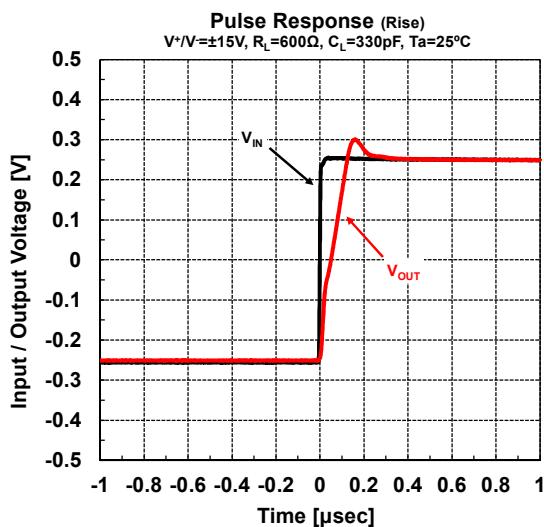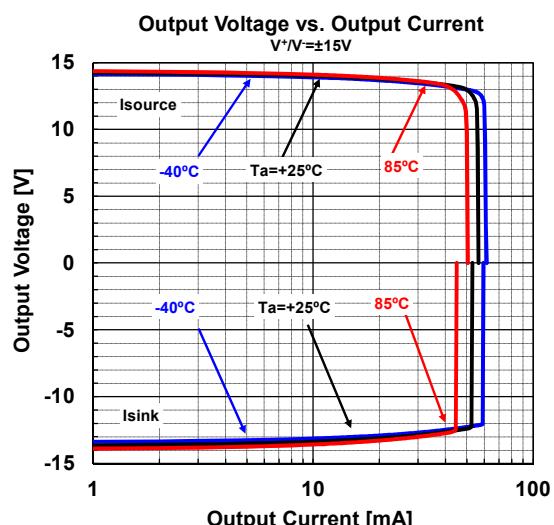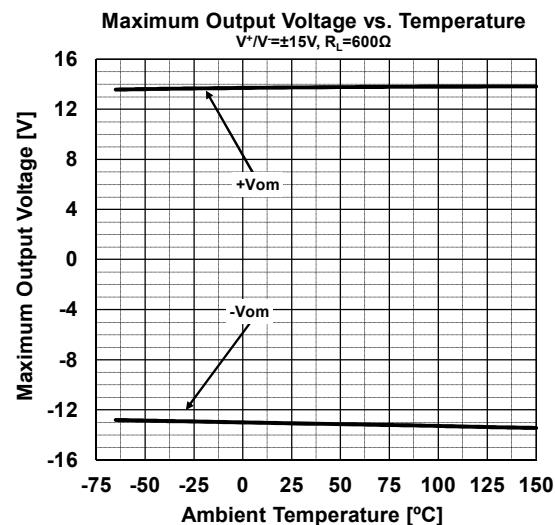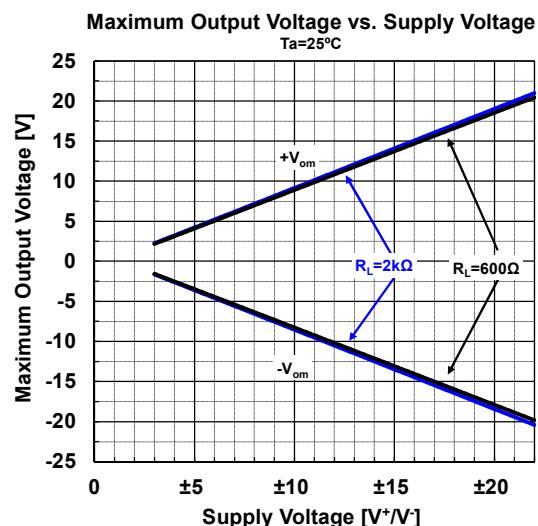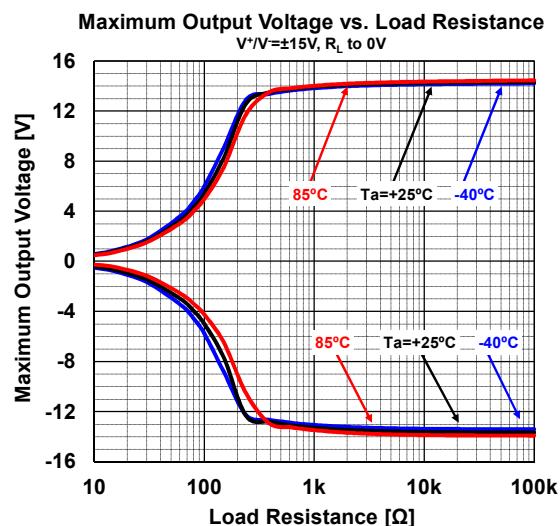


■ TYPICAL CHARACTERISTICS

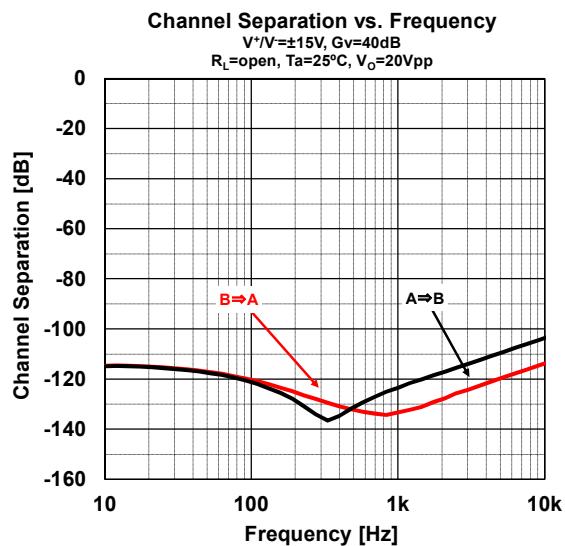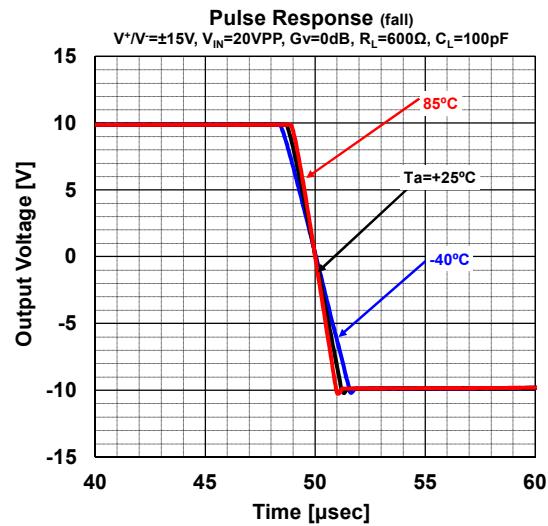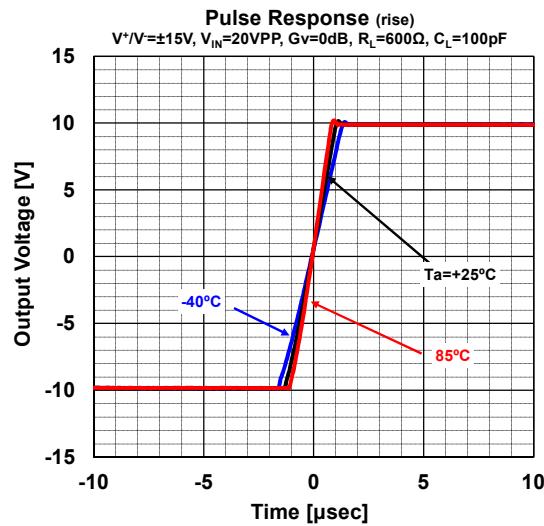

NJM5532C

■PACKAGE OUTLINE UNIT : mm

SOP8

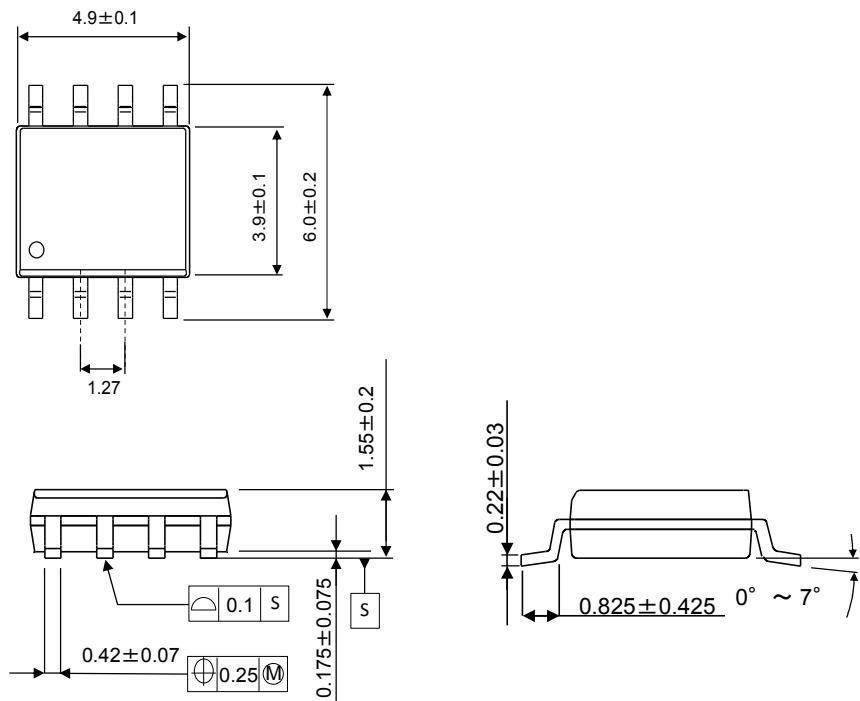

[CAUTION]

The specifications on this data book are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM5532CG-TE2](#)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литер Н,
помещение 100-Н Офис 331