

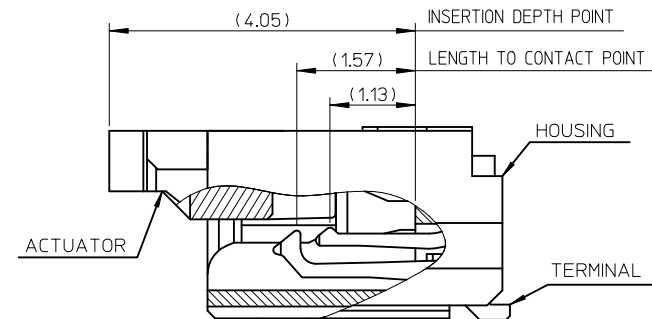
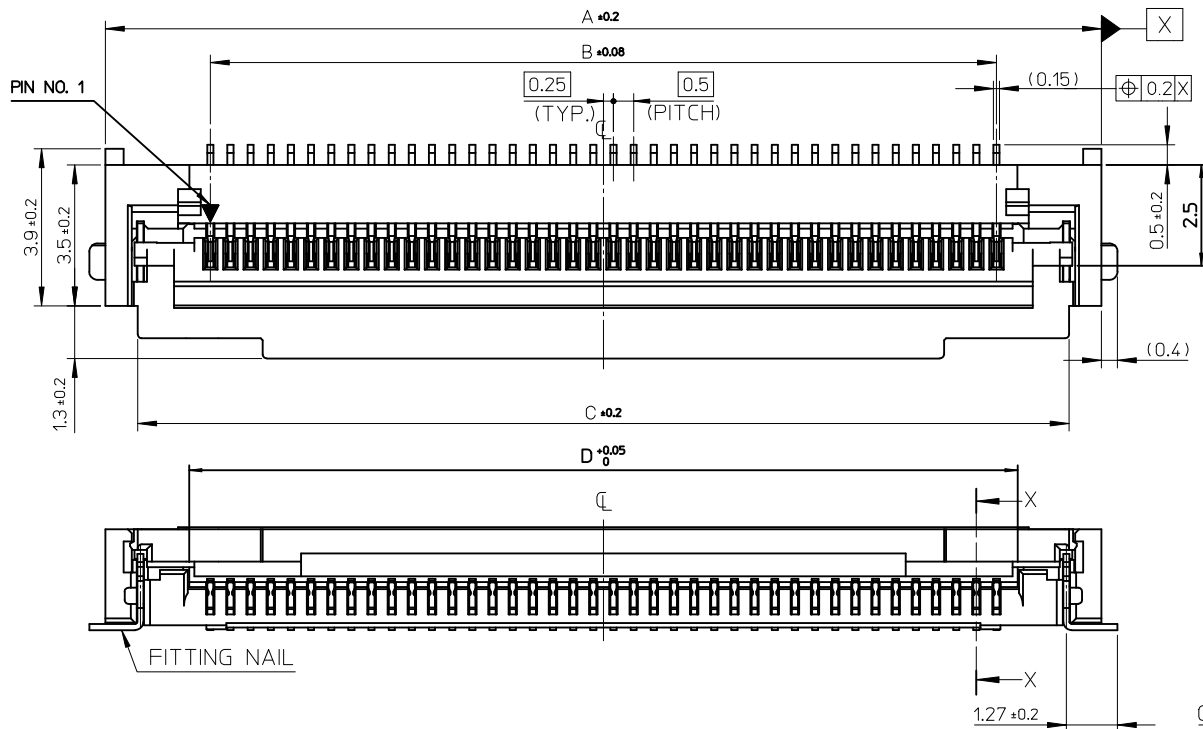




SECTION X-X
Scale 15:1



NOTES

1. MATERIAL

HOUSING LIQUID CRYSTAL POLYMER
GLASS FILLED,UL94V-0(BEIGE)

ACTUATOR PPS GLASS FILLED, UL94V-0(BLACK)

TERMINAL PHOSPHOR BRONZE
(t=0.15)

FITTING NAIL PHOSPHOR BRONZE

2. PLATING

TERMINAL

CONTACT AREA : SEPARATED GOLD PLATING

(0.05 MICROMETER MINIMUM)

SOLDER TAIL AREA : SEPARATED GOLD PLATING

UNDERPLATE : NICKEL OVERALL

(1.0 MICROMETER MINIMUM)

FITTING NAIL

TIN PLATING (1.0 MICROMETER MIN.)

UNDER PLATING : NICKEL PLATING

(1.0 MICROMETER MIN.)

3. IN THE PACKAGE, ACTUATOR OF
PART 104060-**10 SHOULD BE CLOSED.

4. FITTING NAIL FOR PREVENTION OF
PEELING OF P.C.B. PATTERN.

5. R0.3 MUST NOT BE OVERLAPPED
TO PATTERN OF FPC/FFC.

6. N: CIRCUIT.

7. ELV AND RoHS COMPLIANT

8. TAILS AND NAILS COPLANALITY
TO BE 0.1mm MAX.

40.55	43.1	39.5	44.7	104060-8010	104060-8017	80
30.55	33.1	29.5	34.7	104060-6010	104060-6017	60
D	C	B	A	MATERIAL NO.	EMBOSSED PACKAGE	CIRCUIT

CONNECTOR SERIES No. 104060-**10

SCALE
1:1

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

0.5 FFC E/O DUAL CONTACT
HOUSING ASS'Y



MOLEX INCORPORATED

DOCUMENT NO.

SD-104060-001

SHEET NO.

1 OF 3

DIMENSION STYLE
MM ONLY

DRAWN BY	DATE
YR.KIM	2009/06/26
CHECKED BY	DATE
YS00.KIM	2009/06/26
APPROVED BY	DATE
YS00.KIM	2009/06/26
MATERIAL NO.	

SEE TABLE

SIZE
A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

NEW RELEASED	EC NO: KOR2010-0190	2010/06/09
DRWN:HYOU	2010/06/09	
CHKD:KIM	2010/06/09	
APPR:YUNSIKKIM	2010/06/09	
A		

QUALITY SYMBOLS
▽=0
◻=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± 0.3	± ---

ANGULAR ± 1 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

10 9 8 7 6 5 4 3 2 1

F

E



D

C

B

A




ib_frame_A3_P_ME_T
Rev. E 2006/04/15

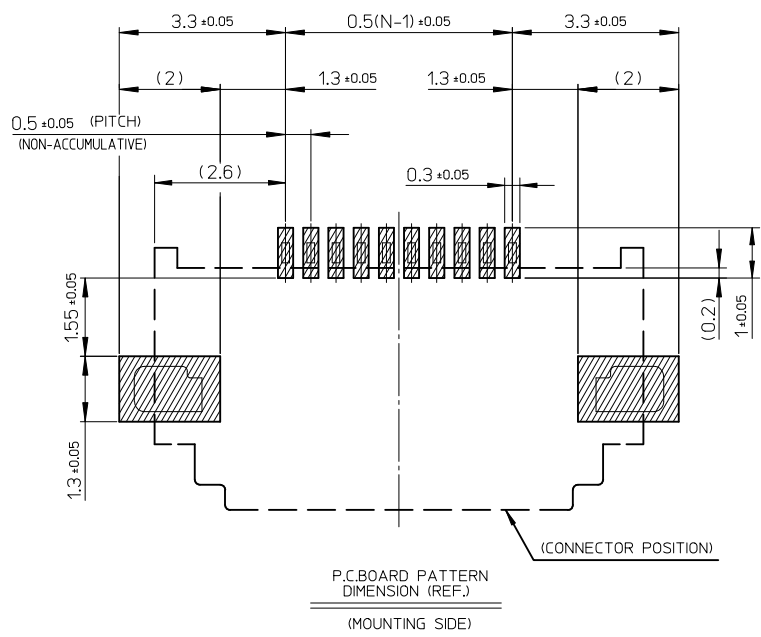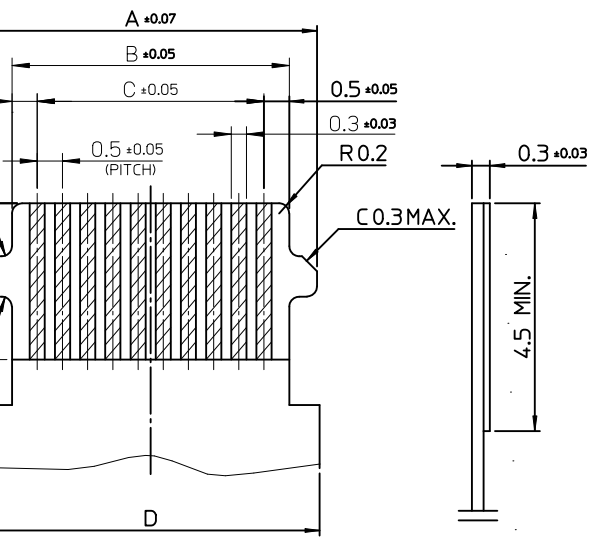

42.3	39.5	40.5	42.2	80
32.3	29.5	30.5	32.2	60
D	C	B	A	CIRCUIT


NEW RELEASED EC NO: KOR2010-0190 DRWN:HYOU CHKD:YS.KIM APPR:YUNSIKKIM	QUALITY SYMBOLS ▽=0 ◻=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION 		
				mm	INCH	DRAWN BY YR.KIM	DATE 2009/06/26	TITLE 0.5 FFC E/O DUAL CONTACT HOUSING ASS'Y			
			4 PLACES	± ---	± ---	CHECKED BY YS00.KIM	DATE 2009/06/26	MOLEX INCORPORATED			
			3 PLACES	± ---	± ---	APPROVED BY YS00.KIM	DATE 2009/06/26				
			2 PLACES	± ---	± ---	MATERIAL NO.		DOCUMENT NO.	SHEET NO.		
			1 PLACE	± 0.3	± ---	SEE TABLE		SD-104060-001	2 OF 3		
			ANGULAR ± 1 °								
A	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

9 8 7 6 5 4 3 2 1

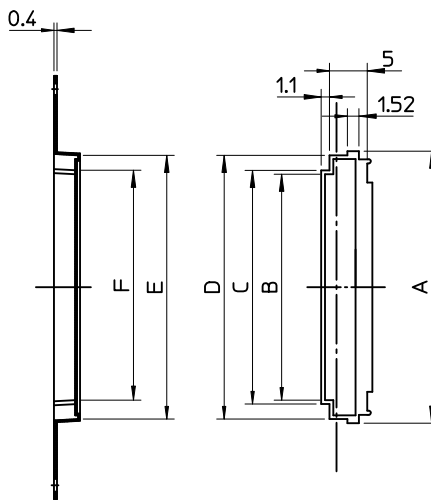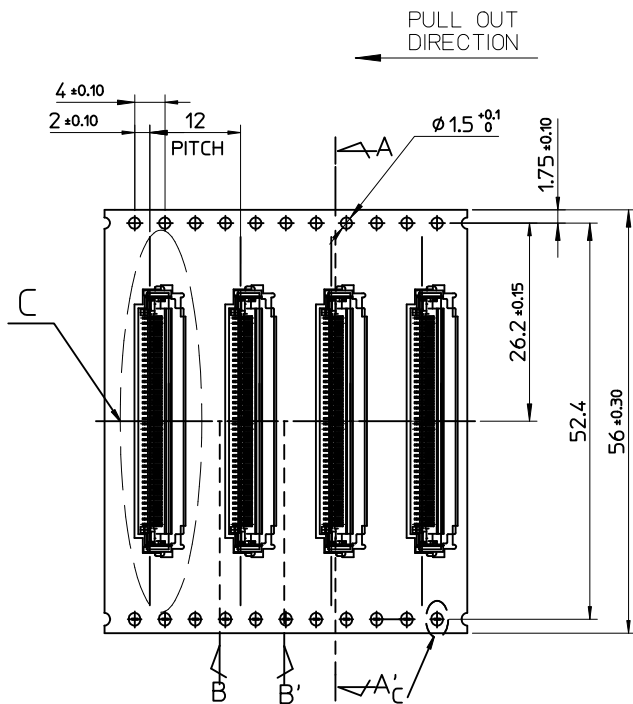

SECTION A-A'

DETAIL C

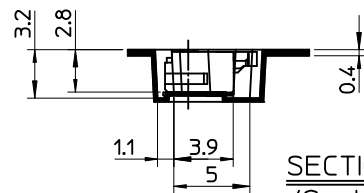


SECTION B-B'
(Scale 2/1)

NOTES

1. NUMBER OF CONNECTORS : 2,400PCS/REEL

2. LEAD TAPE LENGTH

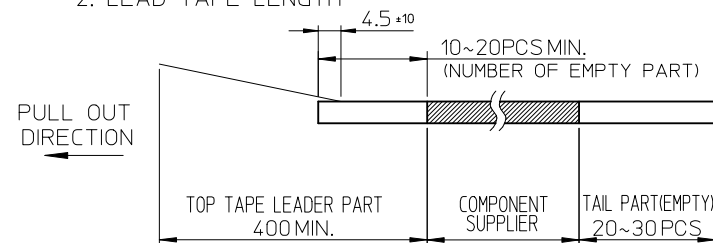


3. FOR DIMENSIONS OF PRODUCT, REFER TO SD-104060-001.

4. MATERIAL

CARRIER TAPE : POLYETHYLENE TEREPHTHALATE
TOP TAPE : POLYETHYLENE TEREPHTHALATE , POLYETHYLENE
REEL : POLYSTYRENE<RECYCLE MATERIAL CONTAINED>

5. ELV AND RoHS COMPLIANT

6. PEELING OFF FORCE OF COVER TAPE : 0.1N~0.59N(10.2GF~60GF)
(PEELING DIRECTION AS SHOW IN FOLLOW FIG.)
PEELING OFF SPEED : 300mm/Min.(Ref.)



35902-0021	104060-8099	40.9	44.9	44.9	40.9	40	46	104060-8017	80
35902-0021	104060-6099	30.9	34.9	34.9	30.9	30	36	104060-6017	60
COVER TAPE	EMBOSS TAPE	F	E	D	C	B	A	MATERIAL NO.	CIRCUIT

NEW RELEASED EC NO: KOR2010-0190 DRWN: HYOU 2010/06/09 CHKD: KS.KIM 2010/06/09 APPR: YUNSIKKIM 2010/06/09	DESCRIPTION	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
					DRAWN BY YR.KIM	DATE 2009/06/26	TITLE 0.5 FFC E/O DUAL CONTACT HOUSING ASS'Y			
					CHECKED BY YS00.KIM	DATE 2009/06/26				
					APPROVED BY YS00.KIM	DATE 2009/06/26	MOLEX INCORPORATED			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		DOCUMENT NO. SD-104060-001		SHEET NO. 3 OF 3	
			SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331