

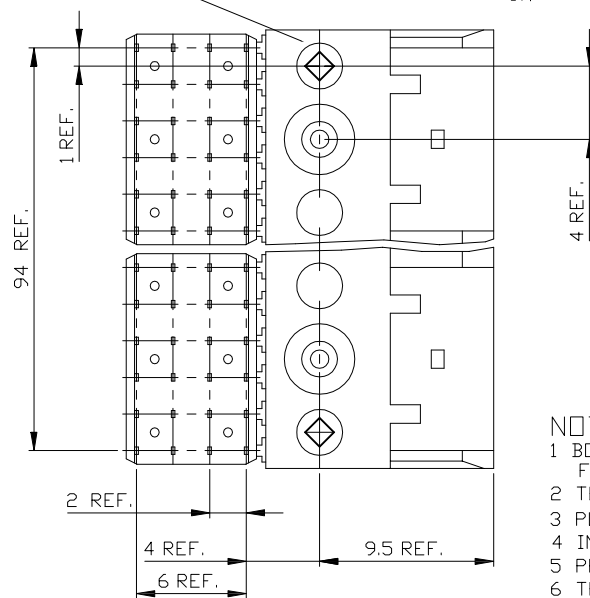



PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM*A"
70230-X01/X01LF	1.6	2.90
70230-X11/X11LF	2.4	3.53

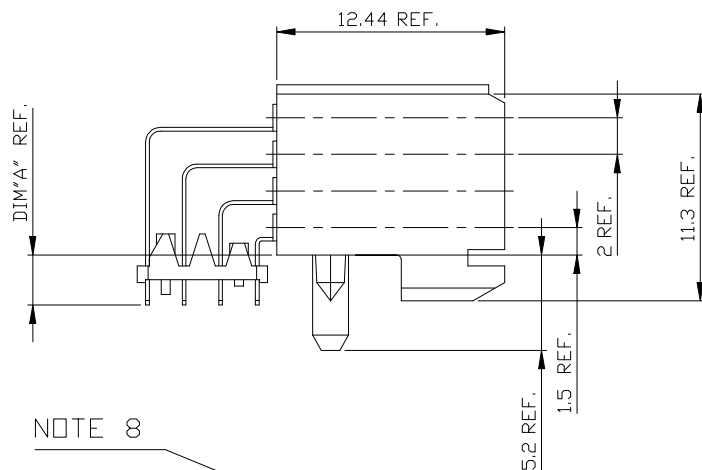

PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

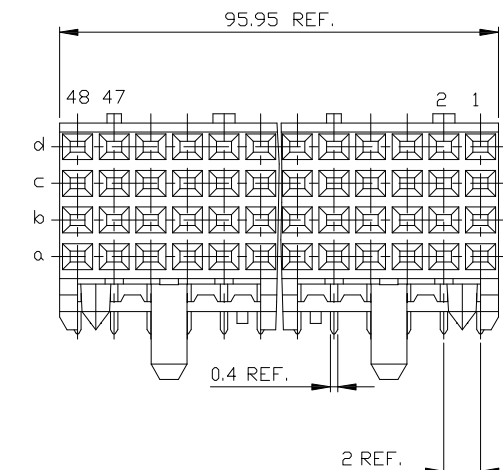


PRODUCT AFTER HOT RIVETTING.

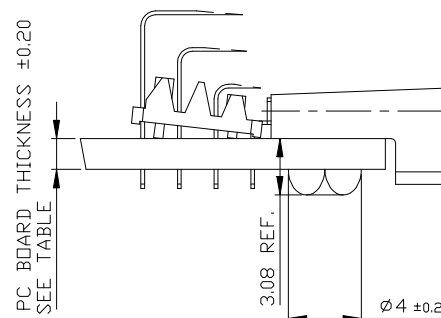

NOTES:

- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
3 PLATING SOLDER TAILS 2-8 um SnPb 90-97 OR 2-8 um PURE Sn
4 INDICATED HOLES ARE UNPLATED.
5 PRODUCT MARKING: PART NUMBER & BATCH ID.
6 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
7 THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK
TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER
APPLICATION.
8 DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE
BOTH SIDES OF PRODUCT.

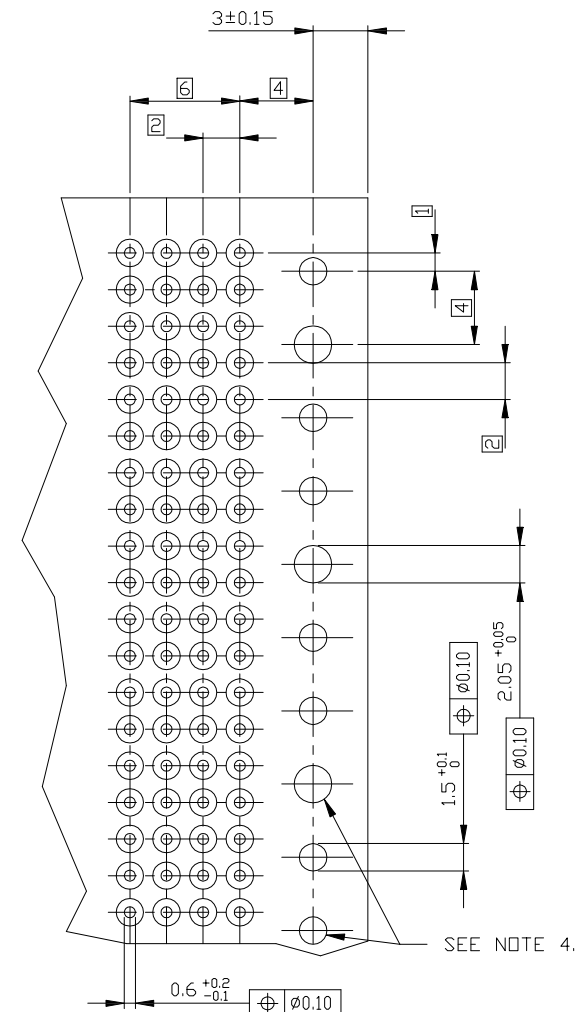



RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

mat'l. code			tolerances unless otherwise specified		CUSTOMER COPY		 www.Falconconnect.com	
ltr ecn nld date			linear		 		title	
K D906-0004 Cdw 04/21/21			D906-0477 Cdw 11/20/069				RA FEMALE SIGNAL	
DG07-0167 Cdw 05/10/07			angles				STB 96 mm VERSION	
N DG09-0068 Cenh 06/06/09			dr R.Rigge 900919				product family METRAL(tn)	
ENGB Bouwmeijer 904208			Cdr A van Zanten 900919				size/dwg no	
H V00579 LLA 000316			opdr van Voensel 900919		scale		A2	213
J V00847 LLA 000530					S1		70230	sheet 1 of 3
sheet revision N N N								
index sheet 1 2 3								






All rights strictly reserved. Reproduction or issue in any form without written authority from the proprietor.
Tous droits strictement réservés. Reproduction ou communication à des tiers sans autorisation écrite du propriétaire.
© FCI NV

PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
70230-X02/X02LF	1.6	2.90
70230-X12/X12LF	2.4	3.53

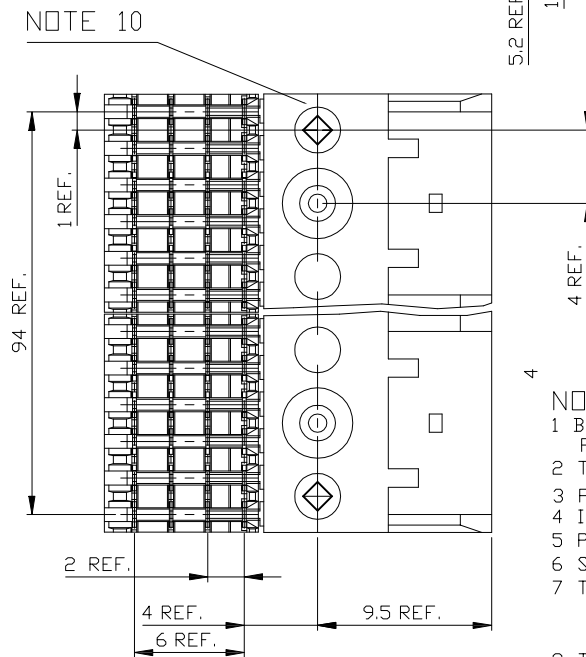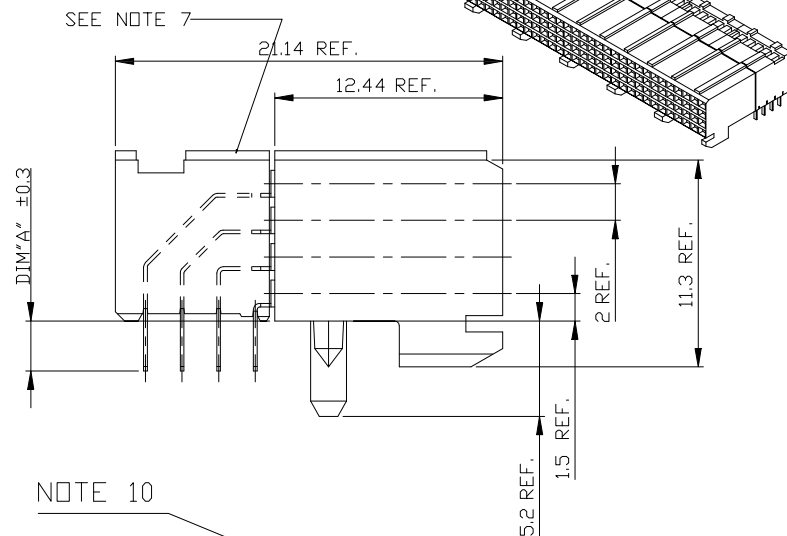

PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

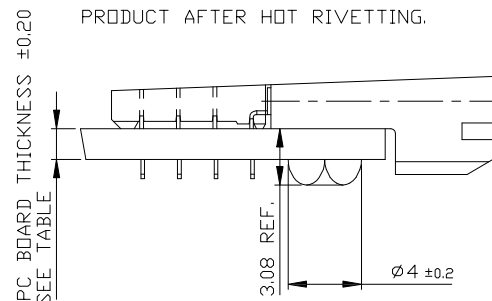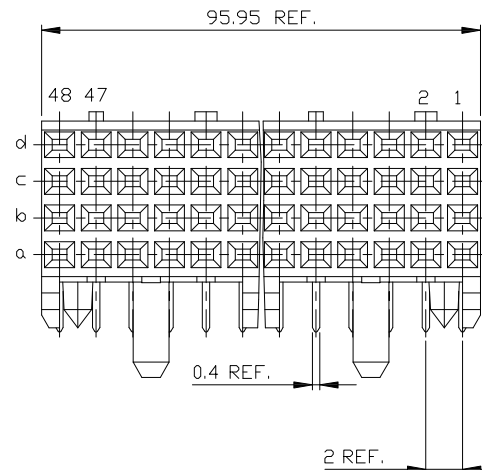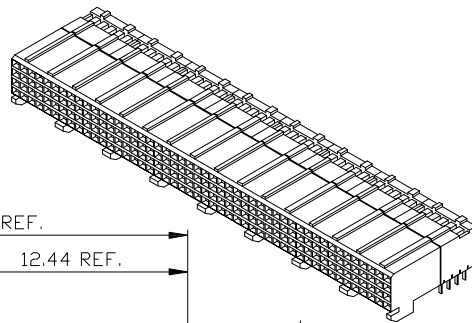


PC BOARD THICKNESS ±0.20
SEE TABLE

PRODUCT AFTER HOT RIVETTING.

NOTES:

- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
- 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
- 3 PLATING SOLDER TAILS 2-8 鍍 SnPb 90-97 OR 2-8 鍍 PURE Sn
- 4 INDICATED HOLES ARE UNPLATED.
- 5 PRODUCT MARKING: PART NUMBER & BATCH ID.
- 6 SET BACK FOR PRESS BLOCK.
- 7 TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD
- 8 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 9 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 10 DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.

14.64 REF. SEE NOTE 6

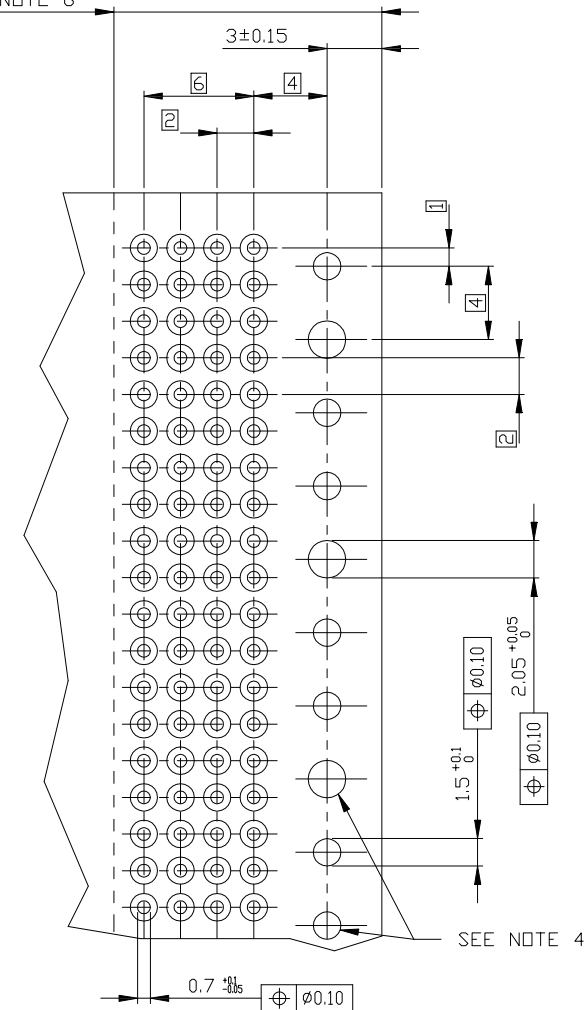


RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

nat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI	
litr	ecnr	nodr	date	linear	projection	title	www.fciconnection
N					mm	RA FEMALE SIGNAL STB 96 mm VERSION	
				angles	mm	product family METAL (tm)	code
				dir. D. de Bil	970529	size dwg no	213
				engr. P. Schalk	970529	scale	sheet
				chr. P. Schalk	970529	A2	2 of -
				app. H. Coolmans	970529	70230	
sheet	revision						
index	sheet						




All rights strictly reserved. Reproduction or issue in any form without written authority from the proprietor.
Tous droits strictement réservés. Reproduction ou communication à des tiers sans autorisation écrite du propriétaire.
Property of FCI S.A.
© FCI S.A.


PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
70230-X03/X03LF	1.6	2.90
70230-X13/X13LF	2.4	3.53

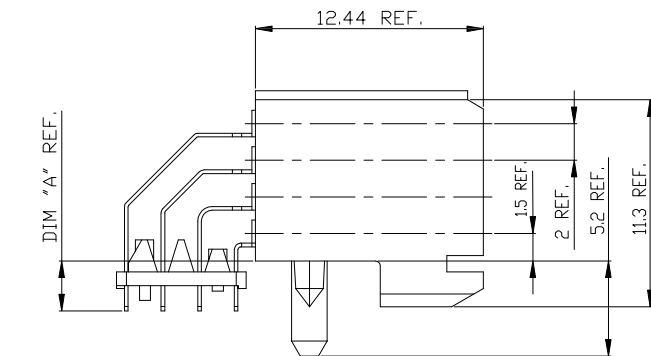


NOTE 11

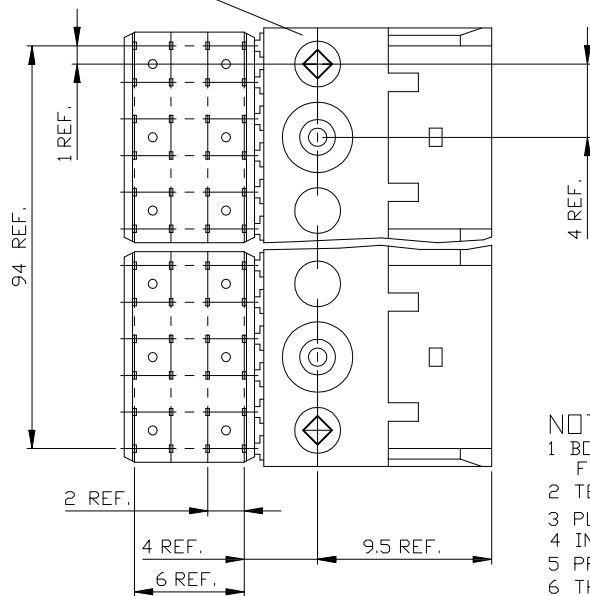

PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

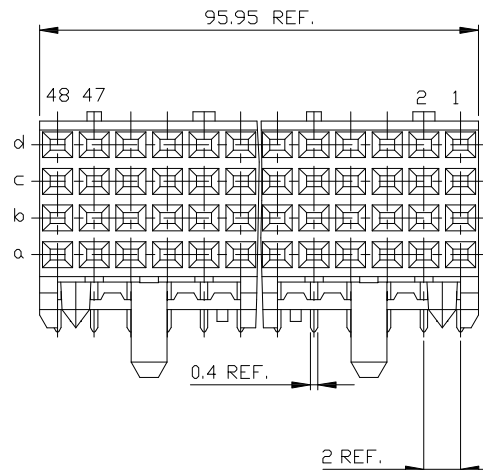


PRODUCT AFTER HOT RIVETTING.

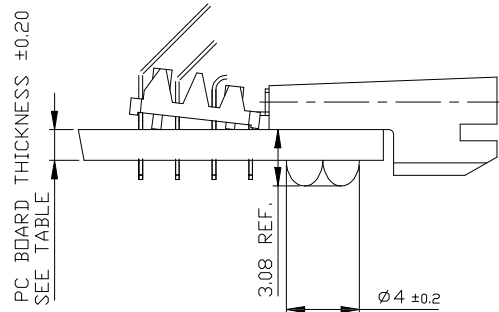

NOTES:

- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
- 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
- 3 PLATING SOLDER TAILS 2-8 鍍 SnPb 90-97 OR 2-8 鍍 PURE Sn
- 4 INDICATED HOLES ARE UNPLATED.
- 5 PRODUCT MARKING: PART NUMBER & BATCH ID.
- 6 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 7 THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK
TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER
APPLICATION.
- 8 DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE
BOTH SIDES OF PRODUCT.

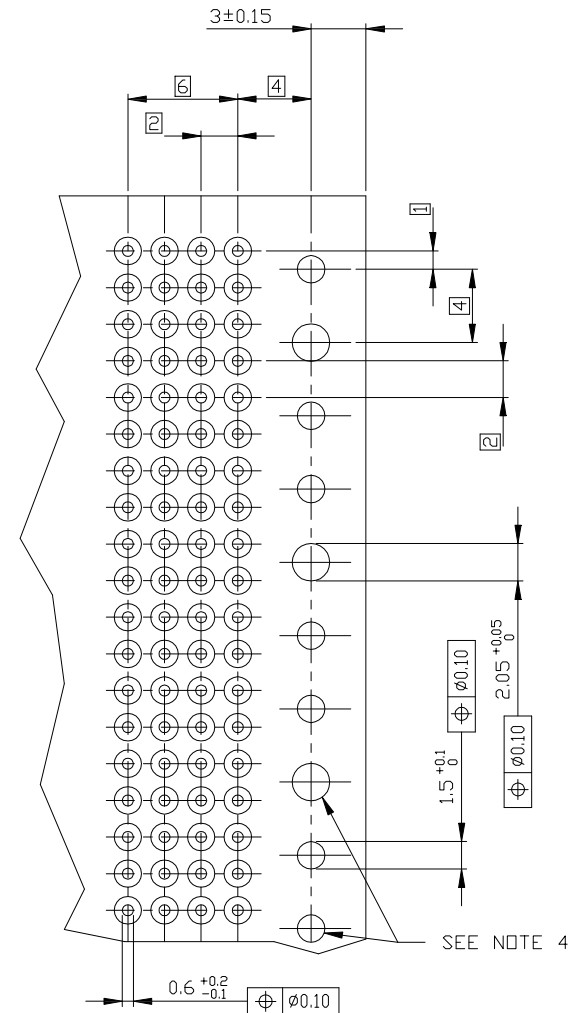

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

nat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI	
litr	ecn	nodr	date	linear	projection	title	www.fciconnection
N						RA FEMALE SIGNAL STB 96 mm VERSION	
				angles	mm	product family	METRAL(tm)
				dir	Heaven Cen	11/20/06	code
				engr	Collins Lu	11/20/06	213
				chr	Beer Fu	11/20/06	sheet
				appd	Joseph Hsia	11/20/06	3 of-
sheet	revision			scale	5:1	A2	70230
index	sheet						



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331