

Amplifier, CATV Return Path Differential 5 - 300 MHz

Rev. V1

Features

- 19 dB Gain
- 7 dB Noise Figure
- 8 V Bias
- Low Distortion
- Wide Bandwidth for DOCSIS 3.1
- Lead-Free 3 mm 16-lead PQFN Package
- Halogen-Free “Green” Mold Compound
- RoHS* Compliant and 260°C Reflow Compatible

Description

The MAAM-011156 is a GaAs single stage differential amplifier assembled in a lead-free 3 mm 16-lead PQFN plastic package. This amplifier provides 19 dB of gain while biased at +8 volts and also offers a power down function. The amplifier provides excellent linearity and high output power with greater than 30 dB MER for 64 QAM modulation with 16 channels and 58 dBmV per channel.

It is ideally suited for use in CATV return path amplifier applications especially the wide bandwidth of DOCSIS 3.1.


Ordering Information^{1,2}

Part Number	Package
MAAM-011156-TR1000	1000 piece reel
MAAM-011156-TR3000	3000 piece reel
MAAM-011156-001SMB	Sample Board

1. Reference Application Note M513 for reel size information.
2. All sample boards include 5 loose parts.

*Restrictions on Hazardous Substances,
European Union Directive 2011/65/EU.

Functional Schematic

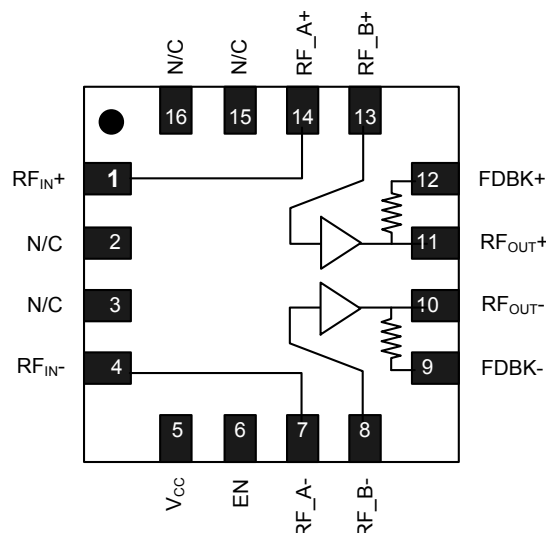

Pin Designations

Pin	Function	Function
1	RF _{IN} +	RF Input+
2	N/C	No Connection
3	N/C	No Connection
4	RF _{IN} -	RF Input-
5	V _{CC}	Bias Voltage
6	EN	Enable
7	RF _A -	RF Input Node A-
8	RF _B -	RF Input Node B-
9	FDBK-	Feedback-
10	RF _{OUT} -	RF Output-
11	RF _{OUT} +	RF Output+
12	FDBK+	Feedback+
13	RF _B +	RF Input Node B+
14	RF _A +	RF Input Node A+
15	N/C	No Connection
16	N/C	No Connection
17	Paddle ³	Ground

3. The exposed paddle centered on the package bottom must be connected to RF and DC ground.

Amplifier, CATV Return Path Differential
5 - 300 MHz

Rev. V1

Electrical Specifications: $T_A = 25^\circ\text{C}$, $V_{CC} = +8\text{ V}$, $EN = 5\text{ V}$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Gain	-10 dBm P_{IN} , 100 MHz 250 MHz	dB	18.5 18.0	19.5 19.5	21.5 21.0
Noise Figure	5 - 300 MHz	dB	—	7	—
Input Return Loss	5 - 300 MHz	dB	—	20	—
Output Return Loss	5 - 300 MHz	dB	—	18	—
Reverse Isolation	5 - 300 MHz	dB	—	26	—
64 QAM MER	16 Channels (5 - 250 MHz), 57 dBmV/Ch.	dBm	30	35	—
P1dB	5 - 300 MHz	dBm	—	28	—
OIP3	Two tones at 1 MHz spacing, $P_{OUT} = +12\text{ dBm}$ per tone, 200 MHz	dBm	—	44	—
OIP2	Two tones at 1 MHz spacing, $P_{OUT} = +12\text{ dBm}$ per tone, 5 - 300 MHz	dBm	—	78	—
I_{CC}	$V_{CC} = +8\text{ V}$, $EN = 5\text{ V}$	mA	—	210	240
I_{CC_OFF}	$V_{CC} = +8\text{ V}$, $EN = 0\text{ V}$	mA	—	1	—

Absolute Maximum Ratings^{4,5}

Parameter	Absolute Maximum
Input Power	+11 dBm
Bias Voltage	+10 V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +125°C

4. Exceeding any one or combination of these limits may cause permanent damage to this device.
 5. MACOM does not recommend sustained operation near these survivability limits.

Handling Procedures

Please observe the following precautions to avoid damage:


Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these HBM Class 1B devices.


Amplifier, CATV Return Path Differential 5 - 300 MHz

Rev. V1

Schematic PCB Layout

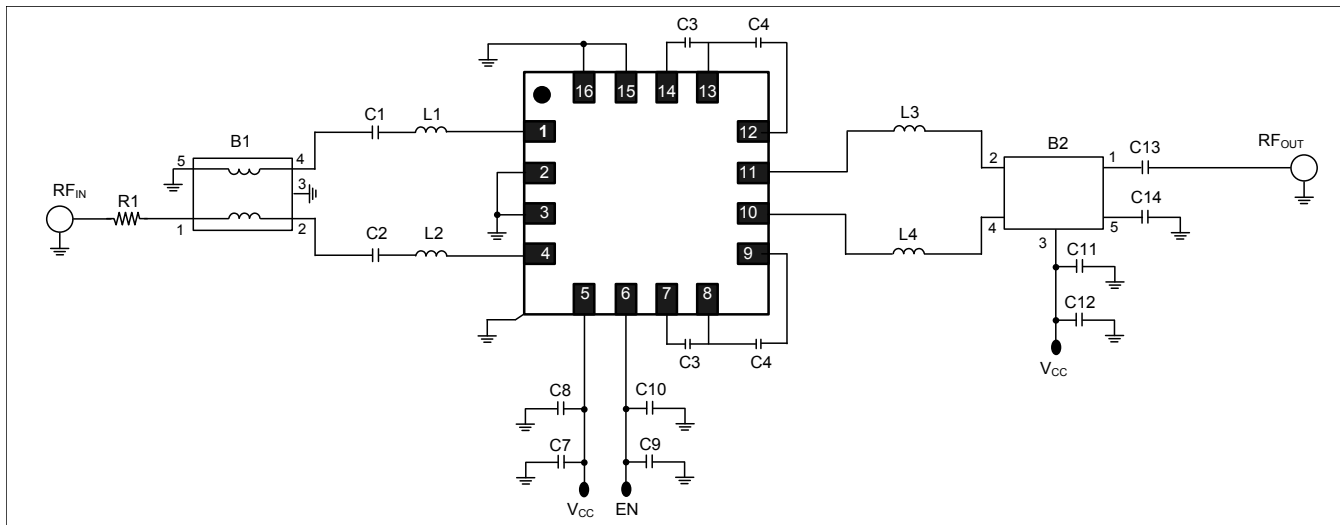

Sample Board

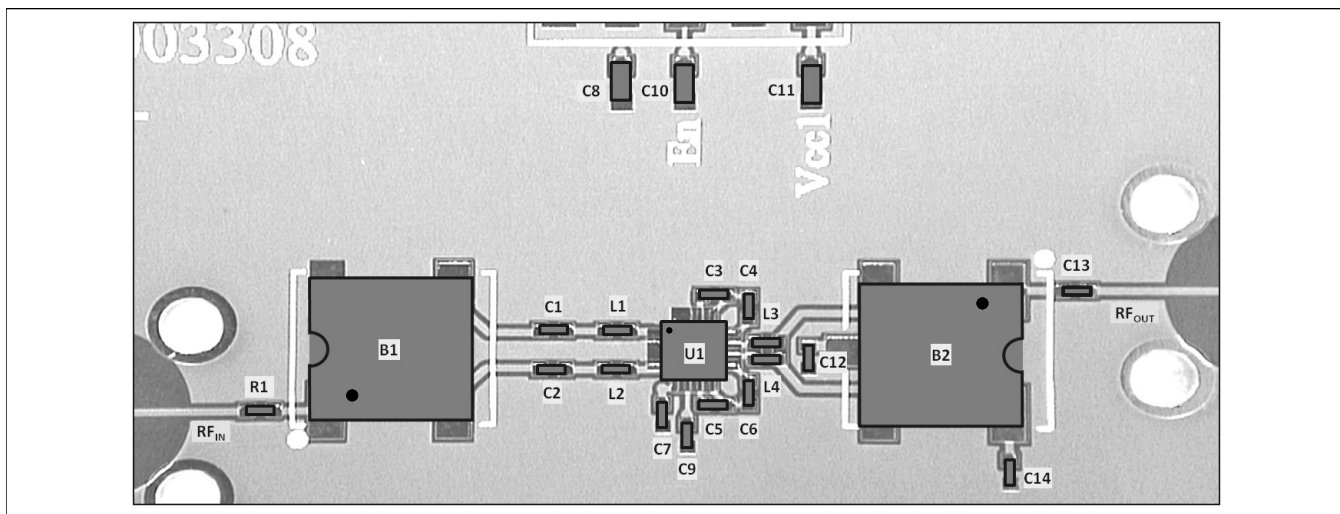

Off-Chip Component Values


Component	Value	Package
C1-C6,C13	0.01 μ F	0402
C7,C9,C12,C14	0.1 μ F	0402
C8,C10,C11	1 μ F	0603
R1	0 Ω	0402
L1-L4	18 nH	0402
B1-B2	1:2 Transformer Balun, MACOM's MABA-011029	

Amplifier, CATV Return Path Differential 5 - 300 MHz


Rev. V1

Typical Performance Curves


Gain

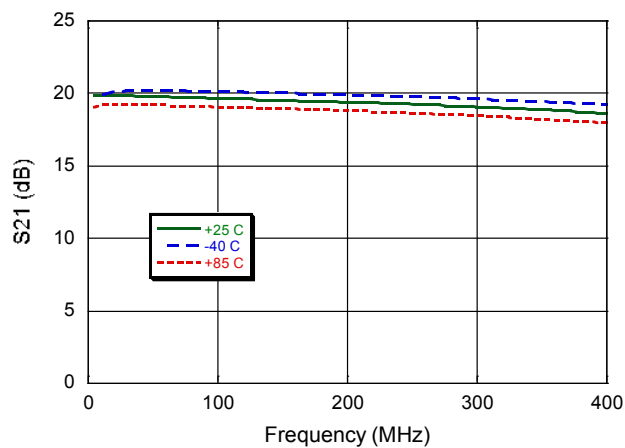


Reverse Isolation

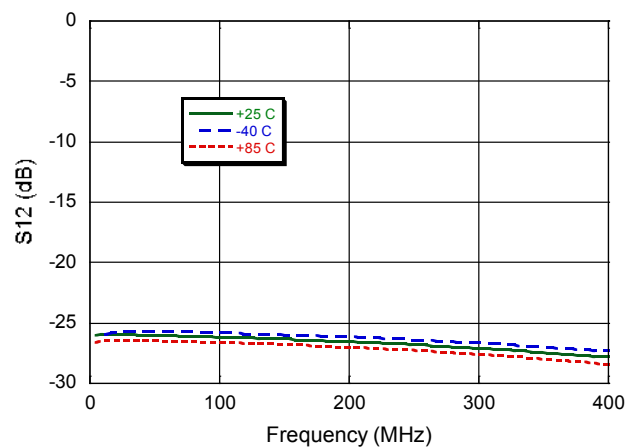


Input Return Loss

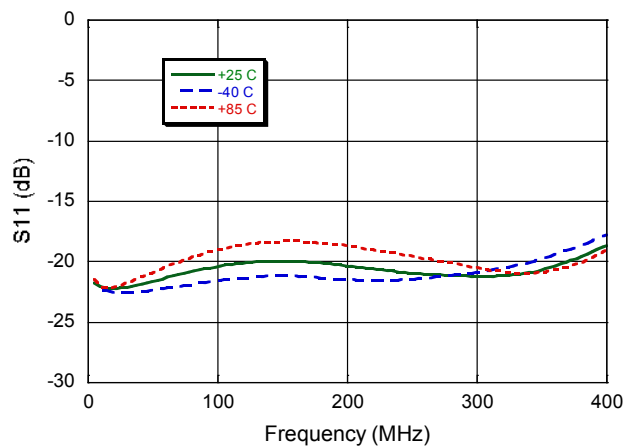

Output Return Loss

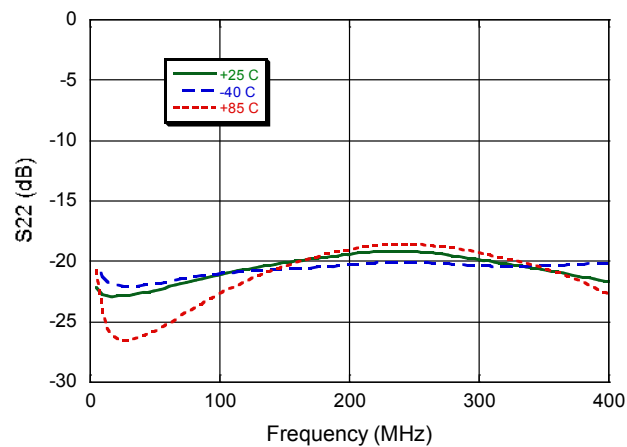

Noise Figure

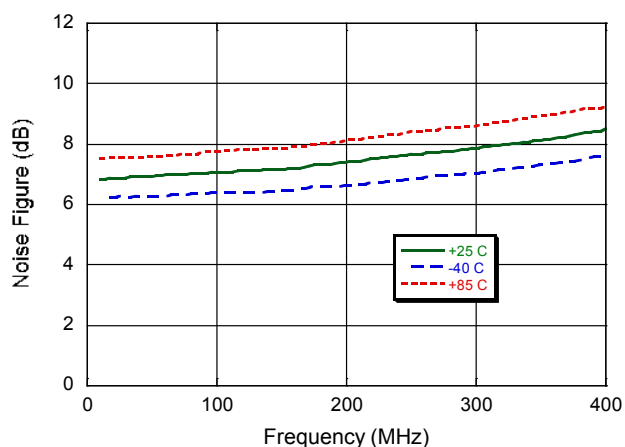


Amplifier, CATV Return Path Differential 5 - 300 MHz


Rev. V1

Typical Performance Curves


OIP2 @ $P_{OUT} = 12$ dBm

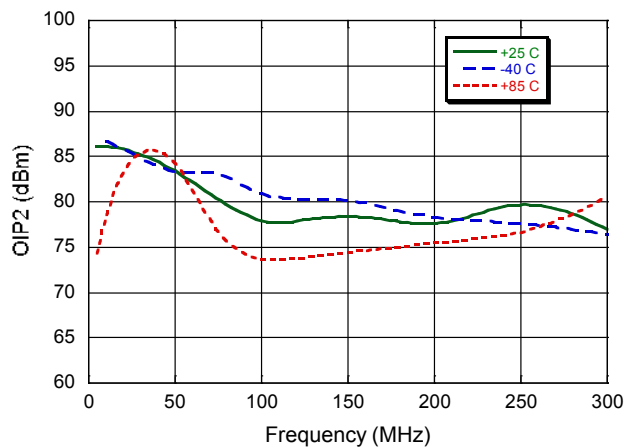


OIP3 @ $P_{OUT} = 12$ dBm

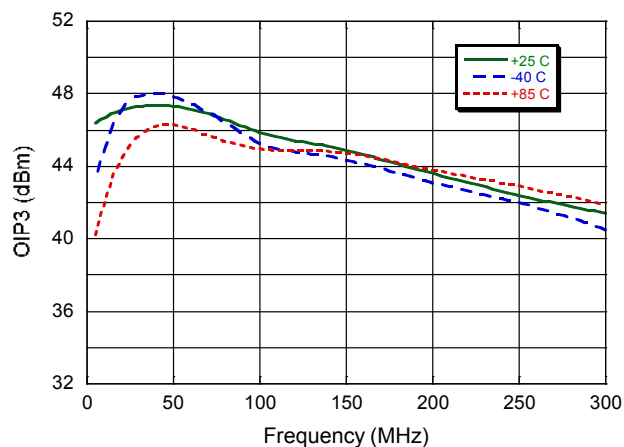

P1dB @ 250 MHz

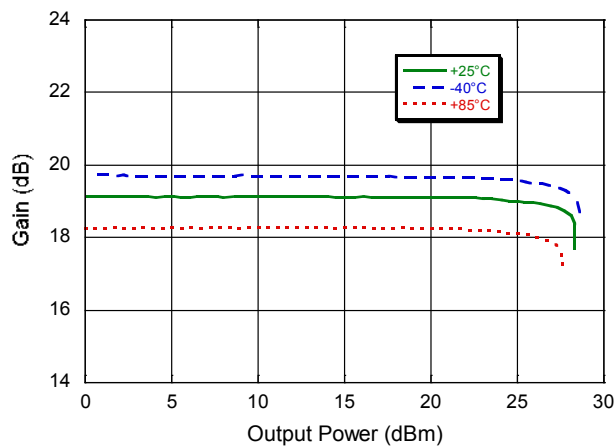

64 QAM Modulation Error Ratio⁶

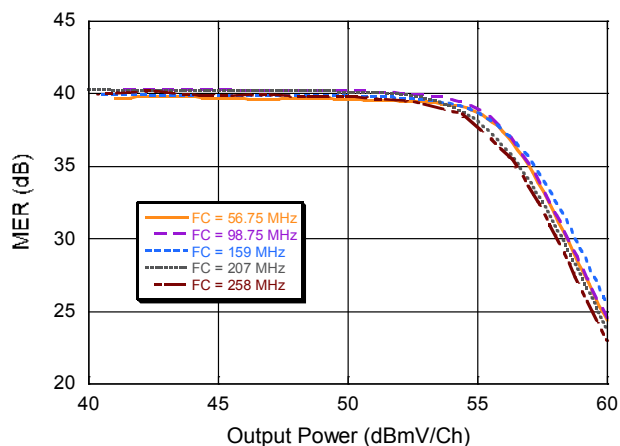


6. Fc is the carrier frequency for 9th of 16 contiguous 6 MHz 64 QAM channels. MER measured on 9th channel.

Amplifier, CATV Return Path Differential 5 - 300 MHz

Rev. V1


Lead-Free 3 mm 16-Lead PQFN[†]

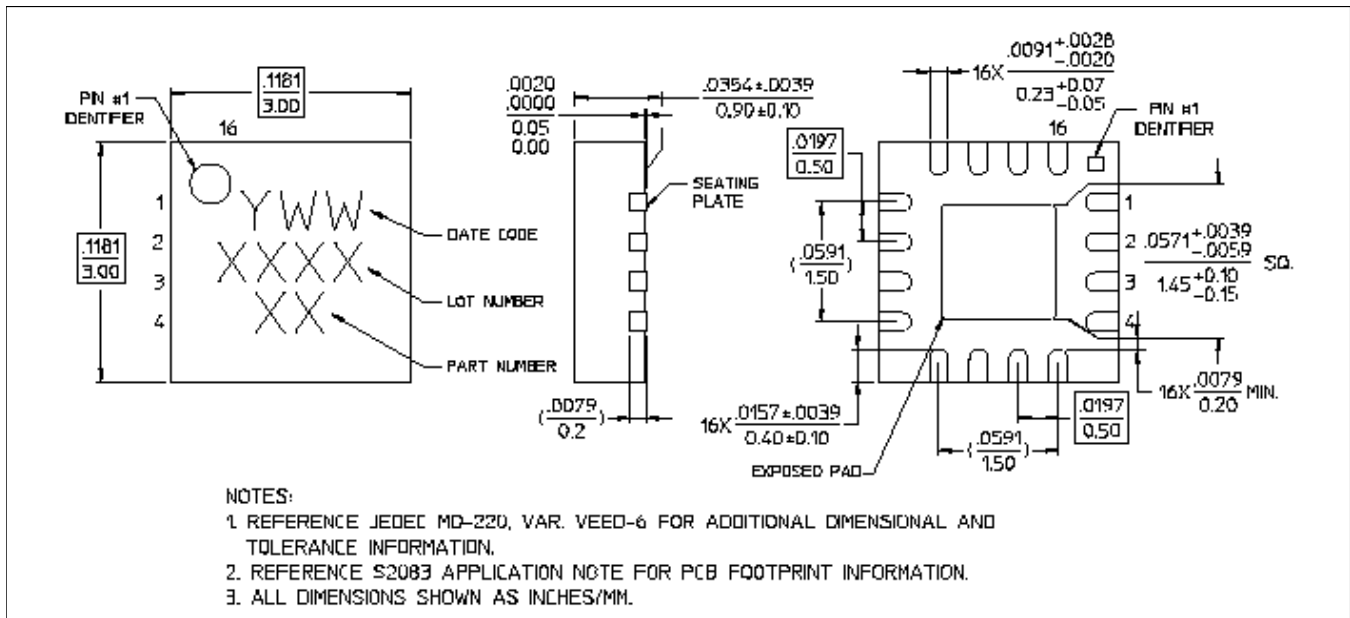

[†] Reference Application Note S2083 for lead-free solder reflow recommendations.
Meets JEDEC moisture sensitivity level TBD requirements.
Plating is 100% matte tin over copper.

Applications Section

15 dB Gain Schematic PCB Layout

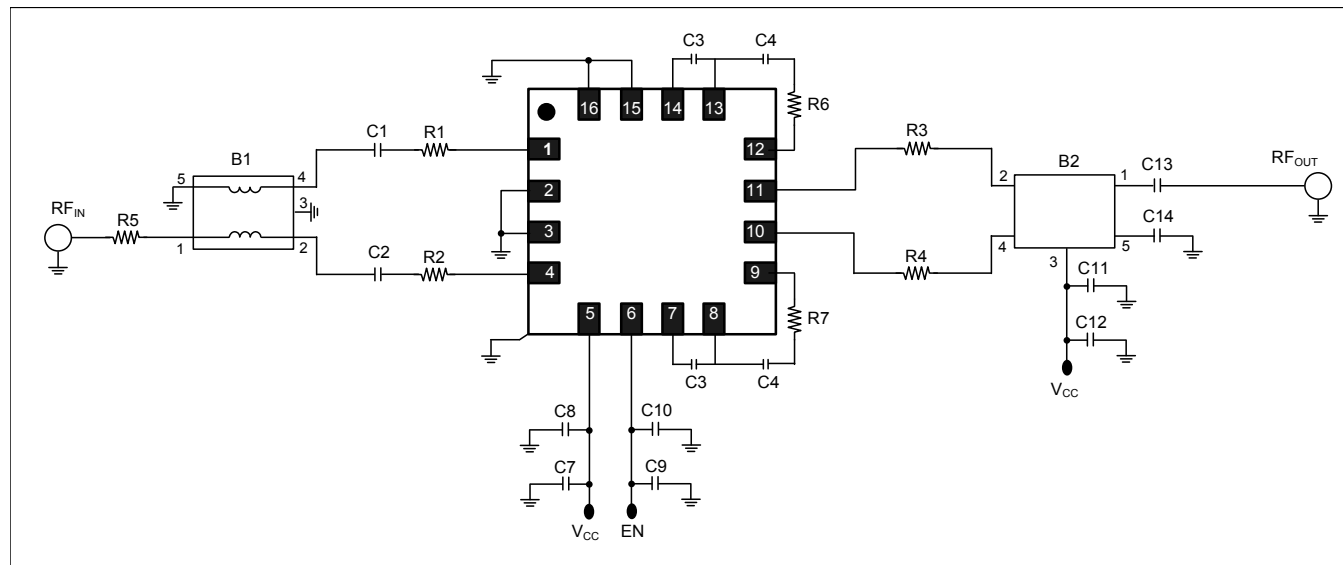


15 dB Gain Off-Chip Component Values


Component	Value	Package
C1-C6,C13	0.01 μ F	0402
C7,C9,C12,C14	0.1 μ F	0402
C8,C10,C11	1 μ F	0603
R1 - R5	0 Ω	0402
R6, R7	560 Ω	0402
B1-B2	1:1 Transformer Balun, MACOM's MABA-009572	

Applications Section


Gain @ 15 dB

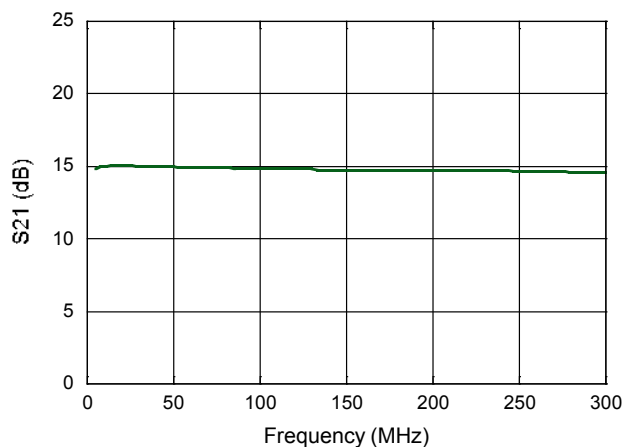


Reverse Isolation with 15 dB Gain

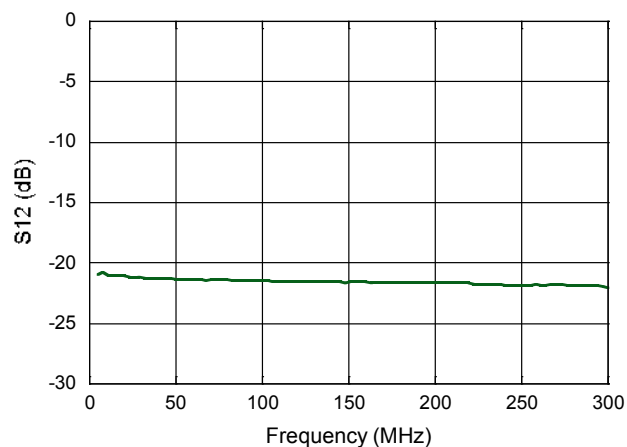


Input Return Loss with 15 dB Gain

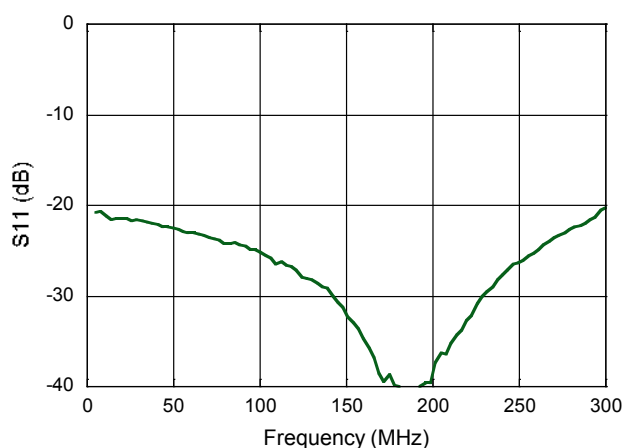

Output Return Loss with 15 dB Gain

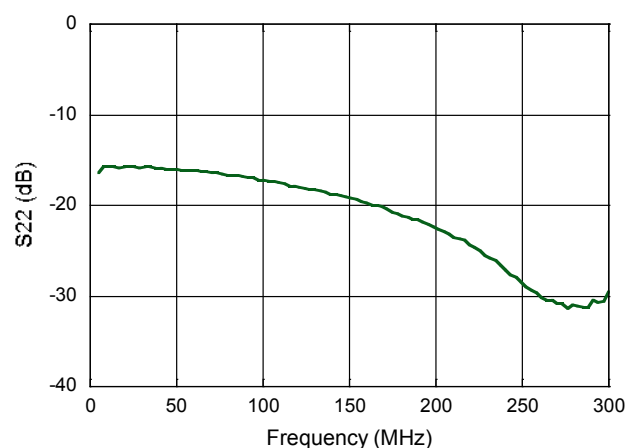


Noise Figure with 15 dB Gain

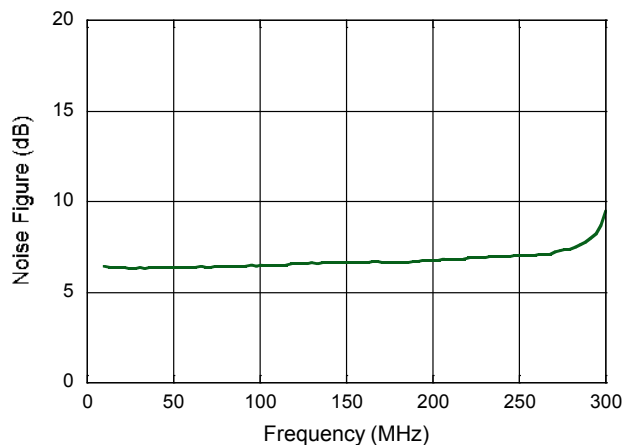

Applications Section

10 dB Gain Schematic PCB Layout

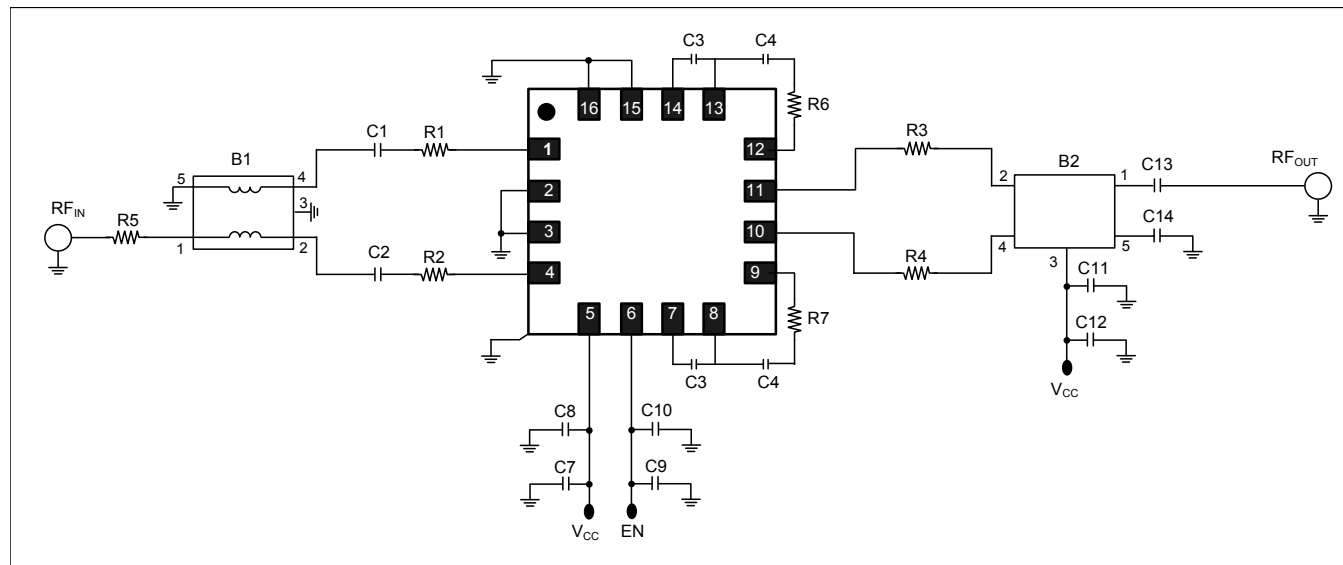


10 dB Gain Off-Chip Component Values


Component	Value	Package
C1-C6,C13	0.01 μ F	0402
C7,C9,C12,C14	0.1 μ F	0402
C8,C10,C11	1 μ F	0603
R1 - R5	0 Ω	0402
R6, R7	160 Ω	0402
B1-B2	1:1 Transformer Balun, MACOM's MABA-009572	

Applications Section


Gain @ 10 dB

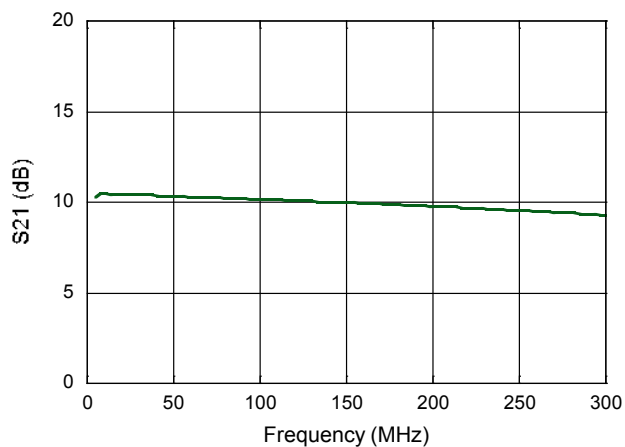


Reverse Isolation with 10 dB Gain

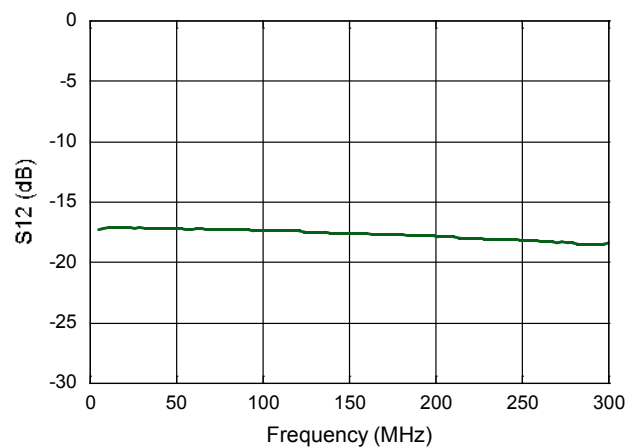

Input Return Loss with 10 dB Gain

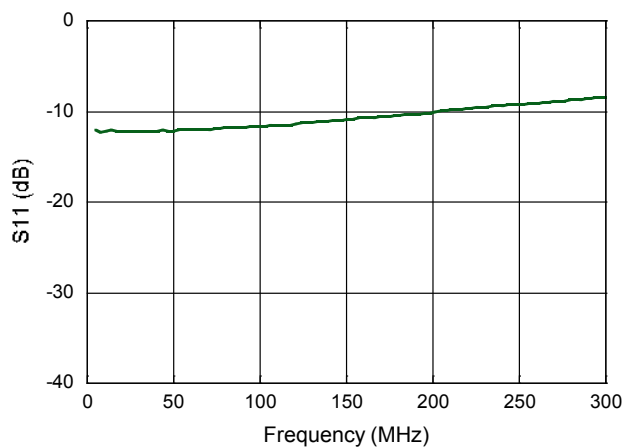

Output Return Loss with 10 dB Gain

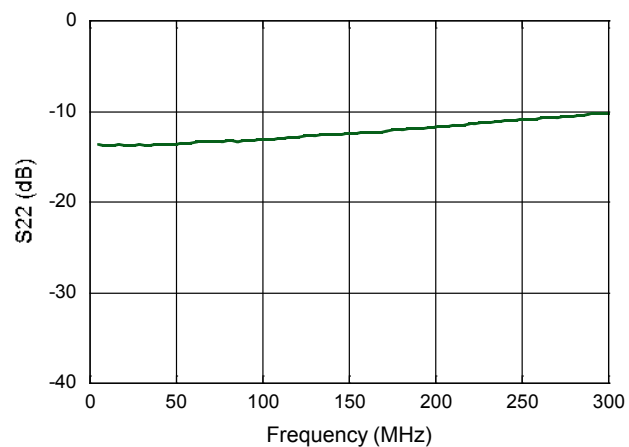



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331