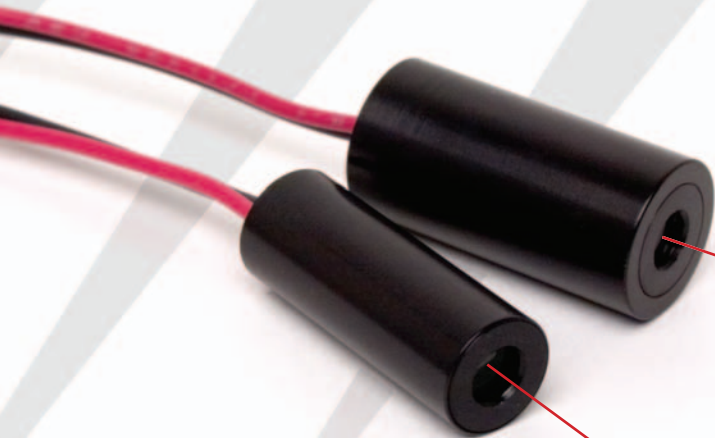


DLC's New High Performance Diode Laser Modules



- **Pointing Accuracy $<2\text{mrad}$**
- **Pointing Stability $<10\mu\text{rad}/^{\circ}\text{C}$**
- **Water and Dust Resistant**
- **Fully Customizable for OEM Applications**

These performance advances provide key advantages to the OEM customer:

- Reduced Fixturing/Labor Costs
- Increased OEM Product Performance
- Broader Application Base
- Unmatched Performance at a Competitive Price.



Diode Laser Concepts, Inc.

4731 Industry Drive - Central Point, OR 97502 USA

Tel: 541-773-5321 - Fax: 541-773-1705

Web: www.diodelaserconcepts.com

EXTERNAL HOUSING SPECIFICATIONS

Housing Dimensions	Ø9.5mm and Ø12.7mm Length: 25.4mm
Housing Material	Aluminum, Hard Anodized (Type III, Class 2 Anodization, Electrically Isolated)
Exit Aperture Protection	Sapphire Window
Customization	Dimensions, Materials, Exit Aperture Protection

ELECTRICAL SPECIFICATIONS

Operating Voltage	5VDC $\pm$ 1%
Load Current	25mA – 150mA (Laser Dependent)
Load Current vs. Temperature	0.7mA/°C Nominal
Continuous Wave (Standard Driver)	CW to 1kHz, Full Depth Modulation
TTL Modulation (Optional Driver)	CW to 1MHz, Full Depth Modulation
Electronic Protection	Reverse Polarity, Over Voltage, Surge Protection
Interconnect	175mm Nominal, 24AWG, UL1569
Customization	Operating Voltage, Interconnect

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-10°C to 50°C
Storage Temperature	-40°C to 85°C
Static Contact Discharge Immunity	>12kV
Dust/Water Resistant	Yes (Sealed Housing)
Customization	Operating Temperature, Dust/Water Resistance

OPTICAL SPECIFICATIONS

Wavelength Range	635-830nm
Wavelength Stability	0.25nm/°C Nominal
Optical Power Range	1-30mW, Single Mode
Power Output Stability at 25C	<1%
Power Output vs. Temperature	<0.5%/°C Nominal
Exit Beam Size	5.0mmX1.2mm, 6.1mmX1.2mm
Beam Divergence	<0.7mrad Nominal, Varies with Optical Configuration
Standard Line Fan angles	10°, 30°, 45°, 60°, 90°
Line Thickness	1mm@1Meter Nominal
Line Thickness Divergence	<0.5mrad Nominal, Varies with Optical Configuration
Line Intensity Profile	Gaussian (Top Hat Profile Available Upon Request)
Lens Material	Glass
Customization	Wavelength, Power Output, Spot Size, Fan Angle, Line Thickness, Line Intensity Profile

POINTING SPECIFICATIONS

Accuracy	<2mrad
Stability vs. Temperature	<10µrad/°C
Customization	Accuracy

RELIABILITY/REGULATORY SPECIFICATIONS

Laser Lifetime	>30,000 hrs at 25°C
Certification/ Regulatory	CE/ CDRH
Warranty	2 Years

NOTE: Custom products may/may not conform to these specifications.



DIODE LASER CONCEPTS, INC.

4731 Industry Drive - Central Point, OR 97502 USA

Tel: 541-773-5321 - Fax: 541-773-1705

Web: www.diodelaserconcepts.com



Laser Material:	InGaAlP
Housing Material:	Aluminum* Type III Class 2 Black Anodized
Exit Aperture Protection:	Sapphire Window (Optional)
Lens Material:	Glass

Wavelength (25°C):	Various within the range of 630nm - 830nm
Wavelength Stability	0.25nm / °C (Nominal)
Output Power (Exit Aperture):	0.97mW, 4.9mW, 20mW (Nominal)*
Output Power Stability (25°C):	<1% Fluctuation over 60 Minutes
Output Power vs. Temperature:	<0.5% / °C (Nominal)
Beam Size (At Exit Aperture):	0.85mm x 3.4mm, 1.2mm x 5.0mm, 1.5mm x 5.5mm (Nominal, varies with optical configuration and focus.)*
Beam Divergence:	Varies with optical configuration and focus.
Emissions Indicator:	Green LED

Accuracy: <2mrad
Stability vs. Temperature: <10μrad / °C

Operating Voltage:	5VDC Regulated +/- 1%*
Load Current –Typical at 25°C:	Varies with Output Power and Wavelength
Load Current –Max. at 25°C:	Varies with Output Power and Wavelength
Continuous Wave:	CW to 1kHz Full Depth Modulation* Turn on Time <0.1s *
Case:	Electrically Isolated
Electronic Protection:	Reverse Polarity Protection Over Voltage Protection Surge Protection
Interconnect:	24 AWG, UL1569* Red (+), Black (-)

Operating Temperature:	-10 to 50°C (60°C, 70°, 80°C) *
Storage Temperature:	-40°C to 85°C
Static Discharge Immunity:	>12Kv (Contact)
Dust/Water Resistance:	Yes

Certifications:	CE CDRH Class Dependant Upon Output Power and Wavelength
RoHS compliance:	Beginning January 2006
Warranty:	2 Years


$\varnothing 9.53^{+0.01}_{-0.01}$ mm
[0.3750^{+0.0004}_{-0.0002} in]

$\varnothing 12.70^{+0.01}_{-0.01} \text{ mm}$
 $[0.5000^{+0.0004}_{-0.0002} \text{ in}]$

$\varnothing 14.73^{+0.01}_{-0.01}$ mm
 $[0.5800^{+0.0004}_{-0.0002}$ in]

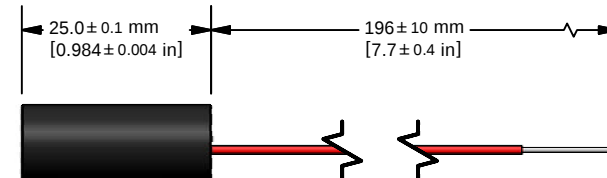
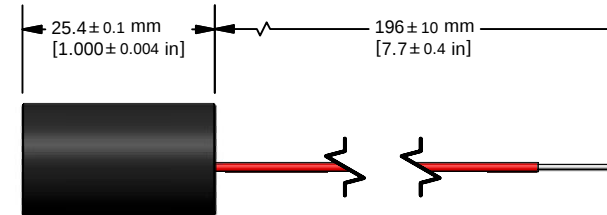
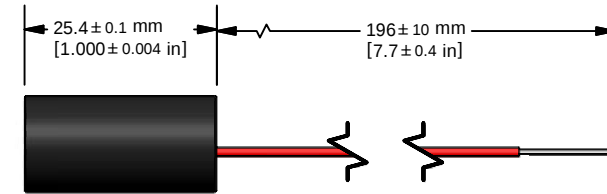
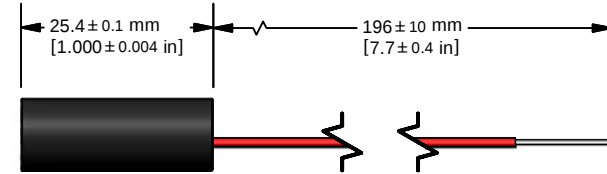


$\varnothing 10.00^{+0.01}_{-0.01}$ mm
 $[0.3937^{+0.0004}_{-0.0002}]$ in



The technical drawing shows a lens with a diameter dimension of $\varnothing 10.00^{+0.01}_{-0.01}$ mm and $[0.3937^{+0.0004}_{-0.0002}]$ in. A 3D model of the lens is shown to the right, with an arrow pointing from the dimension line to the lens.

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
1	Originate Document	11/17/2005	Zack S.



APPROVALS	DATE	 DIODE LASER CONCEPTS, INC. 4731 Industry Drive Central Point, Oregon 97502 USA	
Drawn By: Zack S.	11/17/05		
Approved By: Mike R.	11/17/05		Part Number: Specific part numbers are issued according to configuration.
Customer Approval: N/A	N/A		Description: General specifications for high performance spot modules.

MECHANICAL SPECIFICATIONS

Laser Material: InGaAlP
Housing Material: Aluminum*
Type III Class 2 Black Anodized
Exit Aperture Protection: Sapphire Window
Lens Material: Glass

OPTICAL SPECIFICATIONS

Wavelength (25°C): Various within the range of 630nm - 830nm
Wavelength Stability: 0.25nm / °C (Nominal)
Output Power (Exit Aperture): 0.97mW, 4.9mW, 20mW (Nominal)*
Output Power Stability (25°C): <1% Fluctuation over 60 Minutes
Output Power vs. Temperature: <0.5% / °C (Nominal)
Fan Angle: 45°, 70°, 90° (Nominal) *
Line Thickness : 1mm nominal (Measured at Face)
Line Intensity Profile: Gaussian
Emissions Indicator: Green LED

POINTING SPECIFICATIONS

Accuracy: <2mrad
Stability vs. Temperature: <10µrad / °C

ELECTRICAL SPECIFICATIONS

Operating Voltage: 5VDC Regulated +/- 1%*
Load Current –Typical at 25°C: Varies with Output Power and Wavelength
Load Current –Max. at 25°C: Varies with Output Power and Wavelength
Continuous Wave: CW to 1kHz Full Depth Modulation*
Turn on Time <0.1s*
Case: Electrically Isolated
Electronic Protection: Reverse Polarity Protection
Over Voltage Protection
Surge Protection
Interconnect: 24 AWG, UL1569*
Red (+), Black (-)

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature: -10 to 50°C (60°C, 70°, 80°C) *
Storage Temperature: -40°C to 85°C
Static Discharge Immunity: >12Kv (Contact)
Dust/Water Resistance: Yes

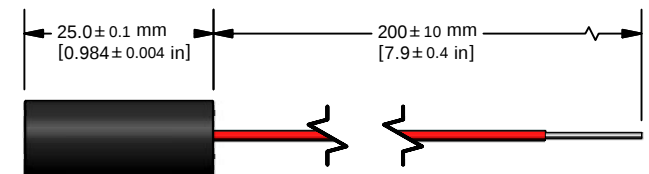

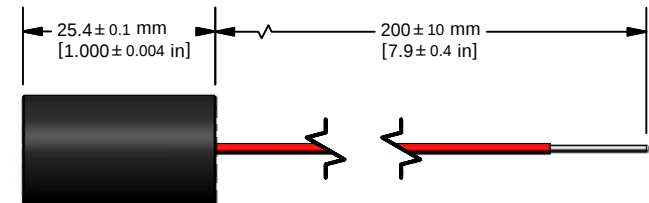

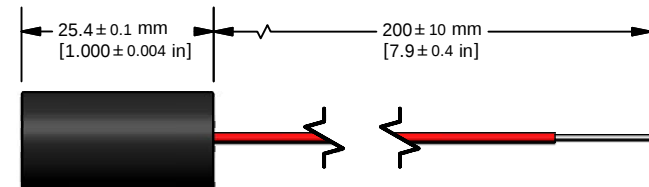

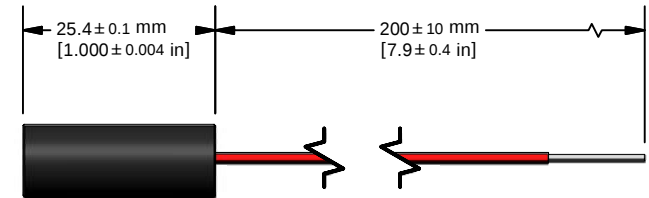

RELIABILITY/REGULATORY SPECIFICATIONS

Certifications: CE
CDRH Class Dependant Upon Output Power and Wavelength
RoHS compliance: Beginning January 2006
Warranty: 2 Years

*Indicates Customization Available

REVISION HISTORY

REV	DESCRIPTION	DATE	APPROVED
1	Originate Document	11/17/2005	Zack S.

**APPROVALS****DATE****DIODE LASER CONCEPTS, INC.**

Drawn By:
Zack S.

11/17/05

4731 Industry Drive
Central Point, Oregon 97502 USA

Approved By:
Mike R.

11/17/05

Part Number:
Specific part numbers are issued according to configuration.

Customer Approval:
N/A

N/A

Description:
General specifications for high performance line generator modules.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331