

## DESCRIPTION

The PUP96N3/PUP120N3 series of AC/DC switching power supplies are for 96-120 watts of continuous output power. They are enclosed in a 94V-0 rated plastic case with an inlet of the IEC320/C14 or IEC320/C6 to mate with interchangeable cord for world-wide use. All models meet EN55032 and FCC class B emission limits, and comply with UL, CSA, IEC and CE requirements.

## PUP96N3/PUP120N3 SERIES

CE  
RoHS



## FEATURES

- No load power consumption less than 0.15 W
- Compliant with DoE level VI requirements
- Meet Energy Star EPS2.0 /ErP EC No 278/2009 (Lot 7)
- Meet EU CoC EPS V5 Tier 2
- Operating altitude up to 5000 meters
- Overvoltage protection (latch)
- Short-circuit protection (auto-recovery)
- Overpower protection (auto-recovery)
- Over temperature protection (latch)
- High Efficiency  $\geq 89\%$
- With PFC circuit
- 100% burn-in at full rated load
- Compliant with RoHS requirements

## SAFETY STANDARD APPROVALS



UL 62368-1, CSA C22.2 No. 62368-1  
File No. E190414



TUV EN 62368-1

## INPUT SPECIFICATIONS

|                        |                                                    |
|------------------------|----------------------------------------------------|
| Input voltage:         | 90-264 VAC                                         |
| Input frequency:       | 47-63 Hz                                           |
| Input current:         | 1.3 A (rms) for 115 VAC<br>0.7 A (rms) for 230 VAC |
| Earth Leakage current: | 250 $\mu$ A max. @ 264 VAC, 60 Hz                  |

## OUTPUT SPECIFICATIONS

|                          |                                                                                                                                  |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Output voltage /current: | See rating chart.                                                                                                                |
| Maximum output power:    | See rating chart.                                                                                                                |
| Ripple and noise:        | 350 mV peak to peak maximum                                                                                                      |
| Overvoltage protection:  | Set at 125-155% of its nominal output voltage                                                                                    |
| Overcurrent protection:  | All models protected to short circuit conditions (auto-recovery)                                                                 |
| Temperature coefficient: | All outputs $\pm 0.04\%$ / $^{\circ}$ C maximum                                                                                  |
| Transient response:      | Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 $\mu$ s after a 25% step load change |

## ENVIRONMENTAL SPECIFICATIONS

|                        |                                      |
|------------------------|--------------------------------------|
| Operating temperature: | 0 $^{\circ}$ C to +40 $^{\circ}$ C   |
| Storage temperature:   | -20 $^{\circ}$ C to +80 $^{\circ}$ C |
| Operating humidity:    | 20% to 80% non-condensing            |
| Storage humidity:      | 10% to 90% non-condensing            |

## GENERAL SPECIFICATIONS

|                     |                                                                             |
|---------------------|-----------------------------------------------------------------------------|
| Hold-up time:       | 10 ms minimum at 100 VAC                                                    |
| Turn on delay time: | 3 s maximum at 100 VAC                                                      |
| Power factor:       | 0.95 typical                                                                |
| Efficiency:         | 89% minimum at 110 VAC or 240 VAC.                                          |
| Line regulation:    | $\pm 0.5\%$ maximum at full load                                            |
| Inrush current:     | 100 A @ 115 Vac or 200 A @ 230 Vac at 25 $^{\circ}$ C cold start            |
| Withstand voltage:  | 4242 VDC from input to output<br>2500 VDC from input to ground              |
| MTBF:               | 200,000 hours at full load at 25 $^{\circ}$ C ambient, calculated per SR332 |

## EMC Performance

|               |                                                                              |
|---------------|------------------------------------------------------------------------------|
| EN55032:      | Class B conducted, Class B radiated                                          |
| FCC:          | Class B conducted, Class B radiated                                          |
| VCCI:         | Class B conducted, Class B radiated                                          |
| EN61000-3-2:  | Harmonic distortion, Class D                                                 |
| EN61000-3-3:  | Line flicker                                                                 |
| EN55024       |                                                                              |
| EN61000-4-2:  | ESD, $\pm 8$ KV air and $\pm 4$ KV contact                                   |
| EN61000-4-3:  | Radiated immunity, 3 V/m                                                     |
| EN61000-4-4:  | Fast transient/burst, $\pm 1$ KV                                             |
| EN61000-4-5:  | Surge, $\pm 1$ KV diff., $\pm 2$ KV com.                                     |
| EN61000-4-6:  | Conducted immunity, 3 Vrms                                                   |
| EN61000-4-8:  | Magnetic field immunity, 1 A/m                                               |
| EN61000-4-11: | Voltage dip immunity, 30% reduction for 500 ms, and >95% reduction for 10 ms |


## OUTPUT VOLTAGE/CURRENT RATING CHART

| Model <sup>(1)</sup> | Output |              |              |      |                               |            | Average Active efficiency (typical) @ 115 / 230 Vac |
|----------------------|--------|--------------|--------------|------|-------------------------------|------------|-----------------------------------------------------|
|                      | V1     | Min. Current | Max. Current | Tol. | Ripple & Noise <sup>(2)</sup> | Max. Power |                                                     |
| PUP96N3-12           | 12 V   | 0 A          | 8.00 A       | ±5%  | 350 mV                        | 96 W       | 89 / 90%                                            |
| PUP96N3S-12          | 12 V   | 0 A          | 8.00 A       | ±5%  | 350 mV                        | 96 W       | 89 / 90%                                            |
| PUP120N3-12          | 12 V   | 0 A          | 10.00 A      | ±5%  | 350 mV                        | 120 W      | 89 / 90%                                            |
| PUP120N3S-12         | 12 V   | 0 A          | 10.00 A      | ±5%  | 350 mV                        | 120 W      | 89 / 90%                                            |
| PUP120N3-14          | 24 V   | 0 A          | 5.00 A       | ±5%  | 350 mV                        | 120 W      | 89 / 91%                                            |
| PUP120N3S-14         | 24 V   | 0 A          | 5.00 A       | ±5%  | 350 mV                        | 120 W      | 89 / 91%                                            |
| PUP120N3-18          | 48 V   | 0 A          | 2.50 A       | ±5%  | 350 mV                        | 120 W      | 89 / 91%                                            |
| PUP120N3S-18         | 48 V   | 0 A          | 2.50 A       | ±5%  | 350 mV                        | 120 W      | 89 / 91%                                            |
| PUP120N3-19          | 54 V   | 0 A          | 2.22 A       | ±5%  | 350 mV                        | 120 W      | 89 / 91%                                            |
| PUP120N3S-19         | 54 V   | 0 A          | 2.22 A       | ±5%  | 350 mV                        | 120 W      | 89 / 91%                                            |

### NOTES:

- PUP120N3 models are equipped with IEC320/C14 inlet, and PUP120N3S models are equipped with IEC320/C6 inlet.
- Ripple and noise is maximum peak-to-peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 47 µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

## MECHANICAL SPECIFICATIONS

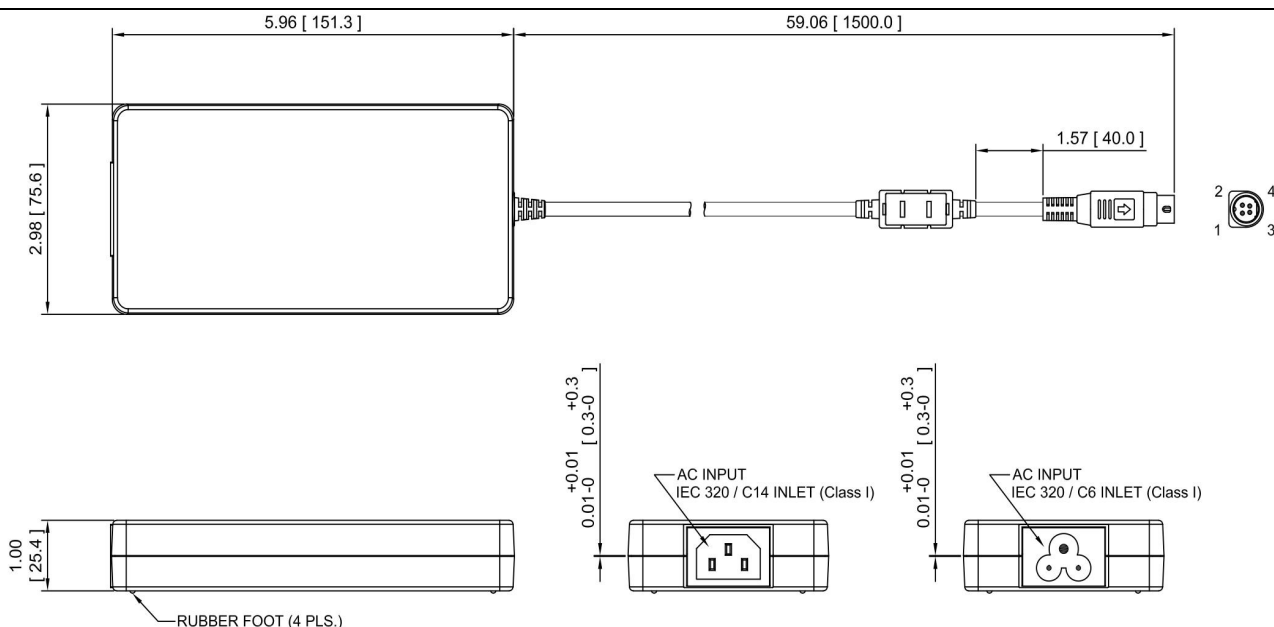

### NOTES:

- Dimensions shown in inches [mm]
- Tolerance 0.02 [0.5] maximum
- Weight: 417 grams (0.92 lbs.) approx.
- V1 return (-) is electrically connected to incoming Earth Ground through a 1M ohm resistor as standard.

## PIN CHART

| PIN NO.  | 1   | 2   | 3         | 4         | SHELL OF CONNECTOR |
|----------|-----|-----|-----------|-----------|--------------------|
| Polarity | +V1 | +V1 | V1 Return | V1 Return | V1 Return          |



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331