



### APPLICATIONS

Wireless Network  
Telecom/Datacom  
Industry Control System  
Measurement Equipment  
Semiconductor Equipment

### FEATURES

- 5 WATTS REGULATED OUTPUT POWER
- OUTPUT CURRENT UP TO 1000mA
- STANDARD 1.25 X 0.80 X 0.40 INCH
- HIGH EFFICIENCY UP TO 81%
- 2:1 WIDE INPUT VOLTAGE RANGE
- SWITCHING FREQUENCY (100KHz, MIN)
- OVER CURRENT PROTECTION
- STANDARD 24 PIN DIP PACKAGE & SMD TYPE PACKAGE
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

### OPTIONS

SMD TYPE

### DESCRIPTION

The PFKC05 series offer 5 watts of output power from a package in an IC compatible 24pin DIP configuration without derating to 71°C ambient temperature and pin to pin compatible with PFKC03, FKC03, FKC05 series. PFKC05 series have 2:1 wide input voltage of 9-18, 18-36 and 36-75VDC.

## TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

| OUTPUT SPECIFICATIONS            |   |                          |  |
|----------------------------------|---|--------------------------|--|
| Output power                     |   |                          | 5 Watts, max.  |
| Voltage accuracy                 | Full load and nominal Vin               |                          | ± 1%   |
| Minimum load (Note 7)            |   |                          | See table  |
| Line regulation                  | LL to HL at Full Load                   |                          | ± 0.2%   |
| Load regulation                  | Min. Load to Full Load                  | Single<br>Dual           | ± 0.5%<br>± 2%   |
| Cross regulation (Dual)          | Asymmetrical load 25% / 100% FL         |                          | ± 5%   |
| Ripple and noise                 | 20MHz bandwidth                         |                          | See table  |
| Temperature coefficient          |   |                          | ±0.02% / °C, max.  |
| Transient response recovery time | 25% load step change                    |                          | 500µs  |
| Over load protection             | % of FL at nominal input                |                          | 180%, typ.   |
| Short circuit protection         |   |                          | Continuous, automatic recovery                             |
| GENERAL SPECIFICATIONS           |   |                          |  |
| Efficiency                       |   |                          | See table  |
| Isolation voltage                | Input to Output                         | Standard<br>Suffix " H " | 1600VDC, min.<br>3000VDC, min.                             |
| Isolation resistance             |   |                          | 10 <sup>9</sup> ohms, min.                                 |
| Isolation capacitance            |   |                          | 300pF, max.  |
| Switching frequency              |   |                          | 100KHz, min.   |
| Approvals and standard           |   |                          | IEC60950-1, UL60950-1, EN60950-1                           |
| Case material                    |   |                          | Non-conductive black plastic                               |
| Base material                    |   |                          | Non-conductive black plastic                               |
| Potting material                 |   |                          | Epoxy (UL94-V0)  |
| Dimensions                       |   |                          | 1.25 X 0.80 X 0.40 Inch<br>(31.8 X 20.3 X 10.2 mm)         |
| Weight                           | DIP<br>SMD                              |                          | 14g (0.48oz)<br>15g (0.52oz)                               |
| MTBF (Note 1)                    | BELLCORE TR-NWT-000332<br>MIL-HDBK-217F |                          | 3.731 x 10 <sup>6</sup> hrs<br>2.591 x 10 <sup>6</sup> hrs |

| INPUT SPECIFICATIONS             |  |             |                                 |
|----------------------------------|--|-------------|---------------------------------|
| Input voltage range              | 12V nominal input                          |             | 9 – 18VDC                       |
|                                  | 24V nominal input                          |             | 18 – 36VDC                      |
|                                  | 48V nominal input                          |             | 36 – 75VDC                      |
| Input filter                     |  |             | Pi type                         |
| Input surge voltage<br>100mS max | 12V input                                  |             | 36VDC                           |
|                                  | 24V input                                  |             | 50VDC                           |
|                                  | 48V input                                  |             | 100VDC                          |
| Input reflected ripple current   | Nominal Vin and full load                  |             | 150mA <sub>p-p</sub>            |
| Start up time                    | Nominal Vin and<br>constant resistive load | Power up    | 30mS, typ.                      |
|                                  |  |             |                                 |
| ENVIRONMENTAL SPECIFICATIONS     |  |             |                                 |
| Operating ambient temperature    |  |             | -25°C ~ +71°C(non derating)     |
| Storage temperature range        |  |             | -55°C ~ +105°C                  |
| Thermal shock                    |  |             | MIL-STD-810F                    |
| Vibration                        |  |             | MIL-STD-810F                    |
| Relative humidity                |  |             | 5% to 95% RH                    |
| EMC CHARACTERISTICS              |  |             |                                 |
| EMI                              | EN55022                                    |             | Class A                         |
| ESD                              | EN61000-4-2                                | Air Contact | ± 8KV<br>± 6KV Perf. Criteria A |
|                                  |  |             |                                 |
| Radiated immunity                | EN61000-4-3                                |             | 10 V/m Perf. Criteria A         |
| Fast transient (Note 6)          | EN61000-4-4                                |             | ± 2KV Perf. Criteria B          |
| Surge (Note 6)                   | EN61000-4-5                                |             | ± 1KV Perf. Criteria B          |
| Conducted immunity               | EN61000-4-6                                |             | 10 Vr.m.s Perf. Criteria A      |









| Model Number | Input Range | Output Voltage | Output Current |           | Output <sup>(4)</sup><br>Ripple & Noise | Input Current<br>No load <sup>(3)</sup> | Input Current<br>Full load <sup>(2)</sup> | Eff <sup>(4)</sup><br>(%) | Capacitor <sup>(5)</sup><br>Load max |
|--------------|-------------|----------------|----------------|-----------|---|---|---|---------------------------|--------------------------------------|
|              |             |                | Min. load      | Full load |   |   |   |                           |                                      |
| PFKC05-12S33 | 9 – 18 VDC  | 3.3 VDC        | 100mA          | 1000mA    | 75mVp-p                                 | 25mA                                    | 404mA                                     | 72                        | 2200µF                               |
| PFKC05-12S05 | 9 – 18 VDC  | 5 VDC          | 100mA          | 1000mA    | 75mVp-p                                 | 10mA                                    | 579mA                                     | 76                        | 1000µF                               |
| PFKC05-12S12 | 9 – 18 VDC  | 12 VDC         | 47mA           | 470mA     | 120mVp-p                                | 30mA                                    | 618mA                                     | 80                        | 220µF                                |
| PFKC05-12S15 | 9 – 18 VDC  | 15 VDC         | 40mA           | 400mA     | 150mVp-p                                | 20mA                                    | 658mA                                     | 80                        | 150µF                                |
| PFKC05-12D05 | 9 – 18 VDC  | ± 5 VDC        | ±50mA          | ± 500mA   | 75mVp-p                                 | 20mA                                    | 571mA                                     | 77                        | ± 680µF                              |
| PFKC05-12D12 | 9 – 18 VDC  | ± 12 VDC       | ±20mA          | ± 230mA   | 120mVp-p                                | 50mA                                    | 605mA                                     | 80                        | ± 100µF                              |
| PFKC05-12D15 | 9 – 18 VDC  | ± 15 VDC       | ±19mA          | ± 190mA   | 150mVp-p                                | 30mA                                    | 625mA                                     | 80                        | ± 68µF                               |
| PFKC05-24S33 | 18 – 36 VDC | 3.3 VDC        | 100mA          | 1000mA    | 75mVp-p                                 | 15mA                                    | 202mA                                     | 72                        | 2200µF                               |
| PFKC05-24S05 | 18 – 36 VDC | 5 VDC          | 100mA          | 1000mA    | 75mVp-p                                 | 10mA                                    | 278mA                                     | 79                        | 1000µF                               |
| PFKC05-24S12 | 18 – 36 VDC | 12 VDC         | 47mA           | 470mA     | 120mVp-p                                | 10mA                                    | 306mA                                     | 81                        | 220µF                                |
| PFKC05-24S15 | 18 – 36 VDC | 15 VDC         | 40mA           | 400mA     | 150mVp-p                                | 10mA                                    | 325mA                                     | 81                        | 150µF                                |
| PFKC05-24D05 | 18 – 36 VDC | ± 5 VDC        | ±50mA          | ± 500mA   | 75mVp-p                                 | 10mA                                    | 282mA                                     | 78                        | ± 680µF                              |
| PFKC05-24D12 | 18 – 36 VDC | ± 12 VDC       | ±23mA          | ± 230mA   | 120mVp-p                                | 40mA                                    | 299mA                                     | 81                        | ± 100µF                              |
| PFKC05-24D15 | 18 – 36 VDC | ± 15 VDC       | ±19mA          | ± 190mA   | 150mVp-p                                | 10mA                                    | 309mA                                     | 81                        | ± 68µF                               |
| PFKC05-48S33 | 36 – 75 VDC | 3.3 VDC        | 100mA          | 1000mA    | 75mVp-p                                 | 5mA                                     | 100mA                                     | 73                        | 2200µF                               |
| PFKC05-48S05 | 36 – 75 VDC | 5 VDC          | 100mA          | 1000mA    | 75mVp-p                                 | 5mA                                     | 141mA                                     | 78                        | 1000µF                               |
| PFKC05-48S12 | 36 – 75 VDC | 12 VDC         | 47mA           | 470mA     | 120mVp-p                                | 5mA                                     | 153mA                                     | 81                        | 220µF                                |
| PFKC05-48S15 | 36 – 75 VDC | 15 VDC         | 40mA           | 400mA     | 150mVp-p                                | 5mA                                     | 162mA                                     | 81                        | 150µF                                |
| PFKC05-48D05 | 36 – 75 VDC | ± 5 VDC        | ±50mA          | ± 500mA   | 75mVp-p                                 | 10mA                                    | 143mA                                     | 77                        | ± 680µF                              |
| PFKC05-48D12 | 36 – 75 VDC | ± 12 VDC       | ±23mA          | ± 230mA   | 120mVp-p                                | 10mA                                    | 149mA                                     | 81                        | ± 100µF                              |
| PFKC05-48D15 | 36 – 75 VDC | ± 15 VDC       | ±19mA          | ± 190mA   | 150mVp-p                                | 10mA                                    | 154mA                                     | 81                        | ± 68µF                               |

**Note**

- BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.  
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment).
- Maximum value at nominal input voltage and full load.
- Typical value at nominal input voltage and no load.
- Typical value at nominal input voltage and full load.
- Test by minimum Vin and constant resistive load.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.  
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220µF/100V, ESR 48mΩ.
- The output requires a minimum loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification.

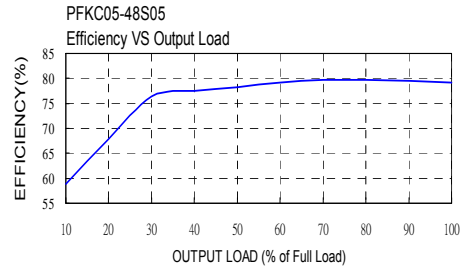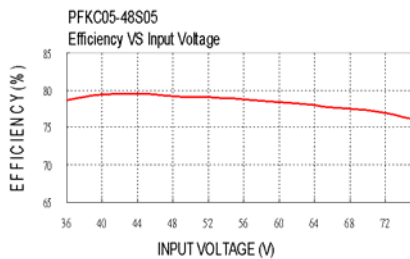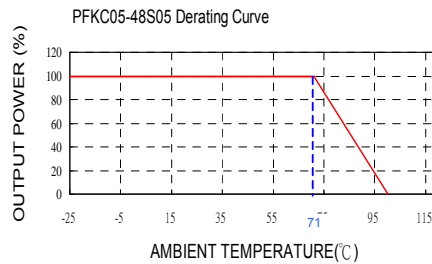

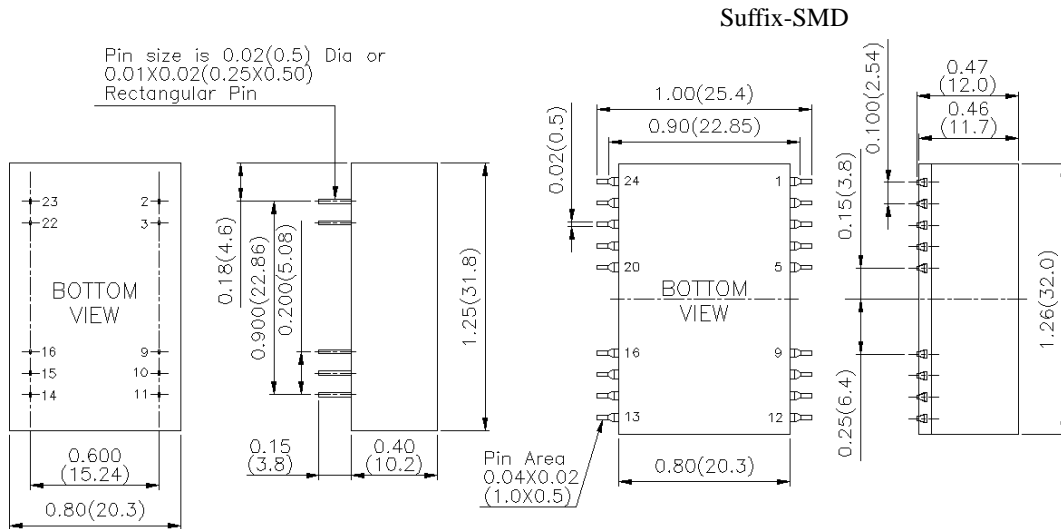

1. All dimensions in Inches (mm)  
Tolerance: X.XX±0.02 (X.X±0.5)  
X.XXX±0.01 (X.XX±0.25)
2. Pin pitch tolerance ±0.01(0.25)
3. Pin dimension tolerance ±0.004 (0.1)

| DIP PIN CONNECTION |         |          |     |          |          |
|--------------------|---------|----------|-----|----------|----------|
| PIN                | SINGLE  | DUAL     | PIN | SINGLE   | DUAL     |
| 2                  | - INPUT | - INPUT  | 23  | + INPUT  | + INPUT  |
| 3                  | - INPUT | - INPUT  | 22  | + INPUT  | + INPUT  |
| 9                  | NC      | COMMON   | 16  | - OUTPUT | COMMON   |
| 10                 | NC      | NC       | 15  | NC       | NC       |
| 11                 | NC      | - OUTPUT | 14  | + OUTPUT | + OUTPUT |

| SMD PIN CONNECTION |         |          |        |          |          |
|--------------------|---------|----------|--------|----------|----------|
| PIN                | SINGLE  | DUAL     | PIN    | SINGLE   | DUAL     |
| 2                  | - INPUT | - INPUT  | 23     | + INPUT  | + INPUT  |
| 3                  | - INPUT | - INPUT  | 22     | + INPUT  | + INPUT  |
| 9                  | NC      | COMMON   | 16     | - OUTPUT | COMMON   |
| 10                 | NC      | NC       | 15     | NC       | NC       |
| 11                 | NC      | - OUTPUT | 14     | + OUTPUT | + OUTPUT |
| Others             | NC      | NC       | Others | NC       | NC       |





## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331