



RF and MICROWAVE DISCRETE LOW POWER TRANSISTORS

Qualified per MIL-PRF-19500/343

Qualified Levels:
JAN, JANTX,
and JANTXV


DESCRIPTION

The 2N2857 is a military qualified silicon NPN transistor (also available in commercial version), designed for UHF equipment and other high-reliability applications. Common applications include low noise amplifier; oscillator, and mixer applications. Microsemi also offers numerous other products to meet higher and lower power voltage regulation applications.

Important: For the latest information, visit our website <http://www.microsemi.com>.


FEATURES

- JEDEC registered 2N2857.
- Silicon NPN, TO-72 packaged UHF transistor.
- Maximum unilateral gain = 13 dB (typ) @ 500 MHz.
- JAN, JANTX, and JANTXV military qualified versions available per MIL-PRF-19500/343.
- RoHS compliant version available (commercial grade only).

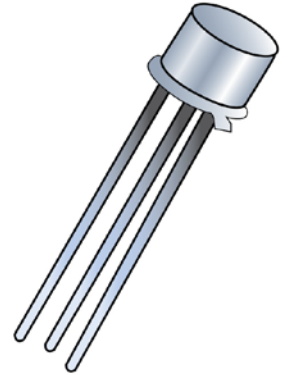

TO-72 Package

Also available in:

 **UB Package**
(surface mount)
[2N2857UB](#)

APPLICATIONS / BENEFITS

- Low-power, ultra-high frequency transistor.
- Leaded metal TO-72 package.

MAXIMUM RATINGS @ T_A = +25 °C

| Parameters/Test Conditions | Symbol | Value | Unit |
|---|-------------------------------------|-------------|------|
| Junction and Storage Temperature | T _J and T _{STG} | -65 to +200 | °C |
| Collector-Emitter Voltage | V _{CEO} | 15 | V |
| Collector-Base Voltage | V _{CBO} | 30 | V |
| Emitter-Base Voltage | V _{EBO} | 3 | V |
| Thermal Resistance Junction-to-Ambient | R _{θJA} | 400 | °C/W |
| Steady-State Power Dissipation ⁽¹⁾ | P _D | 200 | mW |
| Collector Current | I _C | 40 | mA |

Notes: 1. Derate linearly 1.14 mW/°C for T_A > +25 °C.

MSC – Lawrence

6 Lake Street,
Lawrence, MA 01841
Tel: 1-800-446-1158 or
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland


Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:

www.microsemi.com

MECHANICAL and PACKAGING

- CASE: Ni plated kovar, Ni cap.
- TERMINALS: Au over Ni plated kovar leads, solder dipped.
- MARKING: Manufacturer's ID, date code, part number.
- POLARITY: See case outline on last page.
- WEIGHT: 0.322 grams.
- See [Package Dimensions](#) on last page.

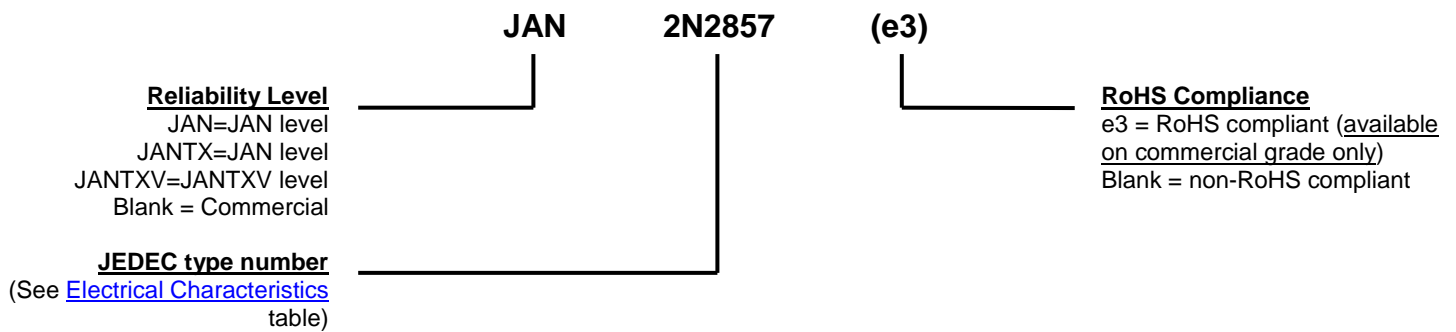PART NOMENCLATURE

SYMBOLS & DEFINITIONS

| Symbol | Definition |
|----------|----------------------------------|
| I_C | Collector current (dc). |
| I_B | Base current (dc). |
| T_A | Ambient or free air temperature. |
| T_C | Case temperature. |
| V_{CB} | Collector to base voltage (dc). |
| V_{EB} | Emitter to base voltage (dc). |

ELECTRICAL CHARACTERISTICS @ $T_C = +25^\circ\text{C}$
OFF CHARACTERISTICS

| Test Conditions | Symbol | Value | | | Unit |
|---|---------------|-------|------|------|---------------|
| | | Min. | Typ. | Max. | |
| Collector-Emitter Breakdown Voltage ($I_C = 3.0\text{ mA}$, Bias condition D) | $V_{(BR)CEO}$ | 15 | - | - | V |
| Collector to Emitter Cutoff Current ($V_{CE} = 16\text{ V}$, Bias condition C) | I_{CES} | - | - | 100 | nA |
| Emitter to Base Cutoff Current ($V_{EB} = 3\text{ V}$, Bias condition D) | I_{EBO} | - | - | 10 | μA |
| Collector to Base Cutoff Current ($V_{CB} = 15\text{ V}$, Bias condition D) | I_{CBO} | - | - | 10 | nA |

ON CHARACTERISTICS

| Test Conditions | Symbol | Value | | | Unit |
|--|---------------|-------|------|------|------|
| | | Min. | Typ. | Max. | |
| Forward Current transfer ratio ($I_C = 3.0\text{ mA}$, $V_{CE} = 1.0\text{ V}$) | h_{FE} | 30 | - | 150 | |
| Collector-Emitter Saturation Voltage ($I_C = 10\text{ mA}$, $I_B = 1\text{ mA}$) | $V_{CE(sat)}$ | | - | 0.4 | V |
| Base-Emitter Saturation Voltage ($I_C = 10\text{ mA}$, $I_B = 1\text{ mA}$) | $V_{BE(sat)}$ | | - | 1.0 | V |

DYNAMIC CHARACTERISTICS

| Test Conditions | Symbol | Value | | | Unit |
|---|------------|-------|------|------|------|
| | | Min. | Typ. | Max. | |
| Magnitude of common emitter small signal short circuit forward current transfer ratio ($V_{CE} = 6\text{ V}$, $I_C = 5\text{ mA}$, $f = 100\text{ MHz}$) | $ h_{fe} $ | 10 | - | 21 | |
| Collector-base time constant ($I_E = 2.0\text{ mA}$, $V_{CB} = 6.0\text{ V}$, $f = 31.9\text{ MHz}$) | $r_b'C_c$ | 4 | - | 15 | pF |
| Collector to Base – feedback capacitance ($I_E = 0\text{ mA}$, $V_{CB} = 10\text{ V}$, $100\text{ kHz} \leq f \leq 1\text{ MHz}$) | C_{cb} | | | 1.0 | pF |
| Noise Figure (50 Ohms) ($I_C = 1.5\text{ mA}$, $V_{CE} = 6\text{ V}$, $f = 450\text{ MHz}$, $R_g = 50\ \Omega$) | F | | 4.5 | | dB |
| Small Signal Power Gain (common emitter) ($I_E = 1.5\text{ mA}$, $V_{CE} = 6\text{ V}$, $f = 450\text{ MHz}$) | G_{pe} | 12.5 | | 21 | dB |

GRAPHS

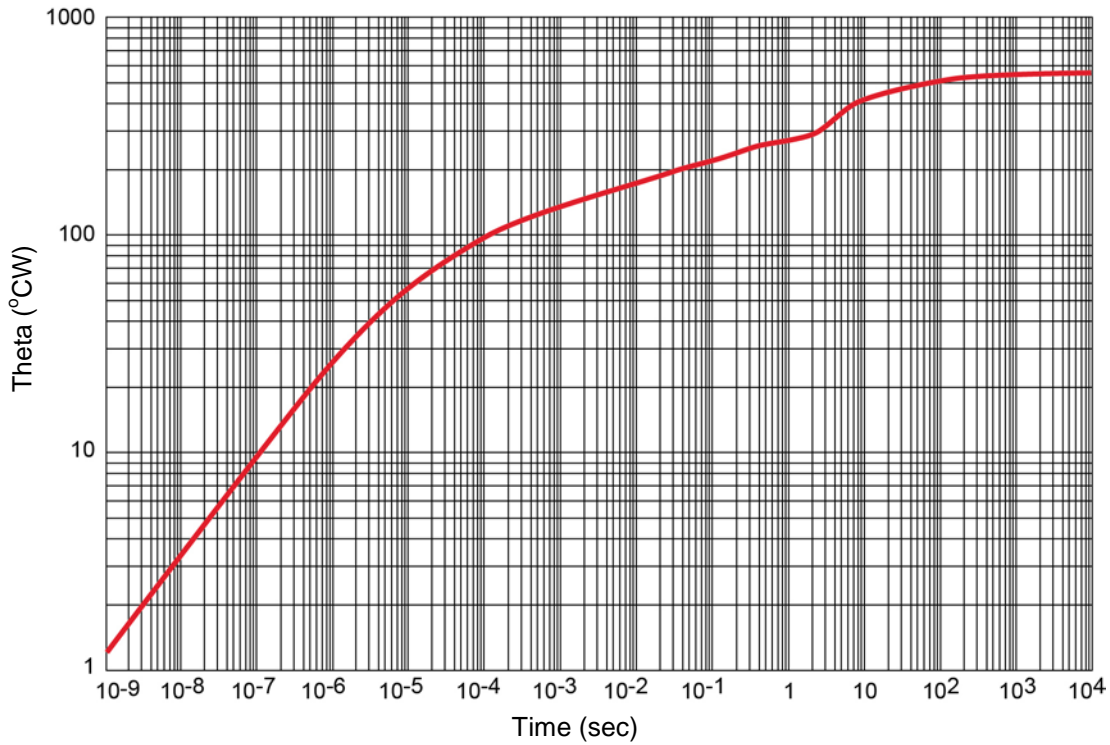


FIGURE 1
Maximum Thermal Impedance ($R_{\theta JA}$)

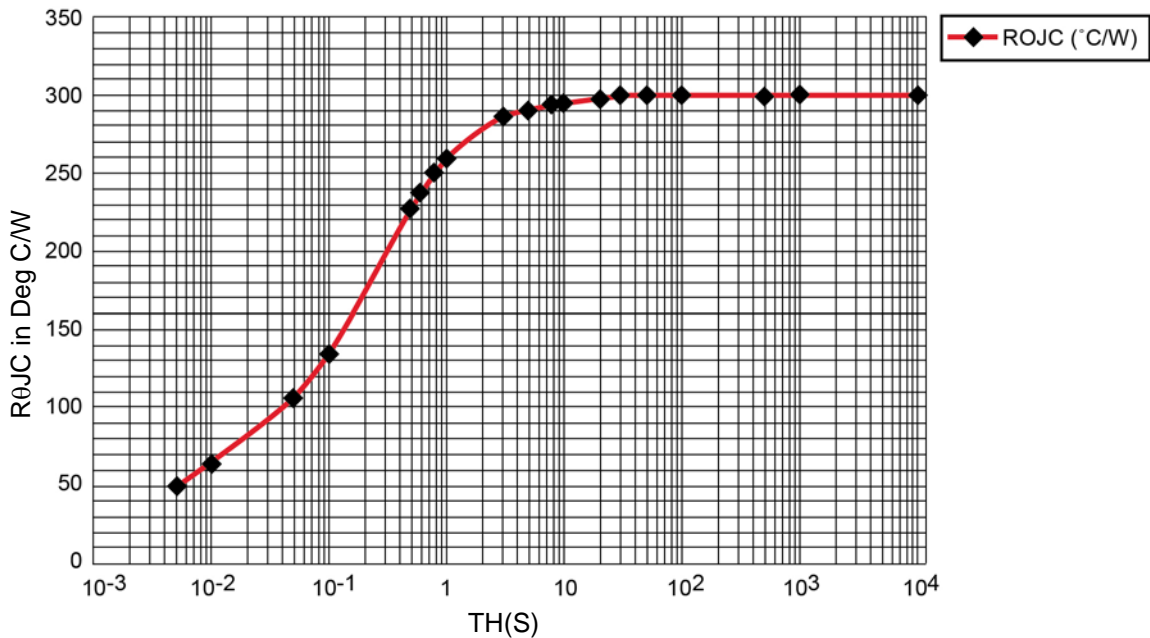
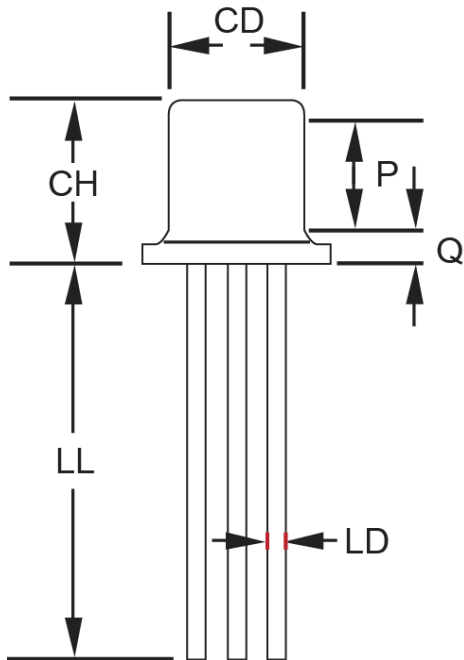

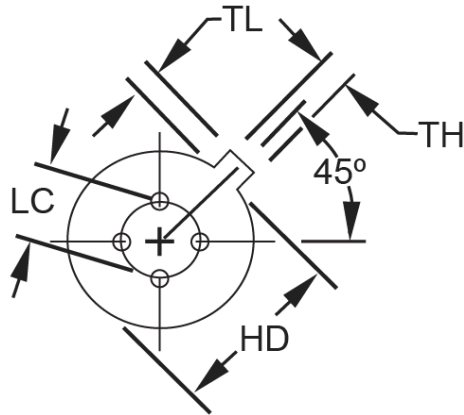


FIGURE 2
Thermal impedance graph ($R_{\theta JC}$)

PACKAGE DIMENSIONS


| Ltr | Dimensions | | | | Notes |
|-----|------------|------|-------------|-------|-------|
| | Inch | | Millimeters | | |
| | Min | Max | Min | Max | |
| TL | .028 | .048 | .071 | 1.22 | |
| TH | .036 | .046 | .091 | 1.17 | |
| HD | .209 | .230 | 5.31 | 5.84 | 5 |
| CD | .178 | .195 | 4.52 | 4.95 | 5 |
| LD | .016 | .021 | .410 | .533 | 7, 8 |
| LC | .100 TP | | 2.54 TP | | 7, 8 |
| CH | .170 | .210 | 4.32 | 5.33 | |
| LL | .500 | .750 | 12.70 | 19.05 | 7, 8 |
| P | .100 | | 2.54 | | |
| Q | | .040 | | 1.02 | 5 |
| 1 | Emitter | | | | |
| 2 | Base | | | | |
| 3 | Collector | | | | |
| 4 | Case | | | | |

NOTES:

1. Dimension are in inches.
2. Millimeters are given for general information only.
3. Beyond r (radius) maximum, TH shall be held for a minimum length of .011 (0.28 mm).
4. Dimension TL measured from maximum HD.
5. Body contour optional within zone defined by HD, CD, and Q.
6. Leads at gauge plane .054 +.001 -.000 inch (1.37 +0.03 -0.00 mm) below seating plane shall be within .007 inch (0.18mm) radius of true position (TP) at maximum material condition (MMC) relative to tab at MMC. The device may be measured by direct methods or by the gauge and gauging procedure shown in figure 2.
7. Dimension LU applies between L1 and L2. Dimension LD applies between L2 and LL minimum. Diameter is uncontrolled in L1 and beyond LL minimum.
8. All four leads.
9. Dimension r (radius) applies to both inside corners of tab.
10. In accordance with ASME Y14.5M, diameters are equivalent to Φ x symbology.
11. Lead 1 = emitter, lead 2 = base, lead 3 = collector, lead 4 = case (electrically connected).



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331