

SIDE ROTARY


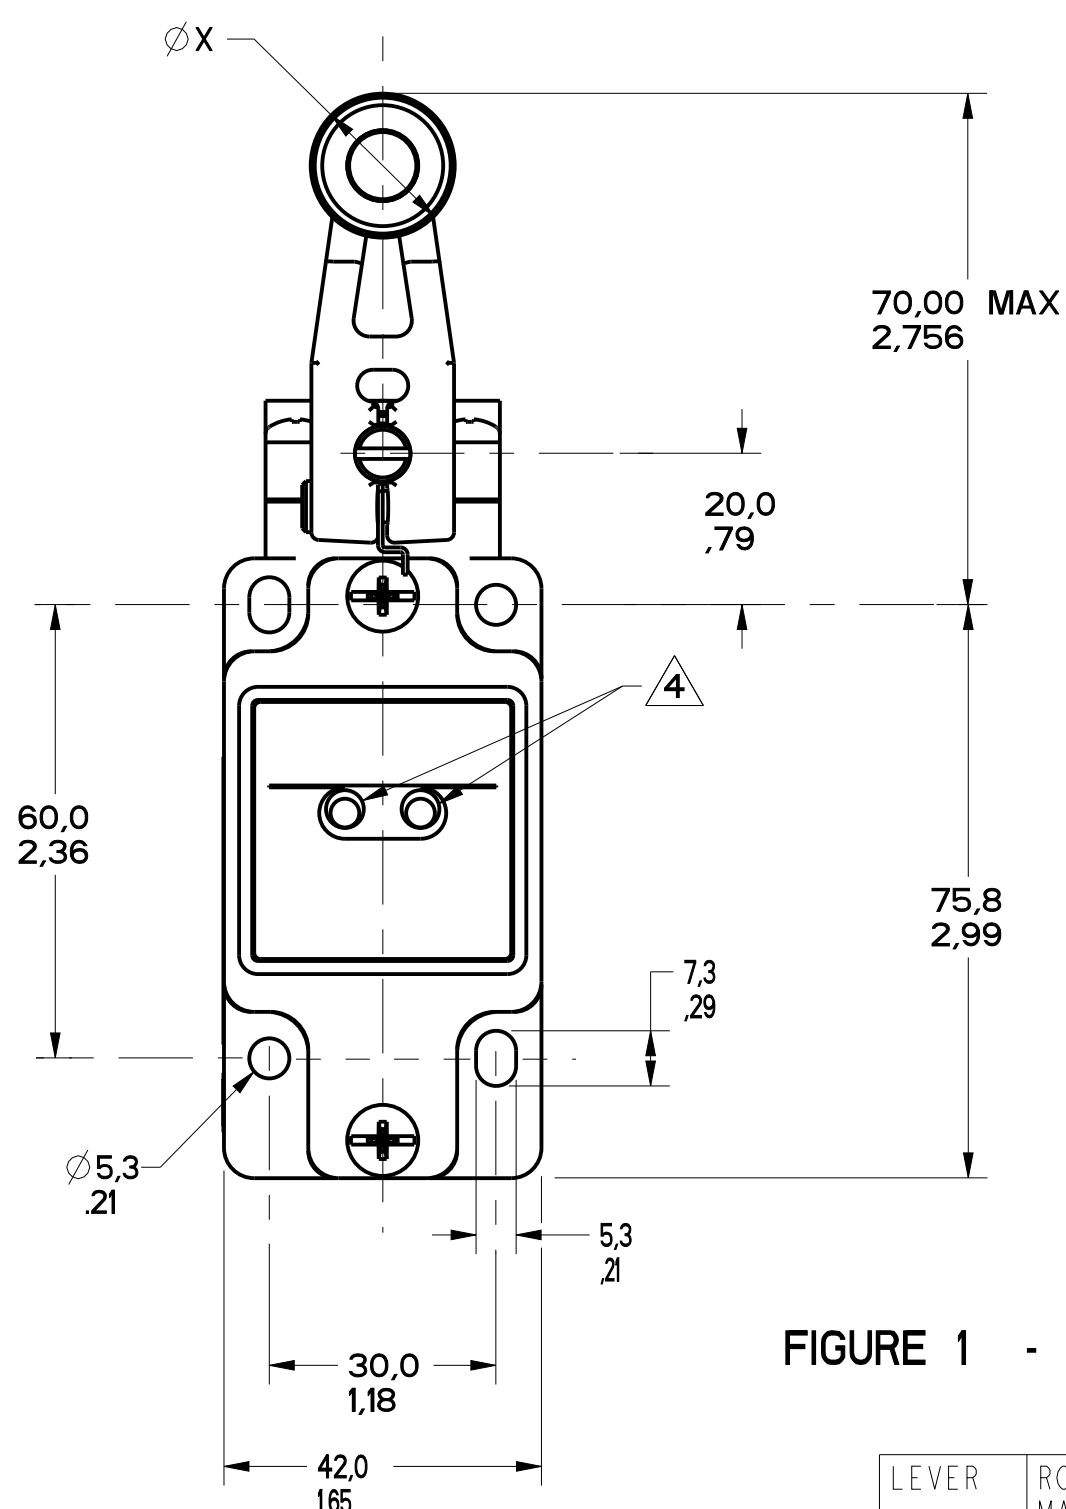


FIGURE 1 - SIDE ROTARY HEAD WITH GLZ51 SERIES LEVER

LEVER	ROLLER MATL	X DIM	Y DIM	Z DIM
GLZ51A	NYLON	19.1 .75	55.9 2.20	6.4 .25
GLZ51B	STEEL	19.1 .75	55.9 2.20	6.4 .25
GLZ51C	NYLON	24.5 1.00	59.1 2.33	12.7 .50
GLZ51Y	RUBBER	50.0 1.97	66.1 2.60	10.0 .39
GLZ51T	STAINLESS STEEL	19.1 .75	56.8 2.24	8.8 .345

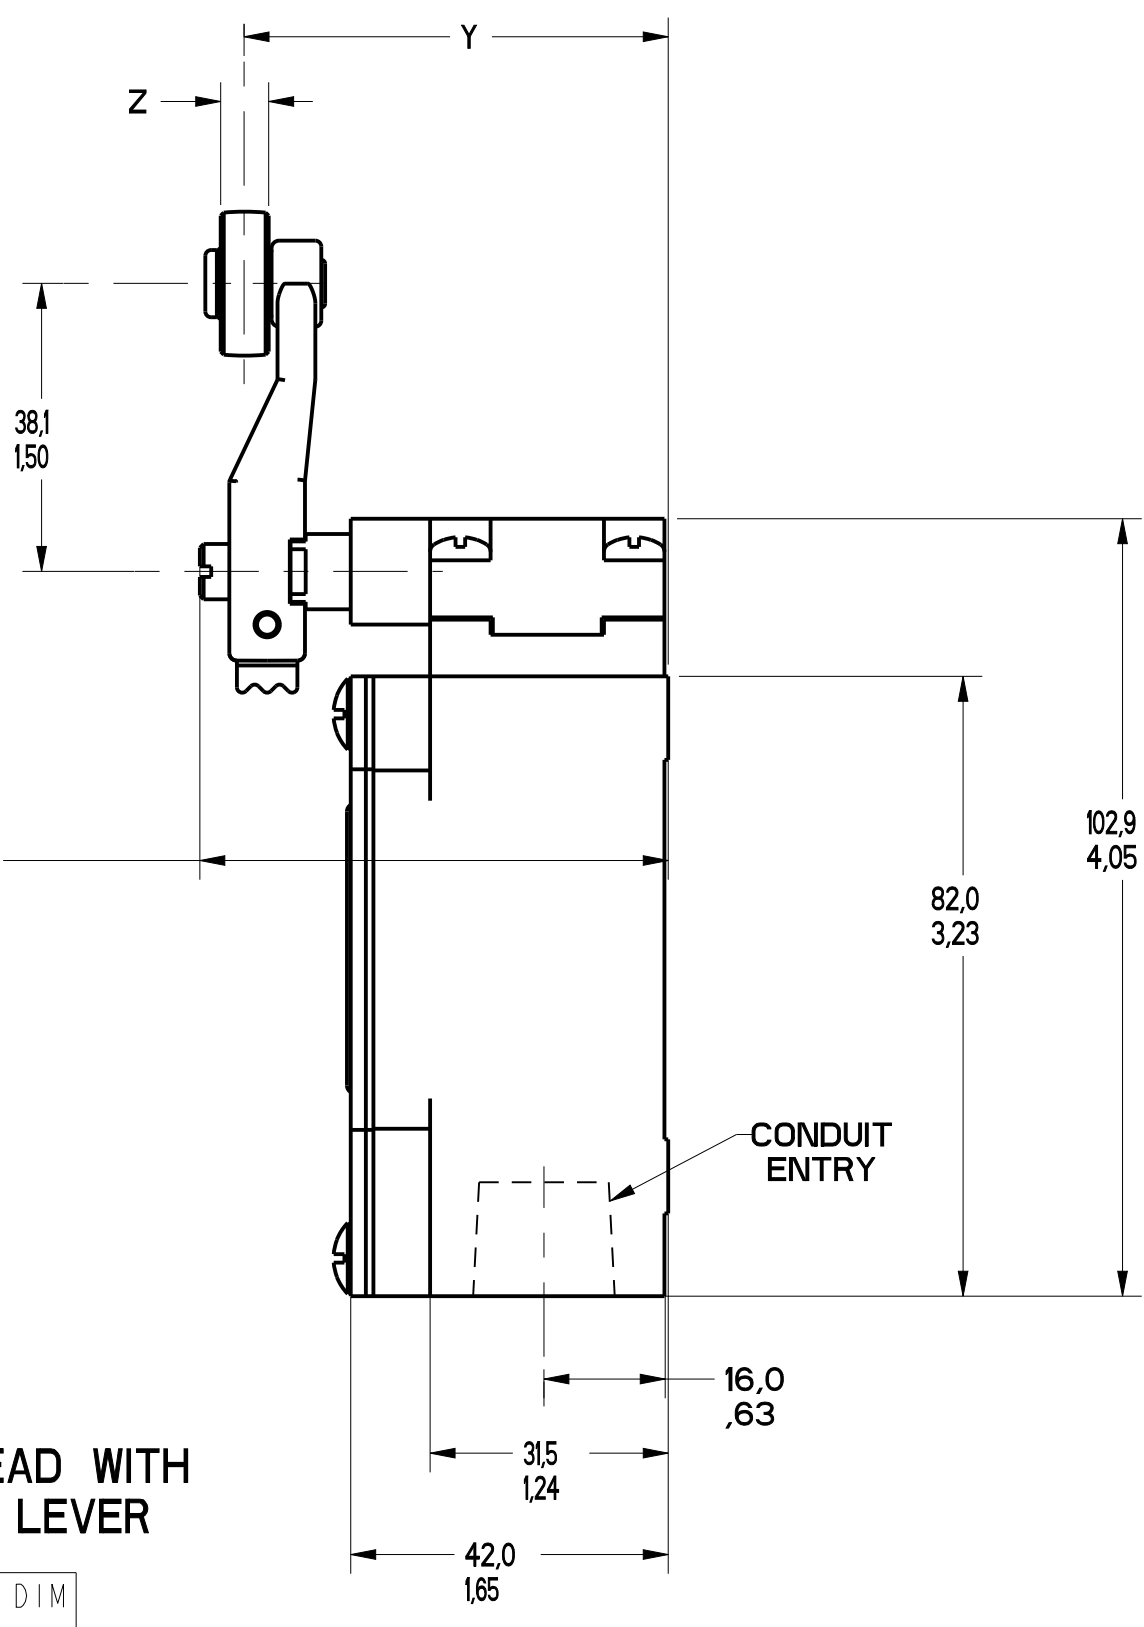

GLZ54J: 200.00 / 7.870 MAX
GLZ54K: 140.00 / 5.510 MAX
ALUMINUM ROD

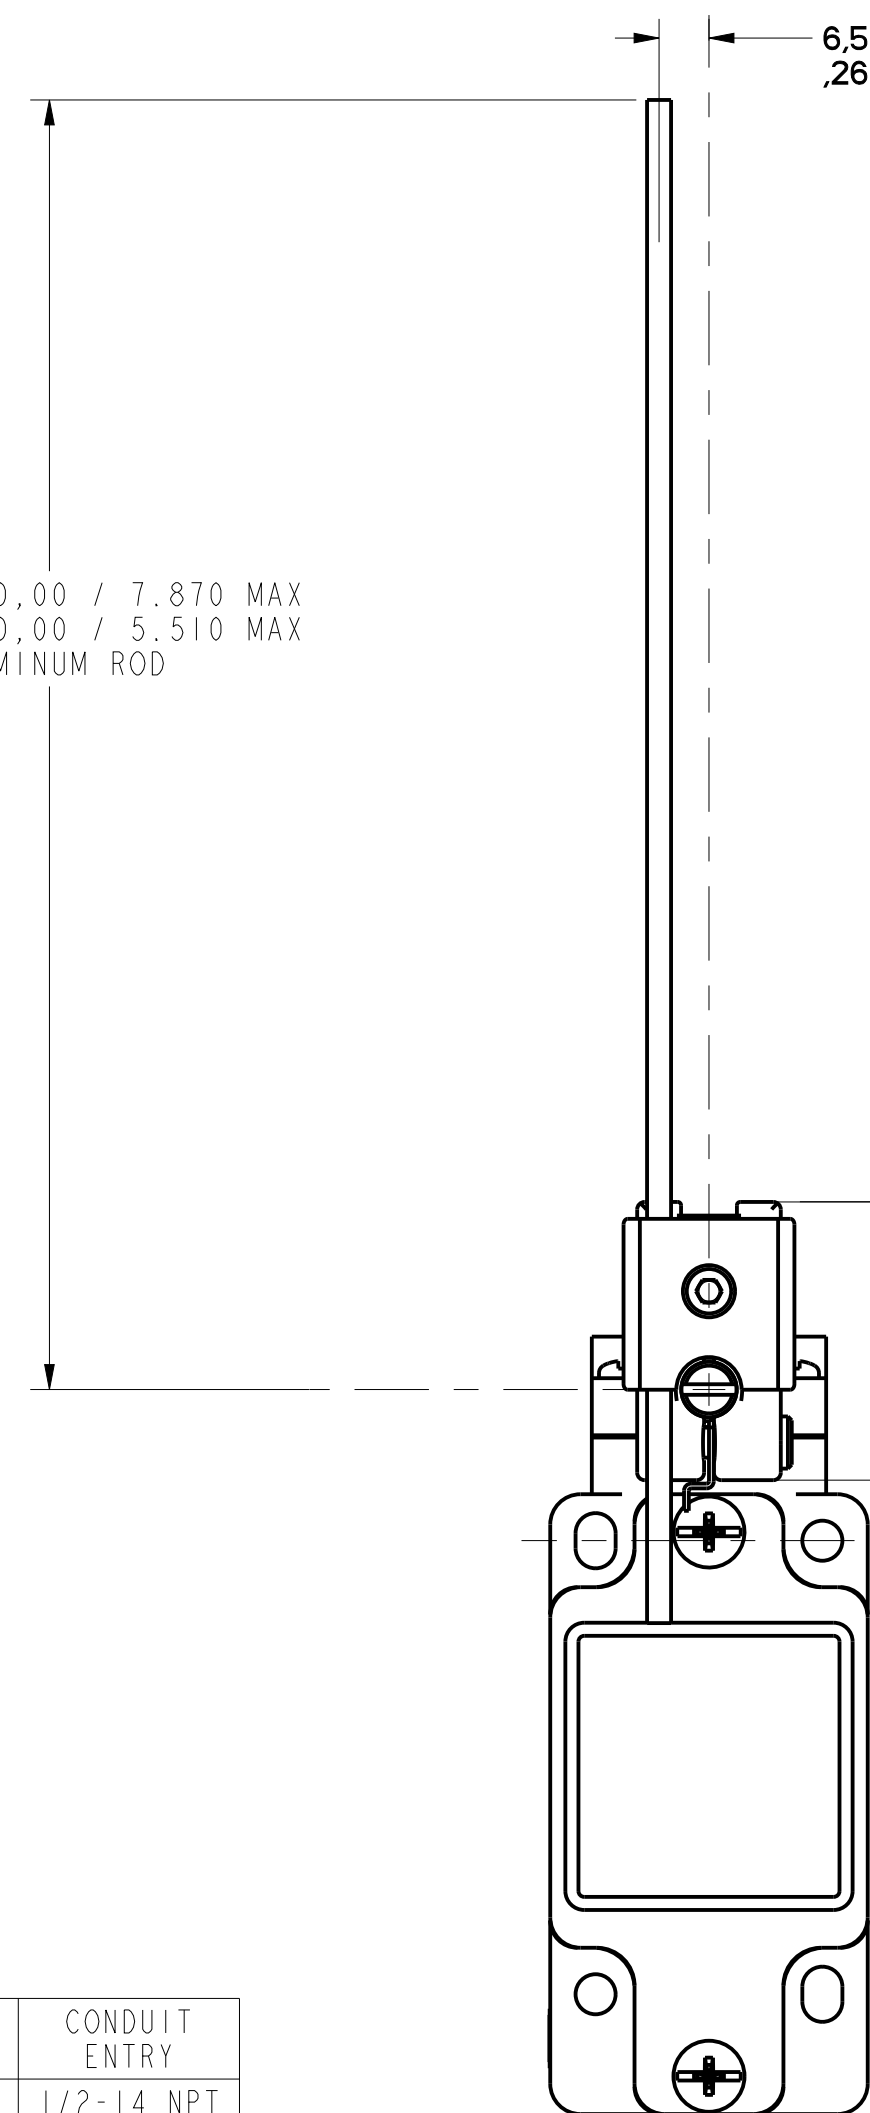


FIGURE 2 - SIDE ROTARY HEAD WITH GLZ54 SERIES LEVER OTHERWISE REFER TO FIGURE 1

FIGURE	CATALOG LISTING	CONDUIT ENTRY
1A	GL*A SERIES	1/2-14 NPT
1B	GL*B SERIES	PG13.5
1C	GL*C SERIES	20mm
1D	GL*D SERIES	PF1/2


ELECTRICAL RATING				GOLD PLATED CONTACTS
AC		DC		
A600 Ue	AC15 Ie	Q300 Ue	DC13 Ie	
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)	1V 10µA MIN 50V 100mA MAX
120	6	24	2.8	
240	3	125	.55	
380	1.9	250	.27	
480	1.5			
500	1.4			
600	1.2			

ENVIRONMENTAL RATING
IP67
NEMA/UL TYPES 1, 4, 12, 13

CATALOG LISTING	BODY DIMENSIONS, FIGURE	HEAD DIMENSIONS, FIGURE	HEAD ACTUATION, FIGURE
GLA***	I	N/A	N/A
GLF***	I	N/A	N/A
GLH***	I	N/A	N/A
GLA***	1A	N/A	N/A
GLB***	1B	N/A	N/A
GLC***	1C	N/A	N/A
GLD***	1D	N/A	N/A
GL***A1*	I	1	8
GL***A2*	I	3	9
GL***A4*	I	2	10
GL***A5*	I		8
GL***B	I	4	11
GL***C	I	5	13A, 13B
GL***D	I	6	14A, 14B
GL***E7A	I	7A	12
GL***E7B	I	7	12
GL***E7C	I	7E	15
GL***E7D	I	7B	12
GL***K8A	I	7C	15
GL***K8B	I	7D	15
GL***K8C	I	7	15

FIGURE 3 - SIDE ROTARY HEAD WITH GLZ52 SERIES LEVERS OTHERWISE REFER TO FIGURE 1

LEVER	ROLLER MATL	X DIM	Y DIM	Z DIM
GLZ52A	NYLON	19.1 .75	65.9 2.59	6.4 .25
GLZ52B	STEEL	19.1 .75	65.9 2.59	6.4 .25
GLZ52D	NYLON	38.1 1.5	65.9 2.59	6.4 .25
GLZ52E	NYLON	19.1 .75	79.37 3.125	33.07 1.300
GLZ52W	RUBBER	40.0 1.6	71.5 2.81	12.7 .5
GLZ52Y	RUBBER	50.0 1.97	68.8 2.71	10.0 .39

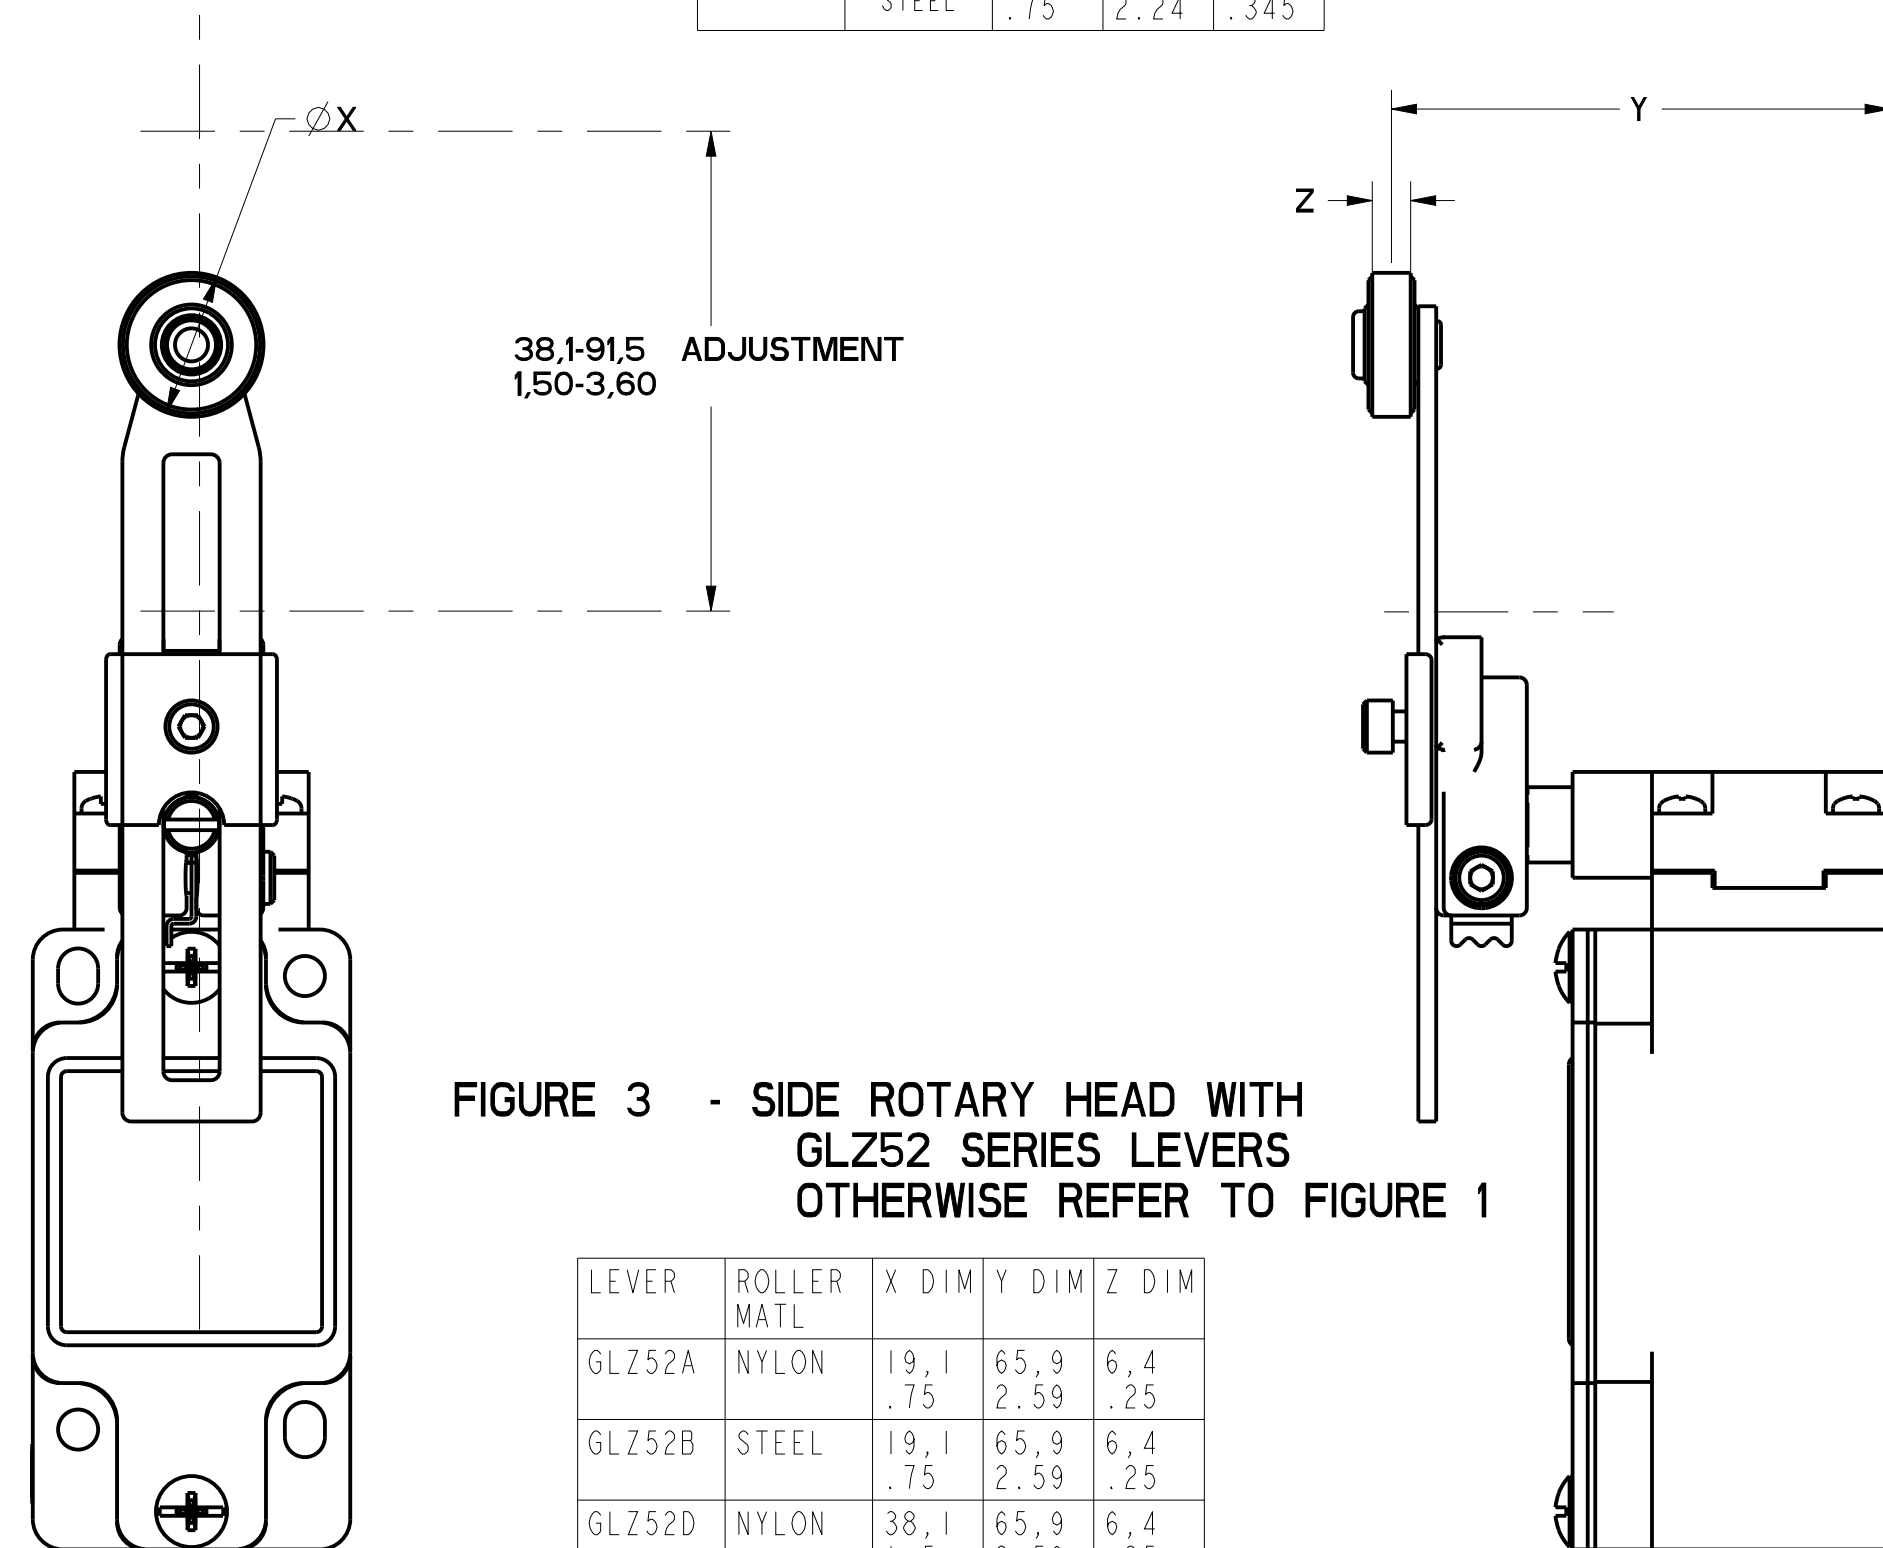

NOTES

- HEADS MAY BE INDEXED IN 90° INCREMENTS.
- LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
- FOR ADDITIONAL LEVERS SEE "M" DRAWING CHART GLZ5.
- THE LEFT INDICATOR IS GREEN AND INDICATES "POWER ON" IT IS ON GLH SERIES PRODUCTS ONLY. THE RIGHT INDICATOR IS YELLOW AND INDICATES "OUTPUT STATUS" IT IS ON GLF AND GLH SERIES PRODUCTS ONLY.
- THE MAXIMUM VOLTAGE, V_e OF GLF AND GLH SERIES PRODUCTS IS THE MAXIMUM RATED VOLTAGE OF INDICATION LIGHTS.
- FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041.
- CAM TRAVEL FOR FIG 9 ONLY APPLIES WHEN LEVER IS ADJUSTED TO 38.1 / 1.50.
- THE MAXIMUM VOLTAGE, V_e OF "06" AND "36" BASIC SWITCH CODE IS 300V (A300) TEMPERATURE RANGE.
- (ALL PRODUCTS EXCEPT w/SIDE ROTARY OPERATING HEAD)
OPERATING: -25°C TO +85°C / -13°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F
- (PRODUCTS w/SIDE ROTARY OPERATING HEAD)
OPERATING: -40°C TO +85°C / -40°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
FED. MFG. CODE 91929		GL SERIES CHART 1	
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED	

THIRD ANGLE PROJECTION			
SCALE 1:1			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:			
NO PLACES	1/16	1/32	1/64
TWO PLACES	1/32	1/64	1/128
THREE PLACES	1/64	1/128	1/256
ANGLES	±.01	±.005	±.002
DESIGN UNITS	SI METRIC	US CUSTOMARY	
WEIGHT			

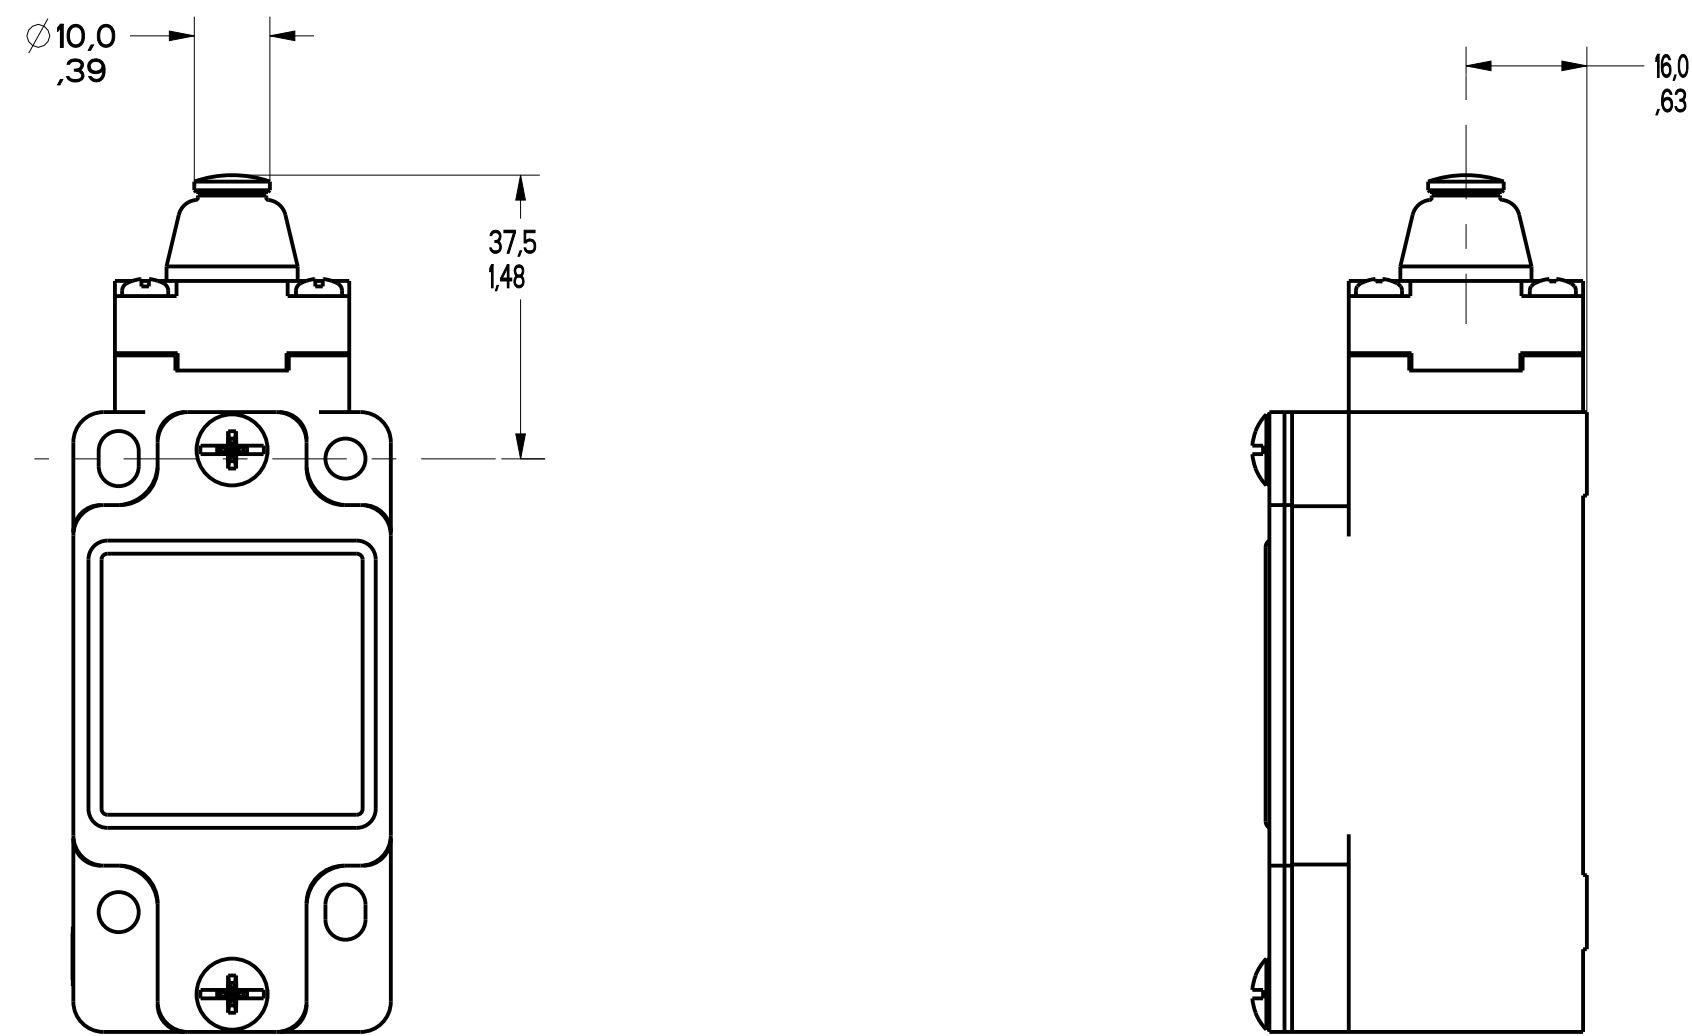


FIGURE 4 - TOP PIN PLUNGER HEAD
OTHERWISE REFER TO
FIGURE 1

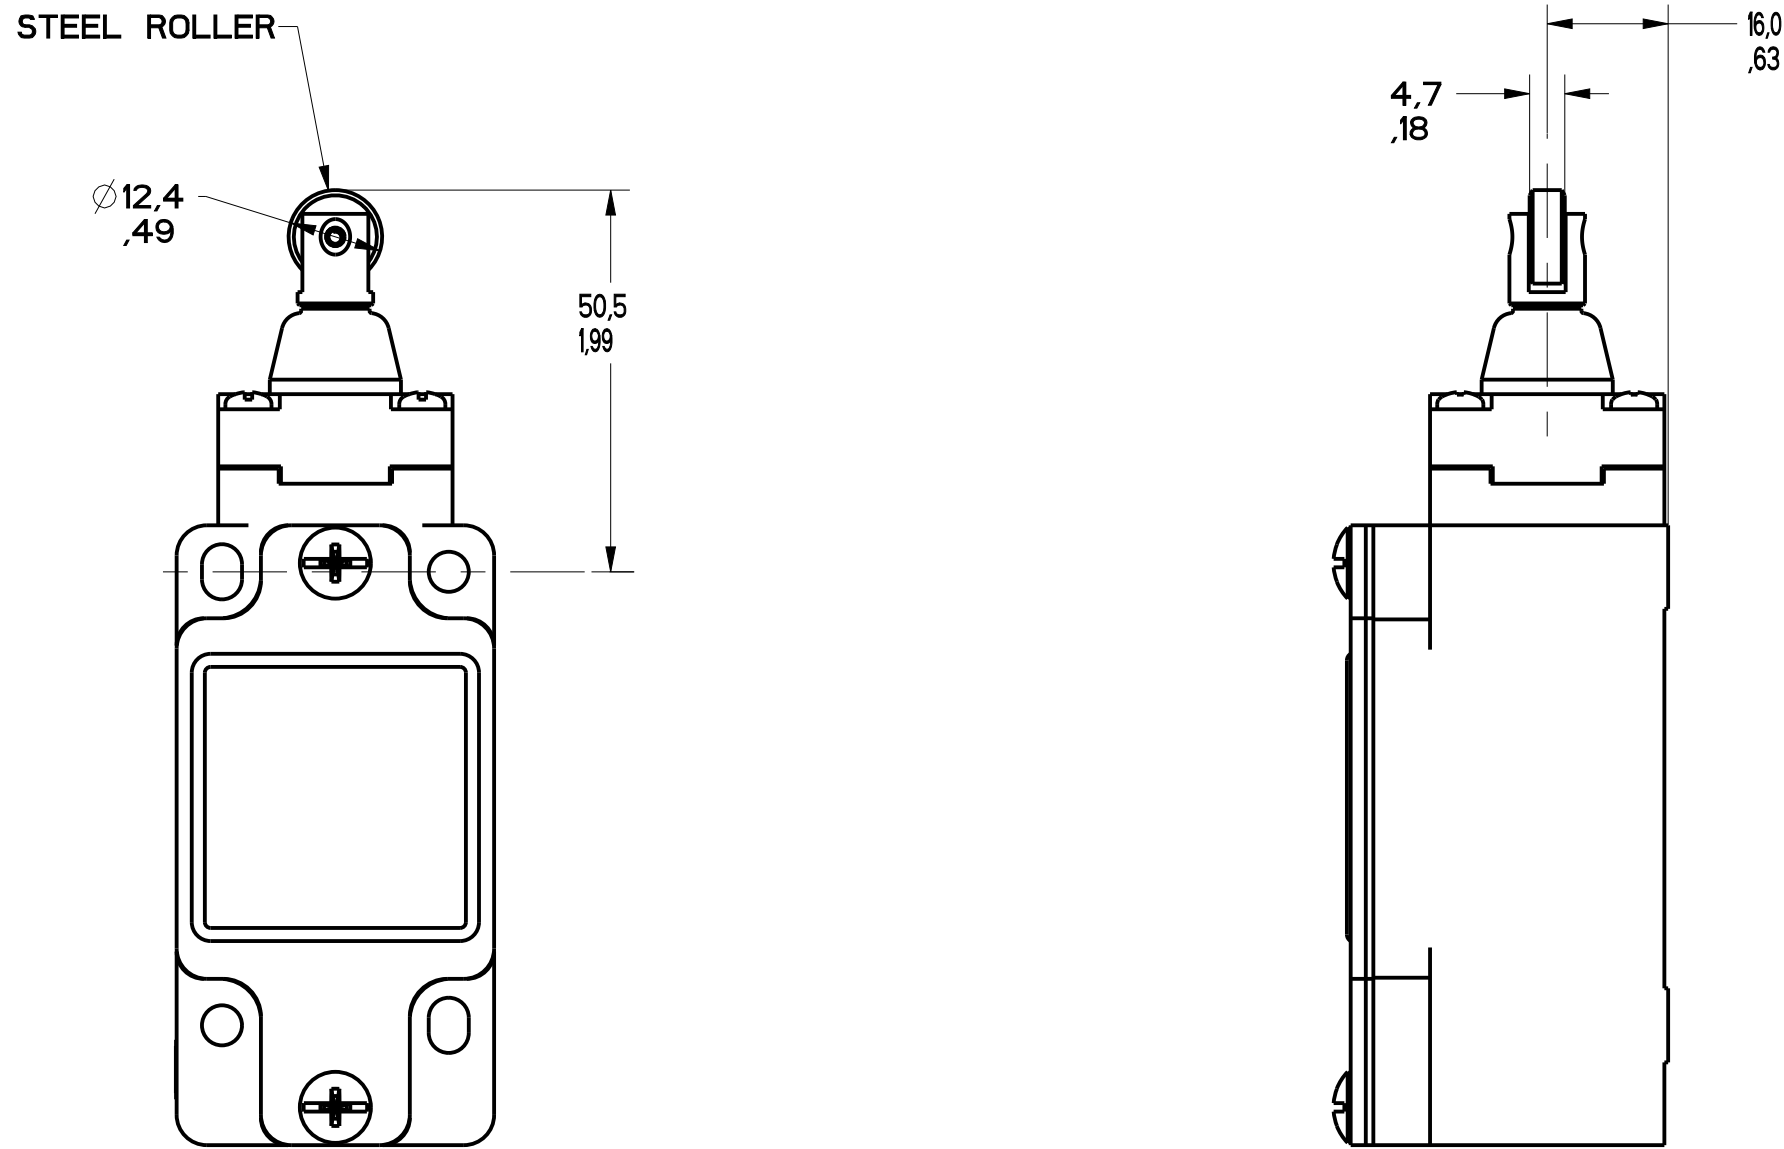


FIGURE 5 - TOP ROLLER PLUNGER HEAD
OTHERWISE REFER TO
FIGURE 1

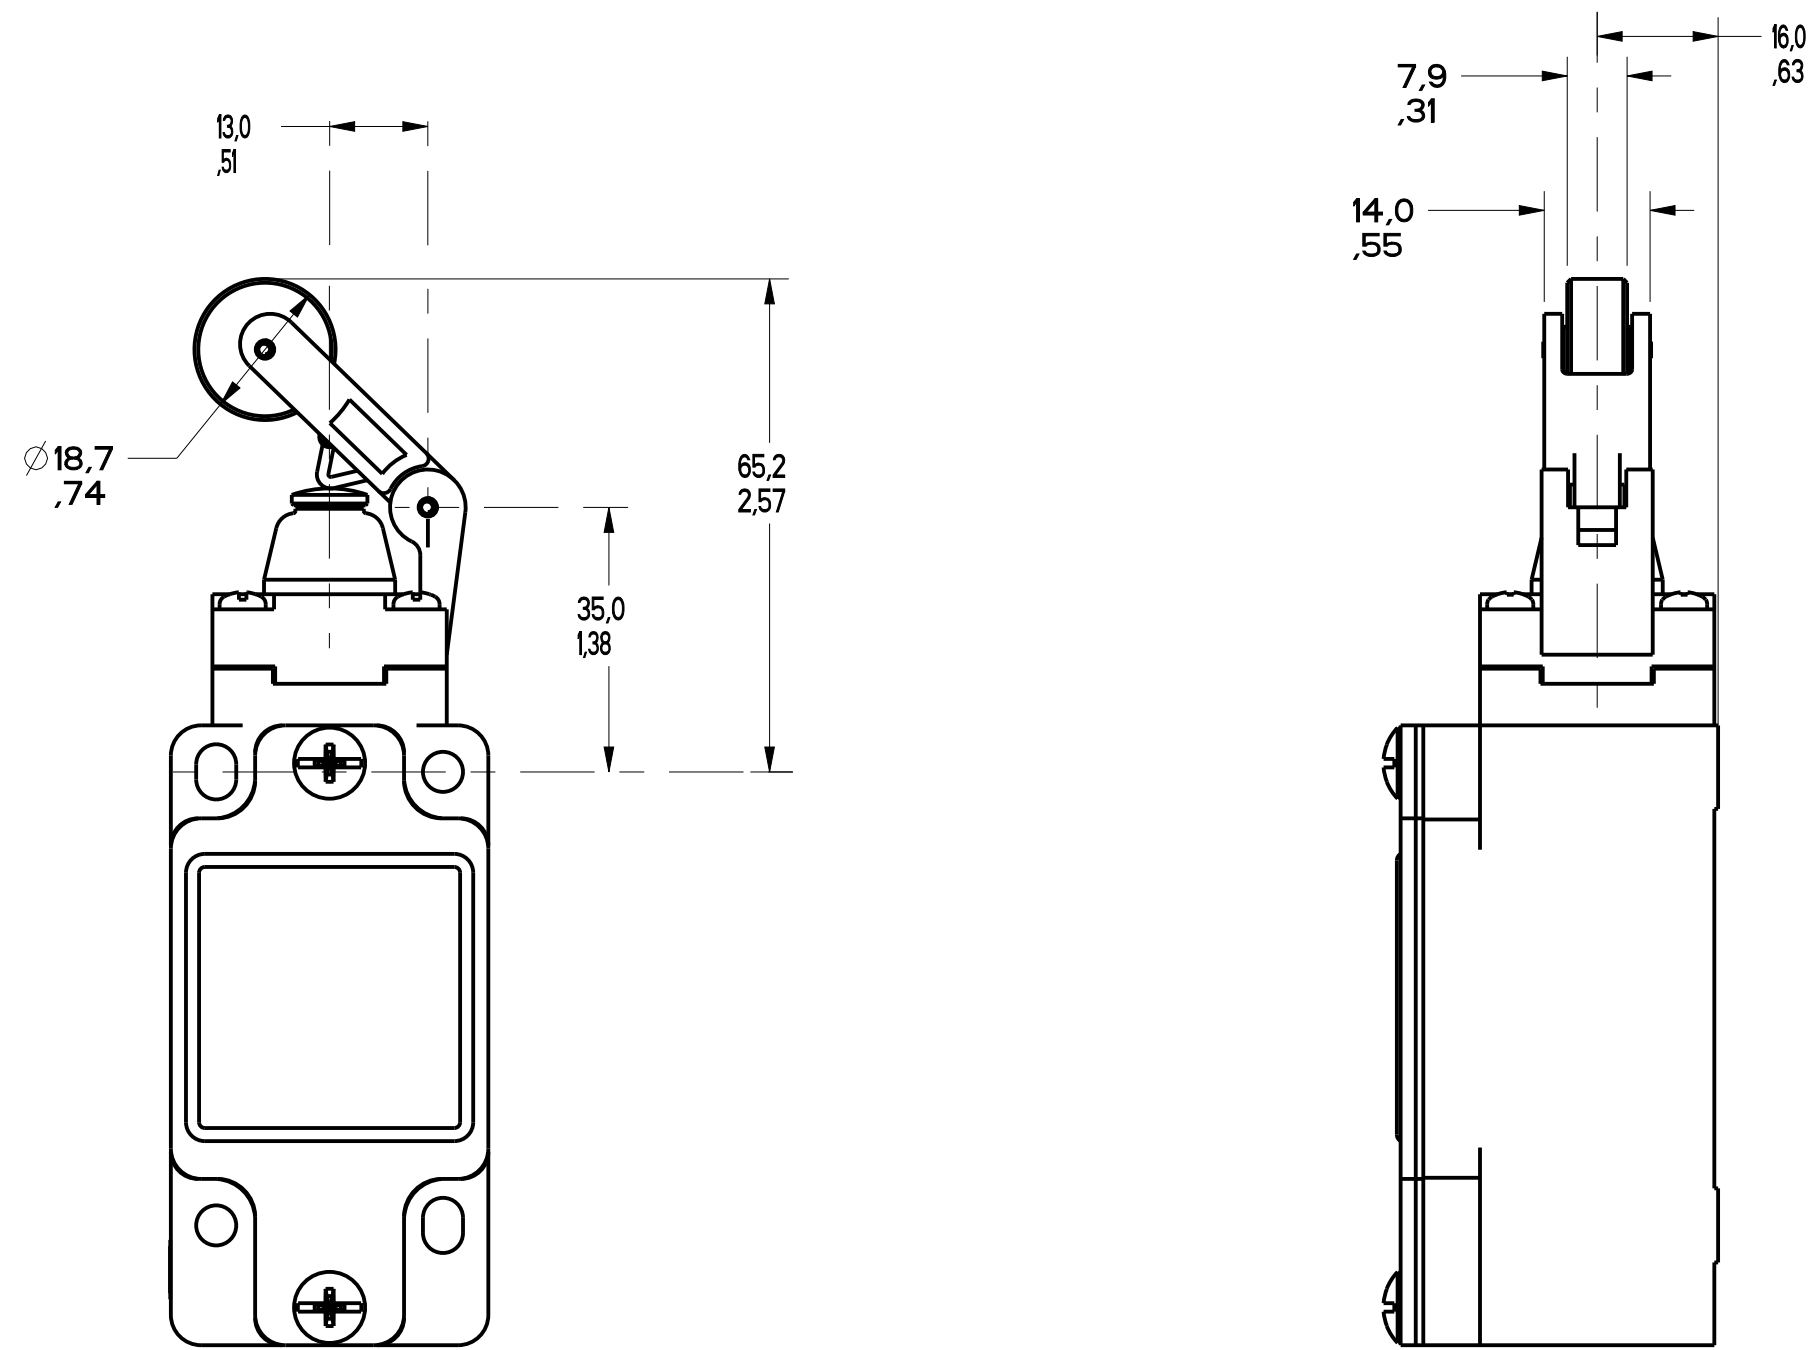


FIGURE 6 - TOP LEVER HEAD,
OTHERWISE REFER TO
FIGURE 1

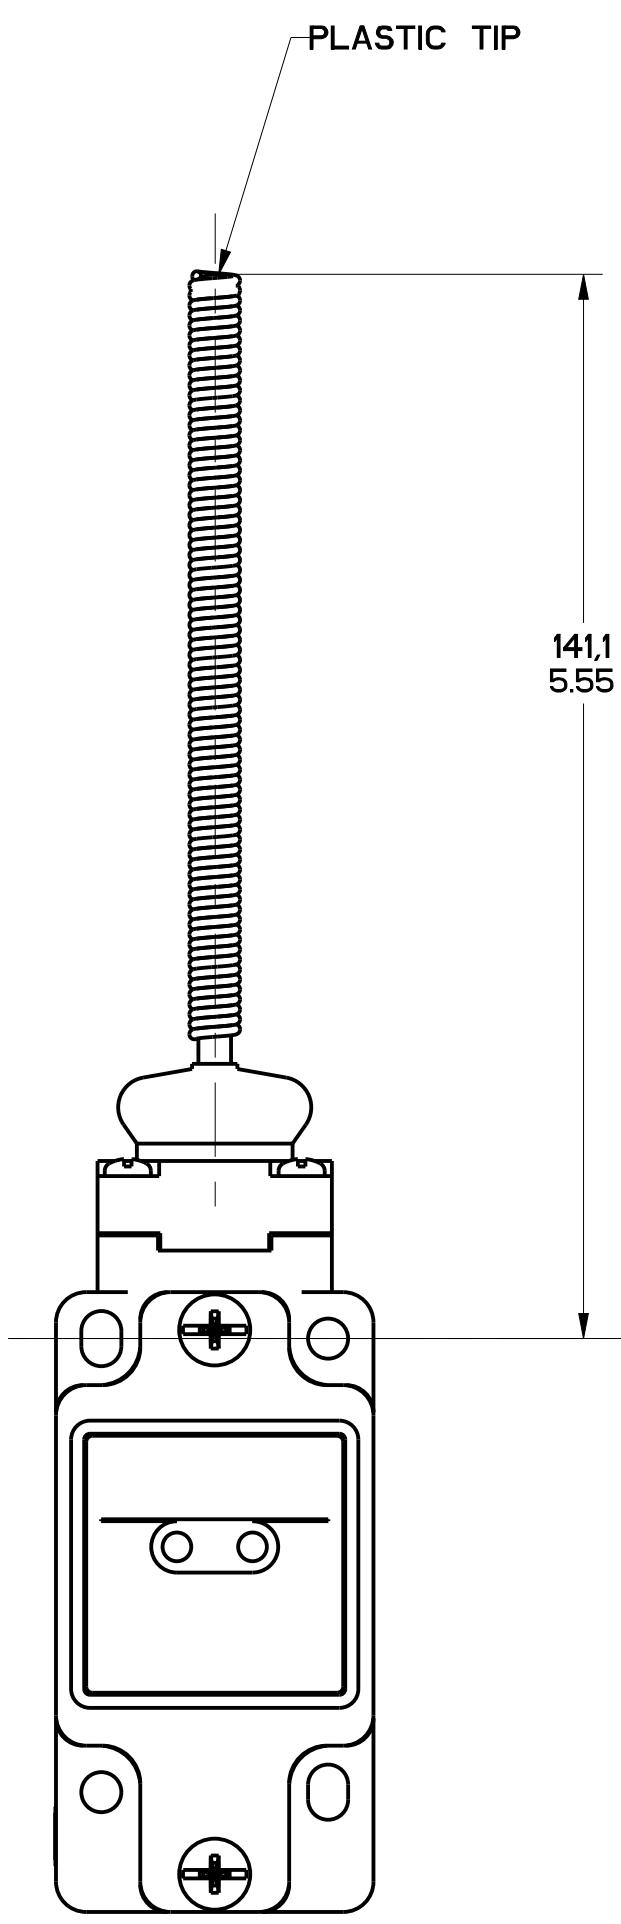


FIGURE 7 - WOBBLE HEAD, AND CAT WISKER HEAD COIL ACTUATOR, OTHERWISE REFER TO FIGURE 1

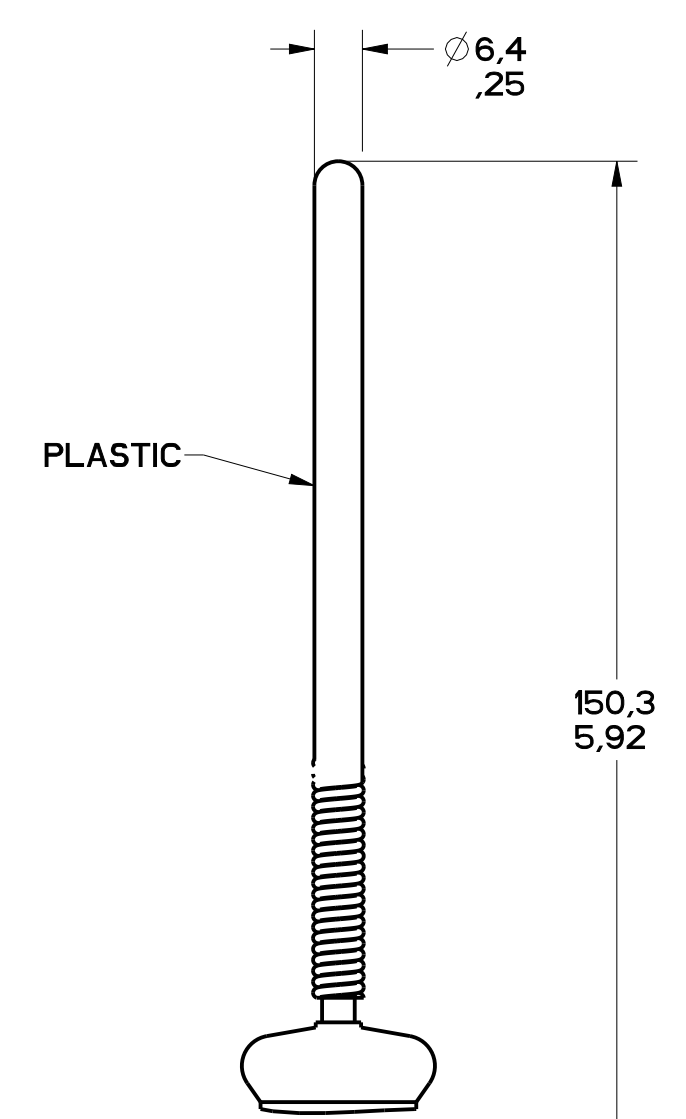


FIGURE 7A - WOBBLE HEAD, PLASTIC ACTUATOR, OTHERWISE SAME AS FIGURE 7

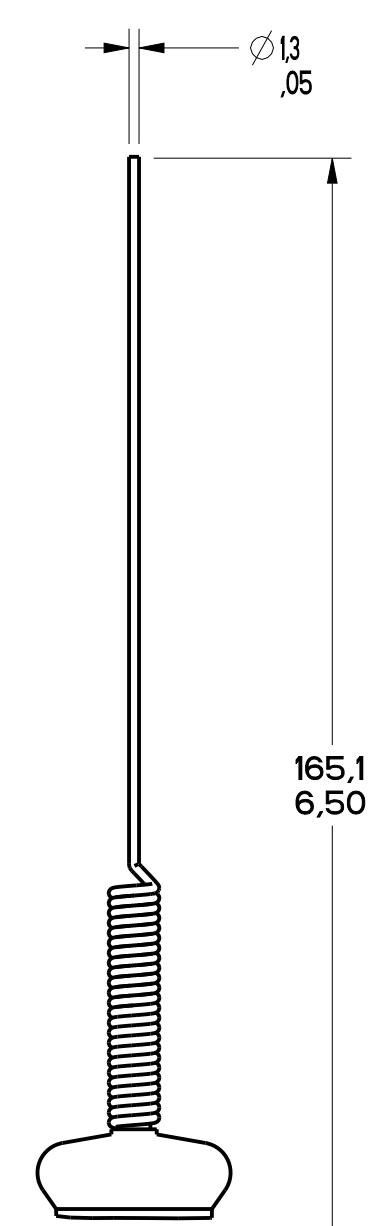


FIGURE 7B - WOBBLE HEAD, STAINLESS STEEL SPRING ACTUATOR, OTHERWISE SAME AS FIGURE 7

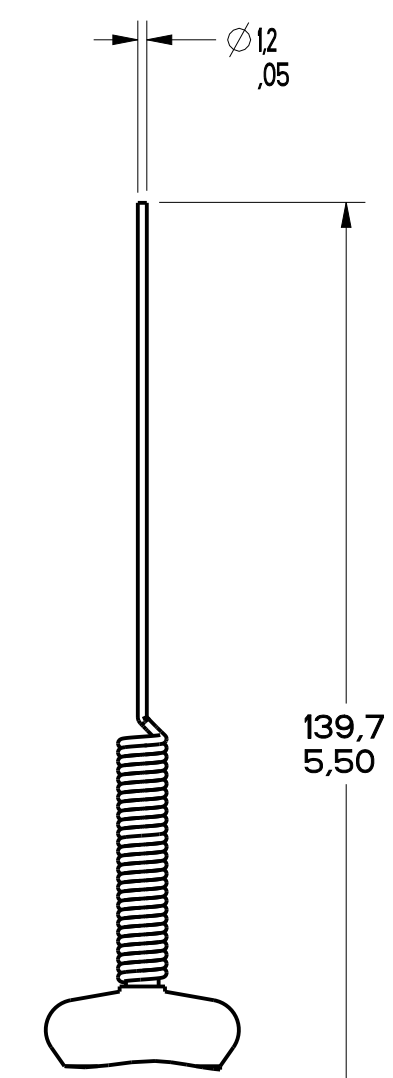


FIGURE 7C - CAT WHISKER ACTUATOR, STAINLESS STEEL SPRING, OTHERWISE SAME AS FIGURE 7

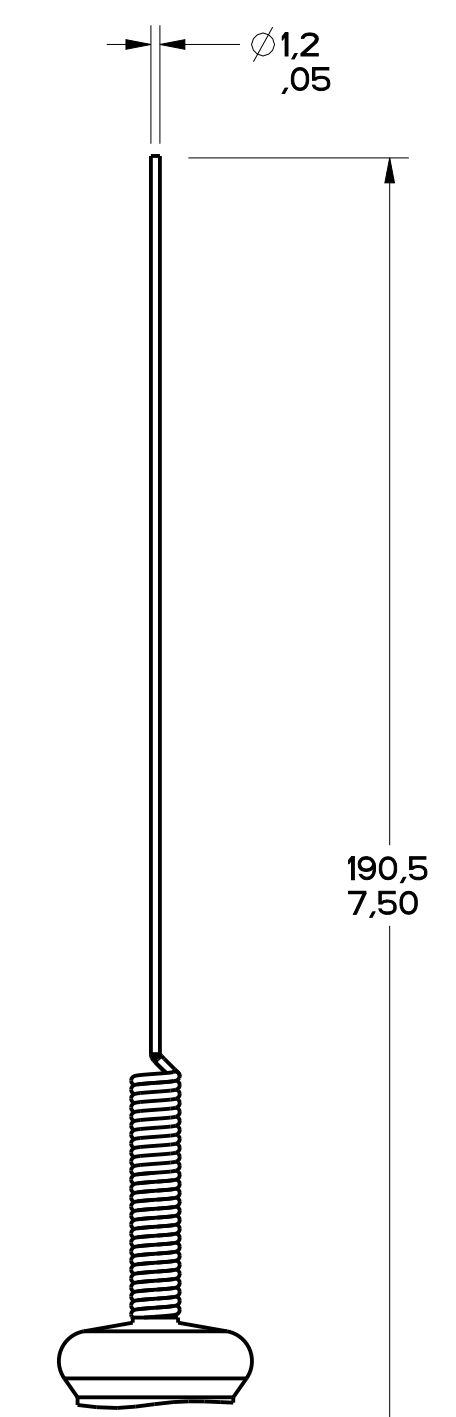


FIGURE 7D - CAT WHISKER ACTUATOR, STAINLESS STEEL SPRING, OTHERWISE SAME AS FIGURE 7

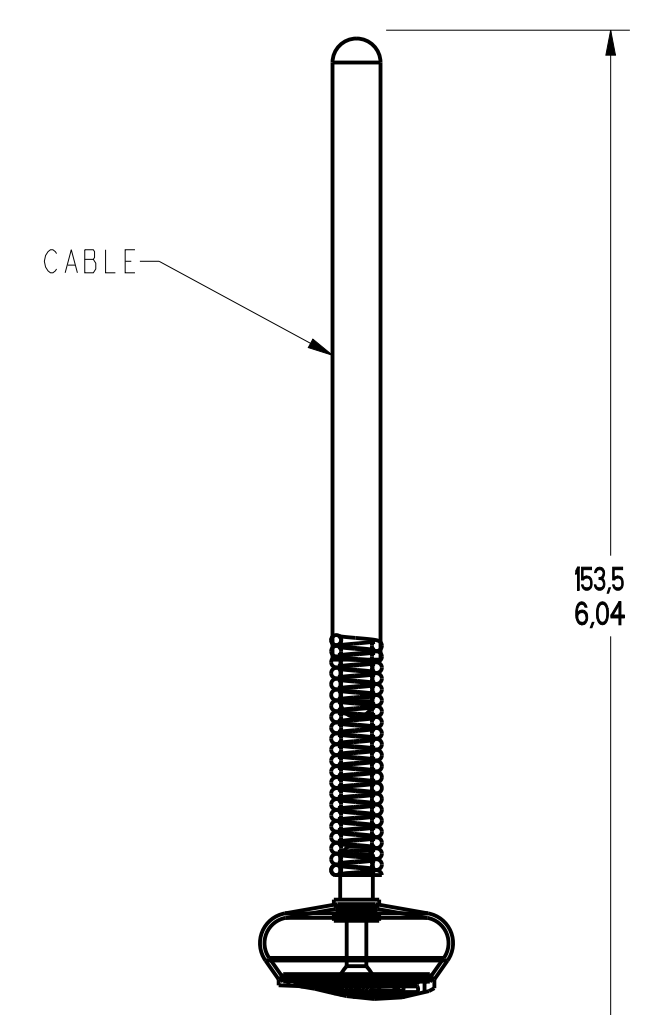


FIGURE 7E - CABLE WOBBLE ACTUATOR, OTHERWISE SAME AS FIGURE 7

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING																																																	
FED. MFG. CODE 91929		GL SERIES CHART 1																																																	
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED																																																	
DESIGN UNITS		WEIGHT																																																	
<table border="1"> <tr> <th colspan="4">TOLERANCES</th> </tr> <tr> <th colspan="4">APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1</th> </tr> <tr> <th>NO PLACES</th> <th>ONE PLACE</th> <th>TWO PLACES</th> <th>THREE PLACES</th> </tr> <tr> <td>±.04</td> <td>±.01</td> <td>±.005</td> <td>±.0005</td> </tr> <tr> <td>±.04</td> <td>±.01</td> <td>±.005</td> <td>±.0005</td> </tr> <tr> <td>±.04</td> <td>±.01</td> <td>±.005</td> <td>±.0005</td> </tr> </table>		TOLERANCES				APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1				NO PLACES	ONE PLACE	TWO PLACES	THREE PLACES	±.04	±.01	±.005	±.0005	±.04	±.01	±.005	±.0005	±.04	±.01	±.005	±.0005	<table border="1"> <tr> <th colspan="4">TOLERANCES</th> </tr> <tr> <th colspan="4">APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1</th> </tr> <tr> <th>NO PLACES</th> <th>ONE PLACE</th> <th>TWO PLACES</th> <th>THREE PLACES</th> </tr> <tr> <td>±.04</td> <td>±.01</td> <td>±.005</td> <td>±.0005</td> </tr> <tr> <td>±.04</td> <td>±.01</td> <td>±.005</td> <td>±.0005</td> </tr> <tr> <td>±.04</td> <td>±.01</td> <td>±.005</td> <td>±.0005</td> </tr> </table>		TOLERANCES				APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1				NO PLACES	ONE PLACE	TWO PLACES	THREE PLACES	±.04	±.01	±.005	±.0005	±.04	±.01	±.005	±.0005	±.04	±.01	±.005	±.0005
TOLERANCES																																																			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1																																																			
NO PLACES	ONE PLACE	TWO PLACES	THREE PLACES																																																
±.04	±.01	±.005	±.0005																																																
±.04	±.01	±.005	±.0005																																																
±.04	±.01	±.005	±.0005																																																
TOLERANCES																																																			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1																																																			
NO PLACES	ONE PLACE	TWO PLACES	THREE PLACES																																																
±.04	±.01	±.005	±.0005																																																
±.04	±.01	±.005	±.0005																																																
±.04	±.01	±.005	±.0005																																																

DRAWING NUMBER		PAGE 3 OF 13		RELEASE NO. PR-21557		REPLACES	
16		1200112		CMH		1200112	
REVISIONS		CHECK		CMH		1200112	
A 00050401		01		JUN03		0002886	
B 0002886		01		JUN04		0002886	
C 0002886		01		JUN04		0002886	
D 0002886		01		JUN04		0002886	
E 0002886		01		JUN04		0002886	
F 0002886		01		JUN04		0002886	
G 0002886		01		JUN04		0002886	
H 0002886		01		JUN04		0002886	
I 0002886		01		JUN04		0002886	
J 0002886		01		JUN04		0002886	
K 0002886		01		JUN04		0002886	
L 0002886		01		JUN04		0002886	
M 0002886		01		JUN04		0002886	
N 0002886		01		JUN04		0002886	
O 0002886		01		JUN04		0002886	
P 0002886		01		JUN04		0002886	
Q 0002886		01		JUN04		0002886	
R 0002886		01		JUN04		0002886	
S 0002886		01		JUN04		0002886	
T 0002886		01		JUN04		0002886	
U 0002886		01		JUN04		0002886	
V 0002886		01		JUN04		0002886	
W 0002886		01		JUN04		0002886	
X 0002886		01		JUN04		0002886	
Y 0002886		01		JUN04		0002886	
Z 0002886		01		JUN04		0002886	

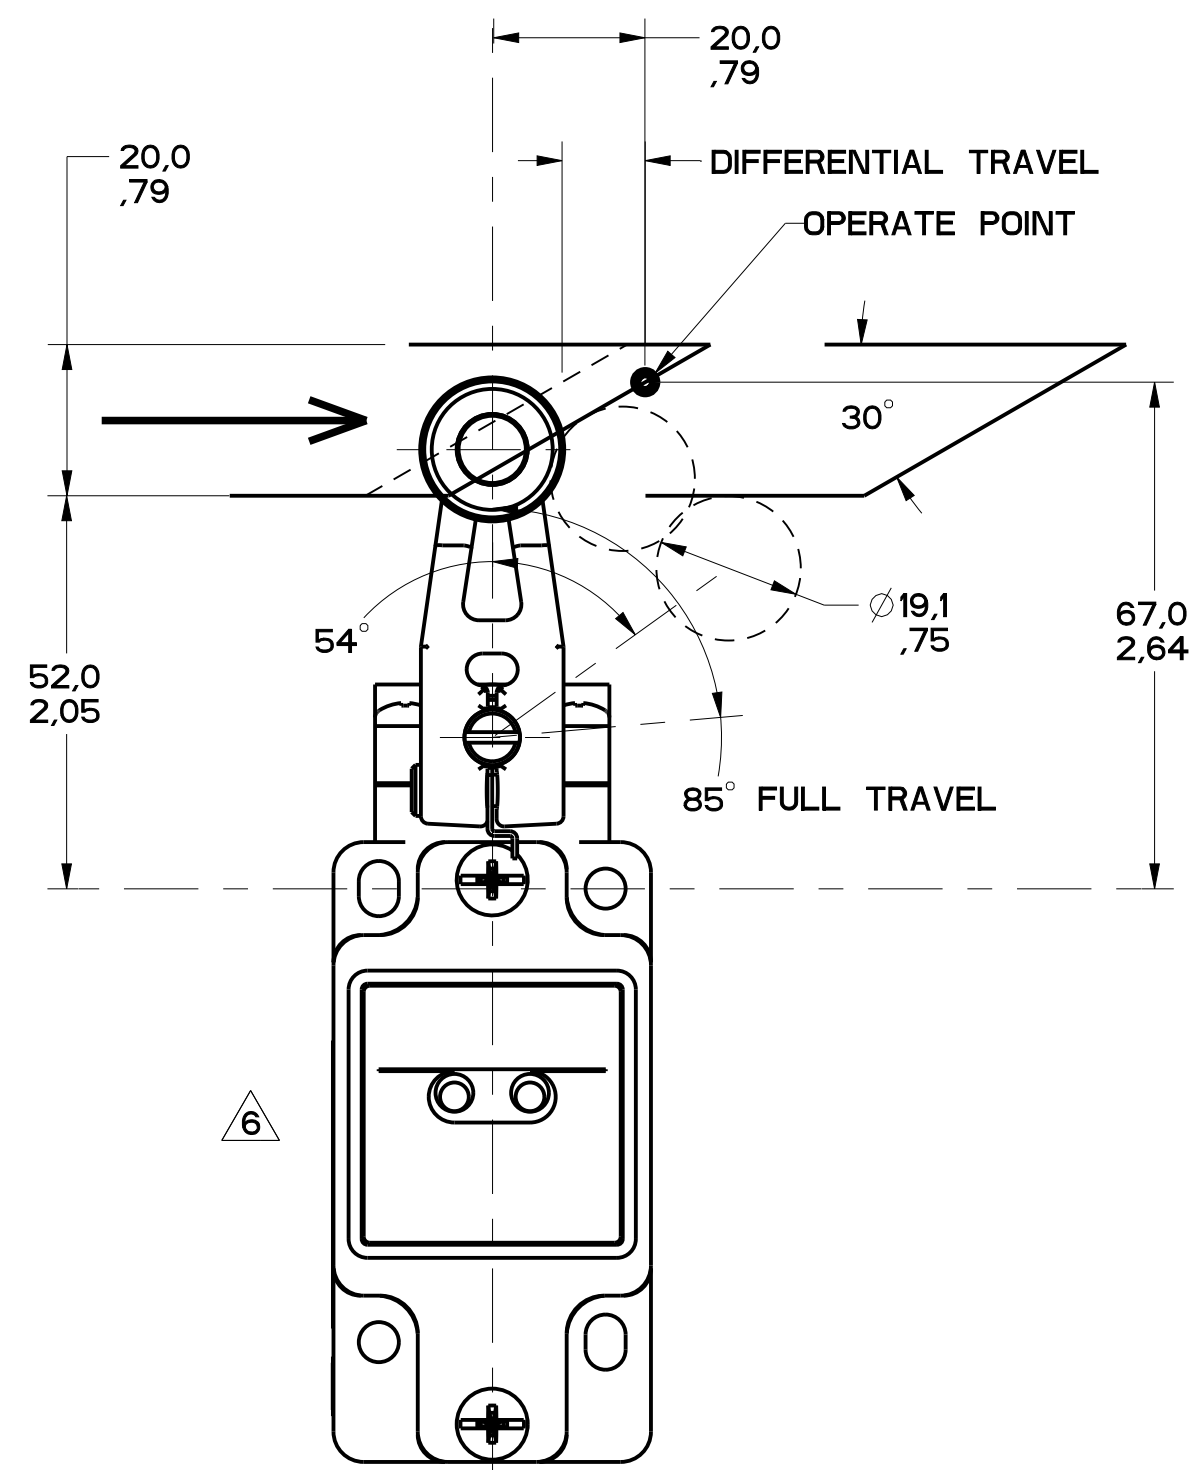


FIGURE 8

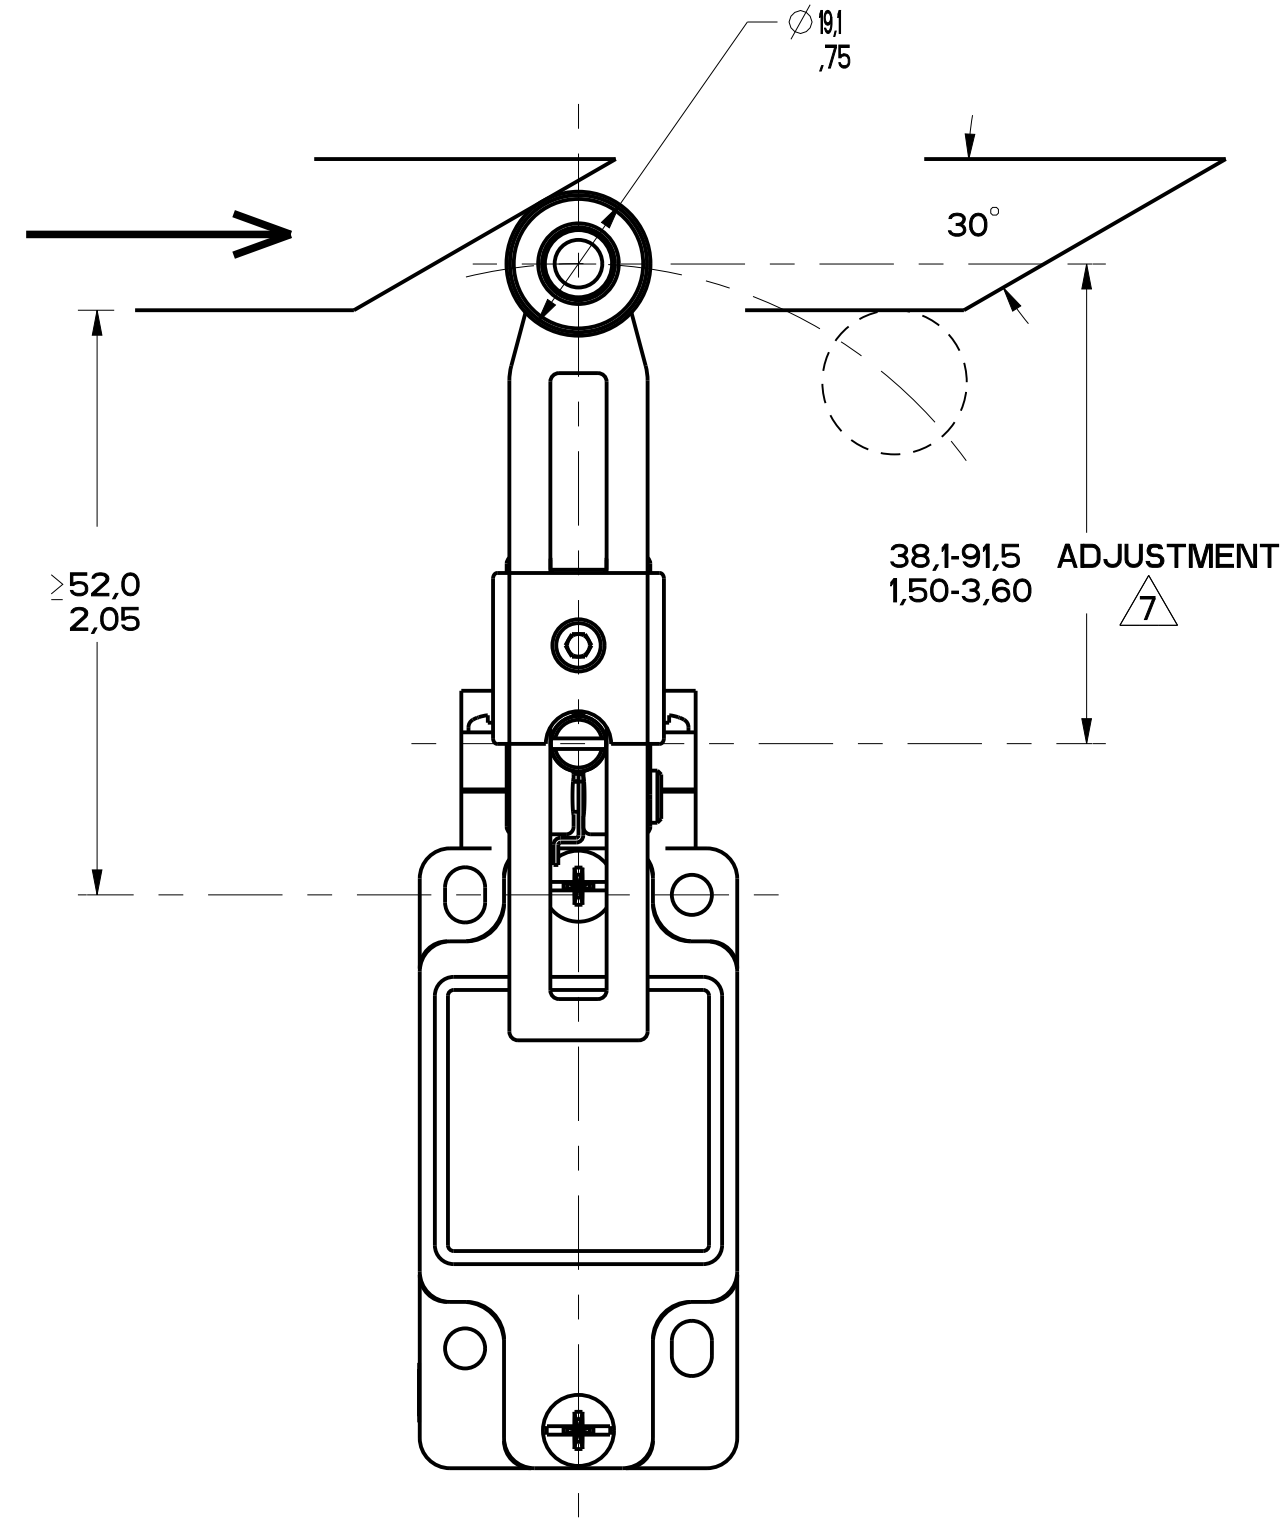


FIGURE 9

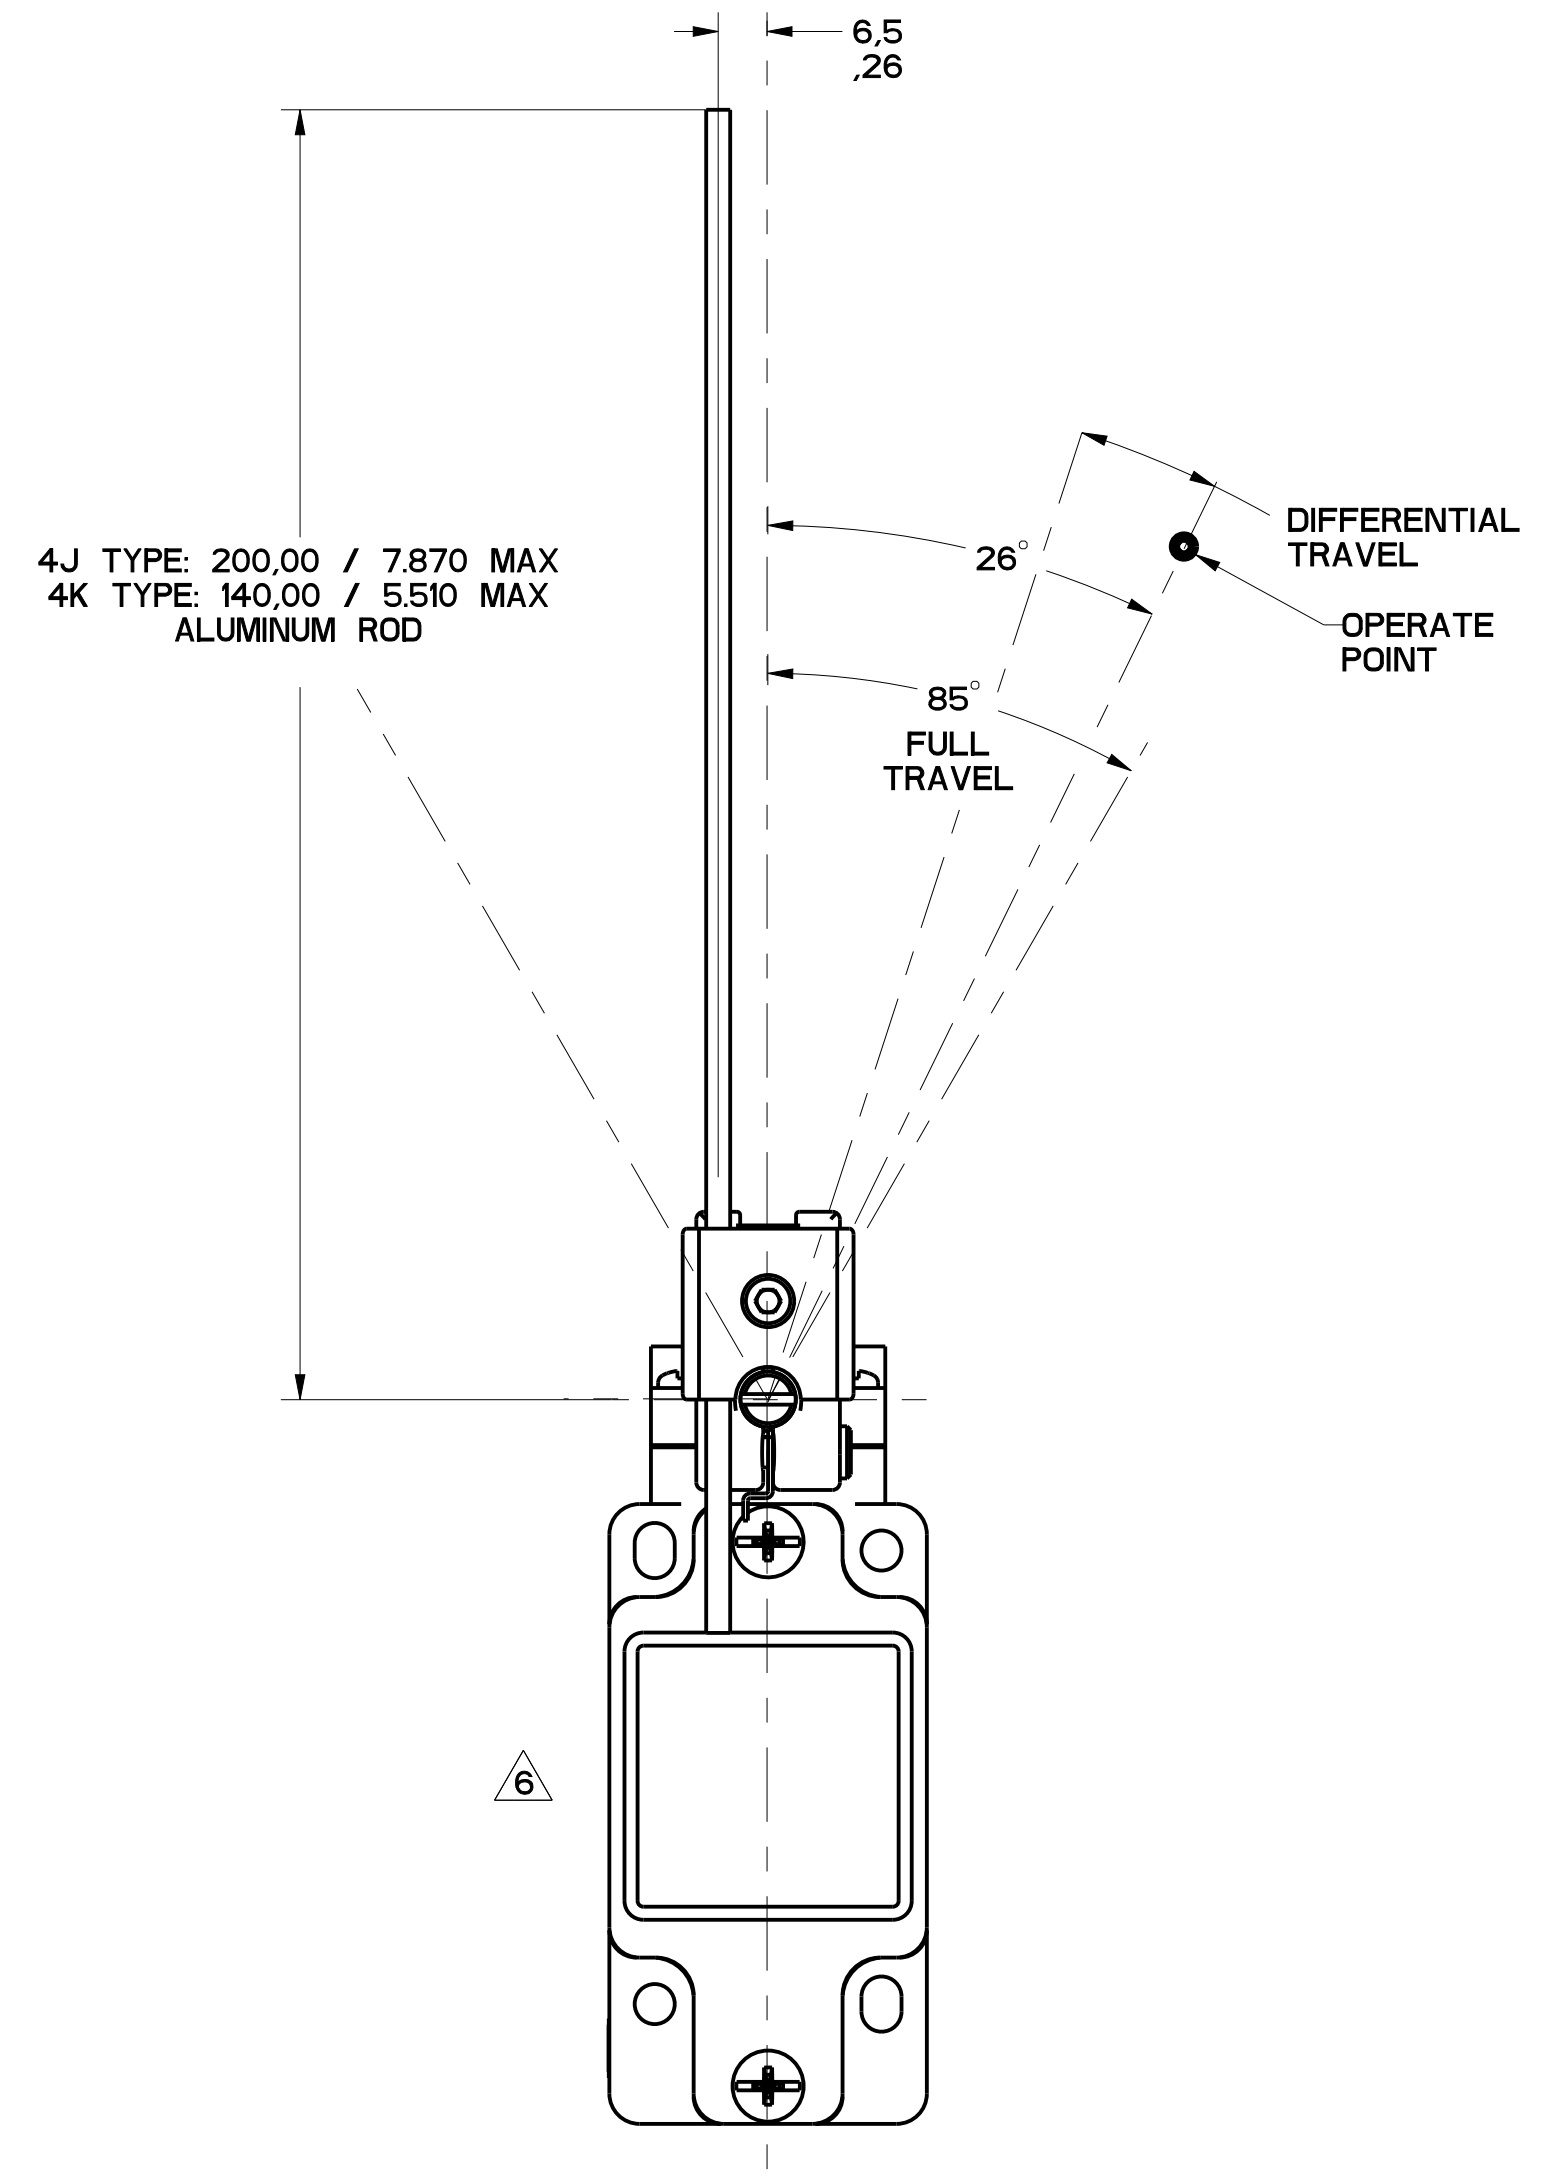


FIGURE 10

[illegible]

PTC/CAD	DRAWN	S A V 27MAR96	CHECK	DVM	07AUG06	CHECK	CMH	05OCT10	REVISIONS
									F 0000401
									GLH 2 JUN03
									G 0002986
									RS 20 JAN04
									H 0023759
									RFP 07AUG06
									J 0037216
									BS 09FEB08
									K 0034629
									SS 12SEP08
									L 0048605
									YKS 09FEB09
									M 0070059
									DN 05OCT10
									N 0049570
									SSH 12OCT12

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		
FED. MFG. CODE 91929	SWITCH, ENCLOSED	CATALOG LISTING
MICRO SWITCH a Honeywell Division		GL SERIES CHART

SWITCH, ENCLOSED

GL SERIES CHART 1

THIRD ANGLE PROJECTION			
			
SCALE	1 : 1		
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE: $\pm$			
NO PLACES	DIM X	TOL mm	DIM X
ONE PLACE	X .1	0.1 / 0.016	1.6
TWO PLACES	X .01	0.01 / 0.001	0.016
THREE PLACES	X .001	0.001 / 0.0001	0.0016
ANGLES	$\pm 20''$		
SI METRIC		US CUSTOMARY	
DESIGN UNITS			
WEIGHT			

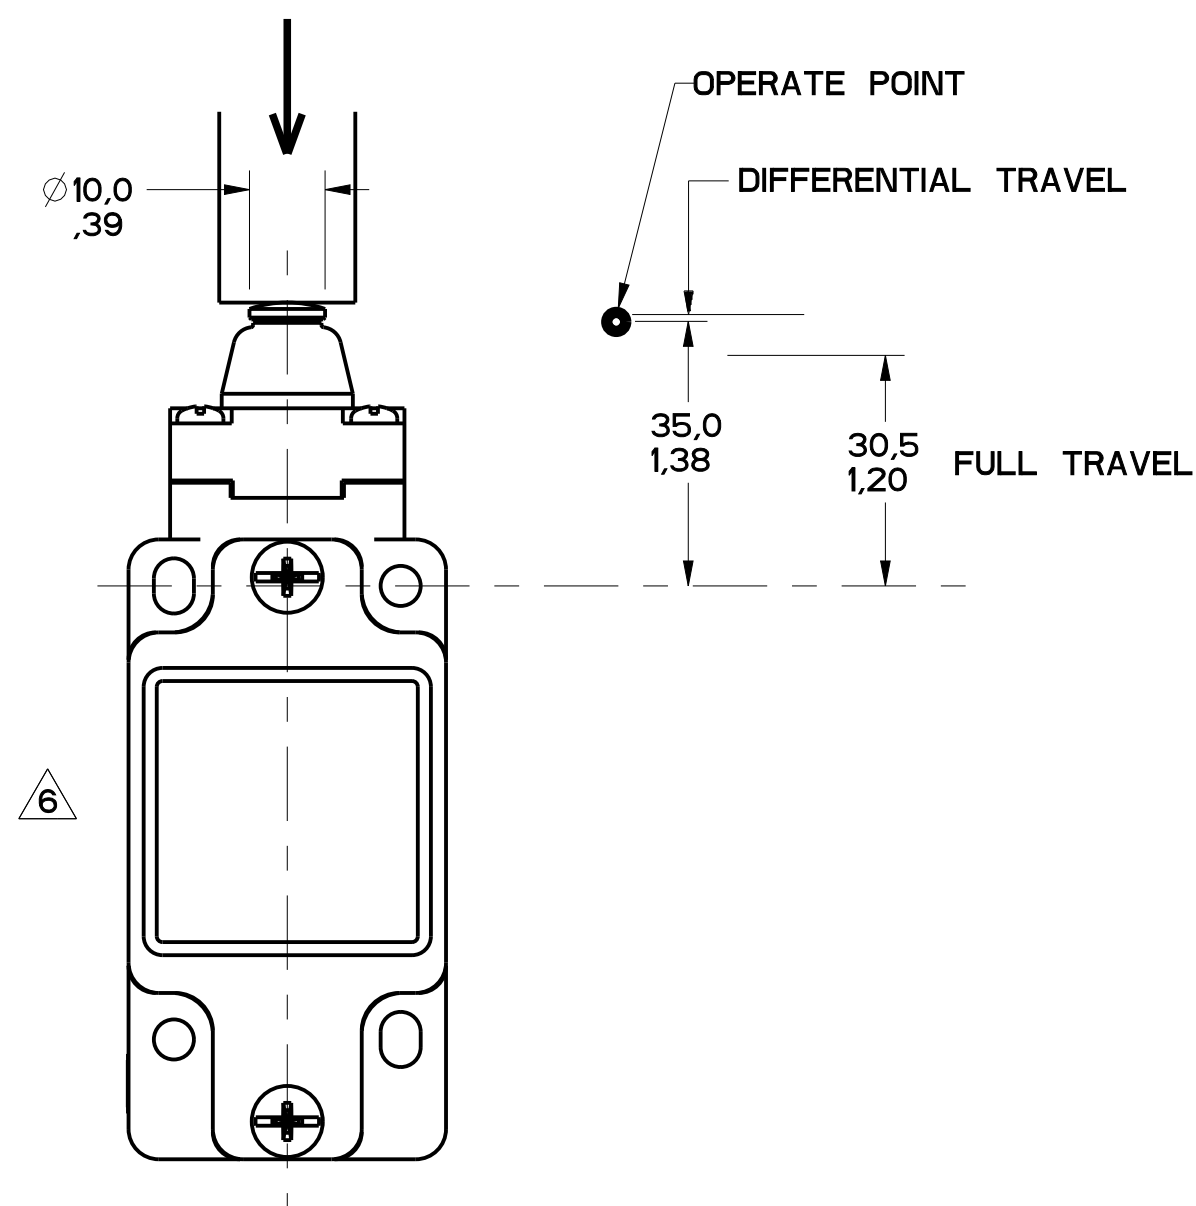


FIGURE 11

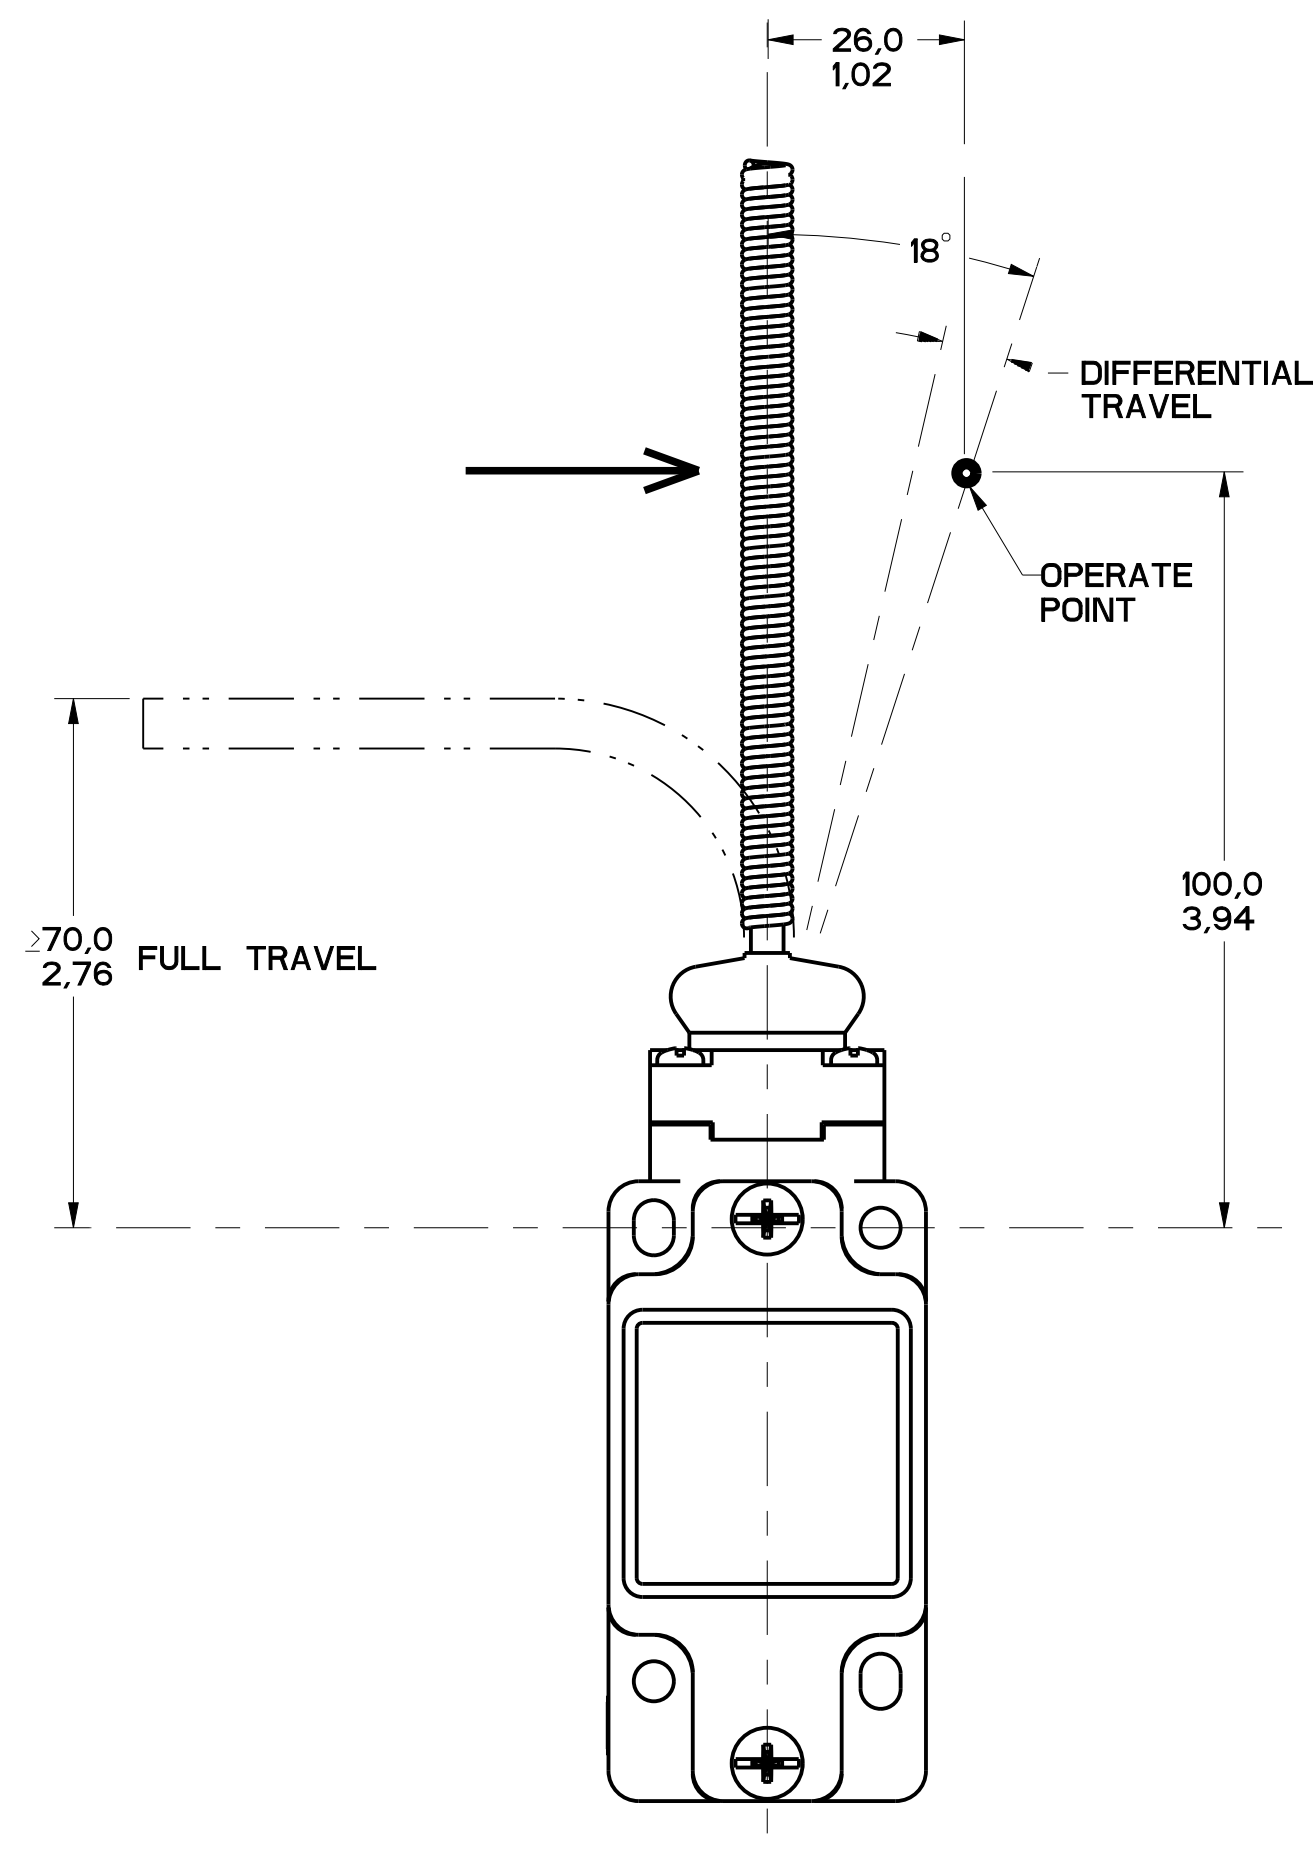

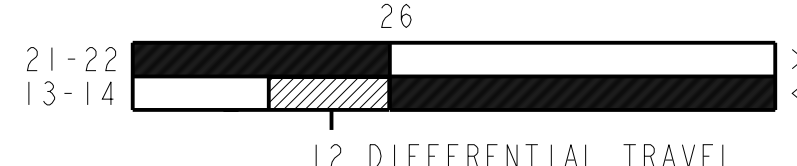










FIGURE 12


MGL SERIES CHART 1			
DRAWING NUMBER	PAGE	6 OF 13	REPLACES
16			
ISSUE	CHECK	CMH	120C112
REVISIONS	DATE	BY	DESCRIPTION
1	0005049	CMH	050C110
2	011	CMH	050C110
3	011	CMH	050C110
4	0022986	CMH	050C110
5	0022986	CMH	050C110
6	0022986	CMH	050C110
7	0022986	CMH	050C110
8	0022986	CMH	050C110
9	0022986	CMH	050C110
10	0022986	CMH	050C110
11	0022986	CMH	050C110
12	0022986	CMH	050C110
13	0022986	CMH	050C110
14	0022986	CMH	050C110
15	0022986	CMH	050C110
16	0022986	CMH	050C110
17	0022986	CMH	050C110
18	0022986	CMH	050C110
19	0022986	CMH	050C110
20	0022986	CMH	050C110
21	0022986	CMH	050C110
22	0022986	CMH	050C110
23	0022986	CMH	050C110
24	0022986	CMH	050C110
25	0022986	CMH	050C110
26	0022986	CMH	050C110
27	0022986	CMH	050C110
28	0022986	CMH	050C110
29	0022986	CMH	050C110
30	0022986	CMH	050C110
31	0022986	CMH	050C110
32	0022986	CMH	050C110
33	0022986	CMH	050C110
34	0022986	CMH	050C110
35	0022986	CMH	050C110
36	0022986	CMH	050C110
37	0022986	CMH	050C110
38	0022986	CMH	050C110
39	0022986	CMH	050C110
40	0022986	CMH	050C110
41	0022986	CMH	050C110
42	0022986	CMH	050C110
43	0022986	CMH	050C110
44	0022986	CMH	050C110
45	0022986	CMH	050C110
46	0022986	CMH	050C110
47	0022986	CMH	050C110
48	0022986	CMH	050C110
49	0022986	CMH	050C110
50	0022986	CMH	050C110
51	0022986	CMH	050C110
52	0022986	CMH	050C110
53	0022986	CMH	050C110
54	0022986	CMH	050C110
55	0022986	CMH	050C110
56	0022986	CMH	050C110
57	0022986	CMH	050C110
58	0022986	CMH	050C110
59	0022986	CMH	050C110
60	0022986	CMH	050C110
61	0022986	CMH	050C110
62	0022986	CMH	050C110
63	0022986	CMH	050C110
64	0022986	CMH	050C110
65	0022986	CMH	050C110
66	0022986	CMH	050C110
67	0022986	CMH	050C110
68	0022986	CMH	050C110
69	0022986	CMH	050C110
70	0022986	CMH	050C110
71	0022986	CMH	050C110
72	0022986	CMH	050C110
73	0022986	CMH	050C110
74	0022986	CMH	050C110
75	0022986	CMH	050C110
76	0022986	CMH	050C110
77	0022986	CMH	050C110
78	0022986	CMH	050C110
79	0022986	CMH	050C110
80	0022986	CMH	050C110
81	0022986	CMH	050C110
82	0022986	CMH	050C110
83	0022986	CMH	050C110
84	0022986	CMH	050C110
85	0022986	CMH	050C110
86	0022986	CMH	050C110
87	0022986	CMH	050C110
88	0022986	CMH	050C110
89	0022986	CMH	050C110
90	0022986	CMH	050C110
91	0022986	CMH	050C110
92	0022986	CMH	050C110
93	0022986	CMH	050C110
94	0022986	CMH	050C110
95	0022986	CMH	050C110
96	0022986	CMH	050C110
97	0022986	CMH	050C110
98	0022986	CMH	050C110
99	0022986	CMH	050C110
100	0022986	CMH	050C110

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			
FED. MFG. CODE 91929		CATALOG LISTING	
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED	
DESIGN UNITS		GL SERIES CHART 1	
WEIGHT			
THIRD ANGLE PROJECTION			
SCALE 1:1			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:			
NO PLACES	ONE PLACE	TWO PLACES	THREE PLACES
SI METRIC	US CUSTOMARY	SI METRIC	US CUSTOMARY
±.04	±.04	±.04	±.04
±.08	±.08	±.08	±.08
±.12	±.12	±.12	±.12
±.16	±.16	±.16	±.16
±.20	±.20	±.20	±.20
±.25	±.25	±.25	±.25
±.30	±.30	±.30	±.30
±.35	±.35	±.35	±.35
±.40	±.40	±.40	±.40
±.45	±.45	±.45	±.45
±.50	±.50	±.50	±.50
±.55	±.55	±.55	±.55
±.60	±.60	±.60	±.60
±.65	±.65	±.65	±.65
±.70	±.70	±.70	±.70
±.75	±.75	±.75	±.75
±.80	±.80	±.80	±.80
±.85	±.85	±.85	±.85
±.90	±.90	±.90	±.90
±.95	±.95	±.95	±.95
±1.00	±1.00	±1.00	±1.00
±1.05	±1.05	±1.05	±1.05
±1.10	±1.10	±1.10	±1.10
±1.15	±1.15	±1.15	±1.15
±1.20	±1.20	±1.20	±1.20
±1.25	±1.25	±1.25	±1.25
±1.30	±1.30	±1.30	±1.30
±1.35	±1.35	±1.35	±1.35
±1.40	±1.40	±1.40	±1.40
±1.45	±1.45	±1.45	±1.45
±1.50	±1.50	±1.50	±1.50
±1.55	±1.55	±1.55	±1.55
±1.60	±1.60	±1.60	±1.60
±1.65	±1.65	±1.65	±1.65
±1.70	±1.70	±1.70	±1.70
±1.75	±1.75	±1.75	±1.75
±1.80	±1.80	±1.80	±1.80
±1.85	±1.85	±1.85	±1.85
±1.90	±1.90	±1.90	±1.90
±1.95	±1.95	±1.95	±1.95
±2.00	±2.00	±2.00	±2.00
±2.05	±2.05	±2.05	±2.05
±2.10	±2.10	±2.10	±2.10
±2.15	±2.15	±2.15	±2.15
±2.20	±2.20	±2.20	±2.20
±2.25	±2.25	±2.25	±2.25
±2.30	±2.30	±2.30	±2.30
±2.35	±2.35	±2.35	±2.35
±2.40	±2.40	±2.40	±2.40
±2.45	±2.45	±2.45	±2.45
±2.50	±2.50	±2.50	±2.50
±2.55	±2.55	±2.55	±2.55
±2.60	±2.60	±2.60	±2.60
±2.65	±2.65	±2.65	±2.65
±2.70	±2.70	±2.70	±2.70
±2.75	±2.75	±2.75	±2.75
±2.80	±2.80	±2.80	±2.80
±2.85	±2.85	±2.85	±2.85
±2.90	±2.90	±2.90	±2.90
±2.95	±2.95	±2.95	±2.95
±3.00	±3.00	±3.00	±3.00
±3.05	±3.05	±3.05	±3.05
±3.10	±3.10	±3.10	±3.10
±3.15	±3.15	±3.15	±3.15
±3.20	±3.20	±3.20	±3.20
±3.25	±3.25	±3.25	±3.25
±3.30	±3.30	±3.30	±3.30
±3.35	±3.35	±3.35	±3.35
±3.40	±3.40	±3.40	±3.40
±3.45	±3.45	±3.45	±3.45
±3.50	±3.50	±3.50	±3.50
±3.55	±3.55	±3.55	±3.55
±3.60	±3.60	±3.60	±3.60
±3.65	±3.65	±3.65	±3.65
±3.70	±3.70	±3.70	±3.70
±3.75	±3.75	±3.75	±3.75
±3.80	±3.80	±3.80	±3.80
±3.85	±3.85	±3.85	±3.85
±3.90	±3.90	±3.90	±3.90
±3.95	±3.95	±3.95	±3.95
±4.00	±4.00	±4.00	±4.00
±4.05	±4.05	±4.05	±4.05
±4.10	±4.10	±4.10	±4.10
±4.15	±4.15	±4.15	±4.15
±4.20	±4.20	±4.20	±4.20
±4.25	±4.25	±4.25	±4.25
±4.30	±4.30	±4.30	±4.30
±4.35	±4.35	±4.35	±4.35
±4.40	±4.40	±4.40	±4.40
±4.45	±4.45	±4.45	±4.45
±4.50	±4.50	±4.50	±4.50
±4.55	±4.55	±4.55	±4.55
±4.60	±4.60	±4.60	±4.60
±4.65	±4.65	±4.65	±4.65
±4.70	±4.70	±4.70	±4.70
±4.75	±4.75	±4.75	±4.75
±4.80	±4.80	±4.80	±4.80
±4.85	±4.85	±4.85	±4.85
±4.90	±4.90	±4.90	±4.90
±4.95	±4.95	±4.95	±4.95
±5.00	±5.00	±5.00	±5.00
±5.05	±5.05	±5.05	±5.05
±5.10	±5.10	±5.10	±5.10
±5.15	±5.15	±5.15	±5.15
±5.20	±5.20	±5.20	±5.20
±5.25	±5.25	±5.25	±5.25
±5.30	±5.30	±5.30	±5.30
±5.35	±5.35	±5.35	±5.35
±5.40	±5.40	±5.40	±5.40
±5.45	±5.45	±5.45	±5.45
±5.50	±5.50	±5.50	±5.50
±5.55	±5.55	±5.55	±5.55
±5.60	±5.60	±5.60	±5.60
±5.65	±5.65	±5.65	±5.65
±5.70	±5.70	±5.70	±5.70
±5.75	±5.75	±5.75	±5.75
±5.80	±5.80	±5.80	±5.80
±5.85	±5.85	±5.85	±5.85
±5.90	±5.90	±5.90	±5.90
±5.95	±5.95	±5.95	±5.95
±6.00	±6.00	±6.00	±6.00
±6.05	±6.05	±6.05	±6.05
±6.10	±6.10	±6.10	±6.10
±6.15	±6.15	±6.15	±6.15
±6.20	±6.20	±6.20	±6.20
±6.25	±6.25	±6.25	±6.25
±6.30	±6.30	±6.30	±6.30
±6.35	±6.35	±6.35	±6.35
±6.40	±6.40	±6.40	±6.40
±6.45	±6.45	±6.45	±6.45
±6.50	±6.50	±6.50	±6.50
±6.55	±6.55	±6.55	±6.55
±6.60	±6.60	±6.60	±6.60
±6.65	±6.65	±6.65	±6.65
±6.70	±6.70	±6.70	±6.70
±6.75	±6.75	±6.75	±6.75
±6.80	±6.80	±6.80	±6.80
±6.85	±6.85	±6.85	±6.85
±6.90	±6.90	±6.90	±6.90
±6.95	±6.95	±6.95	±6.95
±7.00	±7.00	±7.00	±7.00
±7.05	±7.05	±7.05	±7.05
±7.10	±7.10	±7.10	±7.10
±7.15	±7.15	±7.15	±7.15
±7.20	±7.20	±7.20	±7.20
±7.25	±7.25	±7.25	±7.25
±7.30	±7.30	±7.30	±7.30
±7.35	±7.35	±7.35	±7.35
±7.40	±7.40	±7.40	±7.40
±7.45	±7.45	±7.45	±7.45
±7.50	±7.50	±7.50	±7.50
±7.55	±7.55	±7.55	±7.55
±7.60	±7.60	±7.60	±7.60
±7.65	±7.65	±7.65	±7.65
±7.70	±7.70	±7.70	±7.70
±7.75	±7.75	±7.75	±7.75
±7.80	±7.80	±7.80	±7.80
±7.85	±7.85	±7.85	±7.85
±7.90	±7.90	±7.90	±7.90
±7.95	±7.95	±7.95	±7.95
±8.00	±8.00	±8.00	±8.00
±8.05	±8.05	±8.05	±8.05
±8.10	±8.10	±8.10	±8.10
±8.15	±8.15	±8.15	±8.15
±8.20	±8.20	±8.20	±8.20
±8.25	±8.25	±8.25	±8.25
±8.30	±8.30	±8.30	±8.30
±8.35	±8.35	±8.35	±8.35
±8.40	±8.40	±8.40	±8.40
±8.45	±8.45	±8.45	±8.45
±8.50	±8.50	±8.50	±8.50
±8.55	±8.55	±8.55	±8.55
±8.60	±8.60	±8.60	±8.60
±8.65	±8.65	±8.65	±8.65
±8.70	±8.70	±8.70	±8.70
±8.75	±8.75	±8.75	±8.75
±8.80	±8.80	±8.80	±8.80
±8.85	±8.85	±8.85	±8.85
±8.90	±8.90	±8.90	±8.90
±8.95	±8.95	±8.95	±8.95
±9.00	±9.00	±9.00	±9.00
±9.05	±9.05	±9.05	±9.05
±9.10	±9.10	±9.10	±9.10
±9.15	±9.15	±9.15	±9.15
±9.20	±9.20	±9.20	±9.20
±9.25	±9.25	±9.25	±9.25
±9.30	±9.30	±9.30	±9.30
±9.35	±9.35	±9.35	±9.35
±9.40	±9.40	±9.40	±9.40
±9.45	±9.45	±9.45	±9.45
±9.50	±9.50	±9.50	±9.50
±9.55	±9.55	±9.55	±9.55
±9.60	±9.60	±9.60	±9.60
±9.65	±9.65	±9.65	±9.65
±9.70	±9.70	±9.70	±9.70
±9.75	±9.75	±9.75	±9.75
±9.80	±9.80	±9.80	±9.80
±9.85	±9.85	±9.85	±9.85
±9.90	±9.90	±9.90	±9.90
±9.95	±9.95	±9.95	±9.95
±10.00	±10.00	±10.00	±10.00
±10.05	±10.05	±10.05	±10.05
±10.10	±10.10	±10.10	±10.10
±10.15	±10.15	±10.15	±10.15
±10.20	±10.20	±10.20	±10.20
±10.25	±10.25	±10.25	±10.25
±10.30	±10.30	±10.30	±10.30
±10.35	±10.35	±10.35	±10.35
±10.40	±10.40	±10.40	±10.40
±10.45	±10.45	±10.45	±10.45
±10.50	±10.50	±10.50	±10.50
±10.55	±10.55	±10.55	±10.55
±10.60	±10.60	±10.60	±10.60
±10.65	±10.65	±10.65	±10.65
±10.70	±10.70	±10.70	±10.70
±10.75	±10.75	±10.75	±10.75
±10.80	±10.80	±10.80	±10.80
±10.85	±10.85	±10.85	±10.85
±10.90	±10.90	±10.90	±10.90
±10.95	±10.95	±10.95	±10.95
±11.00	±11.00	±11.00	±11.00
±11.05	±11.05	±11.05	±11.05
±11.10	±11.10	±11.10	±11.10
±11.15	±11.15	±11.15	±11.15
±11.20	±11.20	±11.20	±11.20
±11.25	±11.25	±11.25	±11.25
±11.30	±11.30	±11.30	±11.30
±11.35	±11.35	±11.35	±11.35
±11.40	±11.40	±11.40	±11.40
±11.45	±11.45	±11.45	±11.45
±11.50	±11.50	±11.50	±11.50
±11.55	±11.55	±11.55	±11.55
±11.60	±11.60	±11.60	±11.60
±11.65	±11.65	±11.65	±11.65
±11.70	±11.70	±11.70	±11.70
±11.75	±11.75	±11.75	±11.75
±11.80	±11.80	±11.80	±11.80
±11.85	±11.85	±11.85	±11.85
±11.90	±11.90	±11.90	±11.90
±11.95	±11.95	±11.95	±11.95
±12.00	±12.00	±12.00	±12.00
±12.05	±12.05	±12.05	±12.05
±12.10	±12.10	±12.10	±12.10
±12.15	±12.15	±12.15	±12.15
±12.20	±12.20	±12.20	±12.20
±12.25	±12.25	±12.25	±12.25
±12.30	±12.30	±12.30	±12.30
±12.35	±12.35	±12.35	±12.35
±12.40	±12.40	±12.40	±12.40
±12.45	±12.45	±12.45	±12.45
±12.50	±12.50	±12.50	±12.50
±12.55	±12.55	±12.55	±12.55
±12.60	±12.60	±12.60	±12.60
±12.65	±12.65	±12.65	±12.65
±12.70	±12.70	±12.70	±12.70
±12.75	±12.75	±12.75	±12.75
±12.80	±12.80	±12.80	±12.80
±12.85	±12.85	±12.85	±12.85
±12.90	±12.90	±12.90	±12.90
±12.95	±12.95	±12.95	±12.95
±13.00	±13.00	±13.00	±13.00
±13.05	±13.05	±13.05	±13.05
±13.10	±13.10	±13.10	±13.10
±13.15	±13.15	±13.15	±13.15
±13.20	±13.20	±13.20	±13.20
±13.25	±13.25	±13.25	±13.25
±13.30	±13.30	±13.30	±13.30
±13.35	±13.35	±13.35	±13.35
±13.40	±13.40	±13.40	±13

FIGURE 12, WOBBLE HEAD, ANGULAR ACTUATION

FIGURE 12, WOBBLE HEAD, SIDE ACTUATION AT 100mm							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ CONTACT CLOSED, □ CONTACT OPEN ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL mm/S in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**01E GL**07E	SNAP - ACTION CONTACTS SINGLE POLE 	 26 12 DIFFERENTIAL TRAVEL	2.5 0.6	N/A	.5 19.7	.11 .43	100
GL**03E GL**33E	SLOW ACTING BREAK BEFORE MAKE 	 26.5 38.1	2.5 0.6	N/A	.5 19.7	.11 .43	100
GL**04E GL**34E	SLOW ACTING MAKE BEFORE BREAK 	 26.5 38.1	2.5 0.6	N/A	.5 19.7	.11 .43	100
GL**05E GL**35E	SLOW ACTING 	 38.1	2.5 0.6	N/A	.5 19.7	.11 .43	100
GL**06E GL**36E	SLOW ACTING 	 26.5	2.5 0.6	N/A	.5 19.7	.11 .43	100
GL**20E GL**22E GL**24E GL**32E	SNAP ACTION CONTACTS DOUBLE POLE 	 26 12 DIFFERENTIAL TRAVEL	2.5 0.6	N/A	360	8	100

THIRD ANGLE PROJECTION



TOLERANCES

[illegible]

NO PLACES	X	17.04	X.X
ONE PLACE	X.X	0.47.016	X.XX
TWO PLACES	X.XX	0.151.006	X.XXX

TWO PLACES	1.107.000
THREE PLACES	+2°
ANGLES	

SI METRIC	US CUSTOMARY
☒	☐

DESIGN UNITS	☒		
--------------	-------------------------------------	--	--

WEIGHT

FED. MFG. CODE 91929		CATALOG LISTING
----------------------	--	-----------------

MICRO SWITCH

MICROSWITCH	SWITCH ENCLOSED	GL SERIES CHAR
-------------	-----------------	----------------

a Honeywell Division

--	--	--

GL SERIES CHART 1

ANSI Y14.5M-1982 APPLIES

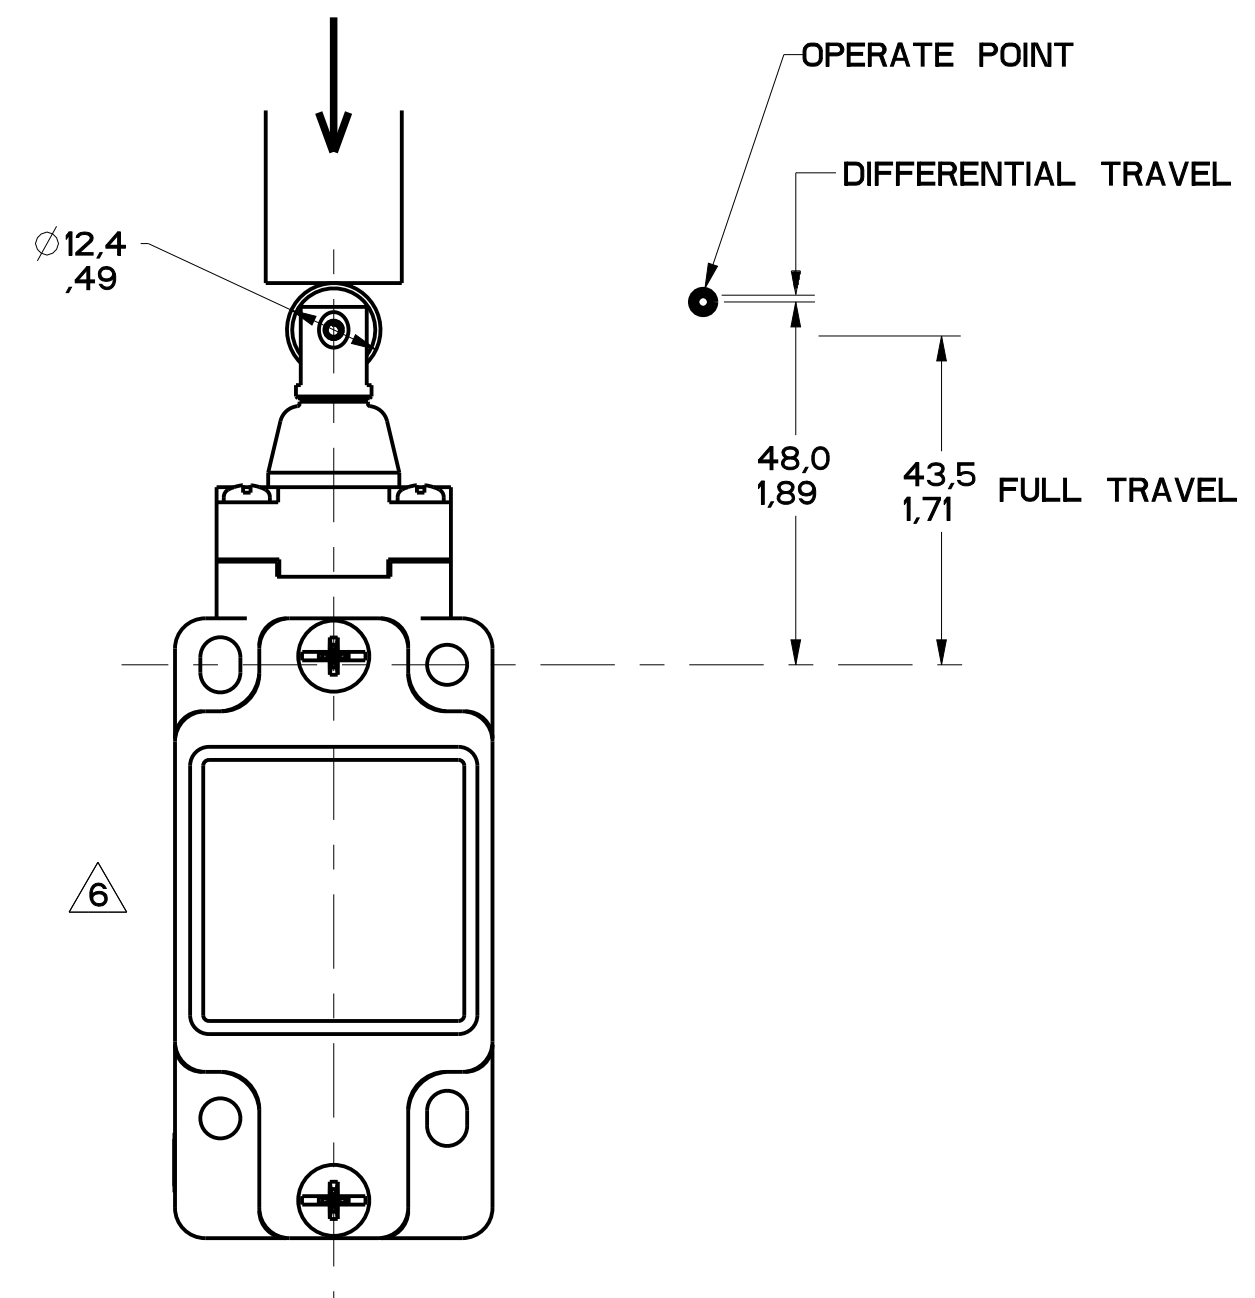


FIGURE 13A

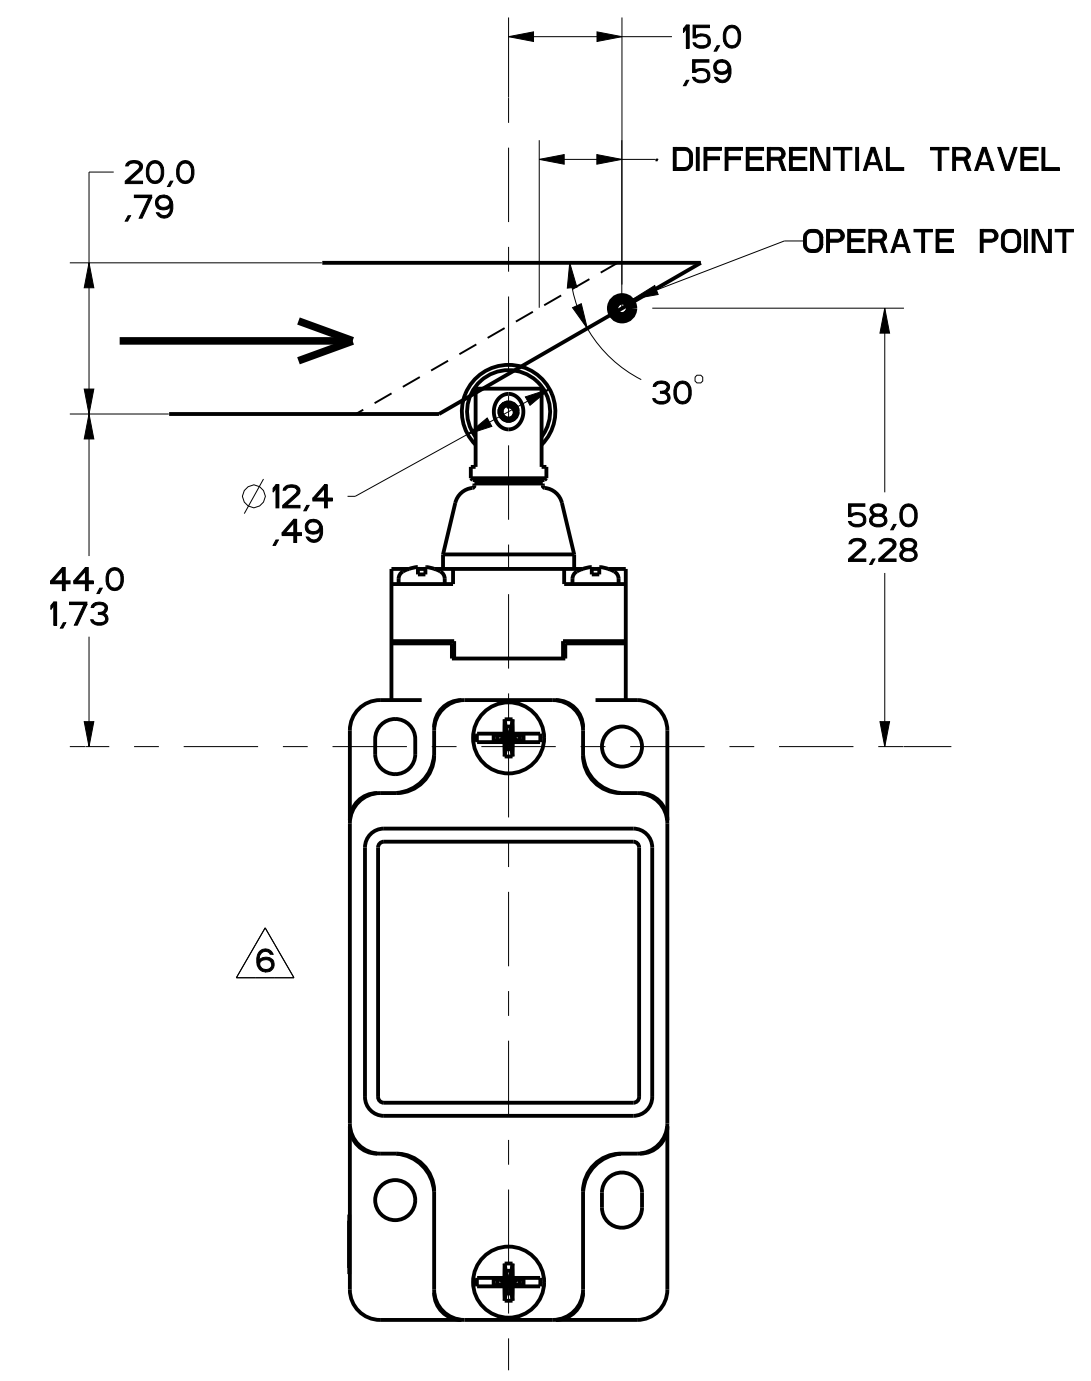


FIGURE 13B

[illegible]

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

CATALOG LISTING

GL SERIES CHART 1

SWITCH, ENCLOSED



THIRD ANGLE PROJECTION			
			
1:1			
DO NOT SCALE PRINT			
TOLERANCES APPLY TO DESIGN UNITS, CONVERSIONS ARE ONLY FOR REFERENCE, UNLESS NOTED. TOLERANCES ARE:			
FIN DIM	TOL DIM	FIN H	TOL H/D & L
NO PLACES ONE PLACE TWO PLACES THREE PLACES ANGLES	X X X X X	1 / 64 0.001 0.005 0.010 0.015	0.001 0.001 0.001 0.001 0.001
±			
DESIGN UNITS		US CUSTOMARY	
X	□		
WEIGHT			

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL mm/S in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**01D GL**07D	SNAP - ACTION CONTACTS SINGLE POLE 		5.5 1.2	7.0 1.6	0.29 11.4	2.9 .11	250
GL**03D GL**33D	SLOW ACTING BREAK BEFORE MAKE 		5.5 1.2	7.0 1.6	0.29 11.4	2.9 .11	250
GL**04D GL**34D	SLOW ACTING MAKE BEFORE BREAK 		5.5 1.2	9.6 2.2	0.29 11.4	2.9 .11	250
GL**05D GL**35D	SLOW ACTING 		5.5 1.2	7.0 1.6	0.29 11.4	2.9 .11	250
GL**06D GL**36D	SLOW ACTING 		5.5 1.2	7.0 1.6	0.29 11.4	2.9 .11	250
GL**20D GL**22D GL**24D GL**32D	SNAP ACTION CONTACTS DOUBLE POLE 		5.5 1.2	7.0 1.6	0.29 11.4	2.9 .11	250
GL**21D GL**25D GL**28D GL**31D	STEP 1 STEP 2 		5.5 1.2	N/A	0.29 11.4	2.9 .11	250

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		
FED. MFG. CODE 91929	SWITCH, ENCLOSED	CATALOG LISTING
MICRO SWITCH a Honeywell Division		GL SERIES CHART

GL SERIES CHART 1

THIRD ANGLE PROJECTION			
			
SCALE			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS, CONVERSIONS ARE ONLY FOR REFERENCE, UNLESS NOTED, TOLERANCES ARE:			
	DIM $\frac{X}{Y}$ ONE PLACE $\frac{X}{Y}$ TWO PLACES $\frac{X}{Y}$ THREE PLACES ANGLES	TOL $\frac{X}{Y}$ 1/16 DIA 0.015 DIA 1/50 DIA $\pm \frac{X}{Y}$	DIM $\frac{X}{Y}$ 1/16 DIA 0.015 DIA 1/50 DIA $\pm \frac{X}{Y}$
			TOL $\frac{X}{Y}$ 0.8/0.03 0.500/0.015 0.130/0.005
DESIGN UNITS 		US CUSTOMARY 	

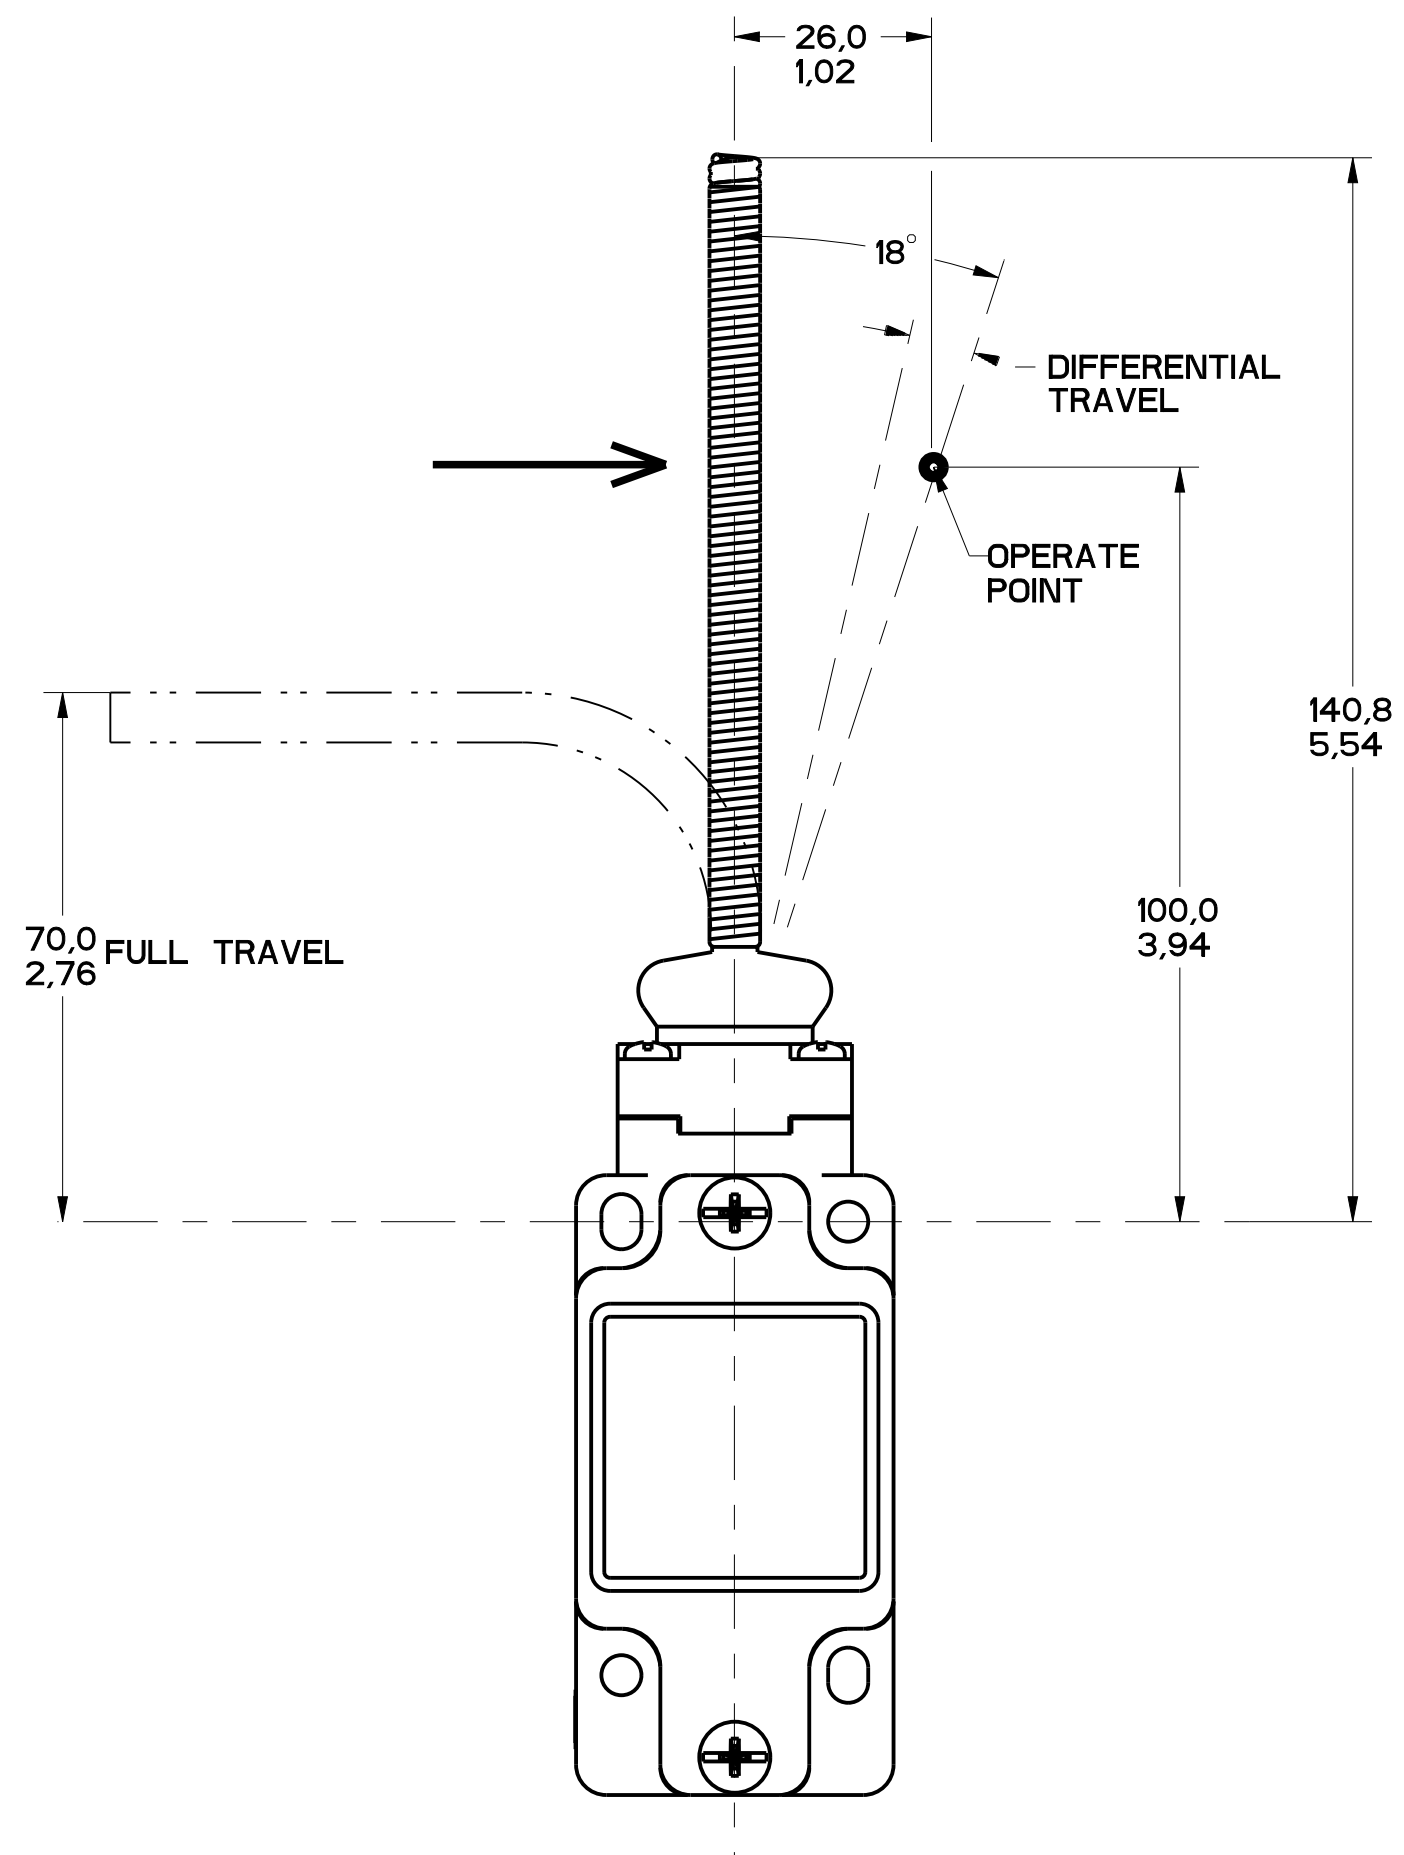


FIGURE 15

[illegible]

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.					
FED. MFG. CODE 91929		CATALOG LISTING			
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED			
		GL SERIES CHART 1			
		NO PLACES 3 ONE PLACE 3 X X TWO PLACES 3 XX THREE PLACES ANGLES $\pm .0005$ $\pm .001$ $\pm .0015$ $\pm .002$		DIM INches TOL mils DIM mm TOL microns SI METRIC DESIGN UNITS ☒ US CUSTOMARY ☐	
		WEIGHT			

FIGURE 15, CAT WISKER HEAD, ANGULAR ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL	MAXIMUM OPERATING TORQUE $\frac{N \cdot m}{LB \cdot IN}$	MAXIMUM DISCONNECT TORQUE $\frac{N \cdot m}{LB \cdot IN}$	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S	MAX OPERATE RATE CYCLES/MIN
GL**01K GL**07K	SNAP - ACTION CONTACTS SINGLE POLE 	 18° 8° DIFFERENTIAL TRAVEL	$\frac{0.1}{.9}$	N/A	360	8	100
GL**03K GL**33K	SLOW ACTING BREAK BEFORE MAKE 	 18° 25	$\frac{0.1}{.9}$	N/A	360	8	100
GL**04K GL**34K	SLOW ACTING MAKE BEFORE BREAK 	 25° 18°	$\frac{0.1}{.9}$	N/A	360	8	100
GL**05K GL**35K	SLOW ACTING 	 25°	$\frac{0.1}{.9}$	N/A	360	8	100
GL**06K GL**36K	SLOW ACTING 	 18°	$\frac{0.1}{.9}$	N/A	360	8	100
GL**20K GL**22K GL**24K GL**32K	SNAP ACTION CONTACTS DOUBLE POLE 	 18° 8° DIFFERENTIAL TRAVEL	$\frac{0.1}{.9}$	N/A	360	8	100

FIGURE 15, CAT WISKER HEAD, SIDE ACTUATION AT 100mm							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M/S}{IN/S}$	MIN OPERATE VEL $\frac{mm/S}{IN/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**01K GL**07K	SNAP - ACTION CONTACTS SINGLE POLE 	 26 12 DIFFERENTIAL TRAVEL	$\frac{1.3}{.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**03K GL**33K	SLOW ACTING BREAK BEFORE MAKE 	 26.5 38.1	$\frac{1.3}{0.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**04K GL**34K	SLOW ACTING MAKE BEFORE BREAK 	 26.5 38.1	$\frac{1.3}{0.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**05K GL**35K	SLOW ACTING 	 38.1	$\frac{1.3}{0.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**06K GL**36K	SLOW ACTING 	 26.5	$\frac{1.3}{0.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**20K GL**22K GL**24K GL**32K	SNAP ACTION CONTACTS DOUBLE POLE 	 26 12 DIFFERENTIAL TRAVEL	$\frac{1.3}{0.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331