

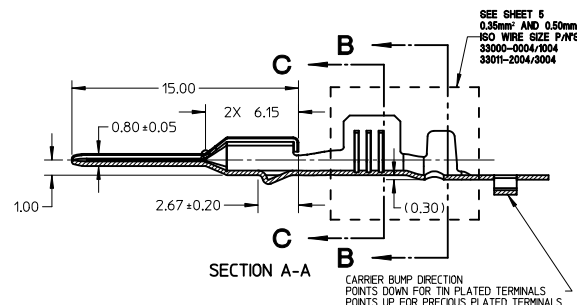

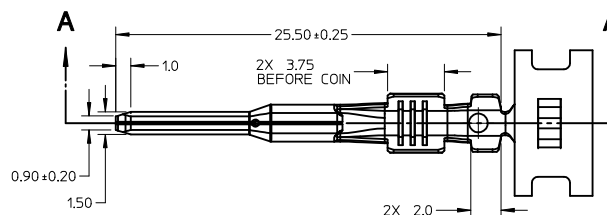
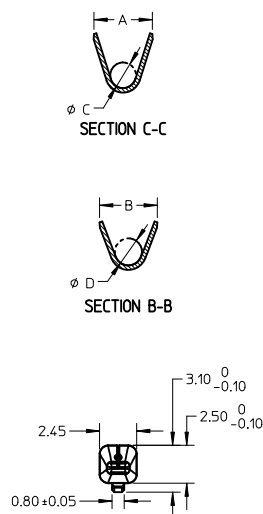


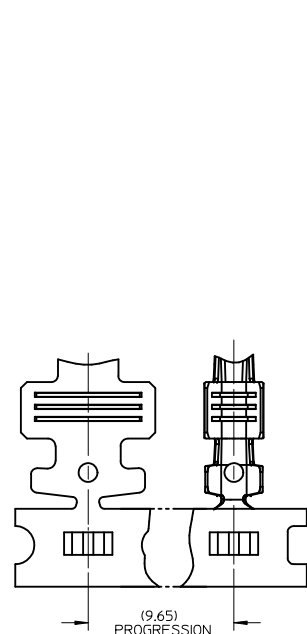


GENERAL NOTES: (UNLESS OTHERWISE SPECIFIED)

- MATING TERMINAL SHOWN ON SD-33012-002
- MATERIAL: ASTM B422, UNS C19025, HR04
THICKNESS: 0.30 mm ± 0.01
TEMPER: FULL HARD (REF)
TENSILE: 496-572 MPA
- TIN PLATED TERMINAL FINISH:
OVERALL UNDERPLATE ELECTRODEPOSITED NICKEL
OVERALL ELECTRODEPOSITED REFLOW TIN
- GOLD PLATED TERMINAL FINISH:
OVERALL UNDERPLATE ELECTRODEPOSITED DUCTILE SULFAMATE NICKEL
CONTACT AREA - ELECTRODEPOSITED GOLD
GRIP AREA - ELECTRODEPOSITED 100% TIN MATTE FINISH
- SILVER PLATED TERMINAL FINISH:
OVERALL UNDERPLATE ELECTRODEPOSITED DUCTILE SULFAMATE NICKEL
CONTACT AREA - ELECTRODEPOSITED PURE SILVER (0.5% MAX IMPURITIES) SEMI-BRIGHT FINISH
- SILVER ANTI-TARNISH : EVABRITE
GRIP AREA - ELECTRODEPOSITED 100% TIN MATTE FINISH
- MEETS CRIMP PERFORMANCE SPECIFICATION SAE/USCAR-21 (RELEASED: 08/25/01)
- MEETS PERFORMANCE STANDARD FOR AUTOMOTIVE ELECTRICAL CONNECTOR SYSTEMS SAE/USCAR-2 REV 3 (APRIL 2001)
- MEETS FIELD CORRELATED LIFE TEST SAE/USCAR-20 (NOVEMBER 2001)
- MEETS WIRING COMPONENT DESIGN GUIDELINES SAE/USCAR-12 REV 2 (DECEMBER 2001)
- MEETS ELECTRICAL CONNECTION SYSTEM DESIGN SPECIFICATION (SDS) REV 11 (5/2002)
- REFERENCE PK-31300-516 FOR REEL DIRECTION
- REFERENCE AS-33000-001 FOR CRIMP INFORMATION



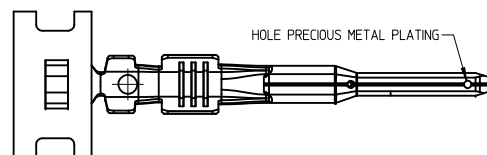


PRECIOUS METAL PLATED BLADE







TIN PLATED BLADE

ENTER DESCRIPTION EC NO: UAU2011-1208 DRWN:ADHIR CHKD: APPR:BMOSER 2011/06/28 2011/07/06	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY L.PULLIAM	DATE 2006/01/31	TITLE MX150 1.5MM BLADE TERMINAL		
			4 PLACES	± ---	± ---	CHECKED BY	DATE			
			3 PLACES	± ---	± ---	A.DHIR	2006/02/01			
			2 PLACES	± 0.1	± ---	APPROVED BY	DATE			
			1 PLACE	± 0.3	± ---	B.MOSER	2006/02/02			
			ANGULAR ± 3 °		MATERIAL NO.		DOCUMENT NO.			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-33000-001			
					SIZE		SHEET NO.			
					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		1 OF 5			

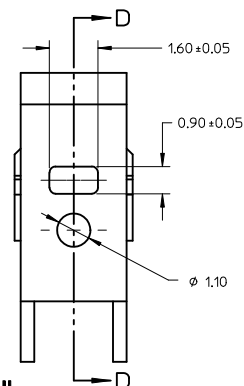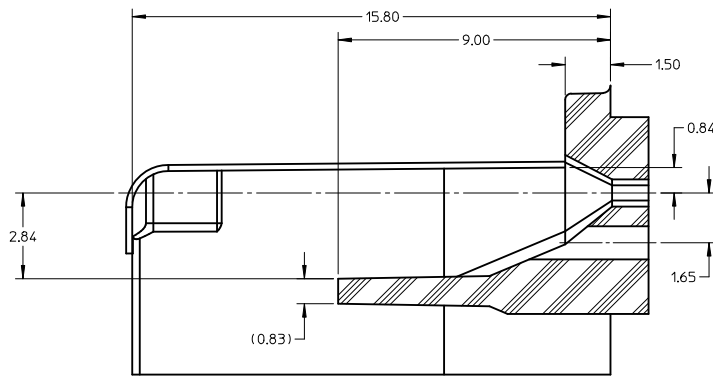

SECTION D-D

TPA/INSERT DETAIL

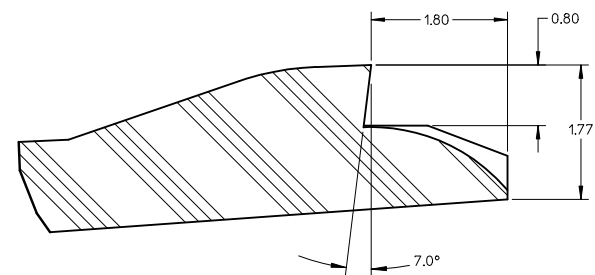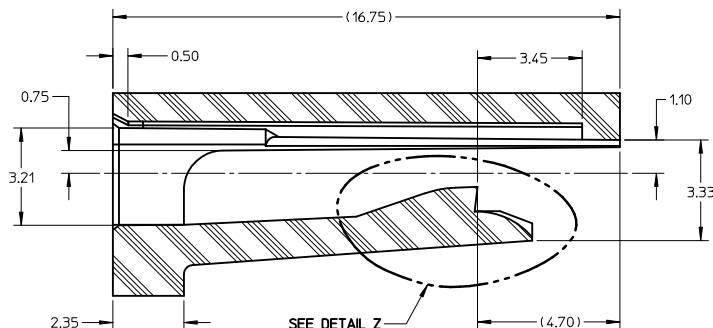




DETAIL Z
SCALE 20:1

SECTION E-E

HOUSING DETAIL

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. TOLERANCES: LINEAR ± 0.10
ANGULAR 3°
2. ALL DRAFT WITHIN TOLERANCE
3. MAX RADI ON ALL CORNERS SHOWN SHARP: 0.10
4. MAX FLASH PERMISSIBLE: 0.1
5. EJECTOR PIN MARKS PERMISSIBLE IF FLUSH TO 0.25 BELOW SURFACE
6. MATERIAL: HOUSING/FINGER SPECIFICATION ENGINEERED FOR MATERIAL WITH THE FOLLOWING PROPERTIES:
A. FLEXURAL MODULUS = 4,500 TO 9,400 MPa
PER ASTM TEST D790
B. ELONGATION AT YIELD = 2.3% OR BETTER
PER ASTM TEST D638 TYPE V
7. CAVITY SPEC FOR USE ONLY WITH MOLEX BLADE. TERMINAL PART NUMBERS (EXCEPT P/N'S FOR UNSEALED APPLICATIONS) SPECIFIED ELSEWHERE ON THIS DRAWING

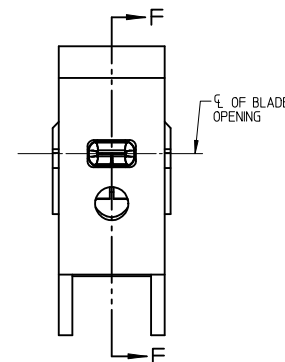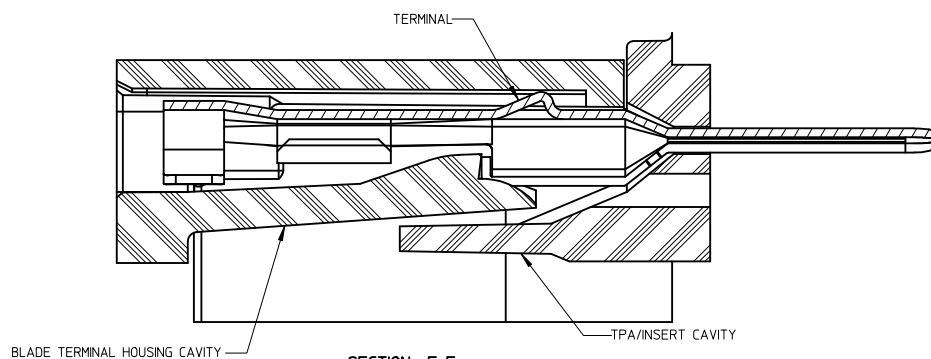

SECTION F-F

BLADE CAVITY ASSEMBLY VIEWS


ENTER DESCRIPTION
EC NO: UAU2011-1208
DRAWN: ADHIR
CHKD: BMOSE
APPR: BMOSE
2011/06/28
2011/07/06

QUALITY SYMBOLS
▽ = 0
▽ = 0
▽ = 0


GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ± 0.1 ± 0.004
3 PLACES ± 0.15 ± 0.006
2 PLACES ± 0.2 ± 0.008
1 PLACE ± 0.3 ± 0.012
ANGULAR $\pm 3^\circ$
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY
DRAWN BY DATE
L. PULLIAM 2006/01/31
CHECKED BY DATE
A. DHIR 2006/02/01
APPROVED BY DATE
B. MOSER 2006/02/02
MATERIAL NO.
SEE TABLE
SIZE
C


SCALE
DESIGN UNITS
METRIC
THIRD ANGLE PROJECTION
TITLE
MX150 15MM BLADE
TERMINAL
MOLEX INCORPORATED
DOCUMENT NO.
SD-33000-001
SHEET NO.
4 OF 5
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION






ISO VIEW
SCALE 2:1



SECTION BB-BB



SECTION CC-CC

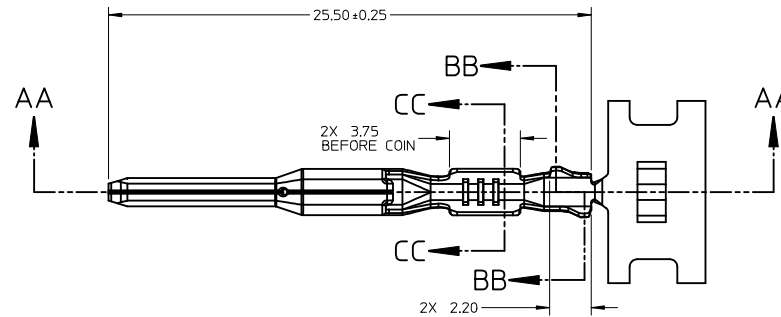

SECTION AA-AA

P/N'S 33000-0004/1004
33011-2004/3004

CARRIER BUMP DIRECTION
POINTS DOWN FOR TIN PLATED TERMINALS
POINTS UP FOR PRECIOUS METAL PLATED
TERMINALS

ENTER DESCRIPTION EC NO: UAU2011-1208 DRWN:ADHIR CHKD: APPR:BMOSER REV: C12	DESCRIPTION 2011/06/28 2011/07/06	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION				
				mm	INCH	DRAWN BY L.PULLIAM	DATE 2006/01/31	TITLE MX150 1.5MM BLADE TERMINAL					
			4 PLACES	± ---	± ---	CHECKED BY A.DHIR	DATE 2006/02/01						
			3 PLACES	± ---	± ---	APPROVED BY B.MOSER		DATE 2006/02/02	MOLEX INCORPORATED				
			2 PLACES	± 0.1	± ---								
1 PLACE	± 0.3	± ---	ANGULAR ± 3 °		DOCUMENT NO. SD-33000-001		SHEET NO. 5 OF 5						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331