



MICROWAVE CORPORATION v00.0215



HMC1131LC4

GaAs pHEMT MMIC MEDIUM POWER AMPLIFIER, 24 - 35 GHz

Typical Applications


The HMC1131LC4 is ideal for:

- Point-to-Point Radios
- Point-to-Multi-Point Radios
- VSAT & SATCOM

Features

- High Saturated Output Power: 25 dBm @ 16% PAE
- High Output IP3: 35 dBm
- High Gain: 22 dB
- High P1dB Output Power: 24 dBm
- DC Supply: +5V @ 225 mA
- Compact 24 Lead 4x4 mm SMT Package: 16 mm²

Functional Diagram

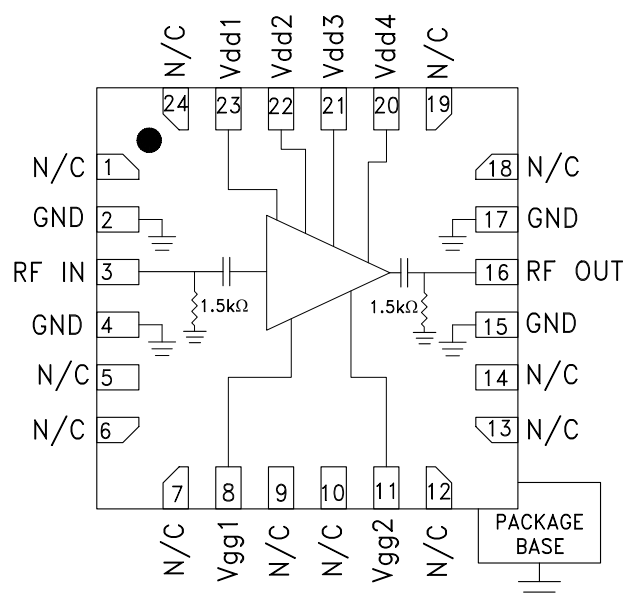

General Description

The HMC1131LC4 is a GaAs pHEMT MMIC driver amplifier which operates between 24 and 35 GHz. The amplifier provides 22 dB of gain, +35 dBm Output IP3, and +24 dBm of output power at 1 dB gain compression, while requiring 225 mA from a +5V supply. The HMC1131LC4 is capable of supplying +25 dBm of saturated output power with 16% PAE and is housed in a compact leadless 4x4 mm ceramic surface mount package. The HMC1131LC4 is an ideal driver amplifier for a wide range of applications including point-to-point radio from 24 to 35 GHz.

Electrical Specifications

$T_A = +25^\circ\text{C}$, $V_{dd1} = V_{dd2} = V_{dd3} = V_{dd4} = +5\text{V}$, $I_{dd} = +225\text{mA}$ ^[1]

Parameter	Min	Typ.	Max	Min	Typ.	Max	Units
Frequency Range	24 - 27			27 - 35			GHz
Gain	22	24		20	22		dB
Gain Variation over temperature		0.031			0.022		dB/°C
Input Return Loss		8			8		dB
Output Return Loss		7			7		dB
Output Power for 1 dB Compression (P1dB)	22	24			24		dBm
Saturated Output Power (Psat)		27			25		dBm
Output Third Order Intercept (IP3) ^[2]		34			35		dBm
Supply Current (Idd)		225			225		mA

[1] Adjust Vgg1 and Vgg2 between -2 to 0V to achieve Idd = 225mA typical

[2] Measurement taken at Pout / tone = +10dBm


For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.com


Application Support: Phone: 978-250-3343 or apps@hittite.com

GaAs pHEMT MMIC MEDIUM POWER AMPLIFIER, 24 - 35 GHz


Broadband Gain & Return Loss

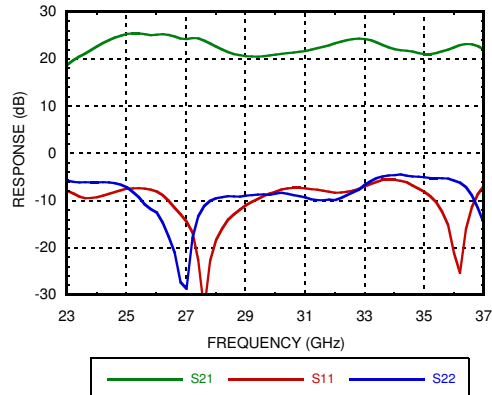


Gain vs. Temperature

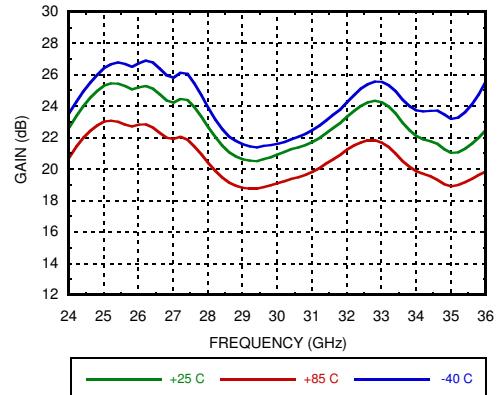


Input Return Loss vs. Temperature

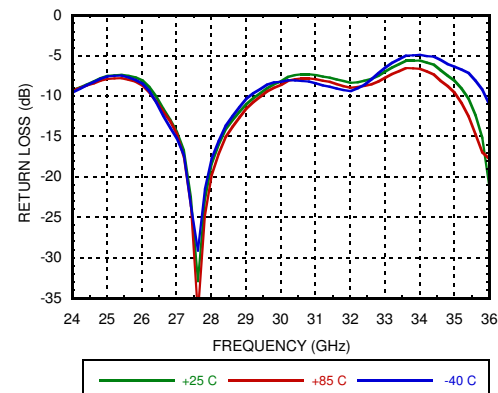


Output Return Loss vs. Temperature

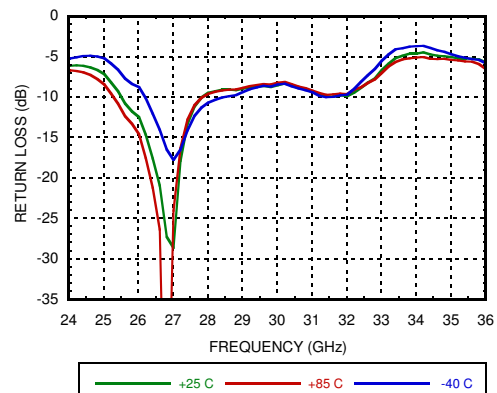

P1dB vs. Temperature

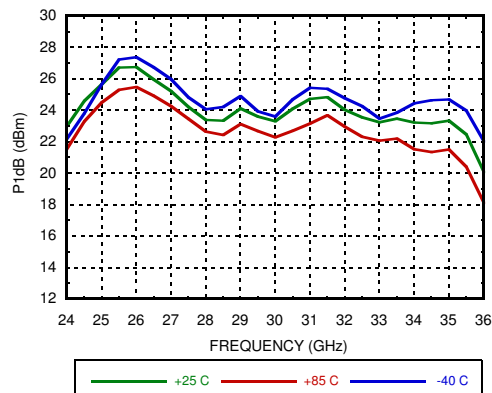


P1dB vs. Supply Voltage

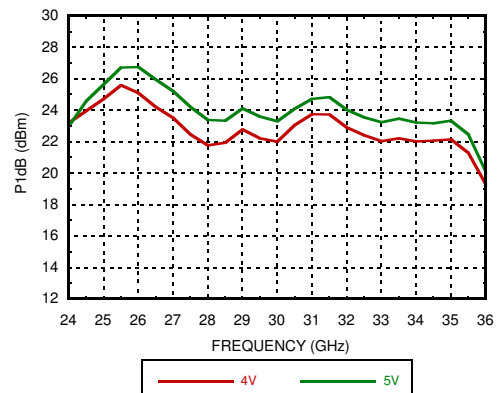


**GaAs pHEMT MMIC MEDIUM
POWER AMPLIFIER, 24 - 35 GHz**


Psat vs. Temperature

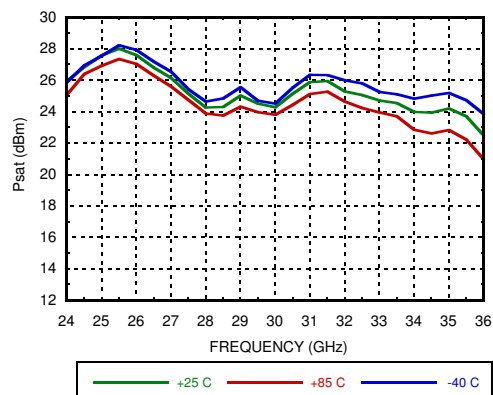


Psat vs. Supply Voltage

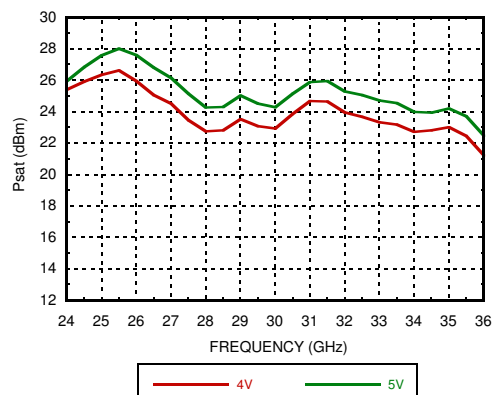


P1dB vs. Supply Current

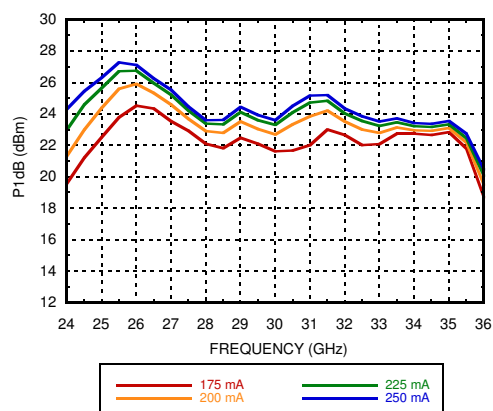


Psat vs. Supply Current

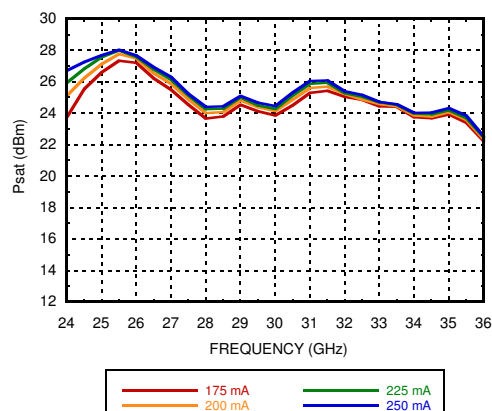

Output IP3 vs. Temperature ^[1]

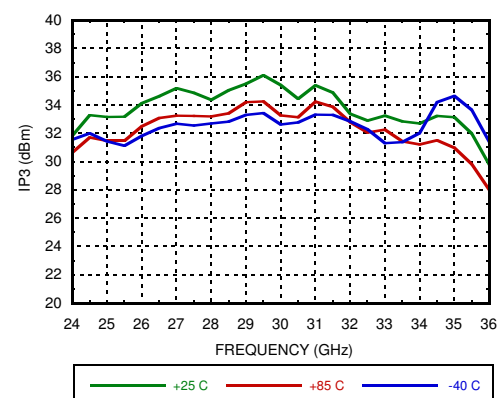


Output IP3 vs. Supply Current ^[1]

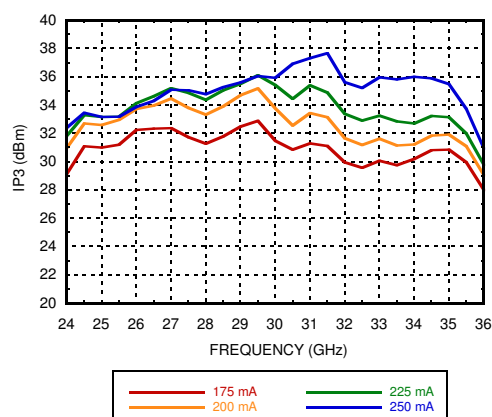


[1] Pout/Tone = +10 dBm

GaAs pHEMT MMIC MEDIUM POWER AMPLIFIER, 24 - 35 GHz


Output IP3 vs. Supply Voltage ^[1]

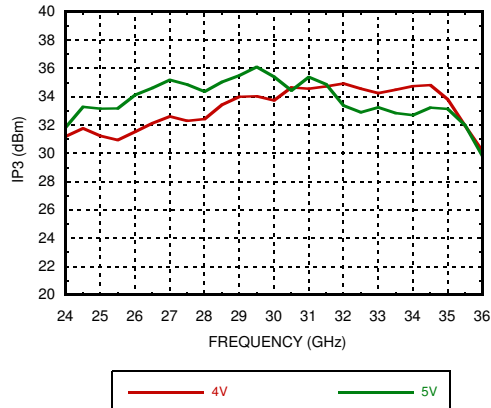


Output IM3 @ Vdd = +4V

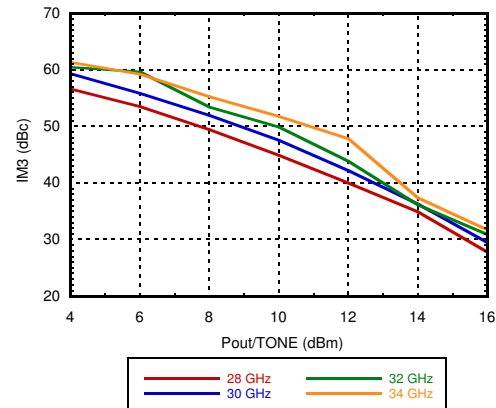


Output IM3 @ Vdd = +5V

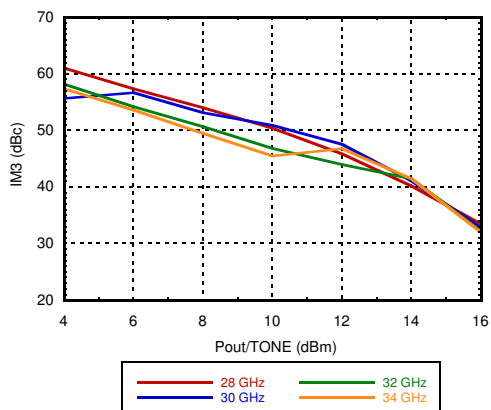


Power Compression @ 30.5 GHz

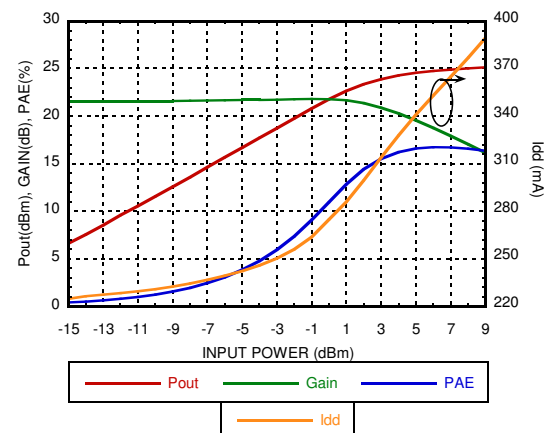

**Gain & Power vs. Supply Current
@ 30.5 GHz**

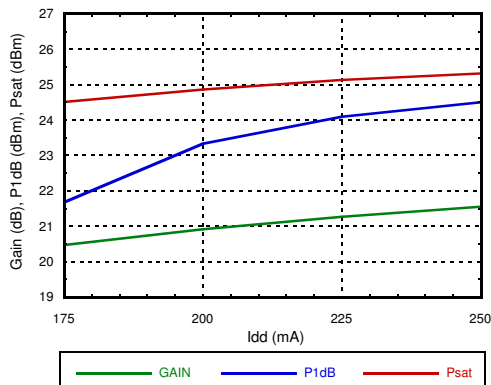

**Gain & Power vs. Supply Voltage
@ 30.5 GHz**

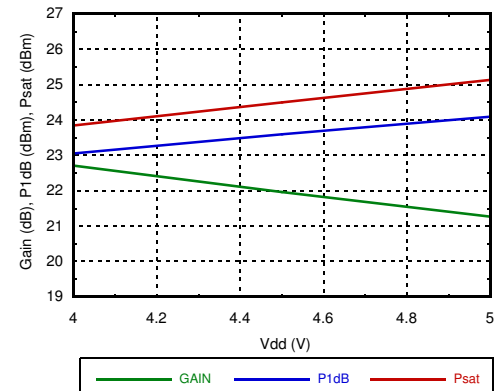

[1] Pout/Tone = +10 dBm




MICROWAVE CORPORATION v00.0215




HMC1131LC4

GaAs pHEMT MMIC MEDIUM POWER AMPLIFIER, 24 - 35 GHz


Reverse Isolation vs. Temperature

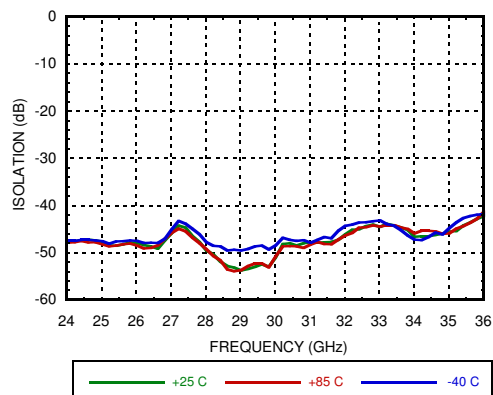


Power Dissipation @ 85C

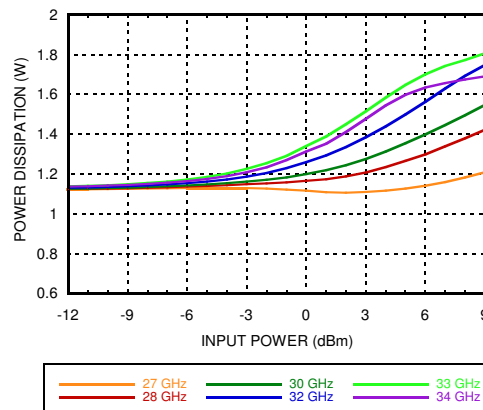


Input IP3 vs Idd over Pout/tone @ 30 GHz [1]

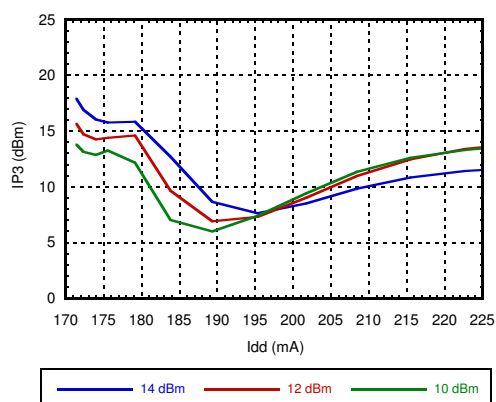

Output IP3 vs Idd over Pout/tone @ 30 GHz [1]

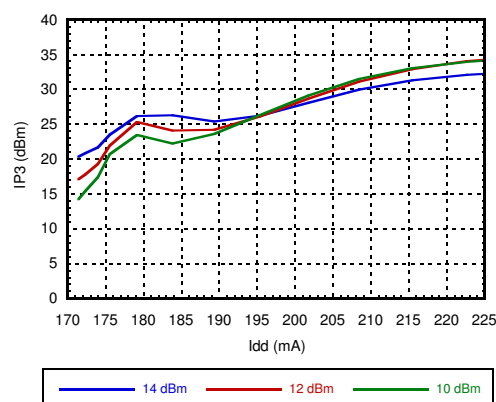

Gain vs Idd over Pout/tone = 14 dBm @ 30 GHz [1]

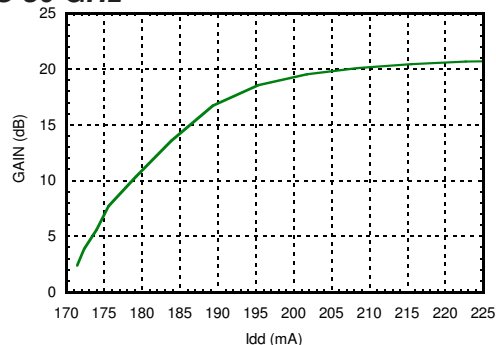

[1] Vdd = 5V, Idd2 fixed = 170mA, Idd1 varied 0 to 50 mA

GaAs pHEMT MMIC MEDIUM POWER AMPLIFIER, 24 - 35 GHz

Absolute Maximum Ratings

Drain Bias Voltage (Vdd)	5.5V
RF Input Power (RFIN)	+12 dBm
Channel Temperature	175 °C
Continuous Pdiss (T=85 °C) (derate 22mW/°C)	1.97W
Thermal Resistance (R _{TH}) (junction to ground paddle)	45.5°C/W
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-65 °C to 150 °C
ESD Sensitivity (HBM)	Class 0, Passed 150V

Typical Supply Current vs. Vdd


Vdd (V)	Idd (mA)
+4	225
+5	225

Adjust Vgg1 to achieve Idd = 225 mA



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

Outline Drawing

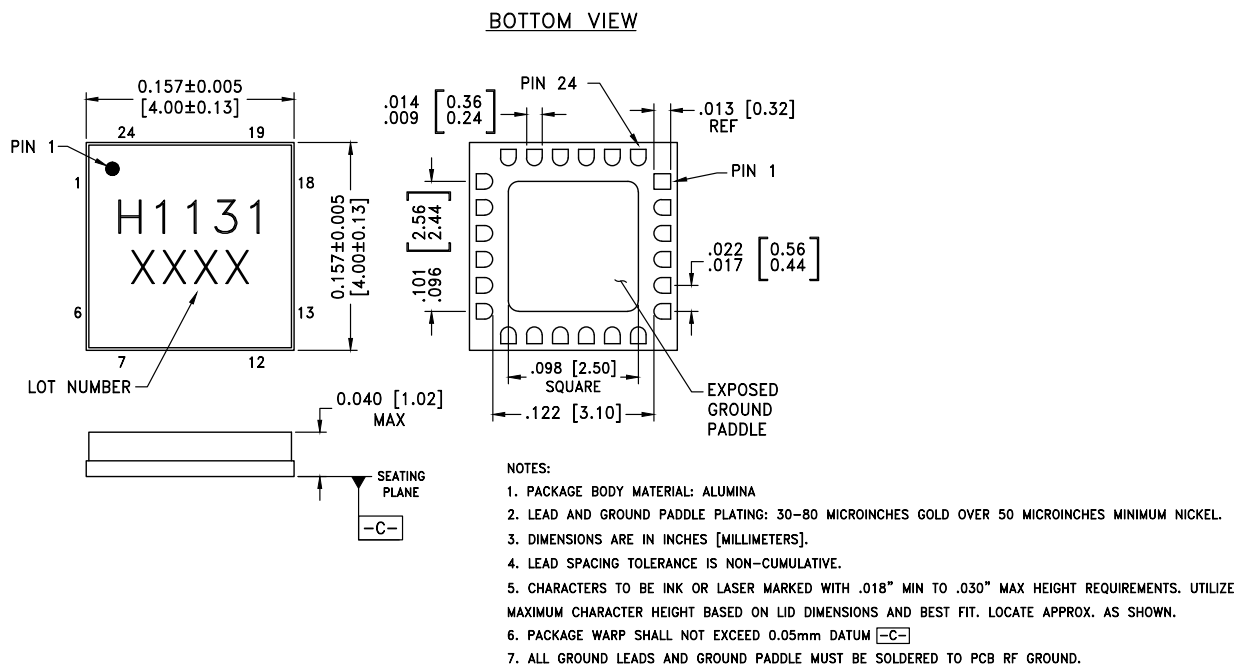

Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating ^[2]	Package Marking ^[1]
HMC1131LC4	Alumina White	Gold over Nickel	MSL3 ^[2]	H1131 XXXX

[1] 4-Digit lot number XXXX

[2] Max peak reflow temperature of 260 °C




MICROWAVE CORPORATION v00.0215

**HMC1131LC4****GaAs pHEMT MMIC MEDIUM
POWER AMPLIFIER, 24 - 35 GHz****Pin Descriptions**

Pin Number	Function	Description	Pin Schematic
1, 5, 6, 7, 9, 10, 12, 13, 14, 18, 19, 24	N/C	These pins are not connected internally, however all data shown herein was measured with these pins connected to RF/DC ground externally.	
3	RF IN	This pin is DC coupled and matched to 50 Ohms.	
2, 4, 15, 17	GND	These pins and package bottom must be connected to RF/DC ground.	
8, 11	Vgg1, Vgg2	Gate control for amplifier. External bypass capacitors of 100 pF, 10 nF and 4.7 uF are required.	
16	RF OUT	This pin is DC coupled and matched to 50 Ohms.	
20, 21, 22, 23	Vdd1, Vdd2, Vdd3, Vdd4	Drain bias voltage for amplifier. External bypass capacitors of 100 pF, 10 nF and 4.7 uF are required.	

GaAs pHEMT MMIC MEDIUM POWER AMPLIFIER, 24 - 35 GHz

Application Circuit

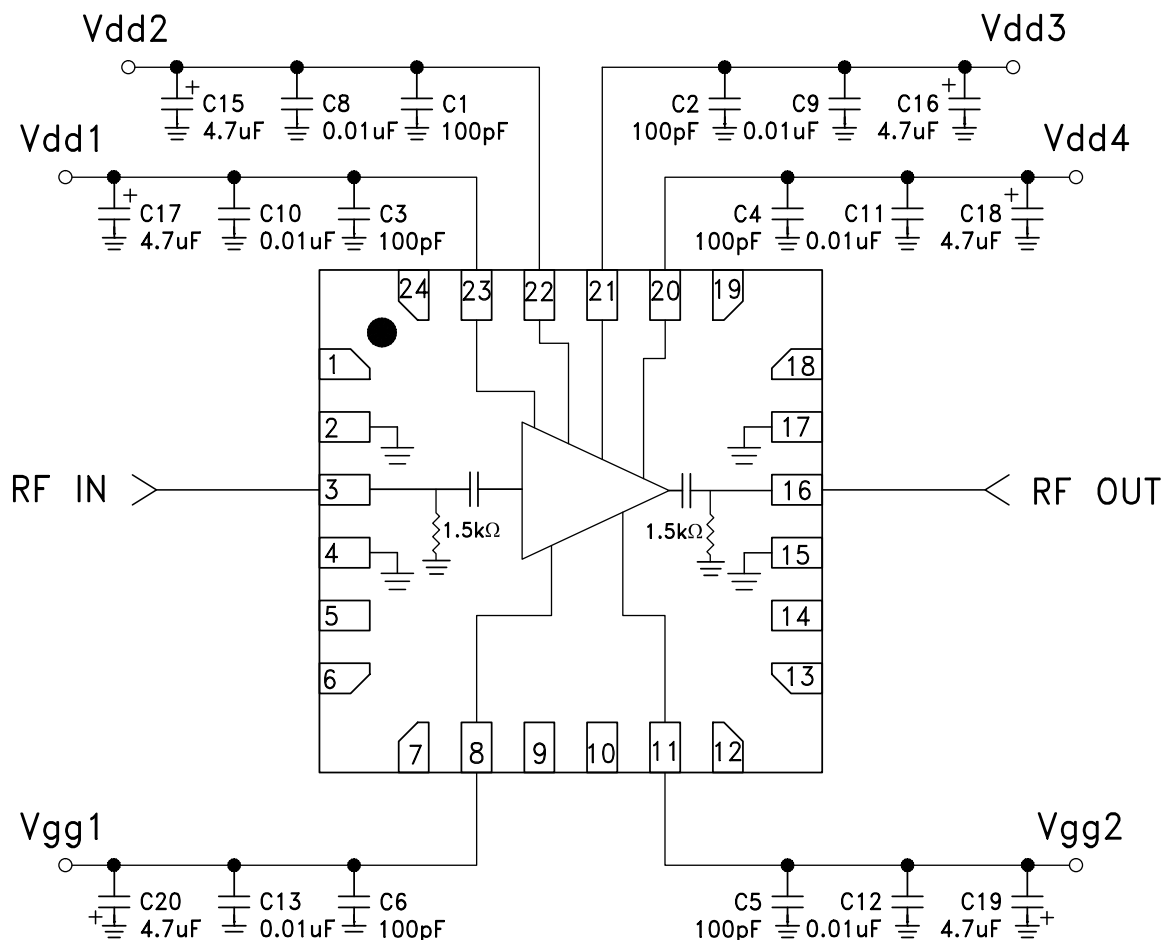




MICROWAVE CORPORATION v00.0215



HMC1131LC4

**GaAs pHEMT MMIC MEDIUM
POWER AMPLIFIER, 24 - 35 GHz**

Evaluation PCB

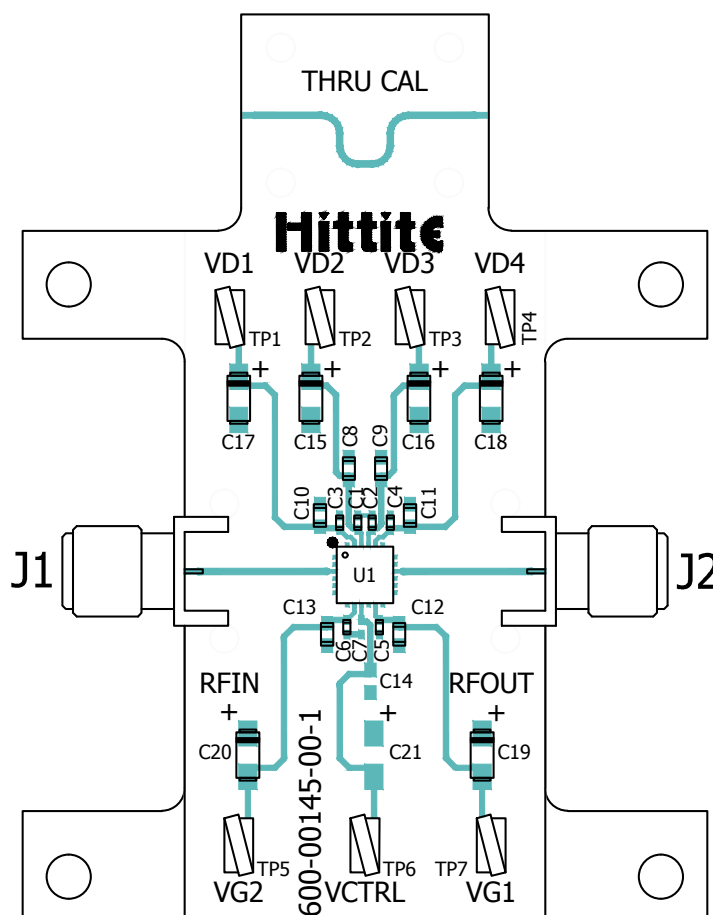

List of Materials for Evaluation PCB EV1HMC1131LC4 ^[1]

Item	Description
J1, J2	PCB Mount K Connectors
TP1 - TP7	DC Pin
C1 - C6	100 pF Capacitor, 0402 Pkg.
C8 - C13	10000 pF Capacitor, 0402 Pkg
C15 - C20	2.2 uF Capacitor, 0402 Pkg.
U1	HMC1131LC4
PCB ^[2]	600-00145-00 Evaluation Board

[1] Reference this number when ordering Complete Evaluation PCB

[2] Circuit Board Material: Rogers 4350 or Arlon 25FR

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from ADI upon request.



MICROWAVE CORPORATION v00.0215



HMC1131LC4

**GaAs pHEMT MMIC MEDIUM
POWER AMPLIFIER, 24 - 35 GHz**

Notes:



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331