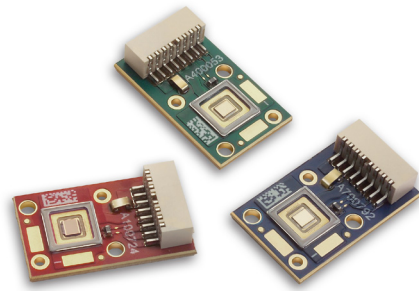


## PT39 LEDs

*Thermally Enhanced*



### Table of Contents

|                                                       |       |
|-------------------------------------------------------|-------|
| Technology Overview . . . . .                         | 2     |
| Understanding Big Chip Test Specifications . . . . .  | 2     |
| Ordering Information . . . . .                        | 3     |
| Flux /Power Bin Definition . . . .                    | 4     |
| Optical & Electrical Characteristics . . . . .        | 5- 6  |
| Blue Flux Bin Ranges by Wavelength . . . . .          | 7     |
| Characterization Curves . . . . .                     | 8     |
| Spectrum and Angular Intensity Distribution . . . . . | 9     |
| Thermal Resistance . . . . .                          | 10    |
| Mechanical Dimensions . . . . .                       | 11-12 |
| Shipping Tray Outline . . . . .                       | 13    |
| Packing and Shipping Specifications . . . . .         | 14    |
| History of Changes . . . . .                          | 15    |

### Features:

- Matched RGB Chipset with 3.9 mm<sup>2</sup> emitting area designed for LED projector applications
- Enhanced thermal performance allows for operation up to 12 A (3A/mm<sup>2</sup>)
- Ultra low thermal resistance, common anode copper-core PCB package
- Photonic lattice technology for very high surface brightness and uniform surface emission
- Wide color gamut: Red-Amber 613nm, GREEN 525 nm, Blue 460nm typical dominant wavelength
- Single emitting area per color allows for collection with single lens for simplified optics
- LED mounted on MC-PCB for easier thermal and optical integration
- Aspect ratio optimized and compatible with micro-display diagonal sizes ranging from 0.45" to 0.55"
- RoHS (EU-2002/95/EC Directive) and REACH compliant

### Applications

- Specifically engineered for high brightness pocket-size, ultra portable front projectors, head-up projection displays and hybrid projectors
- Optimized for Micro-Display diagonal sizes ranging from 0.45" to 0.55"
- Suitable for DLP™ (0.45" WXGA, 0.55" SVGA), LCoS and HTPS /3LCD microdisplays

## Technology Overview

Luminus Big Chip LEDs™ benefit from a suite of innovations in the fields of chip technology, packaging and thermal management. These breakthroughs allow illumination engineers and system designers to achieve solutions that are high brightness and high efficiency.

### Photonic Lattice Technology

Luminus' photonic lattice technology enables large area LED chips with uniform brightness over the entire LED chip surface. The optical power and brightness produced by these large monolithic chips enable solutions which replace arc and halogen lamps where arrays of traditional high power LEDs cannot.

### Packaging Technology

Thermal management is critical in high power LED applications. With a thermal resistance from junction to case of 1.0° C/W, Luminus PT39 LEDs can be driven at higher current densities while maintaining a low junction temperature, thereby resulting in brighter solutions and longer lifetimes.

### Reliability

For high power operation, Luminus Big Chip LEDs are one of the most reliable light sources in the world today. Big Chip LEDs have passed a rigorous suite of environmental and mechanical stress tests, including mechanical shock, vibration, temperature

cycling and humidity, and have been fully qualified for use in extreme high power and high current applications. With very low failure rates and median lifetimes that typically exceed 60,000 hours, Luminus Big Chip LEDs are ready for even the most demanding applications. (Please refer to Luminus' Reliability application note for more information.)

### Environmental Benefits

Luminus LEDs help reduce power consumption and the amount of hazardous waste entering the environment. All Big Chip LED products manufactured by Luminus are RoHS and REACH compliant and free of hazardous materials, including lead and mercury.

## Understanding Big Chip LED Test Specifications

Every Luminus LED is extensively tested at rated current to ensure that it meets the high quality standards expected from Luminus products.

### Testing of Big Chip LEDs

Luminus core board products are typically measured in such a way that the characteristics reported agree with how the devices will actually perform when incorporated into a system. This measurement is accomplished by mounting the devices on a 40° C heat sink and allowing the device to reach thermal equilibrium while fully powered. Only after the device reaches equilibrium are the measurements taken. This method of measurement ensures that Luminus Big Chip LEDs perform in the field just as they are specified.

Luminus surface mount LEDs are typically tested with a 20 ms input pulse and a junction temperature of 25° C. Expected flux

values in real world operation can be extrapolated based on the information contained within this product data sheet.

### Ordering Information

| Ordering Part Number <sup>1</sup> | Color                       | Min Flux or Power Bin <sup>2</sup> | Description                                                                                                                   |
|-----------------------------------|-----------------------------|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| PT-39-RA-L21-MPF                  | Red-Amber<br>(Discontinued) | 2E                                 | Red-Amber LED, consisting of a 3.9 mm <sup>2</sup> Red-Amber LED chip, thermistor and connector mounted on a copper-core PCB. |
| PT-39-RA-L21-MPG                  |                             | 2F                                 |                                                                                                                               |
| PT-39-RA-L21-MPH                  |                             | 2G                                 |                                                                                                                               |
| PT-39-RA-L21-MPJ                  |                             | 2H                                 |                                                                                                                               |
| PT-39-G-L21-MPF                   | Green                       | 2F                                 | Green LED, consisting of a 3.9 mm <sup>2</sup> Green LED chip, thermistor and connector mounted on a copper-core PCB.         |
| PT-39-G-L21-MPG                   |                             | 2G                                 |                                                                                                                               |
| PT-39-G-L21-MPH                   |                             | 2H                                 |                                                                                                                               |
| PT-39-G-L21-MPJ                   |                             | 2J                                 |                                                                                                                               |
| PT-39-B-L21-EPD                   | Blue                        | 2G                                 | Blue LED, consisting of a 3.9 mm <sup>2</sup> Blue LED chip, thermistor and connector mounted on a copper-core PCB.           |
| PT-39-B-L21-EPE                   |                             | 2H                                 |                                                                                                                               |

Note 1: Ordering part numbers represent bin kits (group of bins that are shippable for a given ordering part number)

Note 2: See Bin Kit and Flux / Power bin definitions on page 4

### Ordering Part Number Nomenclature

XXX — 00 — XXXX — X00 — XXX

| Product Family          | Chip Area               | Color                                              | Package Configuration                                                                                                   | Bin Kit <sup>1</sup>              |
|-------------------------|-------------------------|----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| PT: Metal Coreboard PCB | 39: 3.9 mm <sup>2</sup> | RA= Red -Amber (615nm, typ)<br>G= Green<br>B= Blue | L21: 26.5mm x 16.0 mm (standard)<br>L22: 26.5mm x 16.0 mm (die-rotated configuration)<br>See Mechanical Drawing section | See page 4 for bin kit definition |

Note 1: A Bin Kit represents a group of individual flux or power bins that are shippable for a given ordering part number. Individual flux bins are not orderable.

EXAMPLE:

PT-39-RA-L21-MPF is comprised of Red-Amber Flux Bins 2E, 2F, 2G, 2H, 2J.

## PT39 Bin Kit<sup>1</sup> and Flux Bin<sup>2,3,4</sup> Definitions

Note: Please refer to ordering part number table on page 3 for Bin Kit availability

| Red -Amber Flux Bins                                | Bin 2E        | Bin 2F        | Bin 2G        | Bin 2H        | Bin 2J        | Bin 2K        | Bin 2L        | Bin 2M        |  |
|-----------------------------------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|--|
| Red -Amber<br>Bin Flux Range (lm)<br>(Discontinued) | 635-690       | 690-745       | 745-800       | 800-860       | 860-925       | 925-990       | 990-1055      | 1055<br>-1125 |  |
| PT-39-RA-L21-MPF                                    | ☑             | ☑             | ☑             | ☑             | ☑             |               |               |               |  |
| PT-39-RA-L21-MPG                                    |               | ☑             | ☑             | ☑             | ☑             | ☑             |               |               |  |
| PT-39-RA-L21-MPH                                    |               |               | ☑             | ☑             | ☑             | ☑             | ☑             |               |  |
| PT-39-RA-L21-MPJ                                    |               |               |               | ☑             | ☑             | ☑             | ☑             | ☑             |  |
| Green Flux Bins                                     | Bin 2F        | Bin 2G        | Bin 2H        | Bin 2J        | Bin 2K        | Bin 2L        | 2M            |               |  |
| Green Bin Flux<br>Range (lm)                        | 1250<br>-1330 | 1330<br>-1450 | 1450<br>-1550 | 1550<br>-1660 | 1660<br>-1780 | 1780<br>-1900 | 1900<br>-2020 |               |  |
| PT-39-G-L21-MPF                                     | ☑             | ☑             | ☑             | ☑             | ☑             |               |               |               |  |
| PT-39-G-L21-MPG                                     |               | ☑             | ☑             | ☑             | ☑             | ☑             |               |               |  |
| PT-39-G-L21-MPH                                     |               |               | ☑             | ☑             | ☑             | ☑             | ☑             |               |  |
| PT-39-G-L21-MPJ                                     |               |               |               | ☑             | ☑             | ☑             | ☑             |               |  |
| Blue Flux Bins                                      | Bin 2G        | Bin 2H        | Bin 2J        | Bin 2K        | Bin 2L        | Bin 2M        |               |               |  |
| Blue Bin Flux<br>Range (lm)                         | 255-280       | 280-300       | 300-320       | 320-345       | 345-370       | 370-400       |               |               |  |
| PT-39-B-L21-EPD                                     | ☑             | ☑             | ☑             | ☑             | ☑             |               |               |               |  |

Note 1: Bin Kits are defined by a group of flux or power bins. Only one flux bin will be shipped in each individual pack. A shipment will contain packs of different allowed flux bins for a particular ordering part number. Individual Flux or Power bins are not orderable.

Note 2: PT39 LEDs are tested for luminous flux at 9.8 A at 25% duty cycle for Red, Red-Amber and Blue, and at 50% duty cycle for Green Devices. Devices are sorted and packed by flux bin. Not all flux bins are currently populated.

Note 3: Luminus maintains a test measurement accuracy for LED flux and power of +/- 6%.


Note 4: Blue Flux bin limits are defined at reference dominant wavelength of 462nm. See table on page 7 for Blue bin limits at other dominant wavelengths.

## Optical & Electrical Characteristics

| General Characteristics                                                                                  |     | Symbol            | Red -Amber<br>(Discontinued) | Green       | Blue        | Unit            |
|----------------------------------------------------------------------------------------------------------|-----|-------------------|------------------------------|-------------|-------------|-----------------|
| Emitting Area                                                                                            |     | x                 | 3.9                          | 3.9         | 3.9         | mm <sup>2</sup> |
| Emitting Area Dimensions                                                                                 |     | x                 | 2.09 x 1.87                  | 2.09 x 1.87 | 2.09 x 1.87 | mmxmm           |
| <b>Characteristics at Recommended Test Drive Current , I<sub>F</sub><sup>1,2</sup></b>                   |     |                   |                              |             |             |                 |
| Reference Duty Cycle <sup>3</sup>                                                                        |     |                   | 25                           | 50          | 25          | %               |
| Test Peak Drive Current <sup>1,2,4</sup>                                                                 | typ | I <sub>F</sub>    | 9.8                          | 9.8         | 9.8         | A               |
| Peak Luminous Flux <sup>1,2,5</sup>                                                                      | typ | Φ <sub>v</sub>    | 800                          | 1660        | 300         | lm              |
| Peak Radiometric Flux <sup>1,2</sup>                                                                     | typ | Φ <sub>r</sub>    | 3.2                          | 3.5         | 6.2         | W               |
| Dominant Wavelength                                                                                      | min | λ <sub>dmin</sub> | 609                          | 516         | 450         | nm              |
|                                                                                                          | typ | λ <sub>d</sub>    | 613                          | 525         | 460         | nm              |
|                                                                                                          | max | λ <sub>dmax</sub> | 620                          | 540         | 468         | nm              |
| FWHM- Spectral bandwidth at 50% of Φ <sub>r</sub>                                                        | typ |                   | 19                           | 34          | 20          | nm              |
| Chromaticity Coordinates <sup>6,7</sup>                                                                  | typ | x                 | 0.675                        | 0.167       | 0.147       |                 |
|                                                                                                          | typ | y                 | 0.325                        | 0.704       | 0.033       |                 |
| Forward Voltage                                                                                          | min | V <sub>Fmin</sub> | 2.2                          | 3.5         | 3.2         | V               |
|                                                                                                          | typ | V <sub>F</sub>    | 2.6                          | 5.2         | 3.9         | V               |
|                                                                                                          | max | V <sub>Fmax</sub> | 3.2                          | 5.9         | 5.2         | V               |
| Dynamic Resistance                                                                                       | typ |                   | 0.1                          | 0.12        | 0.09        | Ω               |
| <b>Device Thermal Characteristics</b>                                                                    |     |                   |                              |             |             |                 |
| Thermal Coefficient of Photometric Flux                                                                  | typ |                   | -1.0                         | -0.2        | ~0          | % / °C          |
| Thermal Coefficient of Radiometric Flux                                                                  | typ |                   | -0.7                         | -0.2        | -0.2        | % / °C          |
| Forward Voltage Temperature Coefficient                                                                  | typ |                   | -2                           | -4.7        | -3          | mV/ °C          |
| <b>Characteristics at Reference Continuous Drive Current I<sub>F</sub> (continuous wave)<sup>1</sup></b> |     |                   |                              |             |             |                 |
| Reference Drive Current                                                                                  | typ | I <sub>F</sub>    | 5.9                          | 5.9         | 5.9         | A               |
| Luminous Flux                                                                                            | typ | Φ <sub>v</sub>    | 450                          | 1175        | 210         | lm              |
| Radiometric Flux                                                                                         | typ | Φ <sub>r</sub>    | 1.8                          | 2.5         | 4.3         | W               |
| Dominant Wavelength                                                                                      | typ | λ <sub>d</sub>    | 612                          | 528         | 461         | nm              |
| FWHM -Spectral bandwidth at 50% of Φ <sub>r</sub>                                                        | typ |                   | 18                           | 36          | 21          | nm              |
| Chromaticity Coordinates <sup>6,7</sup>                                                                  | typ | x                 | 0.677                        | 0.177       | 0.144       | nm              |
|                                                                                                          | typ | y                 | 0.322                        | 0.713       | 0.034       | nm              |
| Forward Voltage                                                                                          | typ | V <sub>F</sub>    | 2.3                          | 4.5         | 3.4         | V               |

## Optical & Electrical Characteristics

Note 1: All ratings are based on testing conditions with a constant heat sink temperature  $T_{hs} = 40^{\circ}\text{C}$ . See Thermal Resistance section for  $T_{hs}$  definition.

Note 2: Parameters rated at test duty cycle and Pulsed operation frequency  $f > 240\text{ Hz}$ ;  $DC = \frac{t}{T}$  

Note 3: Duty Cycle used to specify device ratings under Pulsed operation. Big Chip LED devices can operate at duty cycles ranging from 1% to 100%. At higher duty cycles, drive current should be adjusted to maintain the junction temperature at desired levels to meet the application lifetime requirements.

Note 4: In pulsed operation, rise time from 10% to 90% of forward current should be larger than 0.5 microseconds

Note 5: For Blue devices, total flux from emitting area at typical dominant wavelength. Refer to page 7 for brightness specifications at other wavelength

Note 6: In CIE 1931 chromaticity diagram coordinates, normalized to  $X+Y+Z=1$

Note 7: For Reference only

### Absolute Maximum Ratings

|                                                                                               | Symbol     | Red -Amber<br>(Discontinued) | Green      | Blue       | Unit               |
|-----------------------------------------------------------------------------------------------|------------|------------------------------|------------|------------|--------------------|
| Absolute Minimum Current (CW or Pulsed) <sup>1</sup>                                          |            | 200                          | 200        | 200        | mA                 |
| Absolute Maximum Current (CW) <sup>2</sup>                                                    |            | 9.8                          | 9.8        | 9.8        | A                  |
| Absolute Maximum Current (Pulsed) <sup>2,3</sup><br>( frequency > 240Hz, duty cycle <50%)     |            | 13.7                         | 13.7       | 13.7       | A                  |
| Absolute Maximum Surge Current <sup>2,3</sup><br>(Frequency > 240 Hz, duty cycle =tbd, t=tbd) |            | TBD                          | TBD        | TBD        | A                  |
| Absolute Maximum Junction Temperature <sup>4</sup>                                            | $T_{jmax}$ | 125                          | 170        | 170        | $^{\circ}\text{C}$ |
| Storage Temperature Range                                                                     |            | -40 / +100                   | -40 / +100 | -40 / +100 | $^{\circ}\text{C}$ |

Note 1: Product performance and lifetime data is specified at recommended forward drive currents. Sustained operation at or near absolute minimum currents may result in a reduction of device performance and device lifetime compared to recommended forward drive currents.

Note 2: Luminus LEDs' absolute maximum forward drive current density is 2.5 A/mm<sup>2</sup> CW, and 3.5A/mm<sup>2</sup> pulsed ( $f > 240\text{ Hz}$ , duty cycle <50%). Please refer to absolute maximum rating table above for specific absolute maximum currents for the products covered in this datasheet. Product lifetime data is specified at recommended forward drive currents. (See Reliability Application Note, APN-001444.) Sustained operation at or above absolute maximum currents will result in a reduction of device lifetime compared to recommended forward drive currents. Actual device lifetimes will also depend on junction temperature. Please refer to lifetime derating curves (available from Luminus) for further information.

Note 3: In pulsed operation, rise time from 10 to 90% of forward current should be larger than 0.5 microseconds.

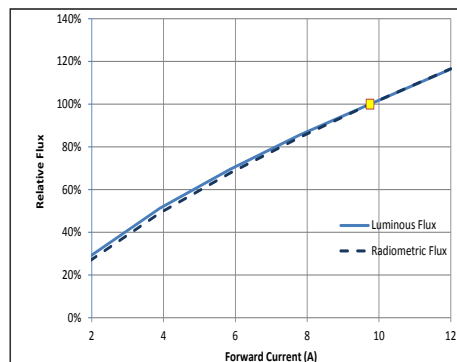
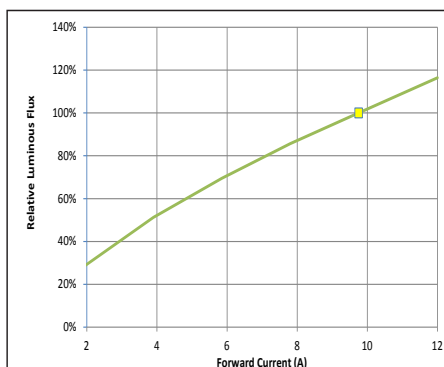
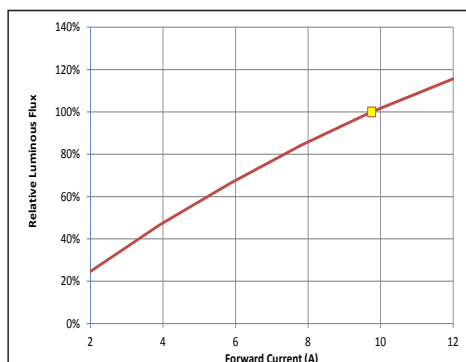
Note 4: Sustained operation at or above Maximum Operating Junction Temperature ( $T_{jmax}$ ) will result in reduced device life time.

**Blue Bin Flux Ranges by Dominant Wavelength <sup>1,2</sup>**

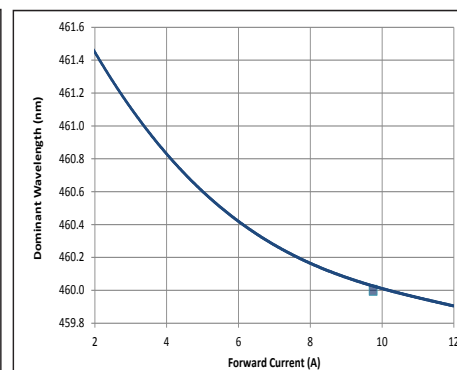
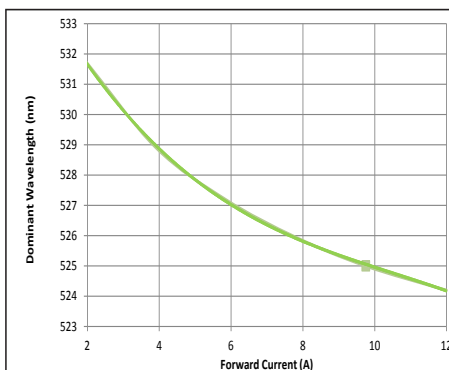
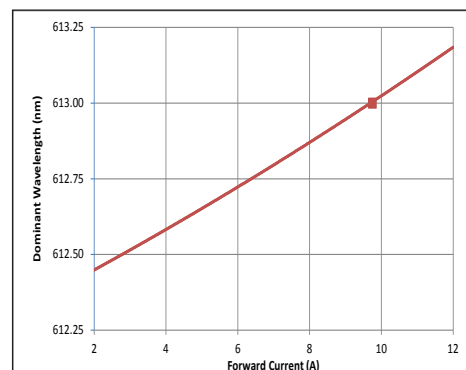
|          | Bin 2G   |          | Bin2H    |          | Bin 2J   |          | Bin 2K   |          | Bin 2L   |          | Bin 2M   |          |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| DWL (nm) | Min (lm) | Max (lm) | Min (lm) | Max (lm) | Min (lm) | Max (lm) | Min (lm) | Max (lm) | Min (lm) | Max (lm) | Min (lm) | Max (lm) |
| 450      | 125      | 137      | 137      | 147      | 147      | 156      | 156      | 169      | 169      | 181      | 181      | 196      |
| 451      | 136      | 149      | 149      | 159      | 159      | 170      | 170      | 183      | 183      | 197      | 197      | 213      |
| 452      | 146      | 161      | 161      | 172      | 172      | 184      | 184      | 198      | 198      | 212      | 212      | 230      |
| 453      | 157      | 173      | 173      | 185      | 185      | 197      | 197      | 213      | 213      | 228      | 228      | 247      |
| 439      | 168      | 185      | 185      | 198      | 198      | 211      | 211      | 227      | 227      | 244      | 244      | 264      |
| 455      | 179      | 197      | 197      | 211      | 211      | 225      | 225      | 242      | 242      | 260      | 260      | 281      |
| 456      | 190      | 208      | 208      | 223      | 223      | 238      | 238      | 257      | 257      | 275      | 275      | 298      |
| 457      | 201      | 220      | 220      | 236      | 236      | 252      | 252      | 272      | 272      | 291      | 291      | 315      |
| 458      | 212      | 232      | 232      | 249      | 249      | 265      | 265      | 286      | 286      | 307      | 307      | 332      |
| 459      | 222      | 244      | 244      | 262      | 262      | 279      | 279      | 301      | 301      | 323      | 323      | 349      |
| 460      | 233      | 256      | 256      | 274      | 274      | 293      | 293      | 316      | 316      | 338      | 338      | 366      |
| 461      | 244      | 268      | 268      | 287      | 287      | 306      | 306      | 330      | 330      | 354      | 354      | 383      |
| 462      | 255      | 280      | 280      | 300      | 300      | 320      | 320      | 345      | 345      | 370      | 370      | 400      |
| 463      | 266      | 292      | 292      | 313      | 313      | 334      | 334      | 360      | 360      | 386      | 386      | 417      |
| 464      | 277      | 304      | 304      | 326      | 326      | 347      | 347      | 374      | 374      | 402      | 402      | 434      |
| 465      | 288      | 316      | 316      | 338      | 338      | 361      | 361      | 389      | 389      | 417      | 417      | 451      |
| 466      | 298      | 328      | 328      | 351      | 351      | 375      | 375      | 404      | 404      | 433      | 433      | 468      |
| 467      | 309      | 340      | 340      | 364      | 364      | 388      | 388      | 418      | 418      | 449      | 449      | 485      |
| 468      | 320      | 352      | 352      | 377      | 377      | 402      | 402      | 433      | 433      | 465      | 465      | 502      |

Note 1: Flux Min, Max values are continuous as function of dominant wavelength values. For illustration purposes, flux Min and Max values are provided at discrete dominant wavelength values.

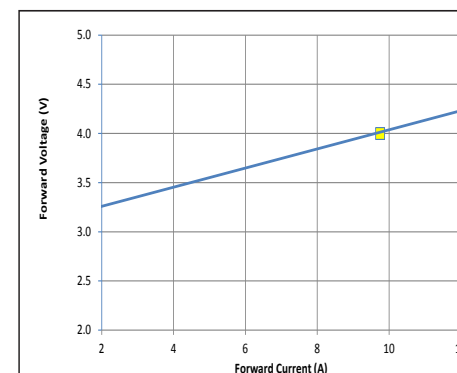
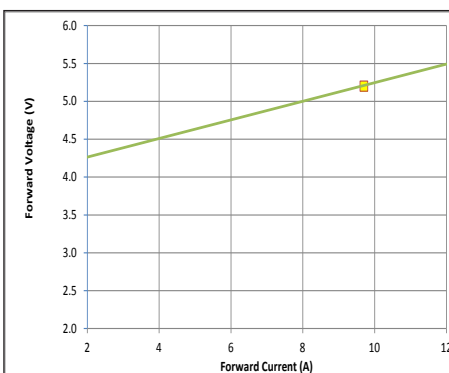
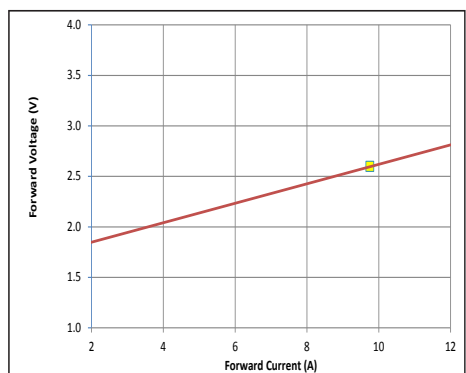
Note 2: Luminus maintains a test measurement accuracy for LED flux and power of +/- 6%.

**Normalized Luminous Flux variation with Forward Current:  $\Phi_v / \Phi_F = f(I_F)$** 


See notes 1, 2 on page 9.

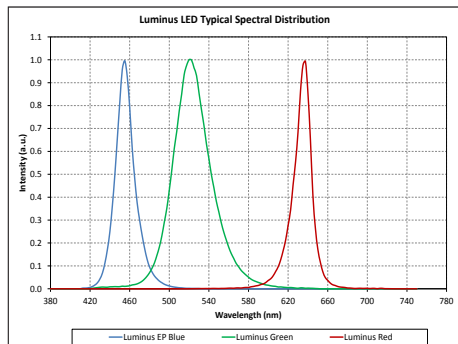
**Dominant Wavelength variation with Forward Current -  $\lambda_d = f(I_F)$  - Typical**


See notes 1, 2 on page 9.

**Forward Voltage variation with Drive current -  $V_F = f(I_F)$  - Typical**


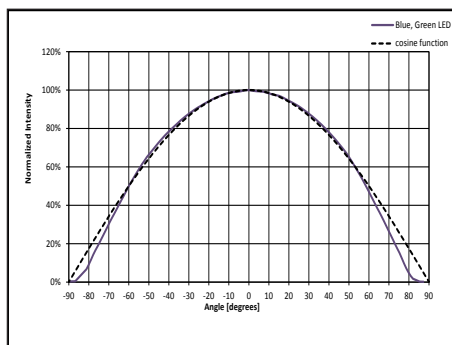
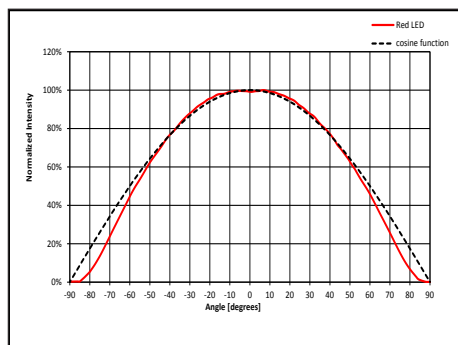
See notes 1, 2 on page 9.

## Optical Spectrum (Typical)



See notes 1, 3 on page 9.

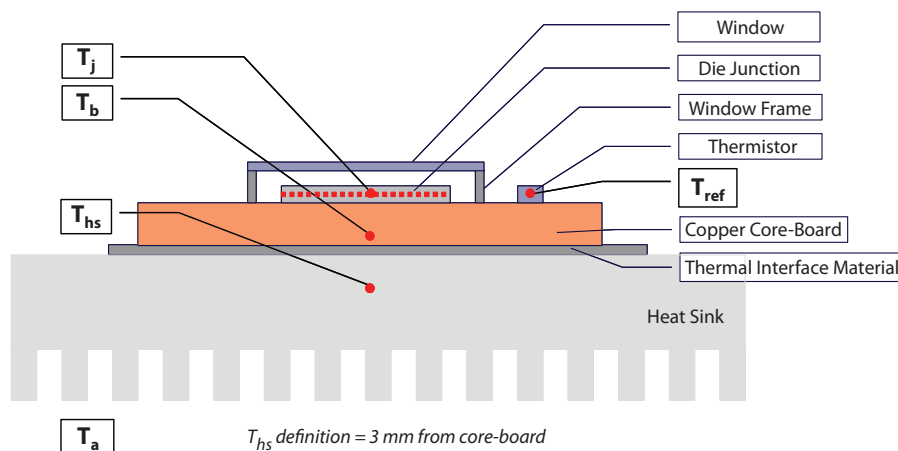
## Angular Intensity Distribution (Typical)



See note 4 on page 9.

- Note 1: For Pulsed operation, the reference R,G, and B duty cycles used are 25%, 50% and 25% respectively ( $T_{hs}=40^{\circ}\text{C}$ ; Frequency =720 Hz).
- Note 2: Square on curves indicate device operating current point (9.8A) under reference conditions listed in the Optical and Electrical Characteristics table.
- Note 3: Typical spectrum at recommended peak drive current . Please contact Luminus to obtain data in Excel format.
- Note 4: Curves (solid) represent the angular radiation pattern of a typical (Red, Green or Blue) device. Discontinuous line represents cosine function. For any specific device, slight variations may be expected.

## Thermal Resistance



### Typical Thermal Resistance

|                         |          |
|-------------------------|----------|
| $R_{\theta j-b}^1$      | 1.0°C/W  |
| $R_{\theta b-hs}^2$     | 0.2 °C/W |
| $R_{\theta j-hs}^{1,2}$ | 1.2 °C/W |
| $R_{\theta j-ref}^2$    | 1.0 °C/W |

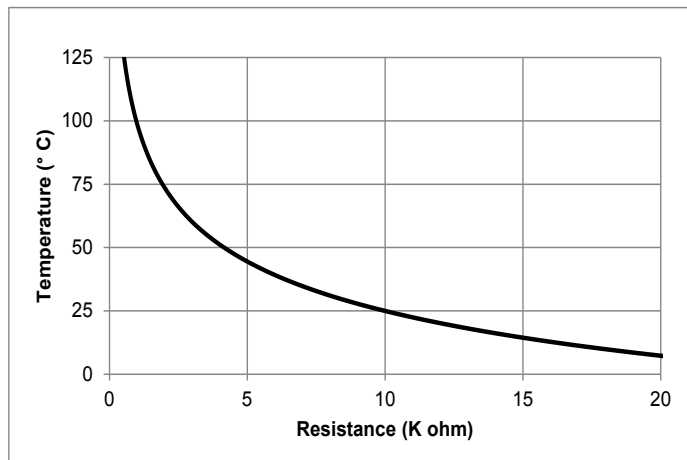
Note 1: Thermal resistance values are based on modeled results correlated to measured  $R_{\theta j-hs}$  data using the wavelength shift method. Verification of compliance with the recent releases of JEDEC Standards JESD51-14 and JESD51-5x series is pending.

Note 2: Thermal Resistance is based on eGraf 1205 Thermal interface.

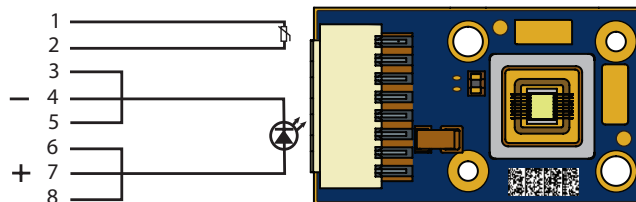
## Thermistor Information

The thermistor used in PT39 devices are mounted on coreboards is from Murata Manufacturing Co. The global part number is NCP15XH103J03RC.

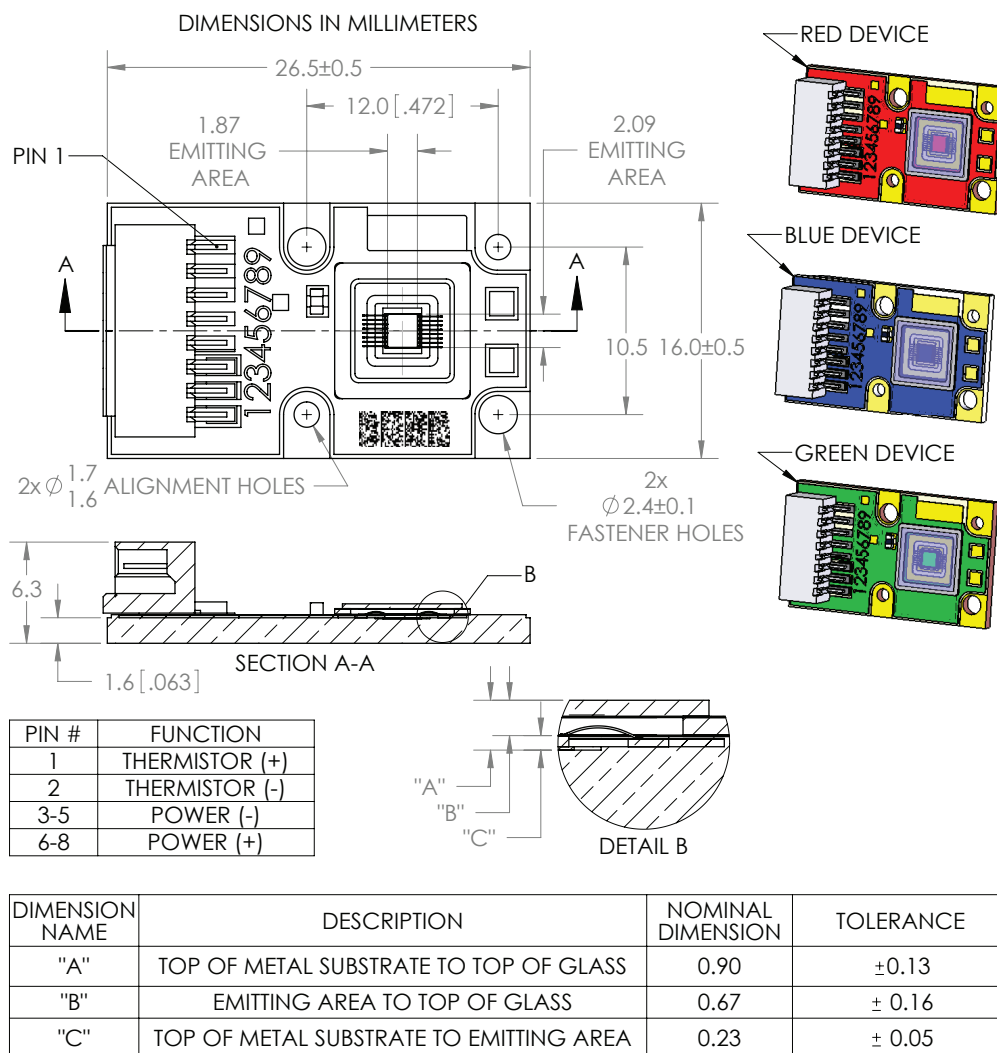
Please contact Luminus for information on use of the thermistor and for data in Excel format for temperature vs. resistance plot below.



## Electrical Pinout



## Mechanical Dimensions -Standard Die Configuration

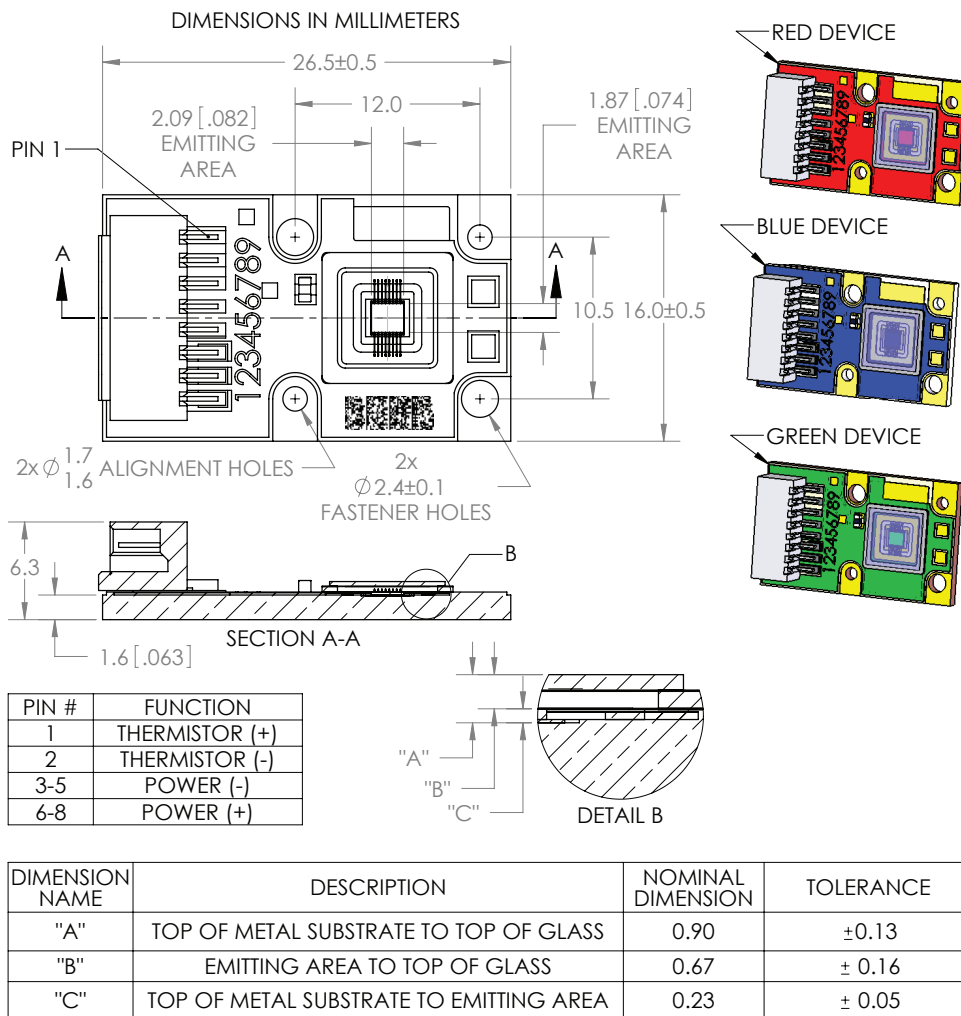


DWG-001989

### Notes:

- 1) Red, Green and Blue PT39 Big Chip LEDs are individually assembled into a common anode copper core- board with a footprint of 26.5 mm x 16 mm.
- 2) Dimensions above are for information only. Please refer to the latest revision of the DWG- 001989 package outline mechanical specifications.
- 3) Connector- MOLEX Part Number: 874380843 or Global Part Number: WTB16-0815F.

## Mechanical Dimensions –Rotated Die Configuration

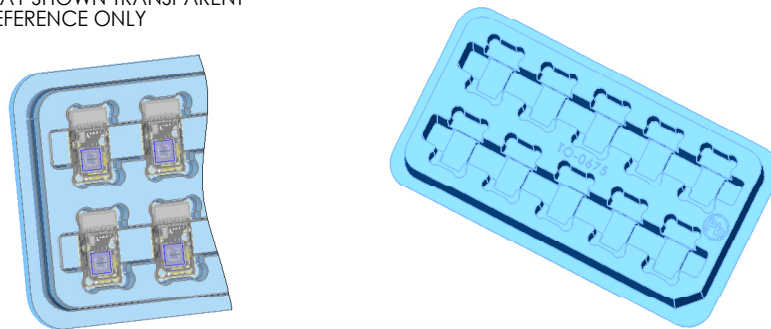
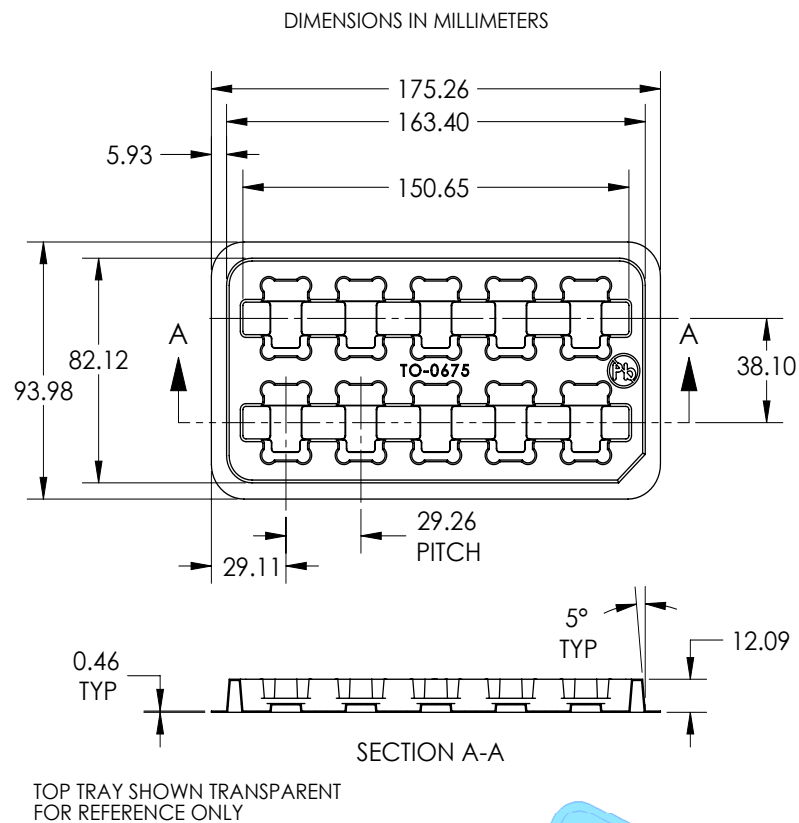


DWG-001991

### Notes:

- 1) Red, Green and Blue PT39 Big Chip LEDs are individually assembled into a common anode copper core- board with a footprint of 26.5 mm x 16 mm.
- 2) Dimensions above are for information only. Refer to the latest revision of the DWG- 001991, package outline mechanical specifications
- 3) Connector- MOLEX Part Number: 874380843 or Global Part Number: WTB16-0815F.

## Shipping Tray Outline



For detailed drawing of shipping trays, please refer to document TO-0675, available upon request.

## Packing and Shipping Specifications

### Packing Specification

| Packing Configuration                                                         | Qty /Pack | Reel Dimensions<br>(diameter x W, mm) | Gross Weight (kg) |
|-------------------------------------------------------------------------------|-----------|---------------------------------------|-------------------|
| Stack of 5 trays with 10 devices per tray<br>Each pack is enclosed in ESD bag | 50        | 95 x 176 x 50                         | 0.45              |

### Product Label Specification

#### Label Fields:

- 6-8 digit Box number (for Luminus internal use)
- Luminus ordering part number
- Quantity of devices in pack
- Part number revision (for Luminus internal use)
- Customer's part number (optional)
- Flux Bin
- 2D Bar code


**LUMINUS**  
LEADER IN BIG CHIP LEDS™ Solid State Filament™

BP-012345

Qty: 50

Box number

PT-39-G-L21-MPH

Rev 01

Luminus part number

12345678

Customer part number

2J

Bin

for traceability peel off label and attach

RoHS Compliant

Sample label –for illustration only

### Shipping Box

| Shipping Box | Quantity    | Material | Dimensions<br>(L x W x H, mm) |
|--------------|-------------|----------|-------------------------------|
| Carton Box   | 1 -20 packs | S4651    | 560 x 560 x 200               |

## History of Changes

| Rev | Date     | Description of Change                             |
|-----|----------|---------------------------------------------------|
| X   | 03/23/12 | Preliminary Draft                                 |
| 01  | 05/15/12 | Preliminary Specification                         |
| 02  | 08/28/12 | Add product characterization curves               |
| 03  | 02/17/15 | Update address and year, remove preliminary marks |

The products, their specifications and other information appearing in this document are subject to change by Luminus Devices without notice. Luminus Devices assumes no liability for errors that may appear in this document, and no liability otherwise arising from the application or use of the product or information contained herein. None of the information provided herein should be considered to be a representation of the fitness or suitability of the product for any particular application or as any other form of warranty. Luminus Devices' product warranties are limited to only such warranties as accompany a purchase contract or purchase order for such products. Nothing herein is to be construed as constituting an additional warranty. No information contained in this publication may be considered as a waiver by Luminus Devices of any intellectual property rights that Luminus Devices may have in such information. Big Chip LEDs™ is a registered trademark of Luminus Devices, Inc., all rights reserved.

This product is protected by U.S. Patents 6,831,302; 7,074,631; 7,083,993; 7,084,434; 7,098,589; 7,105,861; 7,138,666; 7,166,870; 7,166,871; 7,170,100; 7,196,354; 7,211,831; 7,262,550; 7,274,043; 7,301,271; 7,341,880; 7,344,903; 7,345,416; 7,348,603; 7,388,233; 7,391,059 Patents Pending in the U.S. and other countries.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331