


2200 SERIES REED RELAYS

2200 Series Reed Relays

Ideally suited to the needs of Automated Test Equipment and RF requirements. The specification tables allow you to select the appropriate relay for your particular application. If your requirements differ, please consult your local representative or Coto's Factory.




2200 Series Features

- ▶ Very small footprint (0.17 in²), high reliability reed relays
- ▶ High Insulation Resistance - 10¹² Ω available with model 2204
- ▶ High speed switching compared to electromechanical relays
- ▶ Hermetically sealed contacts for long life
- ▶ Epoxy coated steel shell provides magnetic shielding
- ▶ Optional Electrostatic Shield for reducing capacitive coupling
- ▶ Optional Coaxial Shield for 50Ω impedance and switching of fast rise time digital pulses offered on Form A
- ▶ Relay models 2200-2301, 2200-2302 are ATE industry standards
- ▶ Specifically engineered for OEM designs and maintenance of existing production fixtures
- ▶ RoHS compliant

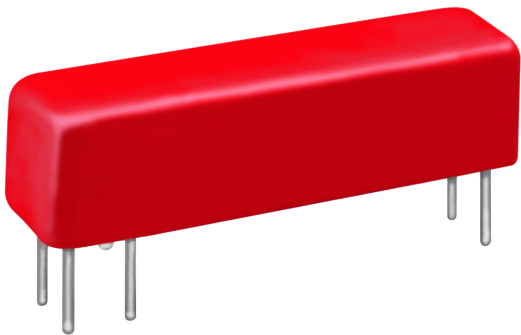

DIMENSIONS

in Inches (Millimeters)

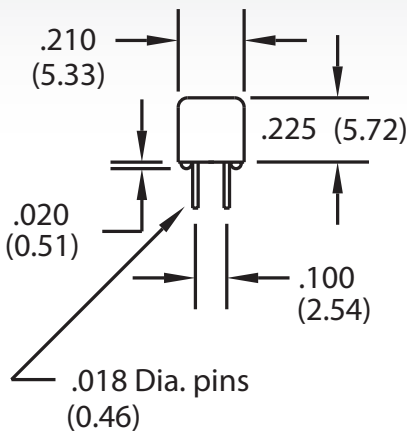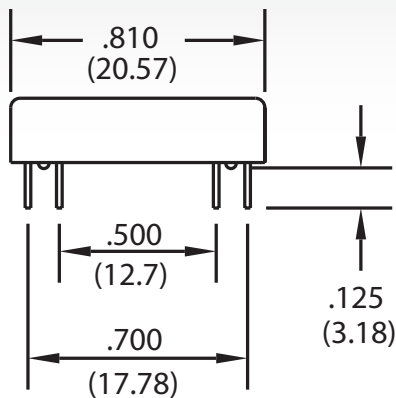





Bottom View

NOTE

- ▶ Model #'s 2200-2301 & 2200-2302 represent complete part numbers.

Ordering Information

Part Number	XXXX-XX-XX1	Shielding Options ²
Model Number		
2204		0=No Shielding
2211		1=Electrostatic Shield (N/A on Model #2211)
	Coil Voltage	2=Coaxial Shield (N/A on Model #2211)
	05=5 volts	
	12=12 volts	
	Coil Options	
	3=use for Model #2204 (12 volt coil) and Model #2211 (5 & 12 volt coil)	
	4=use for Model #2204 (5 volt coil)	

MODEL NUMBER			2204		2211		2200-2301		2200-2302	
Parameters	Test Conditions	Units	1 Form A		1 Form C		1 Form A Electrostatic Shield		1 Form A Coaxial Shield	
COIL SPECS.										
Nom. Coil Voltage		VDC	5 12		5 12		5		5	
Coil Resistance		+/- 10%, 25° C	Ω		370 1500		230 1500		150 150	
Operate Voltage		Must Operate by	VDC - Max.		3.8 9.0		3.8 9.0		3.6 3.6	
Release Voltage		Must Release by	VDC - Min.		0.4 1.0		0.4 1.0		0.5 0.5	
CONTACT RATINGS										
Switching Voltage		Max DC/Peak AC Resist.	Volts		200		100		150 150	
Switching Current		Max DC/Peak AC Resist.	Amps		0.5		0.25		0.5 0.5	
Carry Current		Max DC/Peak AC Resist.	Amps		1.0		0.5		1.0 1.0	
Contact Rating		Max DC/Peak AC Resist.	Watts		10		3		10 10	
Life Expectancy-Typical ¹		Signal Level 1.0V, 10mA	x 10 ⁶ Ops.		500		100		500 500	
Rated Loads			x 10 ⁶ Ops.		5		5		5 5	
Static Contact Resistance (max. init.)		50mV, 10mA	Ω		0.100		0.150		0.150 0.150	
Dynamic Contact Resistance (max. init.)		0.5V, 50mA at 100 Hz, 1.5 msec	Ω		0.200		0.200		0.200 0.200	
RELAY SPECIFICATIONS										
Insulation Resistance (minimum)		Between all Isolated Pins at 100V, 25°C, 40% RH	Ω		10 ¹²		10 ¹¹		10 ¹¹ 10 ¹¹	
Capacitance - Typical		Shield Floating	pF		0.9		0.9		0.9 0.9	
Across Open Contacts		Shield Guarding	pF		0.2		N/A		0.2 0.2	
Dielectric Strength (minimum)		Between Contacts	VDC/peak AC		250		200		250 250	
		Contacts to Coil	VDC/peak AC		250		N/A		250 250	
		Contacts/Shield to Coil	VDC/peak AC		1500		1500		1500 1500	
Operate Time - including bounce		At Nominal Coil Voltage, 30 Hz Square Wave	msec.		0.5 (typ.)		1.0 (typ.)		0.55 (max.) 0.55 (max.)	
Release Time - Typical			msec.		0.1		2.0		0.1 0.1	
Top View: Dot stamped on top of relay refers to pin #1 location Grid = .1"x.1" (2.54mm x 2.54mm)										

Notes:

¹ Consult factory for life expectancy at other switching loads.

² Model 2204, pin #7 is tied to optional electrostatic shield, pins #6 & #7 are tied to optional coaxial shield.

Environmental Ratings:

Storage Temp: -35°C to +100°C; *Operating Temp:* -20°C to +85°C; *Solder Temp:* 270°C max; 10 sec. max

All electrical parameters measured at 25°C unless otherwise specified.

Vibration: 20 G's to 2000 Hz; *Shock:* 50 G's



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331