
— , —

ALL RIGHTS RESERVED.

REVISIONS





DESCRIPTION

APVD

G4	REVISED (ECR-13-017389)
----	-------------------------

01JUL14

V	SC
---	----

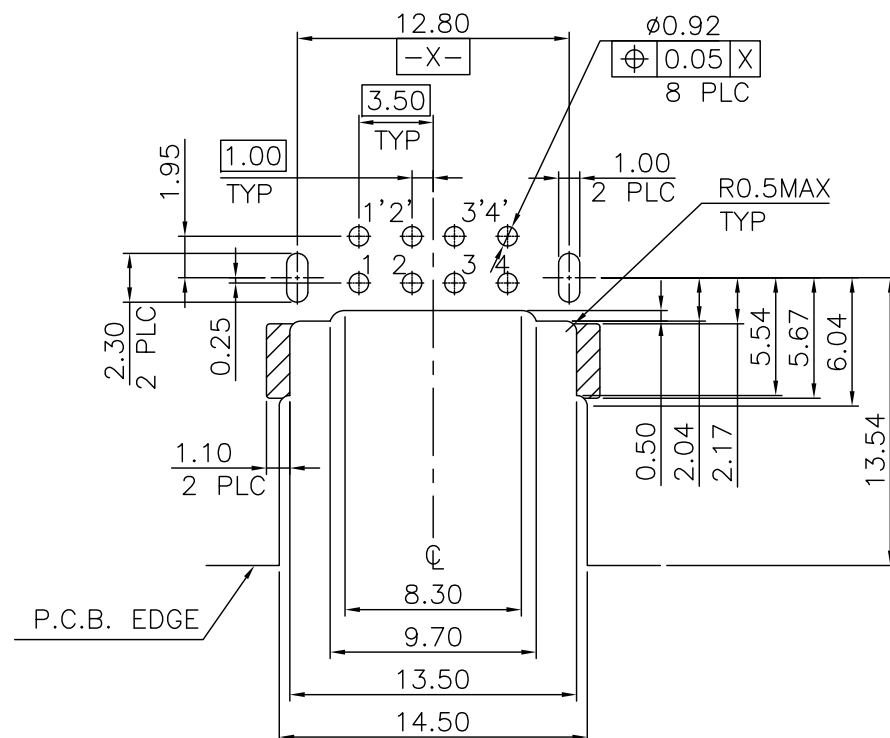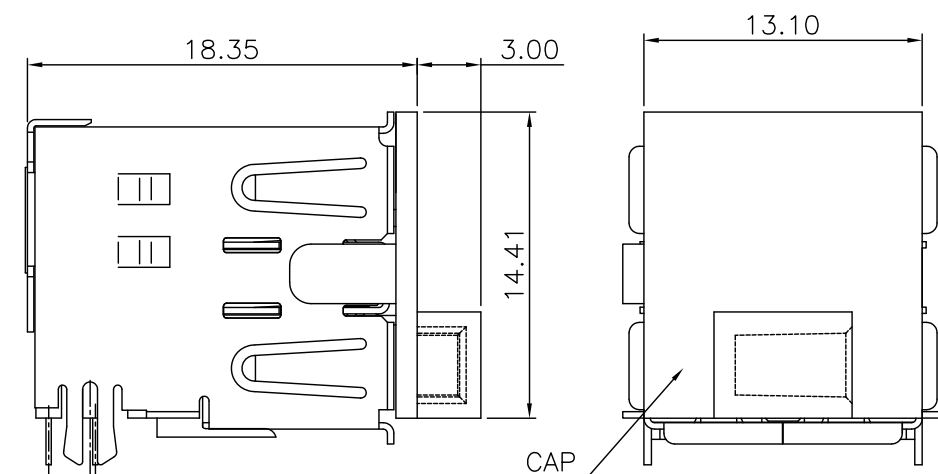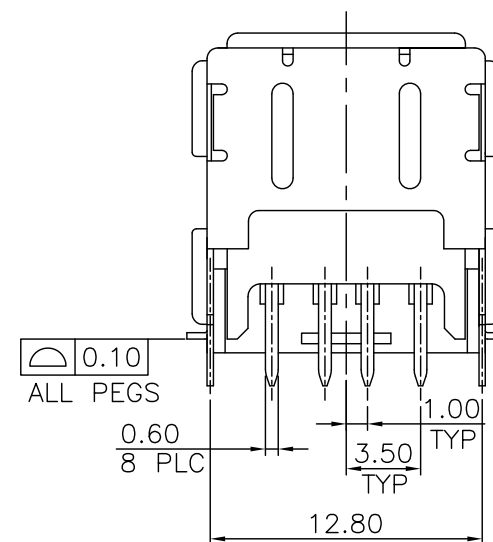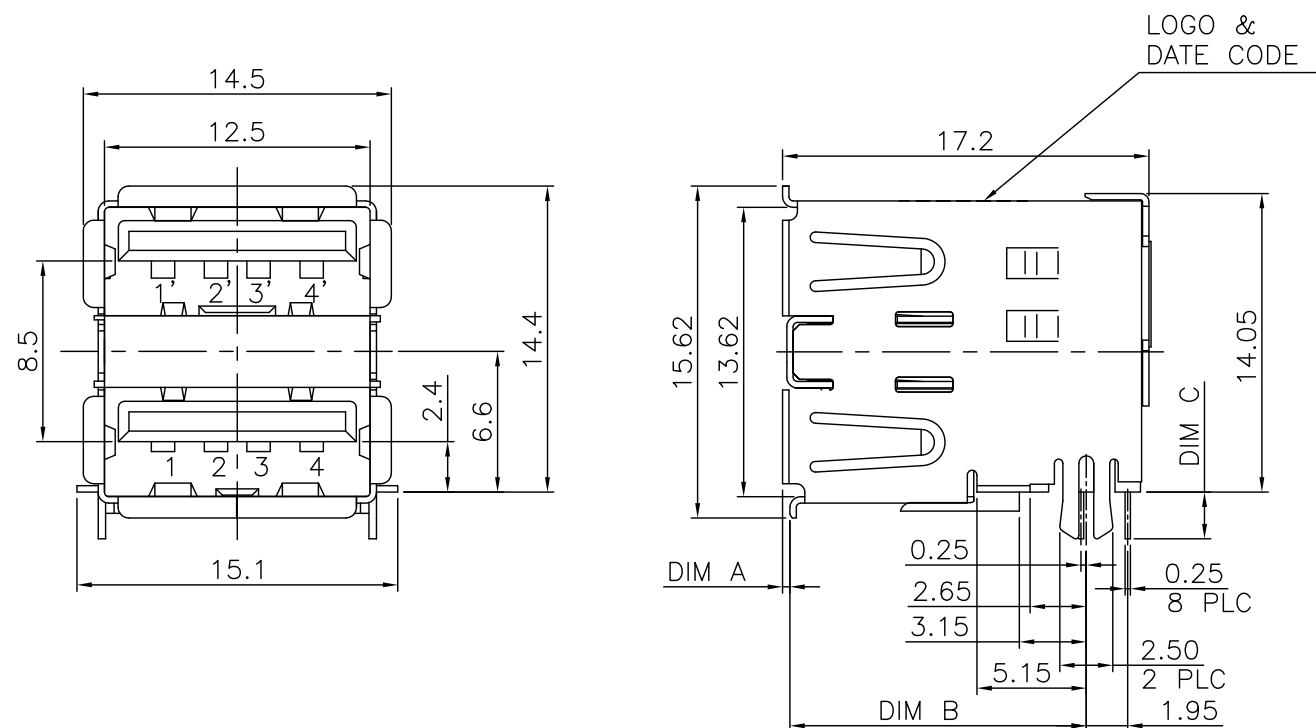


RECOMMEND P.C.B LAYOUT (THICKNESS 1.2~1.4mm)
(COMPONENT SIDE) TOLERANCE±0.05mm

NOTES:

1. MATERIAL:
 - HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 - SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 - CAP: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 - CONTACT: PHOSPHOR BRONZE.
 - FRONT SHIELD: BRASS.
 - REAR SHIELD: SPCC.
 - GROUNDING STRIP: BRASS.
2. FINISH:
 - CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA.
 - 3.048μm [120μ"] MIN. MATTE TIN PLATING ON SOLDER TAILS,
 - WITH ENTIRE CONTACT UNDERPLATED 1.27mμ" [50μ"] MIN. NICKEL.
 - FRONT SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.
 - 0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
 - REAR SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.
 - 0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
 - GROUNDING STRIP: 0.762μm [30μ"] MIN. NICKEL PLATING.
 - 0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

1.90	14.30	0	W/	TAPE & REEL	1734062-3	
2.20	13.95	0.35	W/O	TUBE	1734062-2	OBSOLETED
				TAPE & REEL	1734062-1	OBSOLETED
DIM C	DIM B	DIM A	CAP	PACKAGE	PART NUMBER	NOTE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN F. YANG 10SEP2009		 TE Connectivity	
DIMENSIONS: MM		CHK S. CHIEN 10SEP2009			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD W. KODAMA 10SEP2009		NAME USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE	
		PRODUCT SPEC 108-57481			
0 PLC ± - 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 3°		QUALIFICATION TEST REPORT 501-57557		SIZE A3	
MATERIAL SEE NOTE		FINISH SEE NOTE		CAGE CODE 00779	
		WEIGHT 4.71 GRAMS		DRAWING NO C=1734062	
		CUSTOMER DRAWING		RESTRICTED TO —	
				SCALE —	
				SHEET 1 OF 24	
				REV G4	

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR






DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

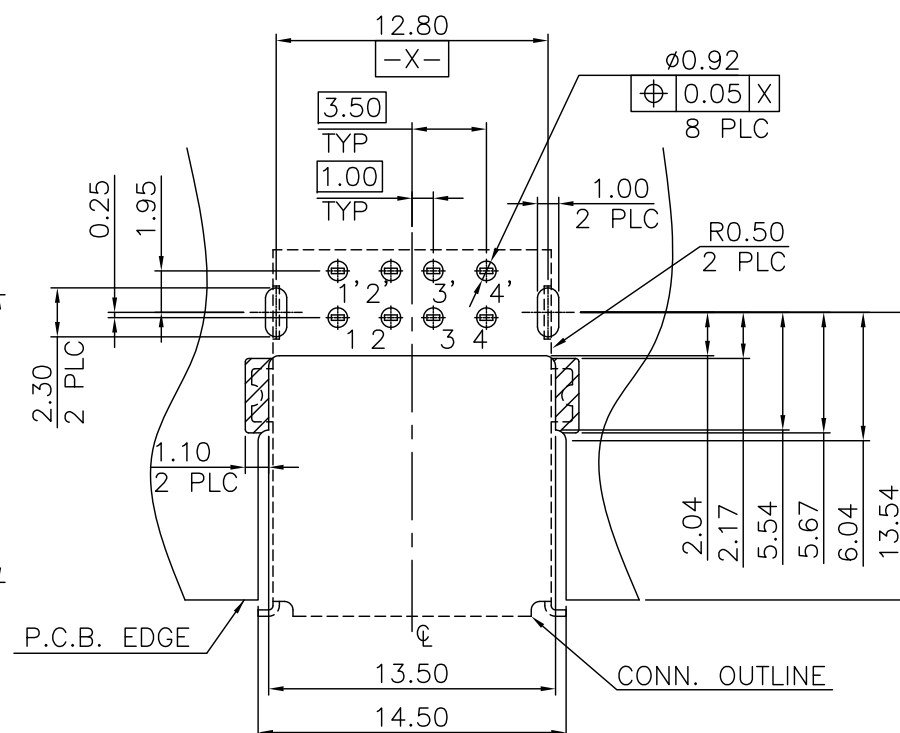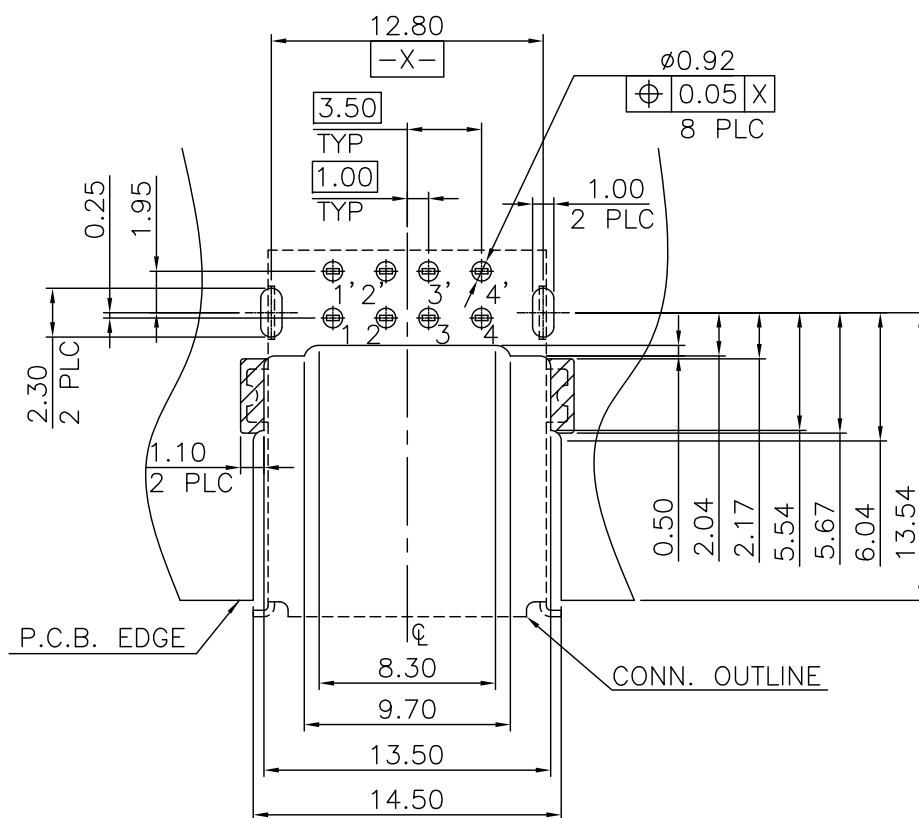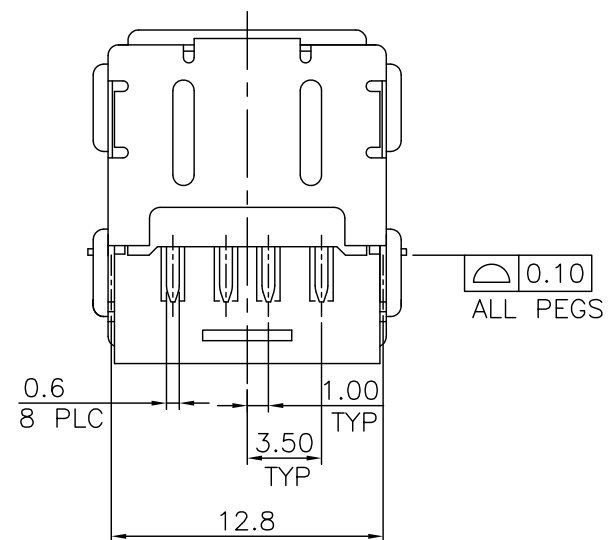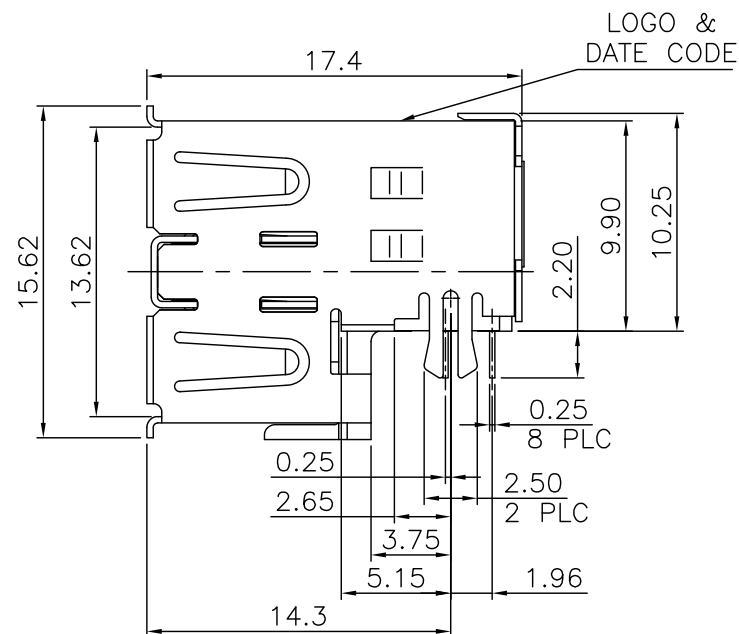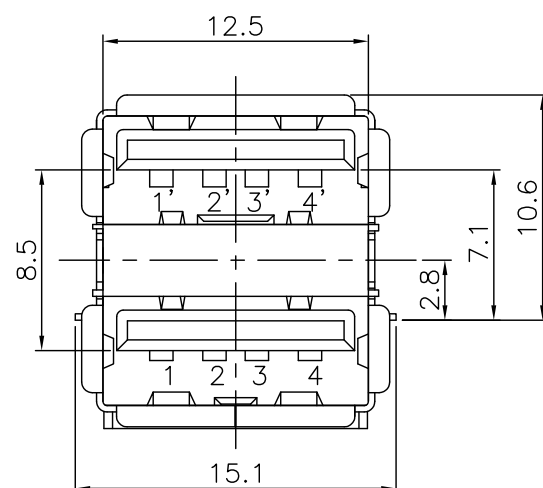

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2~1.4mm)
(COMPONENT SIDE) TOLERANCE±0.05mm

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2~1.4mm)
(COMPONENT SIDE) TOLERANCE±0.05mm

NOTE:

1. MATERIAL:

HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.

SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.

CONTACT: PHOSPHOR BRONZE.

FRONT SHIELD: BRASS.

REAR SHIELD: SPCC.

GROUNDING STRIP: BRASS.

2. FINISH:

CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA.

3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS,

WITH ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL.

FRONT SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.

0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.

REAR SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.

0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.

GROUNDING STRIP: 0.762μm [30μ"] MIN. NICKEL PLATING.

0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.

3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

OBSOLETE	TUBE	1-1734062-2
	TAPE & REEL	1-1734062-1
NOTE	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

QUALIFICATION TEST REPORT

WEIGHT 4.71 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, A SERIES,
STACKED, OFFSET TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C=1734062

SCALE

SHEET

2 OF 24

REV

G4

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , -



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION


DATE

DWN

APVD


SEE SHEET 1.

LOGO &
DATE CODE



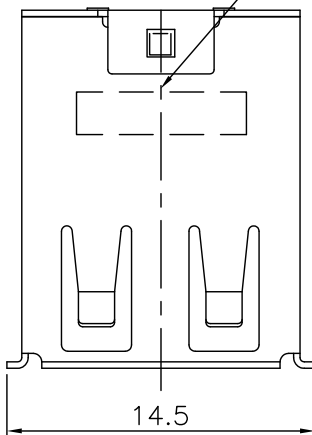


NOTE:

- MATERIAL:
HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
FRONT SHIELD: BRASS.
REAR SHIELD: SPCC.
GROUNDING STRIP: BRASS.
- FINISH:
CONTACT: 0.76μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA.
3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED 1.27mμ [50μ"] MIN. NICKEL.
FRONT SHIELD: 0.76μm [30μ"] MIN. NICKEL PLATING.
0.76μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
REAR SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.
0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
GROUNDING STRIP: 0.762μm [30μ"] MIN. NICKEL PLATING.
0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
- REFLOW SOLDER CAPABLE TO 260°C PER TE
SPEC 109-201, CONDITION B.

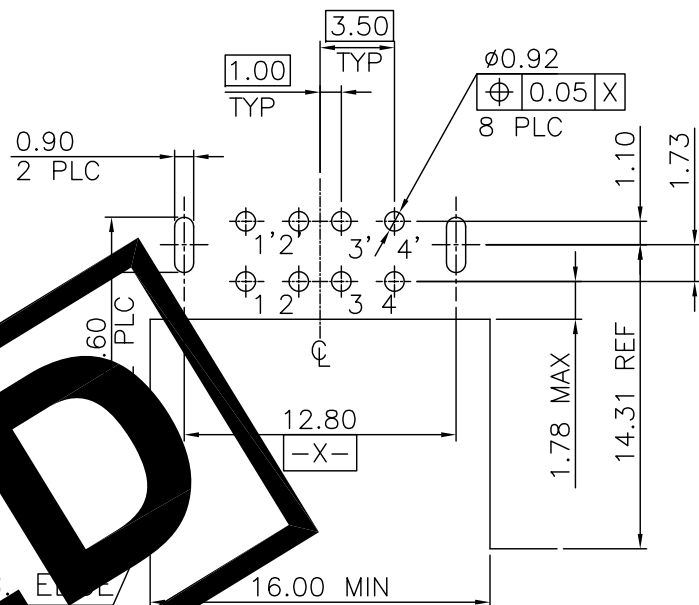

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2mm)
(COMPONENT SIDE) TOLERANCE±0.05mm

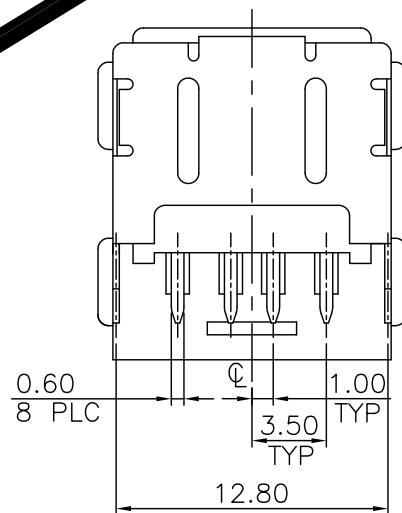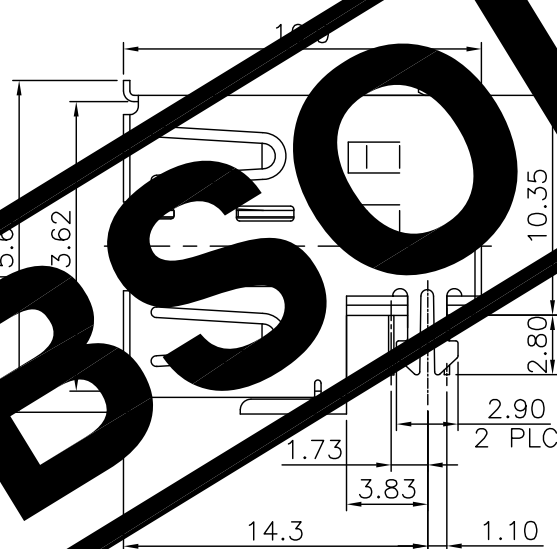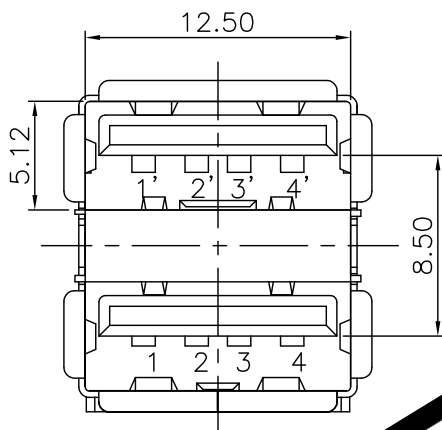

OBSOLETE	—TRAY—	2-1734062-2
OBSOLETE	—TUBE—	2-1734062-1
	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

QUALIFICATION TEST REPORT

WEIGHT 4.71 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, A SERIES,
STACKED, OFFSET TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C=1734062


SCALE

SHEET

3 OF 24

REV G4

DIMENSIONS:
MM



MATERIAL

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.35
2 PLC ± 0.25
3 PLC ± -
4 PLC ± -
ANGLES ± 3°

FINISH

SEE NOTE

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR




DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

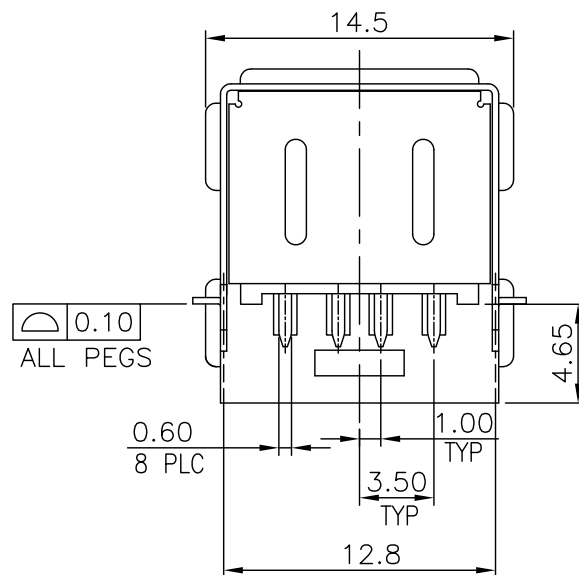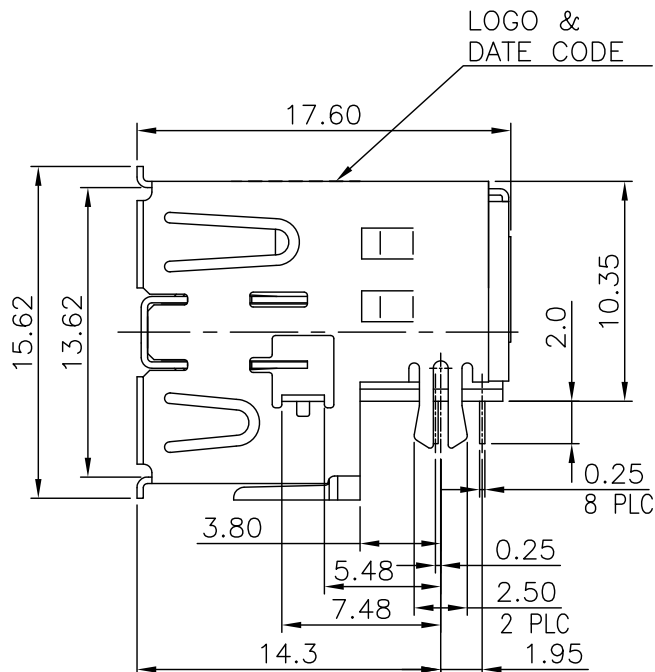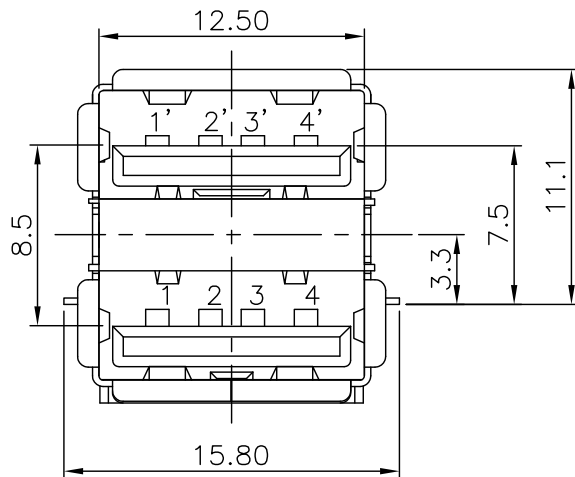

NOTES:

1. MATERIAL:

HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.

SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.

CONTACT: PHOSPHOR BRONZE.

FRONT SHIELD: BRASS.

REAR SHIELD: SPCC.

GROUNDING STRIP: STAINLESS.

2.

FINISH:

CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA.

3.048μm [120μ"] MIN. MATTE TIN PLATING ON SOLDER TAILS,

1.27μm [50μ"] MIN. NICKEL UNDERPLATED WITH ENTIRE CONTACT .

FRONT SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.

0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.

REAR SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.

0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.

3.

FINISH:

CONTACT: 0.254μm [10μ"] MIN. GOLD PLATING ON CONTACT AREA.

3.048μm [120μ"] MIN. MATTE TIN PLATING ON SOLDER TAILS,

1.27μm [50μ"] MIN. NICKEL UNDERPLATED WITH ENTIRE CONTACT.

FRONT SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.

0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.



SPUTTERING/BLACK PLATING IN FRONT SURFACE.

REAR SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.

0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.

GROUNDING STRIP: SPUTTERING/BLACK PLATING IN FRONT SURFACE.

4. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

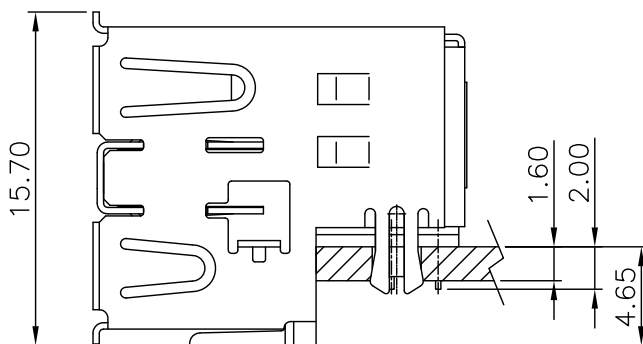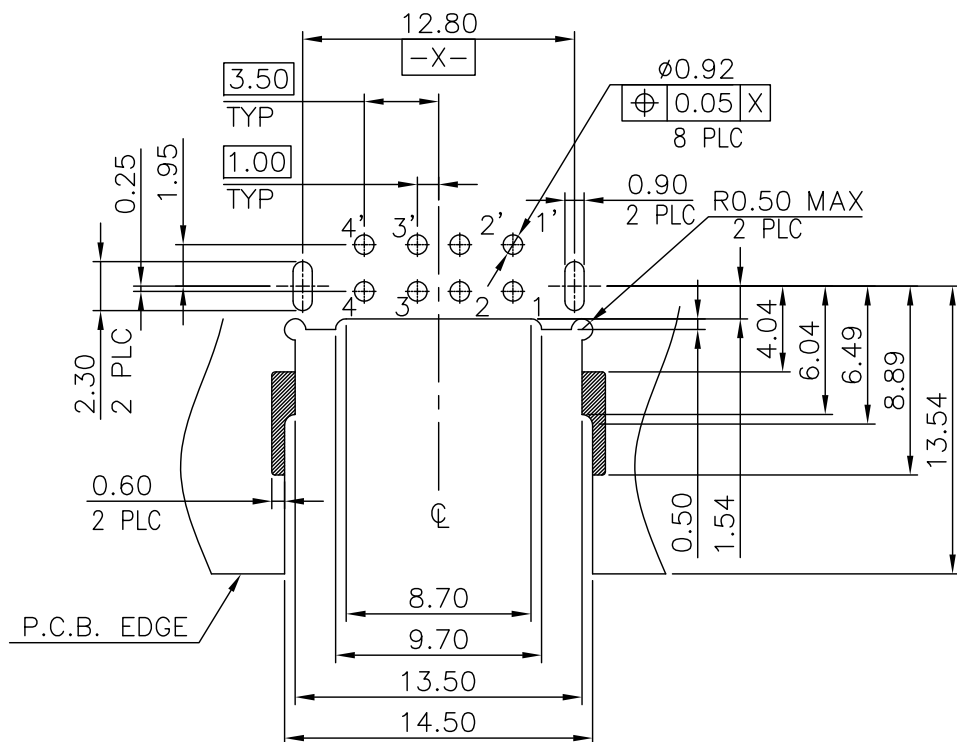

RECOMMEND P.C.B LAYOUT (THICKNESS 1.4~1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05mm

OBSOLETE	3	TAPE & REEL	3-1734062-4
OBSOLETE	2	TAPE & REEL	3-1734062-3
	2	TUBE	3-1734062-2
		TRAY	3-1734062-1
	FINISH	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

QUALIFICATION TEST REPORT

WEIGHT 4.71 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, A SERIES,
STACKED, OFFSET TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C=1734062

SCALE

SHEET

4 OF 24

REV

G4

RELEASED FOR PUBLICATION

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

	DIST
--	------

REVISIONS

P

1	TR
---	----

DESCRIPTION

DATE _____

	DW
--	----

N	A
---	---

SEE SHEET 1.



NOTES:

1. MATERIAL:
HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
FRONT SHIELD: BRASS.
REAR SHIELD: SPCC.
GROUNDING STRIP: BRASS.
2. FINISH:
CONTACT: $0.762\mu\text{m}$ [30μ "] MIN. GOLD PLATING ON CONTACT AREA.
 $3.048\mu\text{m}$ [120μ "] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
WITH ENTIRE CONTACT UNDERPLATED $1.27\mu\text{m}$ [50μ "] MIN. NICKEL.
FRONT SHIELD: $0.762\mu\text{m}$ [30μ "] MIN. NICKEL PLATING.
 $0.762\mu\text{m}$ [30μ "] MIN. Cu UNDER PLATING OVERALL.
REAR SHIELD: $0.762\mu\text{m}$ [30μ "] MIN. NICKEL PLATING.
 $0.762\mu\text{m}$ [30μ "] MIN. Cu UNDER PLATING OVERALL.
GROUNDING STRIP: $0.762\mu\text{m}$ [30μ "] MIN. NICKEL PLATING.
 $0.762\mu\text{m}$ [30μ "] MIN. Cu UNDER PLATING OVERALL.
3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

OBSOLETE	TUBE	4-1734062-1
	PACKAGE	PART NUMBER

	DWN
--	-----

CHK

APV

PRODUCT SPEC

~~QUALIFICATION TEST REPORT~~

NAME



TE Connectivity

USB CONNECTOR, A SERIES,
STACKED, OFFSET TYPE

SIZE	
------	--

CAGE CODE

DRAWING NO

RESTRICTED TO

A.3 00779 ©=1734062

CUSTOMER DRAWING

SCALE

SHEET

5 OF 2

4	REV
---	-----

AMP 1470-19 REV 31MAR2000

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR






DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

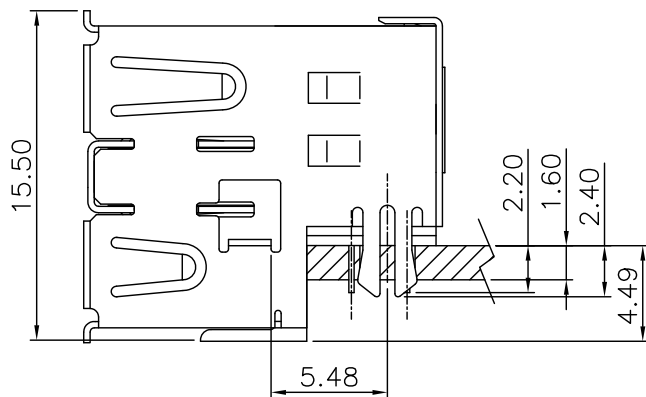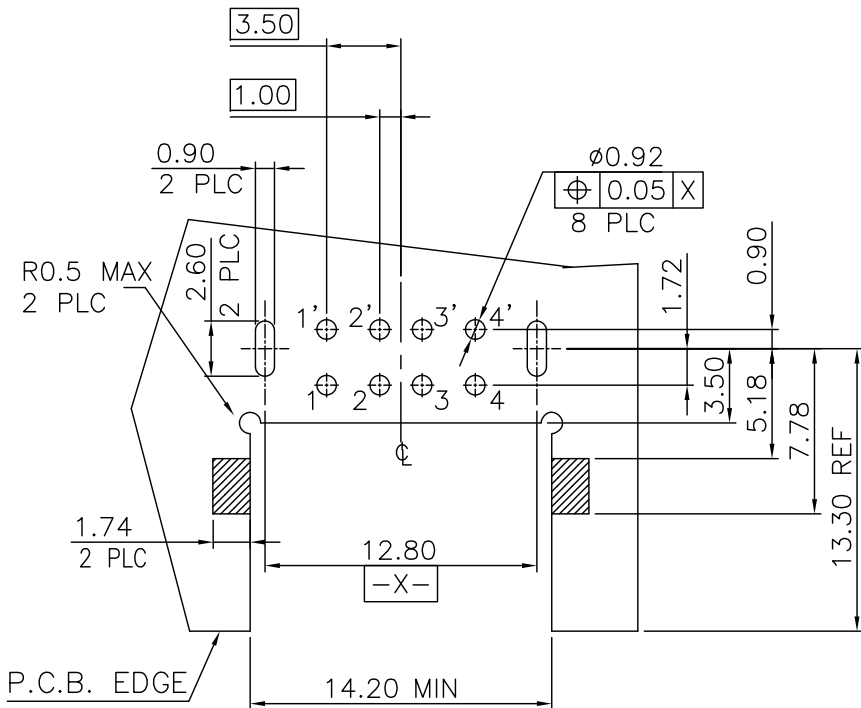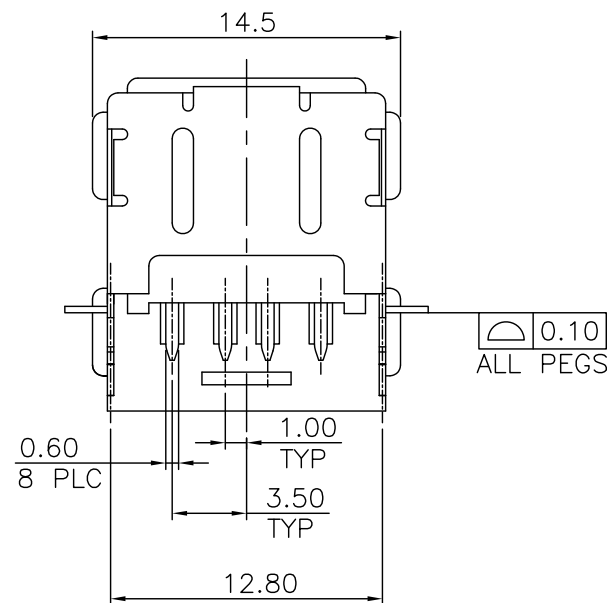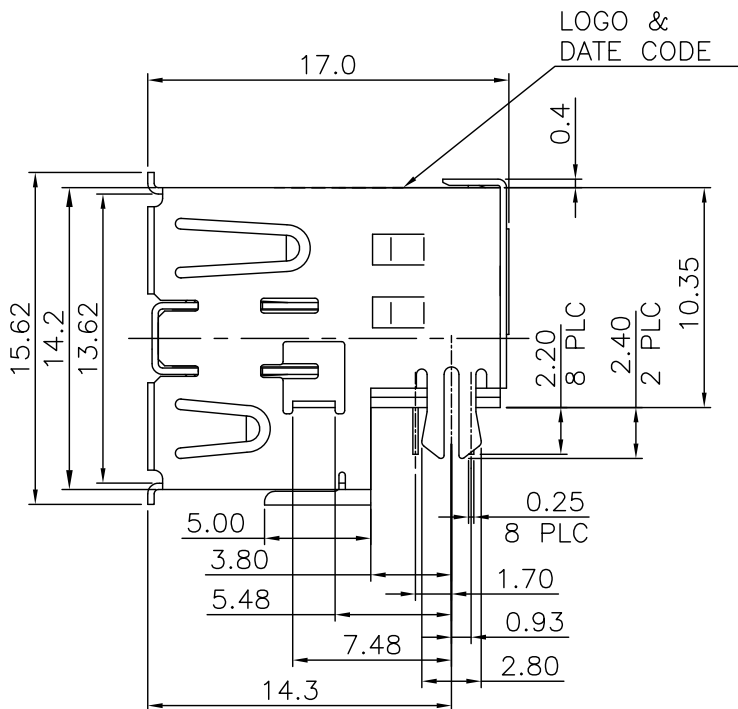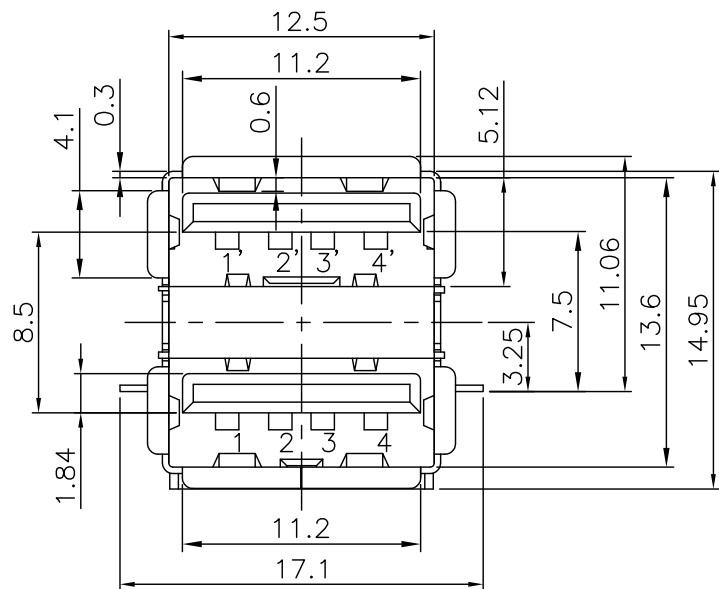

RECOMMENDED MOUNT DIMENSION

NOTES:

- MATERIAL:
HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
FRONT SHIELD: SUS.
REAR SHIELD: SPCC.
GROUNDING STRIP: SUS.
- FINISH:
CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA.
3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
WITH ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL.
FRONT SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING OVERALL.
REAR SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.
0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
- REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

RECOMMEND P.C.B LAYOUT (THICKNESS 1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05mm

OBSOLETE	TAPE & REEL	4-1734062-2
	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

QUALIFICATION TEST REPORT

WEIGHT 4.71 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, A SERIES,
STACKED, OFFSET TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C-1734062

SCALE

SHEET

6 of 24

REV

G4

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE



DWN

APVD





SEE SHEET 1.

NOTES:


- MATERIAL:
HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
FRONT SHIELD: SUS.
REAR SHIELD: SPCC.
GROUNDING STRIP: SUS.
- FINISH:
CONTACT: $0.762\mu\text{m}$ [30μ] MIN. GOLD PLATING ON CONTACT AREA,
 $2.540\mu\text{m}$ [100μ] MIN. BRIGHT TIN PLATING ON SOLDER TAILS,
WITH ENTIRE CONTACT UNDERPLATED $1.27\mu\text{m}$ [50μ] MIN. NICKEL.
FRONT SHIELD: $0.762\mu\text{m}$ [30μ] MIN. NICKEL PLATING OVERALL.
REAR SHIELD: $0.762\mu\text{m}$ [30μ] MIN. NICKEL PLATING,
 $0.762\mu\text{m}$ [30μ] MIN. Cu UNDER PLATING OVERALL.
- REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

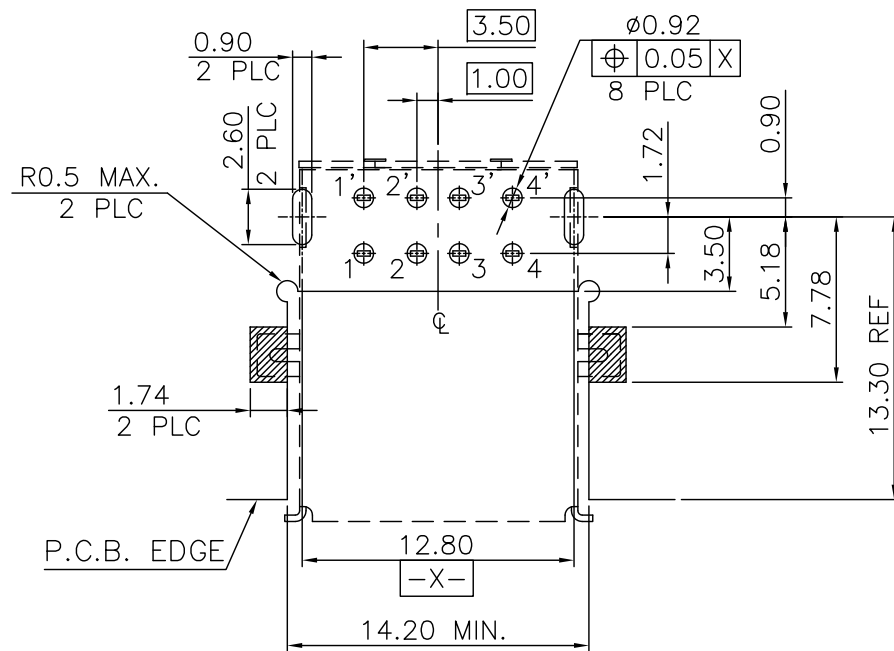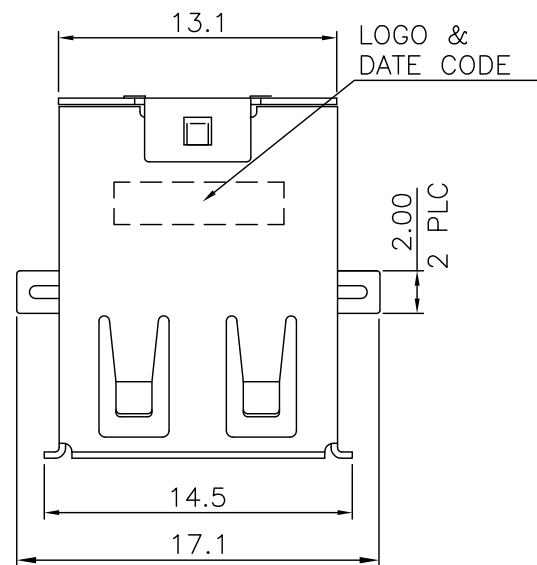

RECOMMEND P.C.B LAYOUT (THICKNESS 1.6mm)
(COMPONENT SIDE) TOLERANCE $\pm 0.05\text{mm}$

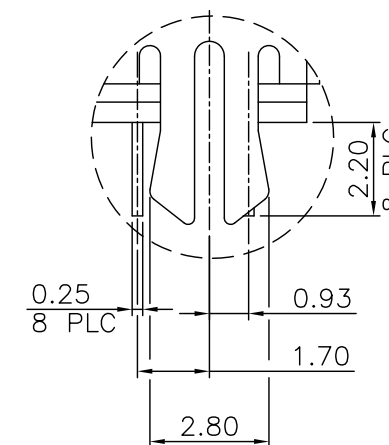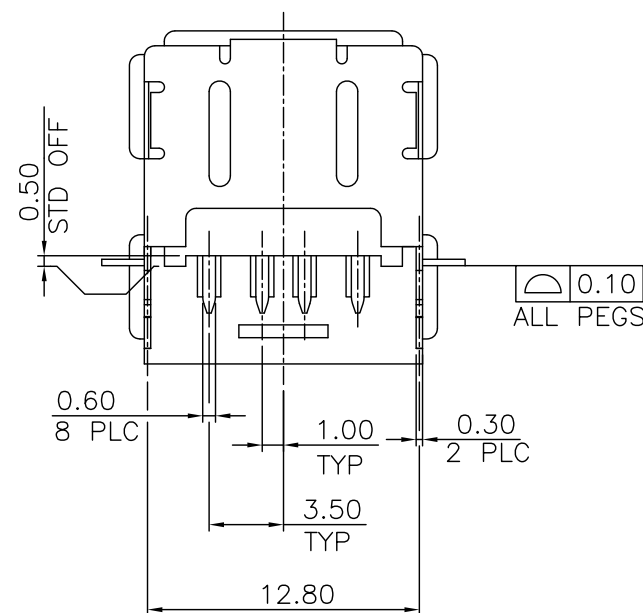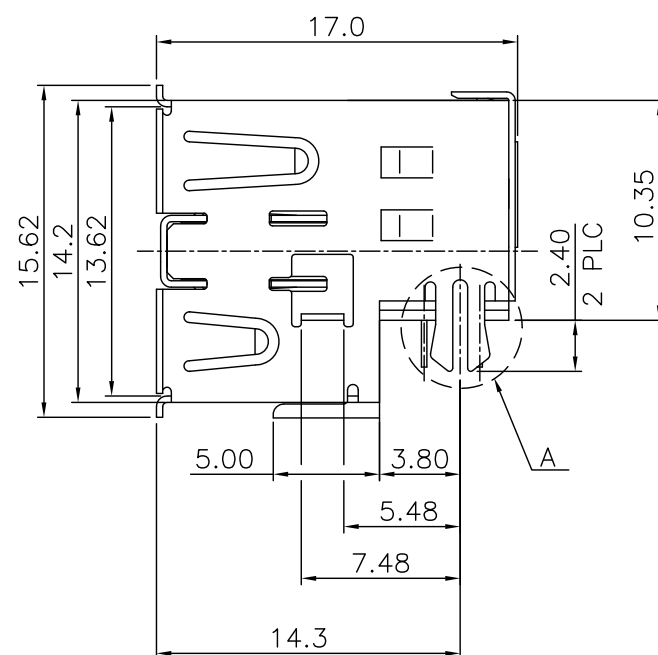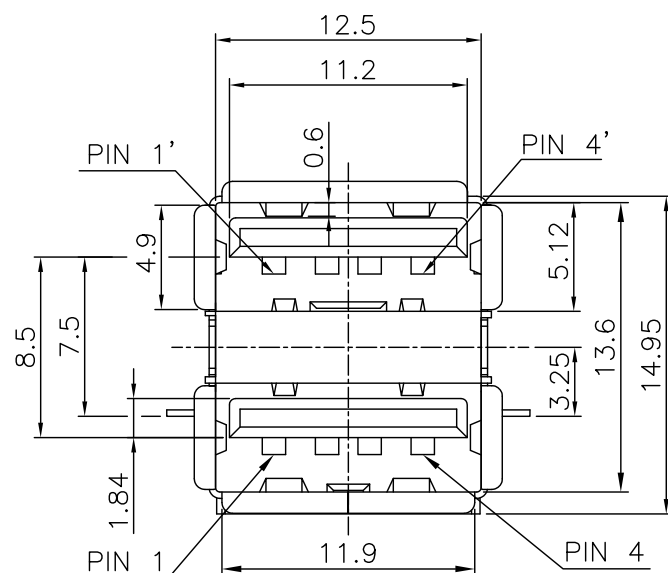

DETAIL A
SCALE 2:1

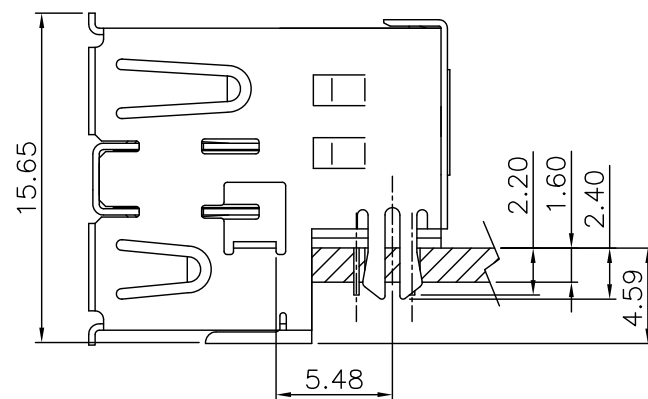

RECOMMENDED MOUNT DIMENSION

TAPE & REEL	4-1734062-3
PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

QUALIFICATION TEST REPORT

WEIGHT 4.25 GRAMS

CUSTOMER DRAWING

NAME

USB CONNECTOR, A SERIES,
STACKED, OFFSET TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734062

SCALE

SHEET

7 OF 24

REV G4

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , - .



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR





DESCRIPTION

DATE


DWN

APVD

SEE SHEET 1.

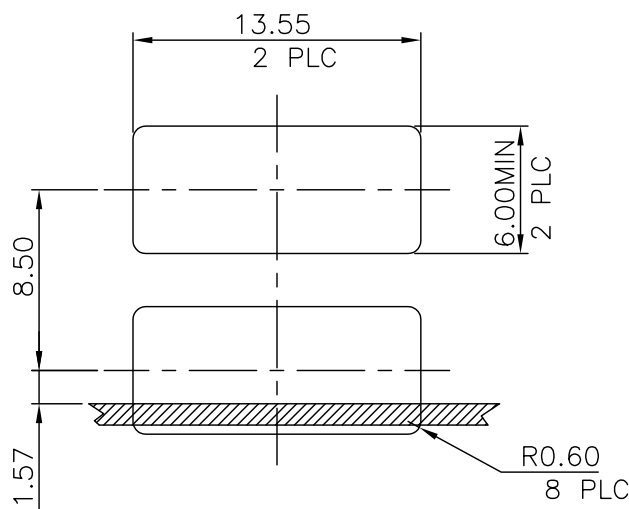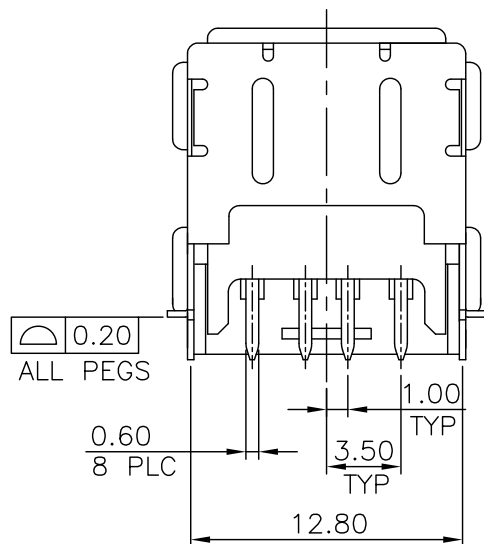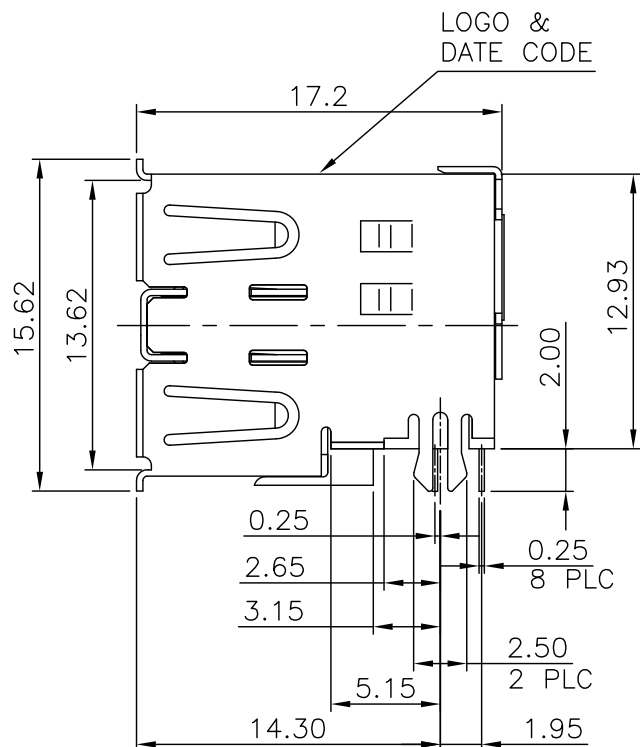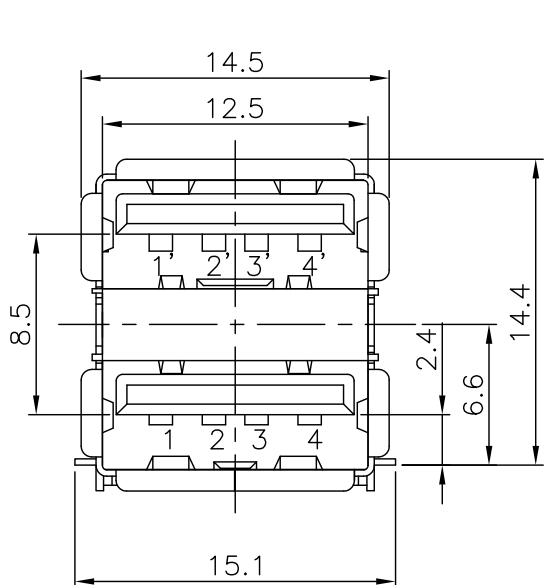

MOUNTING PANEL CUTOUT
(INTERNAL SIDE)

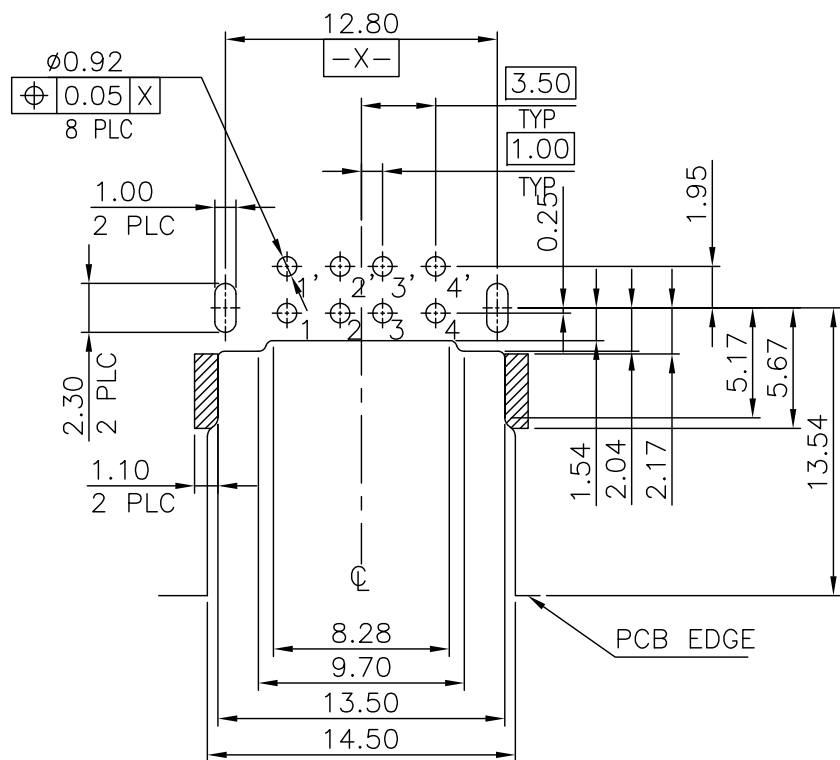

NOTES:

- MATERIAL:
HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
FRONT SHIELD: BRASS.
REAR SHIELD: SPCC.
GROUNDING STRIP: BRASS.
- FINISH :
CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA.
3.048μm [120μ"] MIN. BRIGHT-TIN PLATING ON SOLDER TAILS.
WITH ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL.
FRONT SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.
0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
REAR SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.
0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
GROUNDING STRIP: 0.762μm [30μ"] MIN. NICKEL PLATING.
0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
- REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

OBSOLETE	TRAY	5-1734062-2
OBSOLETE	TAPE & REEL	5-1734062-1
	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
		CHK				
DIMENSIONS: MM		APVD	NAME			
		PRODUCT SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE			
		QUALIFICATION TEST REPORT				
MATERIAL		WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
SEE NOTE		4.71 GRAMS	A3	00779	C=1734062	
FINISH		CUSTOMER DRAWING	SCALE		SHEET	REV
SEE NOTE					8 of 24	G4

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , - .



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR





DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

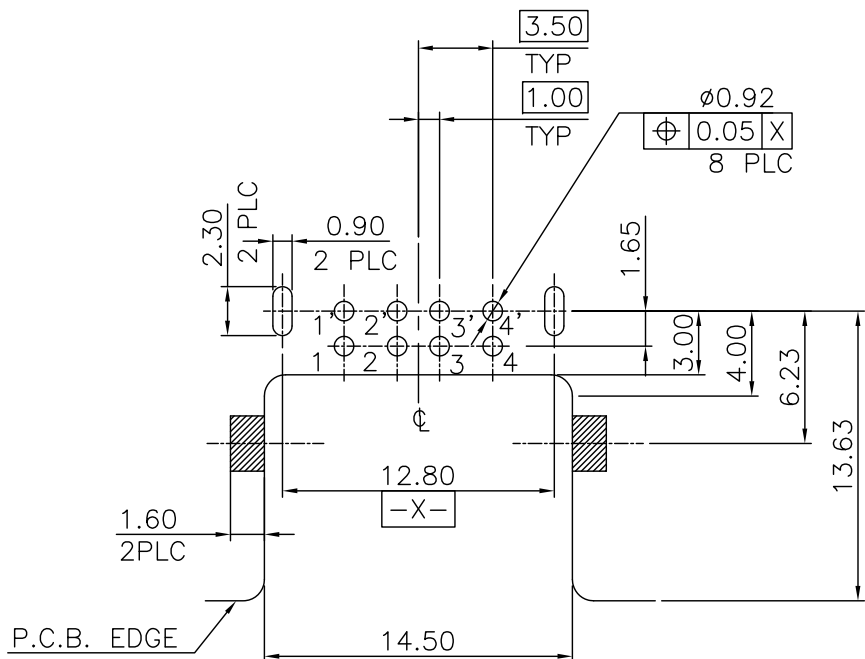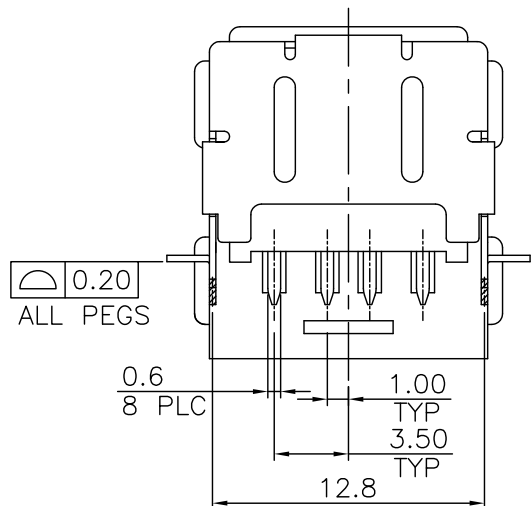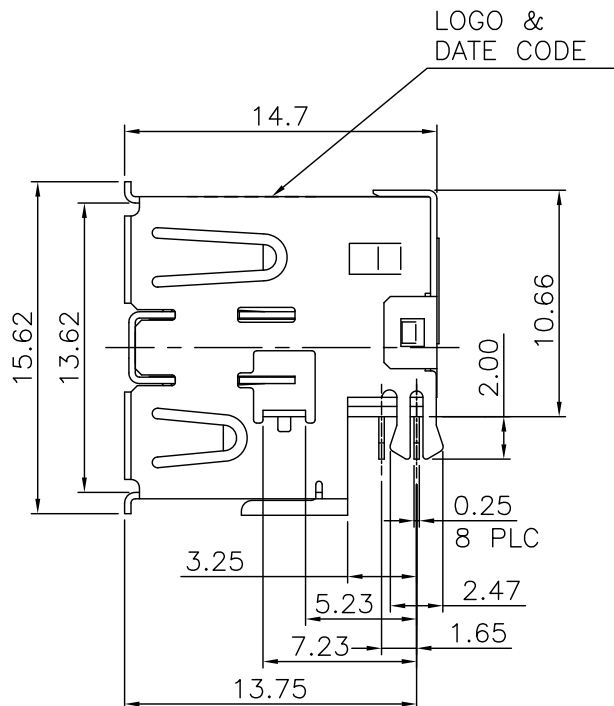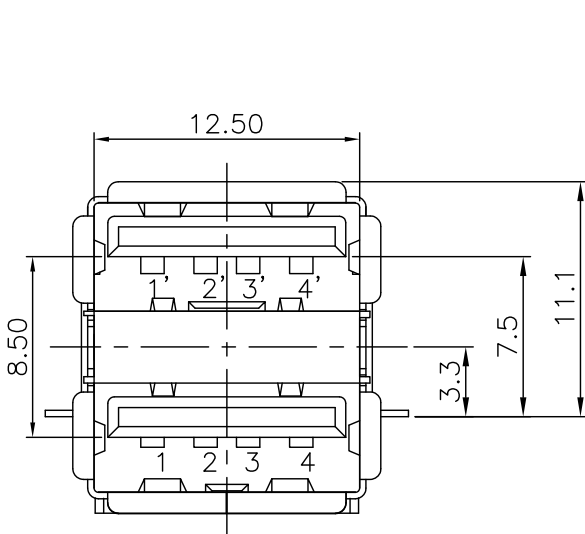

NOTES:

1.MATERIAL:

HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.

SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.

CONTACT: PHOSPHOR BRONZE.

FRONT SHELL: BRASS.

REAR SHELL: SPCC.

GROUNDING STRIP: STAINLESS.

2.FINISH:

CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA.

3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS,
WITH ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL.

FRONT SHELL: 0.762μm [30μ"] MIN. NICKEL PLATED.

0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.

REAR SHELL: 0.762μm [30μ"] MIN. NICKEL PLATED.

0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.

GROUNDING SHELL: 0.762μm [30μ"] MIN. NICKEL PLATED.

0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.

3. REFLOW SOLDER CAPABLE TO 260°C PER TE

SPEC 109-201, CONDITION B.

OBSOLETE TAPE & REEL 6-1734062-1

PACKAGE PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

QUALIFICATION TEST REPORT

WEIGHT 4.71 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, A SERIES,
STACKED, OFFSET TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C-1734062

SCALE

SHEET

9 of 24

REV G4

DIMENSIONS:

MM

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.35
2 PLC ± 0.25
3 PLC ± -
4 PLC ± -
ANGLES ± 3°








MATERIAL

SEE NOTE

FINISH

SEE NOTE

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2mm)
(COMPONENT SIDE) TOLERANCE ± 0.05mm

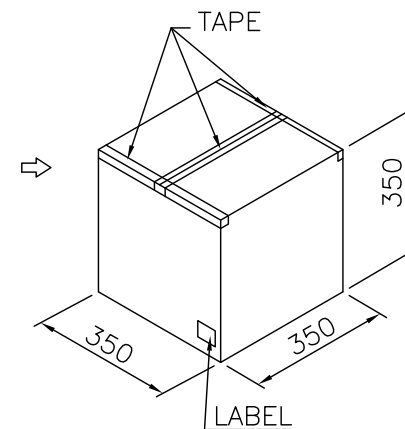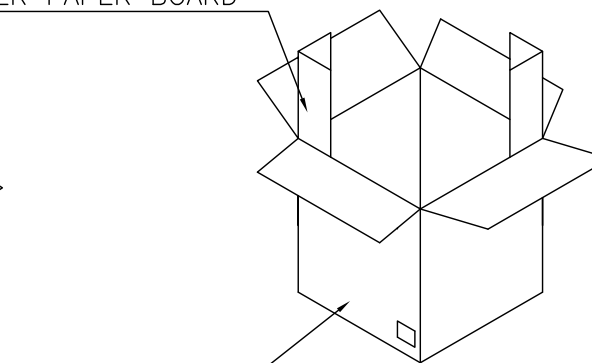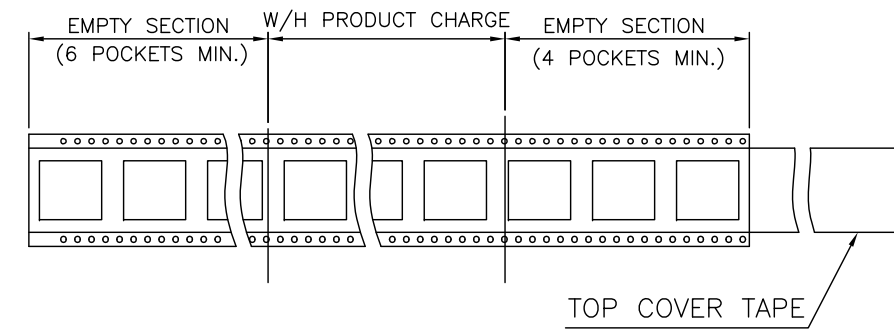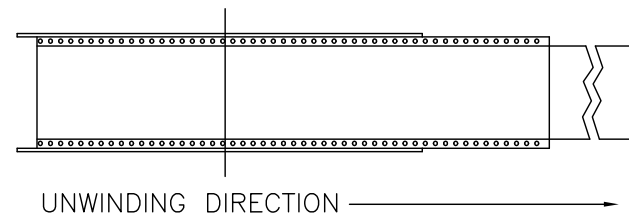

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		 TE Connectivity	
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		NAME	
0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —		PRODUCT SPEC —		USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE	
MATERIAL		APPLICATION SPEC —			
FINISH		WEIGHT —		SIZE	CAGE CODE
				DRAWING NO	
				RESTRICTED TO	
				A3 00779 C-1734062	
				—	
CUSTOMER DRAWING				SCALE	SHEET
				—	12 of 24
				REV	G4

ALL RIGHTS RESERVED.

REVISIONS

DESCRIPTION

DWN

SEE SHEET 1.



MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0	PLC
1	PLC
2	PLC
3	PLC
4	PLC

ANGLES	
FINISH	

CUSTOMER DRAWING

WEIGHT

USB CONNECTOR, A SERIES,
STACKED, OFFSET TYPE

RESTRICTED TO

C-1734062

SCALE

SHEET

13 OF 24

1	REV
---	-----

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE





DWN

APVD

SEE SHEET 1.


D

D

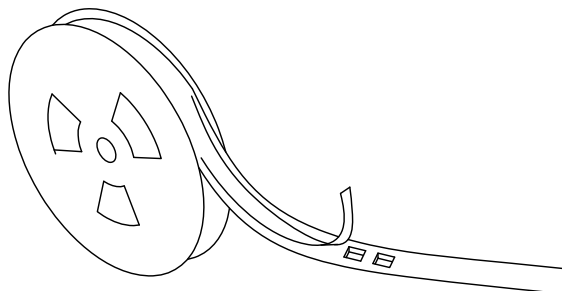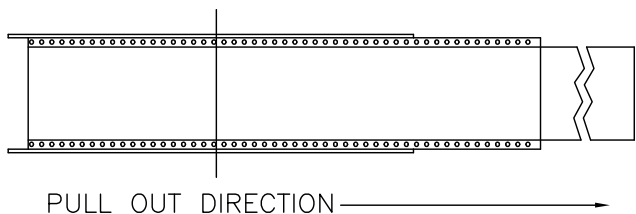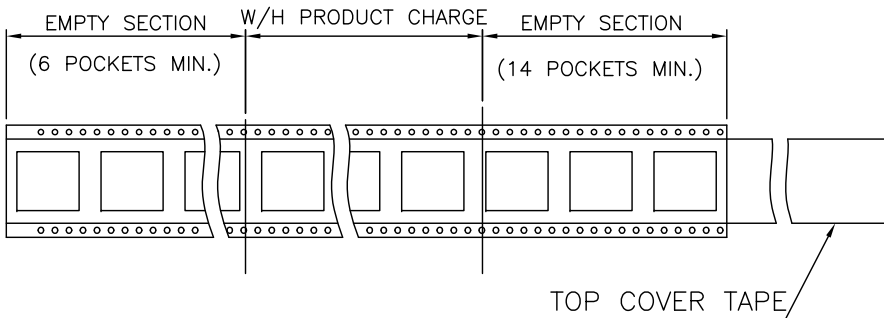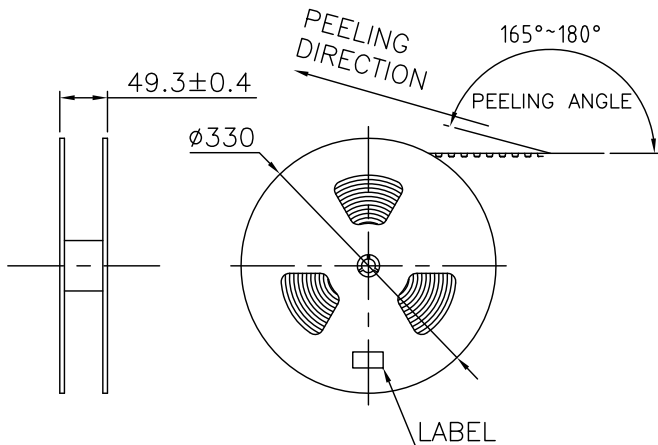


C


C

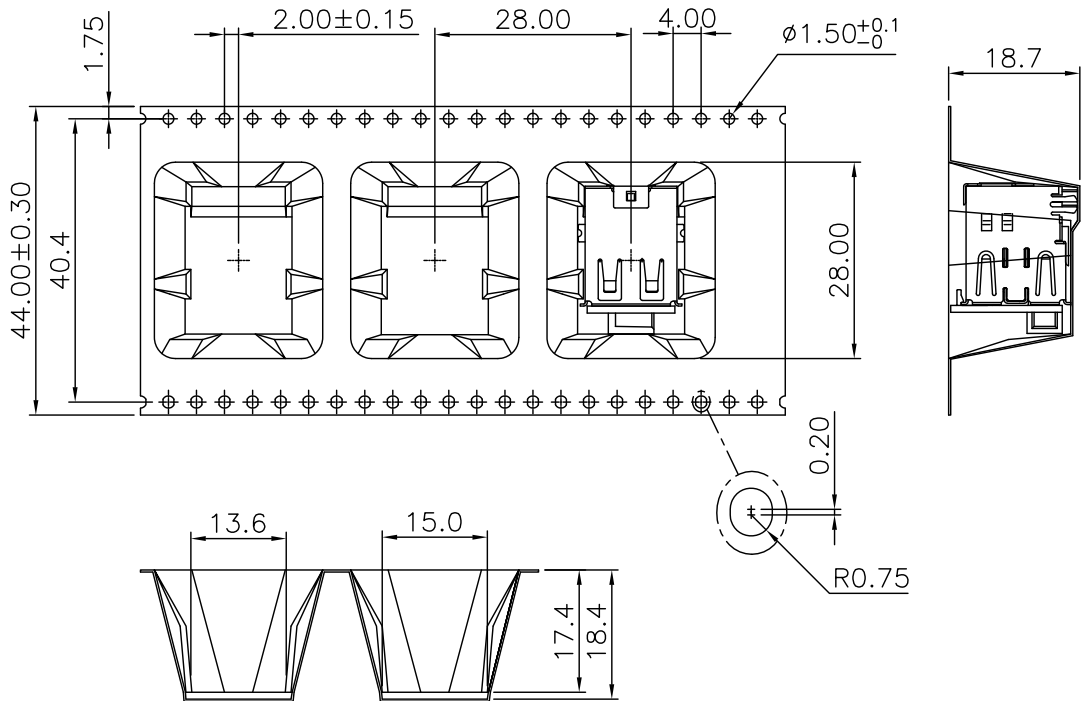

FOLDER PAPER BOARD



SHIPPING BOX

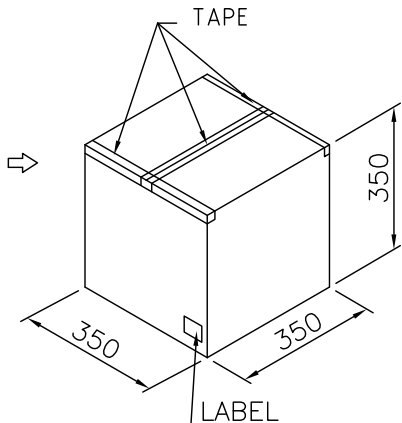

B

B

A

A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

DIMENSIONS:

MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC $\pm -$
1 PLC $\pm -$
2 PLC $\pm -$
3 PLC $\pm -$
4 PLC $\pm -$
ANGLES $\pm -$

MATERIAL

FINISH

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, A SERIES,
STACKED, OFFSET TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734062

SCALE

SHEET

14 of 24

REV

G4

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

D

D

C








C

B

B

A

A

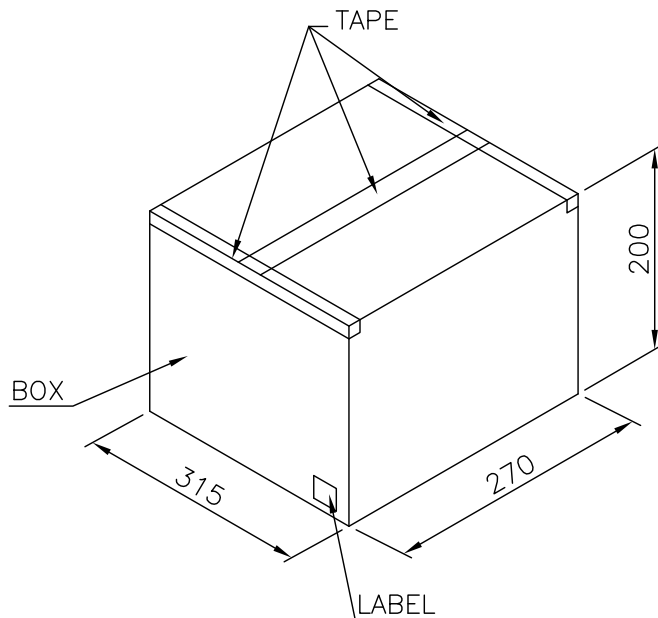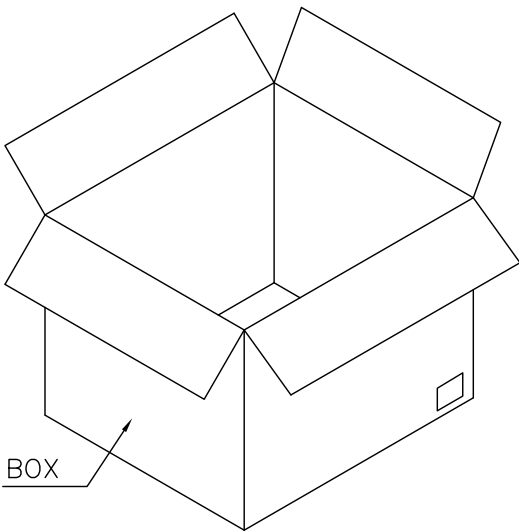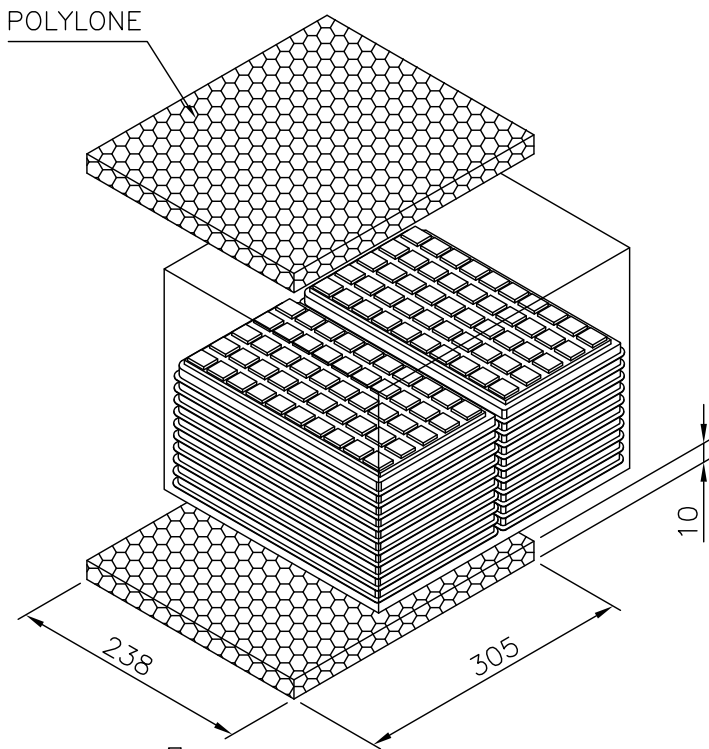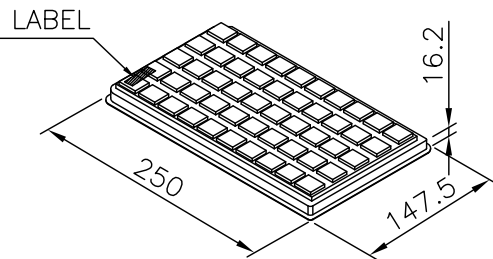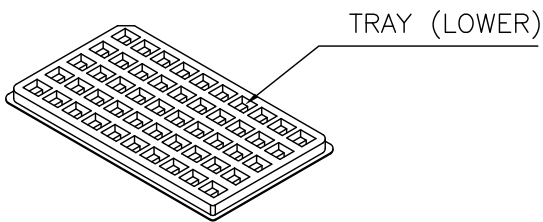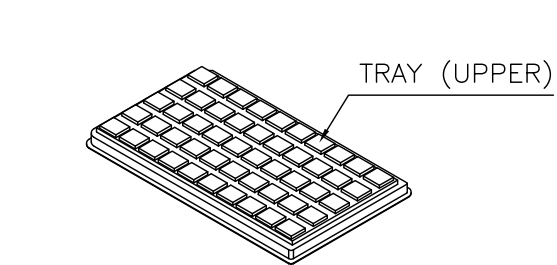

50	20	1000	6.82	4.71	2-1734062-2
PCS/ TRAY	TRAY/ BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity		
		CHK			
		APVD	NAME		
		PRODUCT SPEC			
		APPLICATION SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE		
		WEIGHT			
		CUSTOMER DRAWING	SIZE	CAGE CODE	DRAWING NO
			A3	00779	C=1734062
			SCALE	SHEET	REV
			—	15 of 24	G4

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , - .



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

D

D

C


C

B

B

A

A

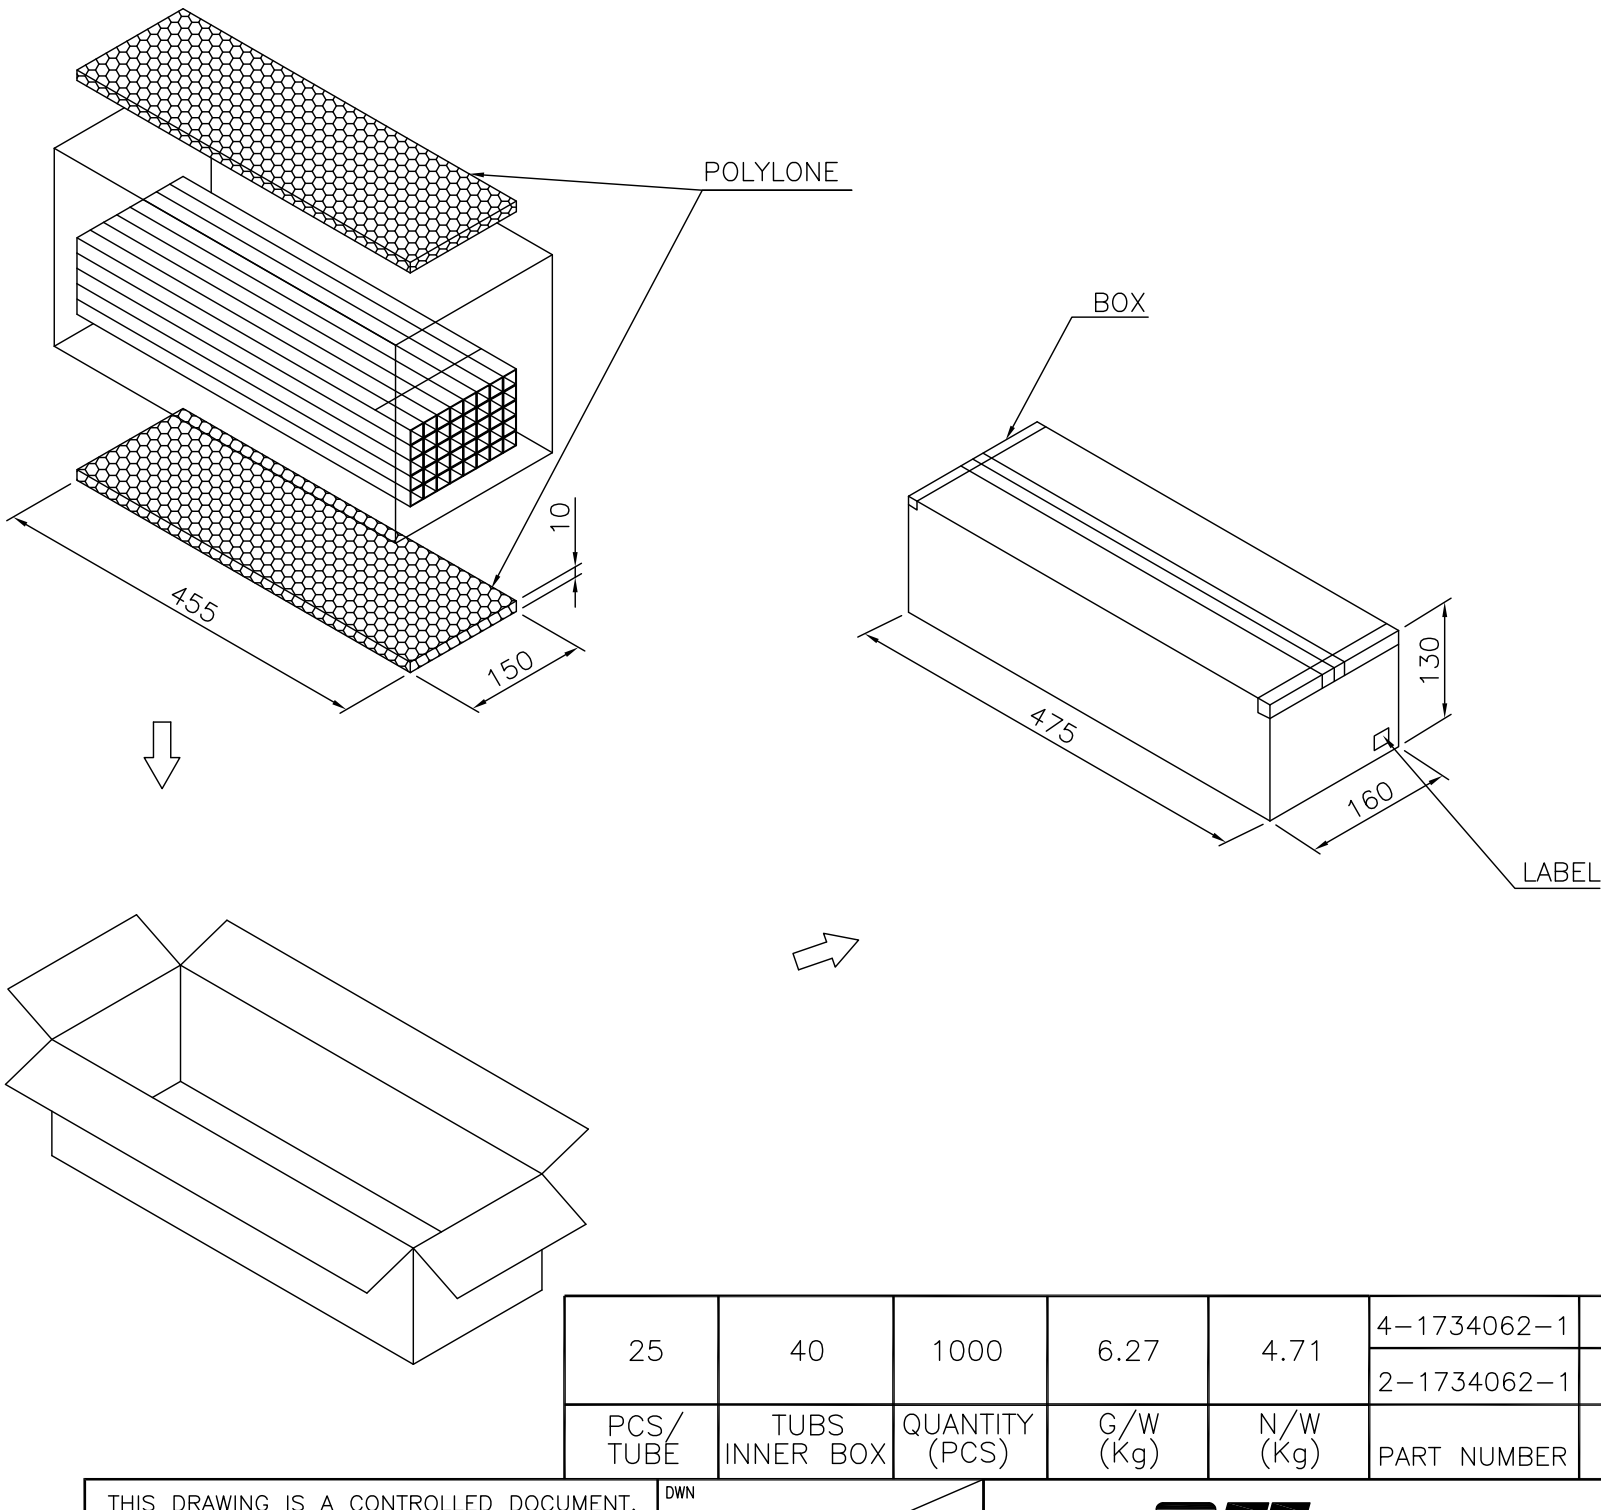

25	40	1000	6.27	4.71	4-1734062-1	OBSOLETE
PCS/ TUBE	TUBS INNER BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	2-1734062-1	
					PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		TE Connectivity			
DIMENSIONS: MM		CHK					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD					
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC — APPLICATION SPEC — WEIGHT —					
MATERIAL		FINISH		NAME USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE			
				SIZE A3	CAGE CODE 00779	DRAWING NO C=1734062	RESTRICTED TO —
CUSTOMER DRAWING				SCALE —	SHEET 16 of 24	REV G4	

4

3

2

1

THIS DRAWING IS UNPUBLISHED.






RELEASED FOR PUBLICATION

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
DW	—			SEE SHEET 1.		



D

D

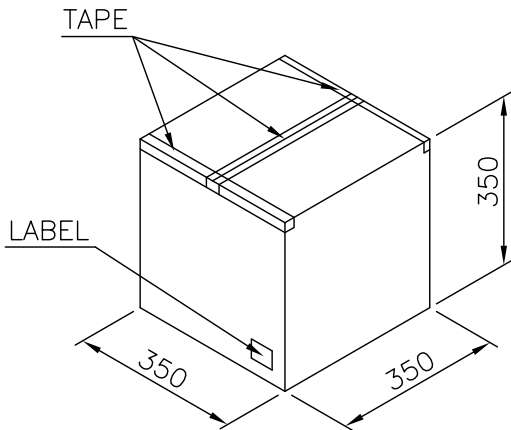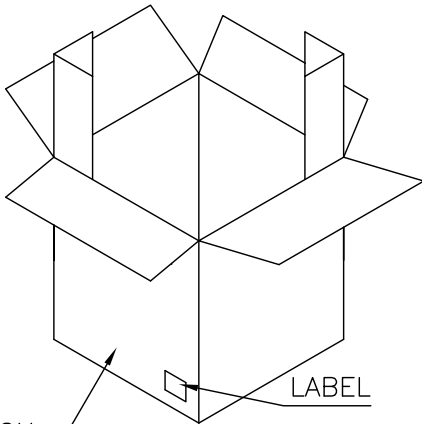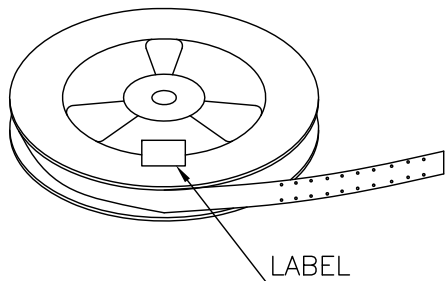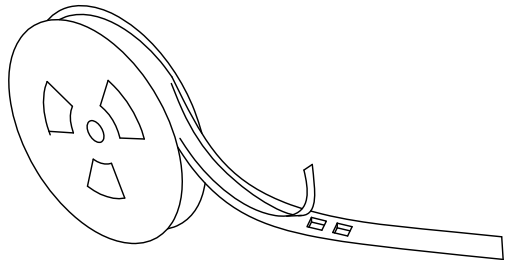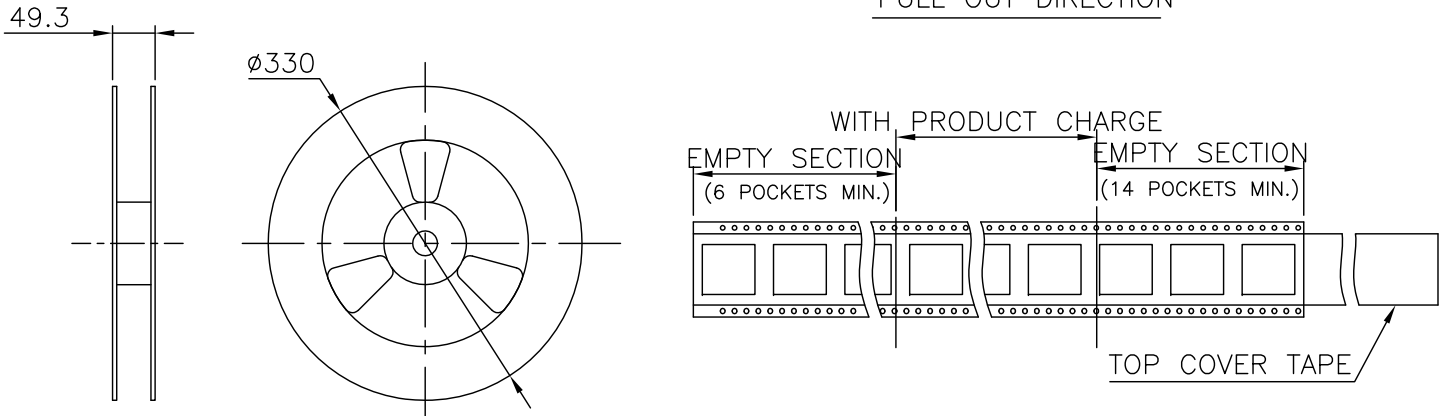

C


C

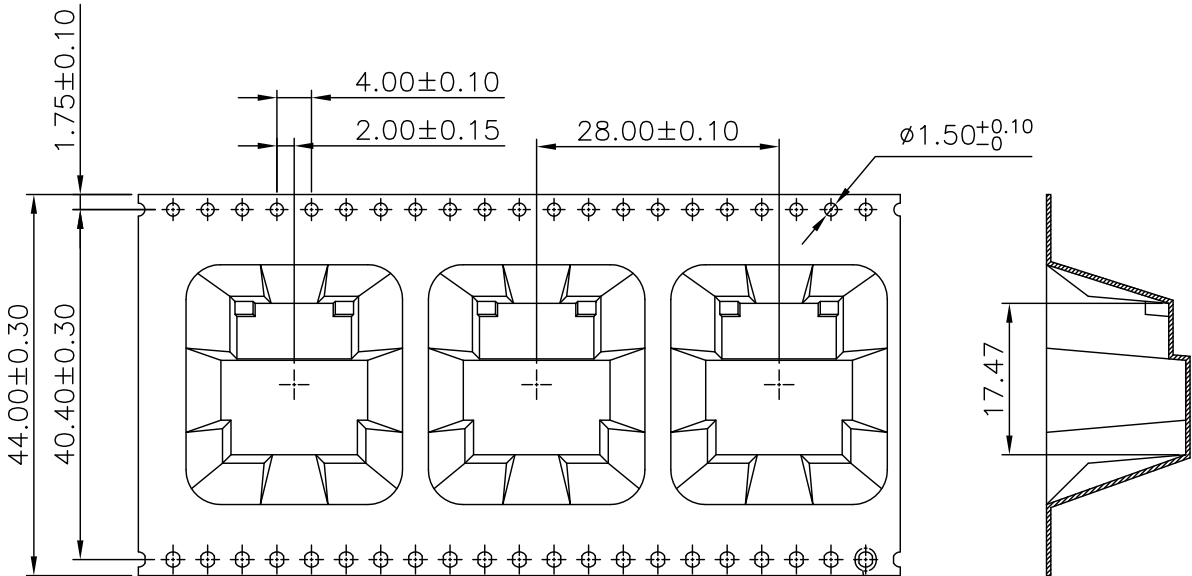

SHIPPING BOX
7 REELS / SHIPPING BOX

B

B

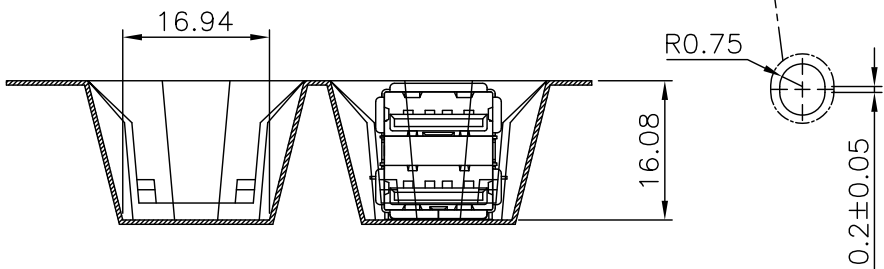

A

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
		CHK				
DIMENSIONS: MM		APVD	NAME			
		PRODUCT SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE			
		—				
MATERIAL		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO			
		—	A3 00779 C= 1734062			
FINISH		WEIGHT	SCALE SHEET 17 of 24 REV G4			
—		—	CUSTOMER DRAWING			

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , - .



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR


DESCRIPTION

DATE


DWN

APVD


SEE SHEET 1.

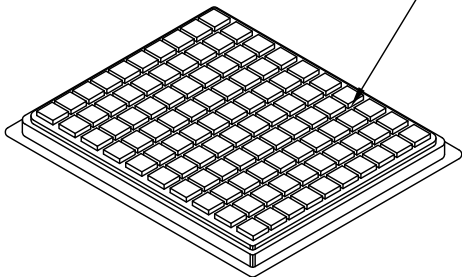


TRAY (UPPER)



USB

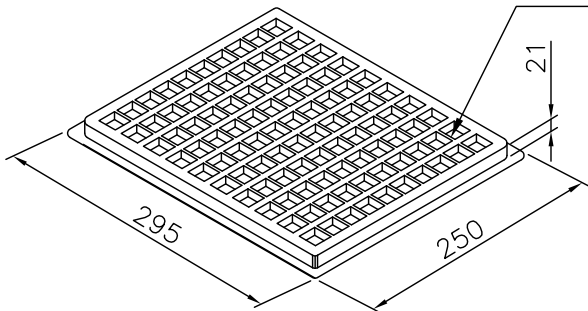


TRAY (LOWER)

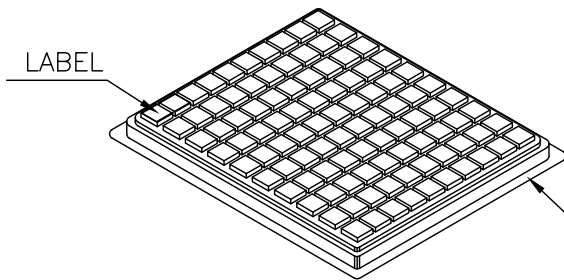



LABEL

TRAY

POLYLONE

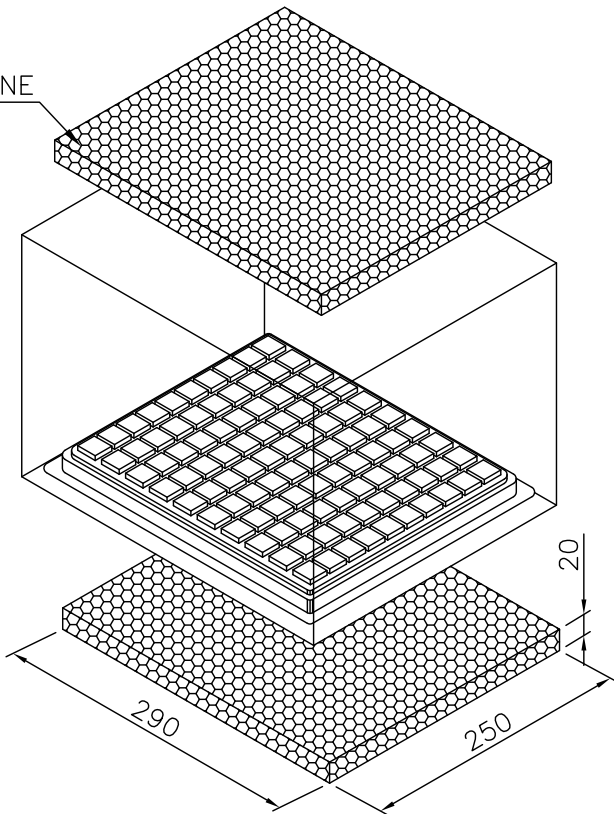

BOX

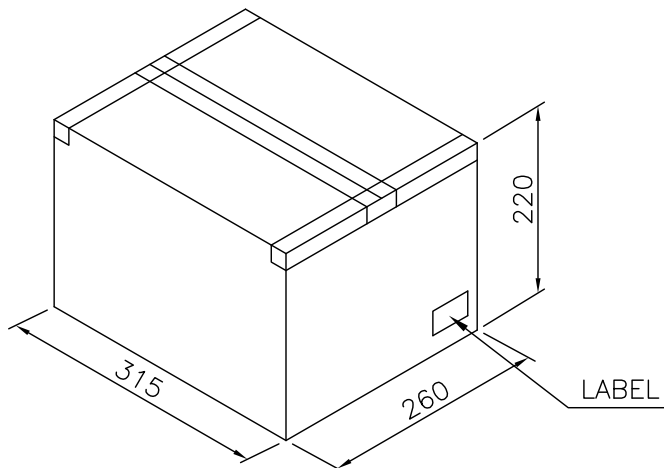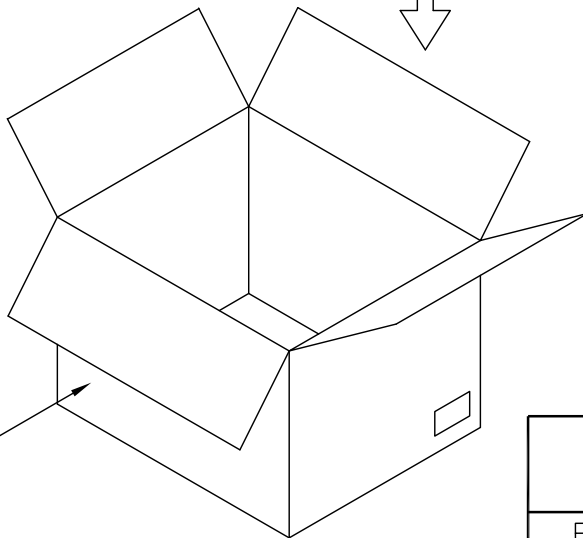

LABEL

100	10	1000	6.27	4.71	5-1734062-2	OBSOLETE
PCS/ TRAY	TRAY/ BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	3-1734062-1	
					PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± -
	4 PLC ± -
	ANGLES ± -
MATERIAL	FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, A SERIES,
STACKED, OFFSET TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C=1734062

SCALE

SHEET

18 of 24

REV

G4

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

49.4

ø330(13")

EMPTY SECTION
(7 POCKETS MIN.)



W/H PRODUCT CHARGE

EMPTY SECTION
(14 POCKETS MIN.)



TOP COVER TAPE

PULL OUT DIRECTION

ø1.50±0.10

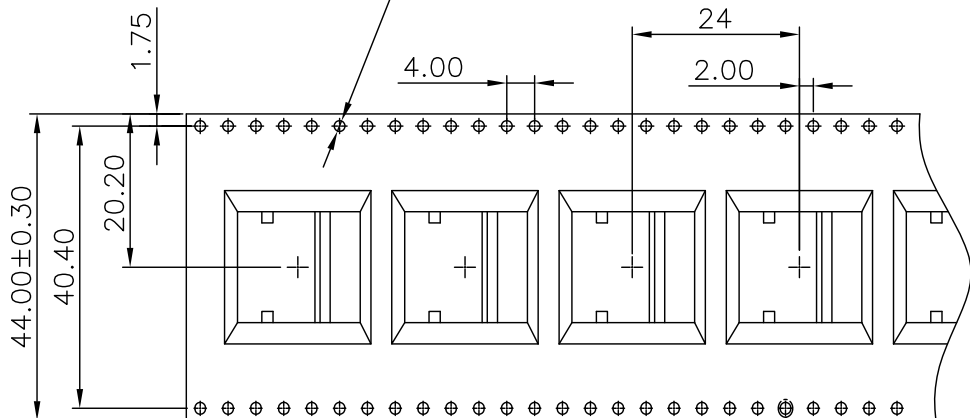

BOX

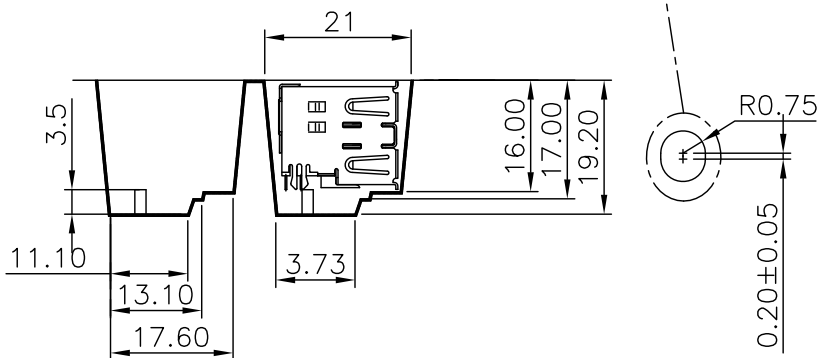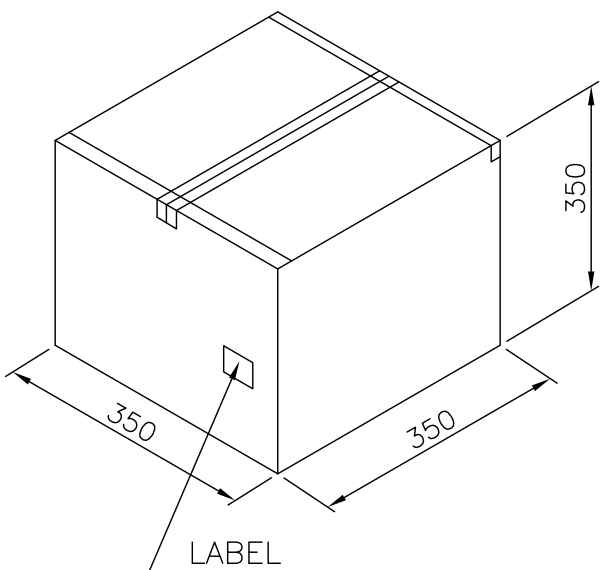

140	7	980	8.60	4.62	5-1734062-1	OBSOLETE
PCS/ REEL	REELS/ BOX	QUANTITY (PCS)	G/W (kg)	N/W (kg)	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, A SERIES,
STACKED, OFFSET TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C-1734062

SCALE

SHEET

19 of 24

REV

G4

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , -



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR



DESCRIPTION

DATE


DWN

APVD




SEE SHEET 1.

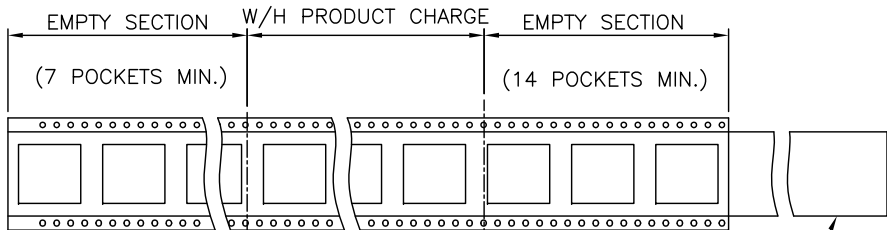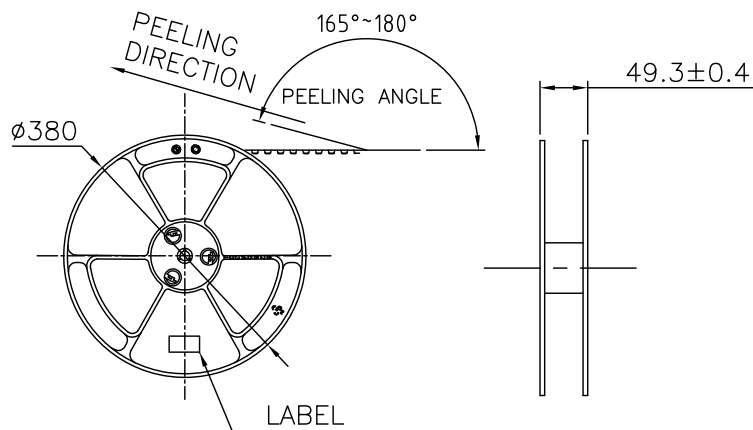


TOP COVER TAPE

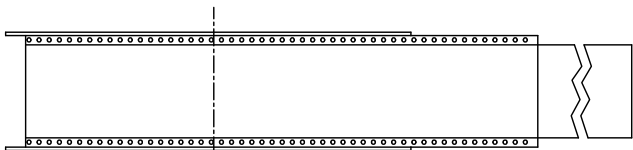

PULL OUT DIRECTION

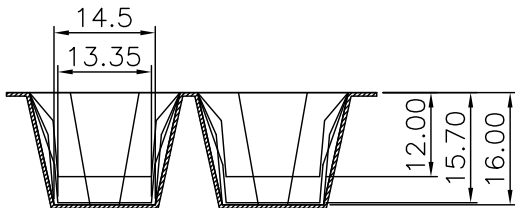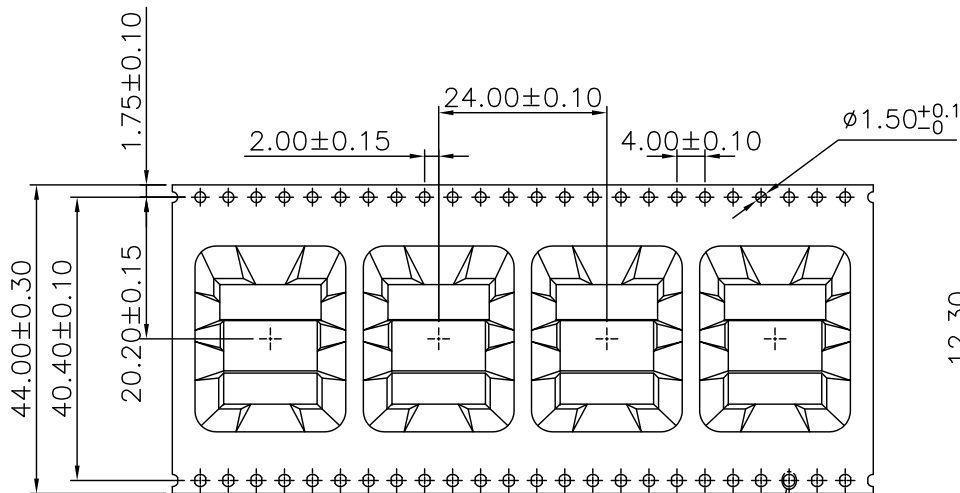

LABEL



FOLDER PAPER BOARD

SHIPPING BOX

TAPE

LABEL

11.20 Kg	6.10 Kg	200	7	1400 PCS	4-1734062-2	OBSOLETE
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS/CARTON	QUANTITY	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, A SERIES,
STACKED, OFFSET TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734062

SCALE

SHEET

20 of 24

REV

G4

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE


DWN

APVD

SEE SHEET 1.


D

D

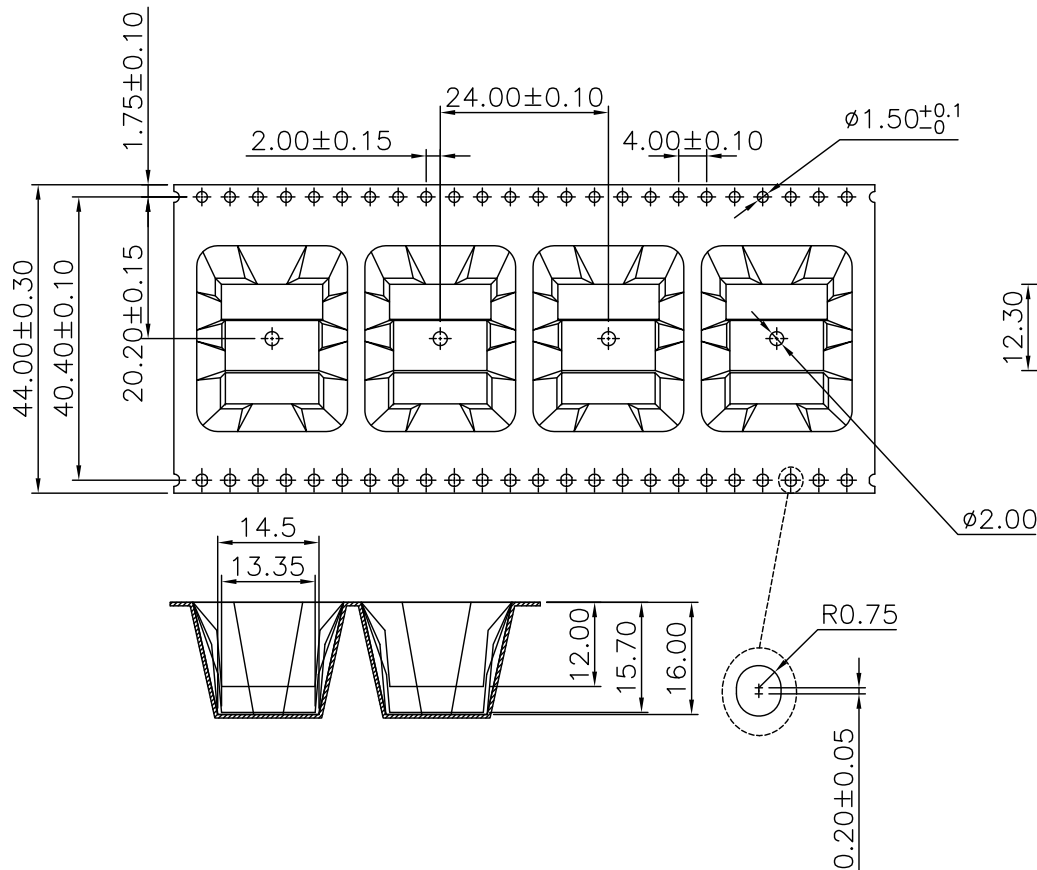


C

C

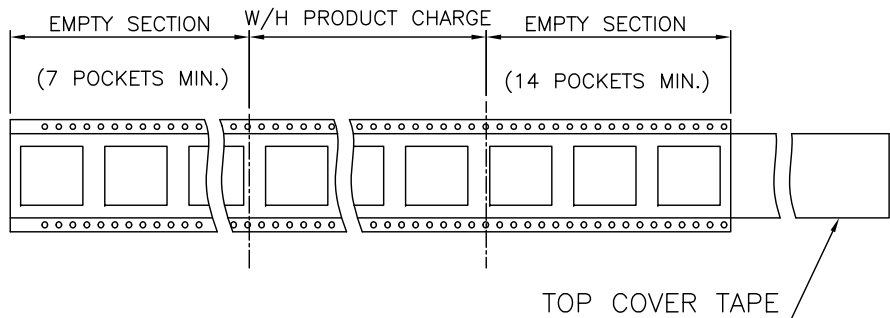

B

B

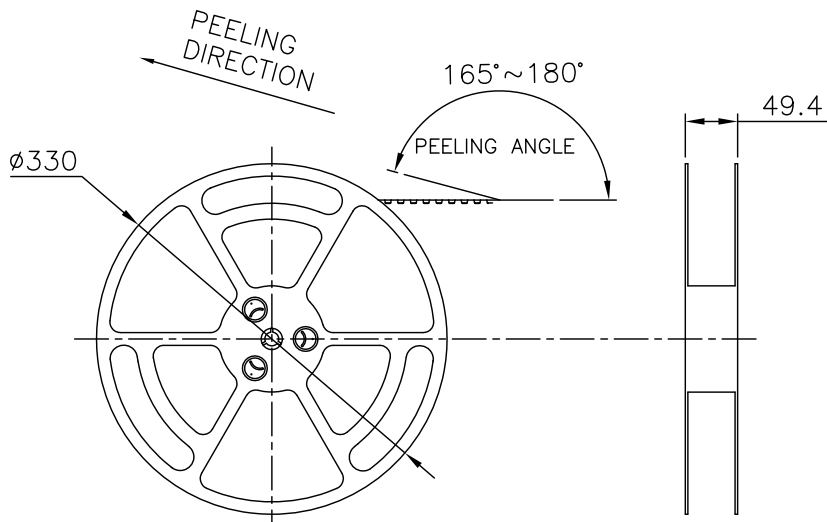

A

A

LABEL

FOLDER PAPER BOARD

SHIPPING BOX

TAPE

LABEL

7.01 Kg	2.98 Kg	100	7	700 PCS	4-1734062-3
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS /CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity		
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME		
0 PLC ± -		PRODUCT SPEC			
1 PLC ± -		—	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE		
2 PLC ± -		APPLICATION SPEC			
3 PLC ± -		—	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
4 PLC ± -		WEIGHT			
ANGLES ± -		—	A3 00779 C=1734062		
FINISH		—			
MATERIAL		CUSTOMER DRAWING	SCALE — SHEET 21 of 24 REV G4		

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , -



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

37.1

ø330(13")

EMPTY SECTION
(6 POCKETS MIN.)

W/H PRODUCT CHARGE

EMPTY SECTION
(4 POCKETS MIN.)

TOP COVER TAPE

PULL OUT DIRECTION

R0.75

0.20±0.05

28.00

2.00±0.10

4.00±0.10

ROUND HOLE

OVAL HOLE

3.30

6.50

15.00

44.00±0.20

40.40±0.10

20.20±0.10

1.75±0.10

ø1.55±0.05

16.75

7.60

13.40

9.20

14.45

15.95

1.45MAX

BOX

350

350

350

LABEL

150

7

1050

8.93

4.95

6-1734062-1

PCS/
REEL

REELS/
BOX

QUANTITY
(PCS)

G/W
(Kg)

N/W
(Kg)

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, A SERIES,
STACKED, OFFSET TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C-1734062

SCALE

SHEET

22 of 24

REV

G4

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE


DWN

APVD


SEE SHEET 1.

D


D

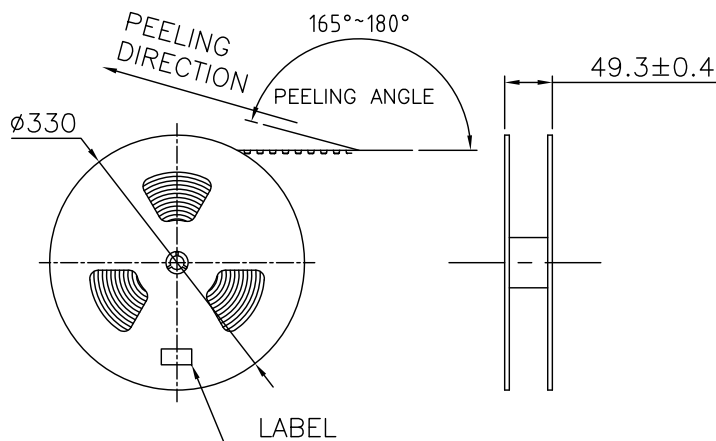


EMPTY SECTION (7 POCKETS MIN.) W/H PRODUCT CHARGE EMPTY SECTION (14 POCKETS MIN.)



TOP COVER TAPE




PULL OUT DIRECTION

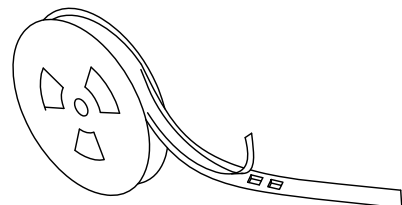


C


C

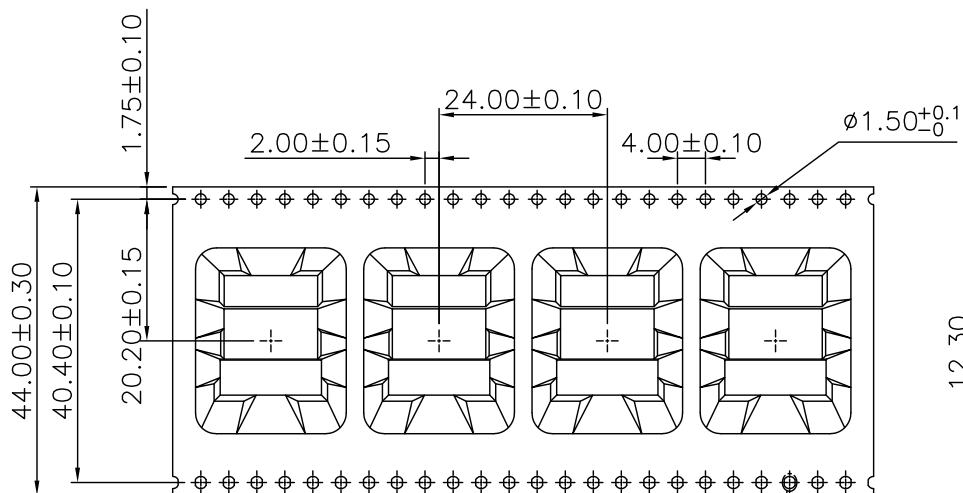


LABEL



FOLDER PAPER BOARD

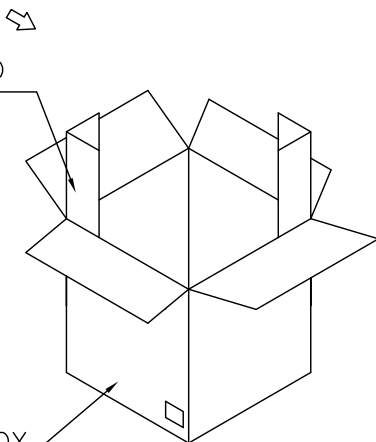

SHIPPING BOX

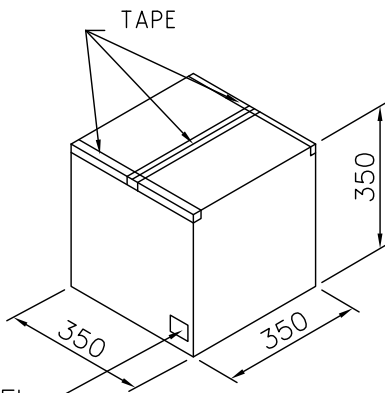

LABEL

B

B

A

A

130	7	910	7.94	3.91	7-1734062-1	OBSOLETE
PCS/REEL	REELS/BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, A SERIES,
STACKED, OFFSET TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C=1734062

SCALE

SHEET

23 of 24

REV

G4

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

D

49.4

ø330(13")

EMPTY SECTION

W/H PRODUCT CHARGE

EMPTY SECTION

(7 POCKETS MIN.)

(14 POCKETS MIN.)

TOP COVER TAPE

PULL OUT DIRECTION

C

B

1.75±0.10

24.00±0.10

2.00±0.15







4.00±0.10

ø1.50^{+0.10}₀



44.00±0.30

40.40±0.10


20.20±0.15

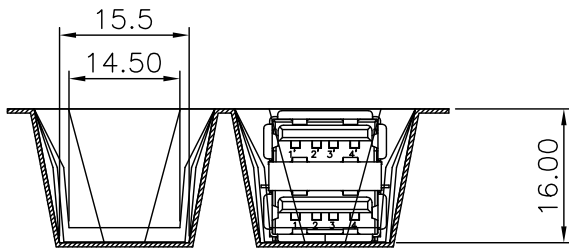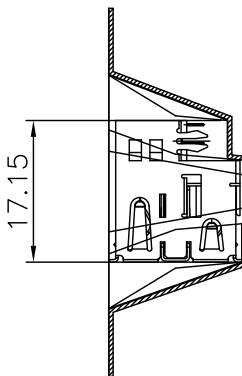

A

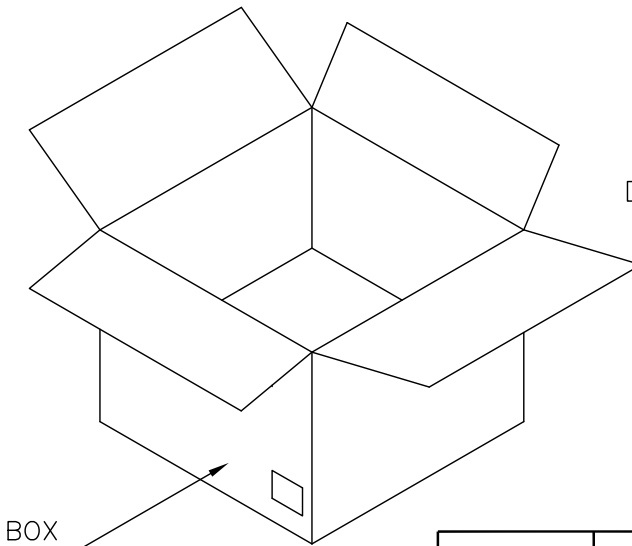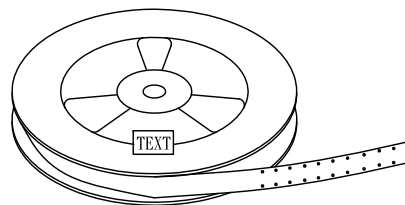

BOX

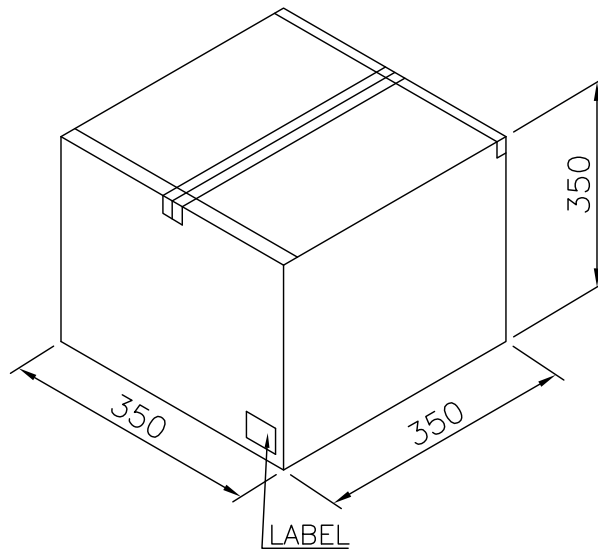

D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC


APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:

MM



MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH

NAME

USB CONNECTOR, A SERIES,
STACKED, OFFSET TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734062

SCALE

SHEET

24 of 24

REV

G4



TE Connectivity



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331