

**SiC**

Silicon Carbide Diode

**5<sup>th</sup> Generation thinQ!<sup>TM</sup>**

650V SiC Schottky Diode

**IDW24G65C5B**

**Final Datasheet**

Rev. 2.0, 2015-04-13

## 5<sup>th</sup> Generation thinQ!<sup>TM</sup> SiC Schottky Diode

IDW24G65C5B

### 1 Description

ThinQ!<sup>TM</sup> Generation 5 represents Infineon leading edge technology for the SiC Schottky Barrier diodes. A combination with a new, more compact design and thin-wafer technology results in a new family of products showing improved efficiency over all load conditions, resulting from both the improved thermal characteristics and a lower figure of merit ( $Q_c \times V_f$ ).

The new thinQ!<sup>TM</sup> Generation 5 has been designed to complement our 650V CoolMOS<sup>TM</sup> families; this ensures meeting the most stringent application requirements in this voltage range.

#### Features



- Revolutionary semiconductor material - Silicon Carbide
- Benchmark switching behavior
- No reverse recovery/ No forward recovery
- Temperature independent switching behavior
- High surge current capability
- Pb-free lead plating; RoHS compliant
- Qualified according to JEDEC<sup>1)</sup> for target applications
- Breakdown voltage tested at 9 mA<sup>2)3)</sup>
- Optimized for high temperature operation

#### Benefits

- System efficiency improvement over Si diodes
- System cost / size savings due to reduced cooling requirements
- Enabling higher frequency / increased power density solutions
- Higher system reliability due to lower operating temperatures
- Reduced EMI

#### Applications

- Switch mode power supply
- Power factor correction
- Solar inverter
- Uninterruptible power supply

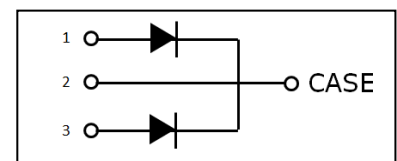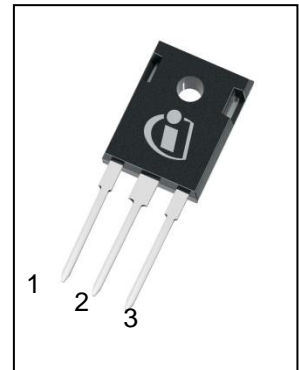

**Table 1 Key Performance Parameters** <sup>4)</sup>

Parameter	Value	Unit
$V_{DC}$	650	V
$Q_C; V_R=400V$	2 x 18	nC
$E_C; V_R=400V$	2 x 4.1	$\mu J$
$I_F @ T_C < 125^\circ C$	2 x 12	A

**Table 2 Pin Definition**

Pin 1	Pin 2	Pin 3
A	C	A

Type / ordering Code	Package	Marking	Related links
IDW24G65C5B	PG-TO247-3	D2465B5	<a href="http://www.infineon.com/sic">www.infineon.com/sic</a>

1) J-STD20 and JESD22

2) All devices tested under avalanche conditions for a time periode of 10ms

3) Per Leg

4) Per Device

## Table of Contents

1	Description.....	2
2	Maximum ratings.....	4
3	Thermal characteristics.....	4
4	Electrical characteristics.....	5
5	Electrical characteristics diagrams.....	6
6	Simplified Forward Characteristics Model.....	8
7	Package outlines.....	9
8	Revision History.....	10

## 2 Maximum ratings

**Table 3** Maximum ratings

Parameter	Symbol	Values			Unit	Note/Test Condition
		Min.	Typ.	Max.		
Continuous forward current <sup>1)</sup>	$I_F$	–	–	12	A	$T_C < 125^\circ\text{C}$ , $D=1$
Surge non-repetitive forward current, sine halfwave <sup>1)</sup>	$I_{F,SM}$	–	–	71		$T_C = 25^\circ\text{C}$ , $t_p=10\text{ ms}$
		–	–	56		$T_C = 150^\circ\text{C}$ , $t_p=10\text{ ms}$
Non-repetitive peak forward current <sup>1)</sup>	$I_{F,max}$	–	–	505		$T_C = 25^\circ\text{C}$ , $t_p=10\text{ }\mu\text{s}$
$i^2t$ value <sup>1)</sup>	$\int i^2 dt$	–	–	25.4	A <sup>2</sup> s	$T_C = 25^\circ\text{C}$ , $t_p=10\text{ ms}$
		–	–	15.7		$T_C = 150^\circ\text{C}$ , $t_p=10\text{ ms}$
Repetitive peak reverse voltage	$V_{RRM}$	–	–	650	V	$T_j = 25^\circ\text{C}$
Diode dv/dt ruggedness	$dv/dt$	–	–	100	V/ns	$V_R=0..480\text{ V}$
Power dissipation <sup>2)</sup>	$P_{tot}$	–	–	152	W	$T_C = 25^\circ\text{C}$
Operating and storage temperature	$T_j, T_{stg}$	-55	–	175	°C	
Mounting torque		–	50	70	Ncm	M3 screws

## 3 Thermal characteristics

**Table 4** Thermal characteristics TO-247-3

Parameter	Symbol	Values			Unit	Note/Test Condition
		Min.	Typ.	Max.		
Thermal resistance, junction-case <sup>1)</sup>	$R_{thJC}$	–	1.5	2.0	K/W	lead
Thermal resistance, junction-ambient <sup>1)</sup>	$R_{thJA}$	–	–	62		
Soldering temperature, wavesoldering only allowed at leads	$T_{sold}$	–	–	260	°C	1.6mm (0.063 in.) from case for 10 s

1) Per Leg

2) Per Device

## 4 Electrical characteristics

**Table 5 Static characteristics**

Parameter	Symbol	Values			Unit	Note/Test Condition
		Min.	Typ.	Max.		
DC blocking voltage <sup>1)</sup>	$V_{DC}$	650	–	–	V	$T_j=25^{\circ}C$
Diode forward voltage <sup>1)</sup>	$V_F$	–	1.5	1.7		$I_F=12\text{ A}, T_j=25^{\circ}C$
		–	1.8	2.1		$I_F=12\text{ A}, T_j=150^{\circ}C$
Reverse current <sup>1)</sup>	$I_R$	–	0.6	190	$\mu A$	$V_R=650\text{ V}, T_j=25^{\circ}C$
		–	0.2	68		$V_R=600\text{ V}, T_j=25^{\circ}C$
		–	2.4	1350		$V_R=650\text{ V}, T_j=150^{\circ}C$

**Table 6 AC characteristics**

Parameter	Symbol	Values			Unit	Note/Test Condition
		Min.	Typ.	Max.		
Total capacitive charge <sup>1)</sup>	$Q_c$	–	18		nC	$V_R=400\text{ V}, di/dt=200\text{ A}/\mu\text{s}, I_F \leq I_{F,MAX}, T_j=150^{\circ}C$
Total Capacitance <sup>1)</sup>	C	–	360	–	pF	$V_R=1\text{ V}, f=1\text{ MHz}$
		–	47	–		$V_R=300\text{ V}, f=1\text{ MHz}$
		–	46	–		$V_R=600\text{ V}, f=1\text{ MHz}$

1) Per Leg

2) Per Device

## 5 Electrical characteristics diagrams

Table 7


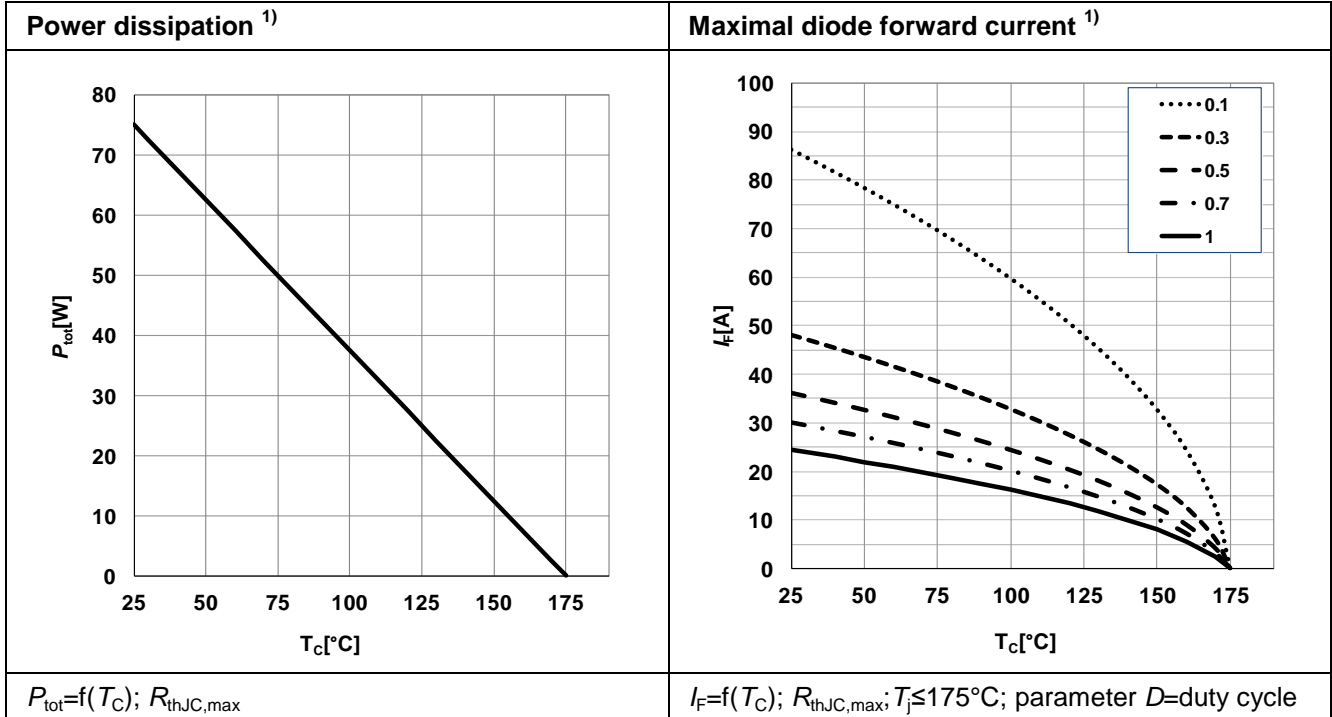


Table 8

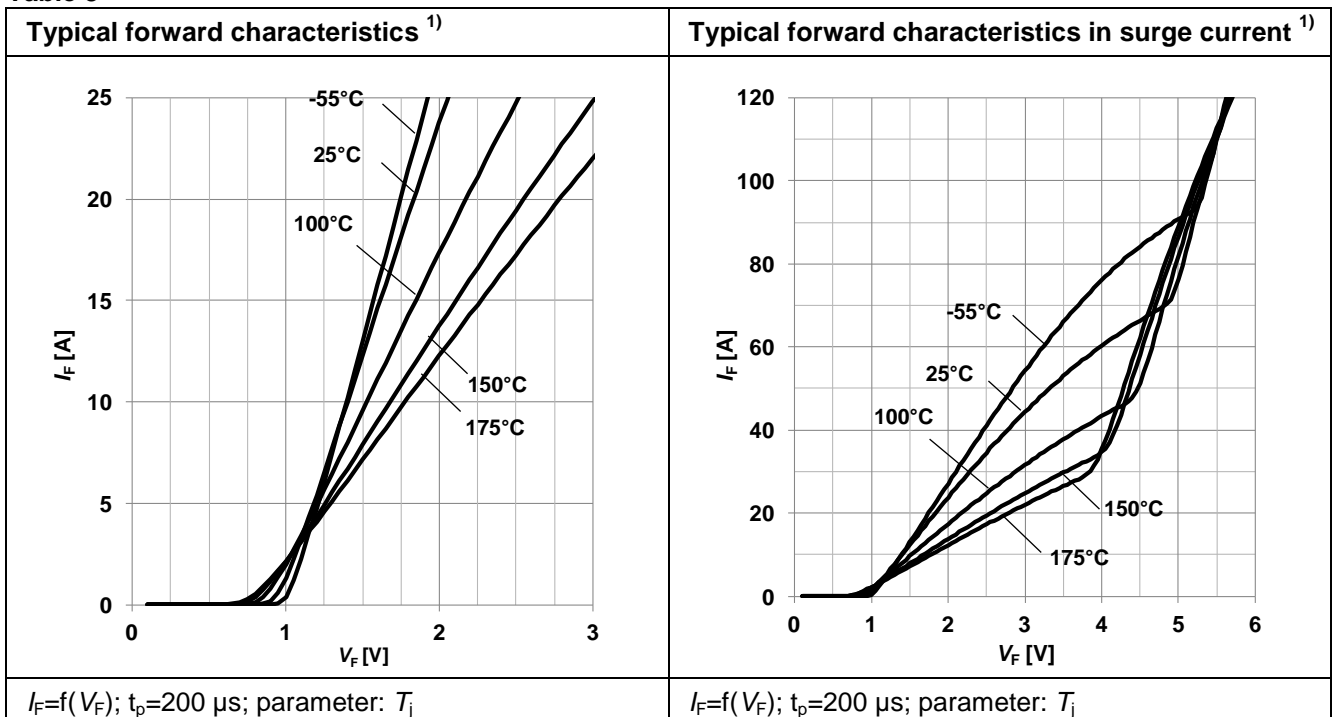

1) Per Leg

2) Per Device

Table 9


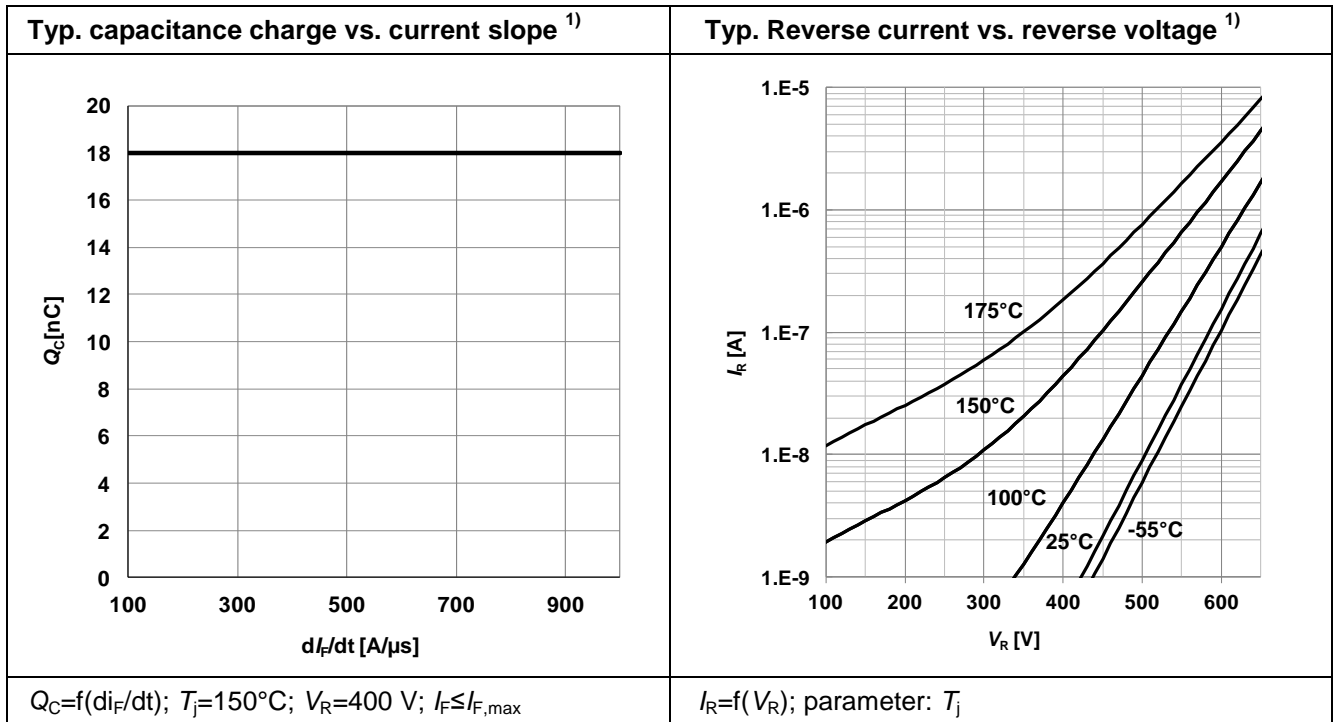



Table 10

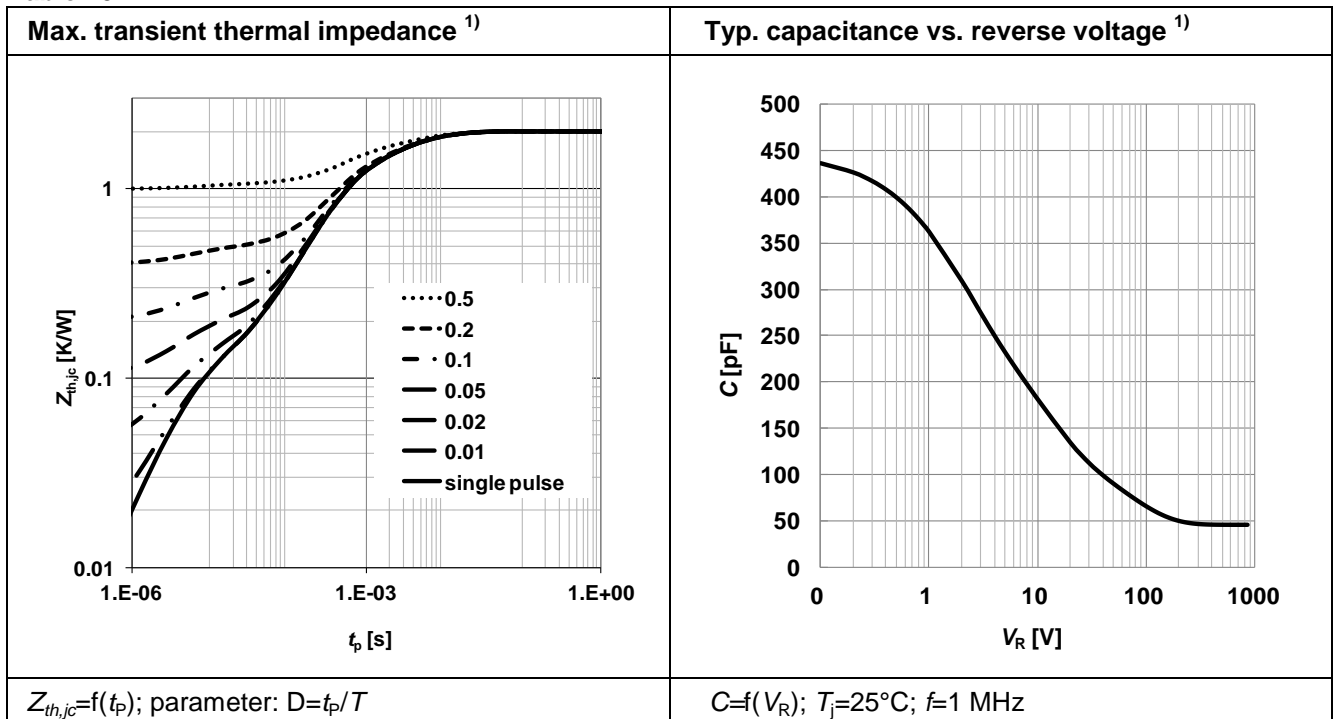

1) Per Leg

2) Per Device

Table 11

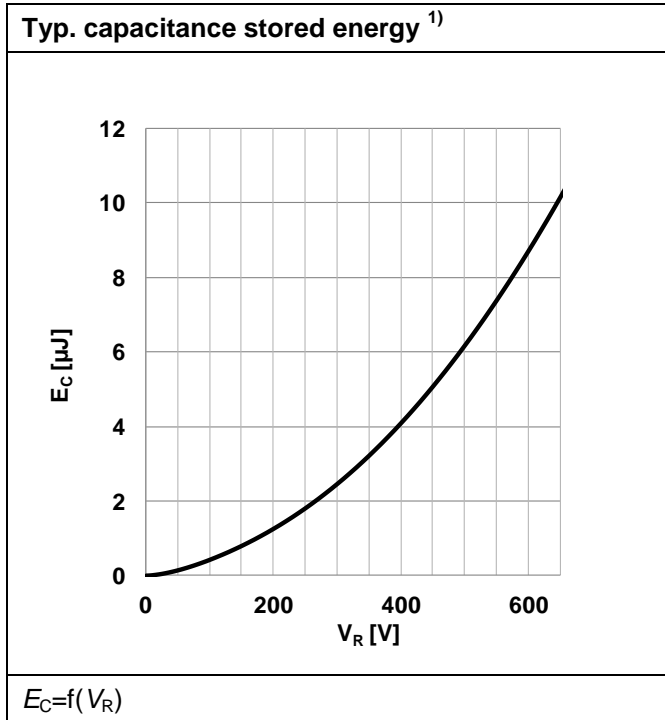

## 6 Simplified Forward Characteristics Model

Table 12


Equivalent forward current curve <sup>1)</sup>	Mathematical Equation
	$V_F = V_{TH} + R_{DIFF} \cdot I_F$ $V_{TH}(T_j) = -0.001 \cdot T_j + 1.04 \text{ [V]}$ $R_{DIFF}(T_j) = 1.07 \cdot 10^{-6} \cdot T_j^2 + 1.07 \cdot 10^{-4} \cdot T_j + 0.039 \text{ [\Omega]}$
$V_F = f(I_F)$	$T_j$ in °C; $-55^\circ\text{C} < T_j < 175^\circ\text{C}$ ; $I_F < 24 \text{ A}$

1) Per Leg

2) Per Device



### Package outlines

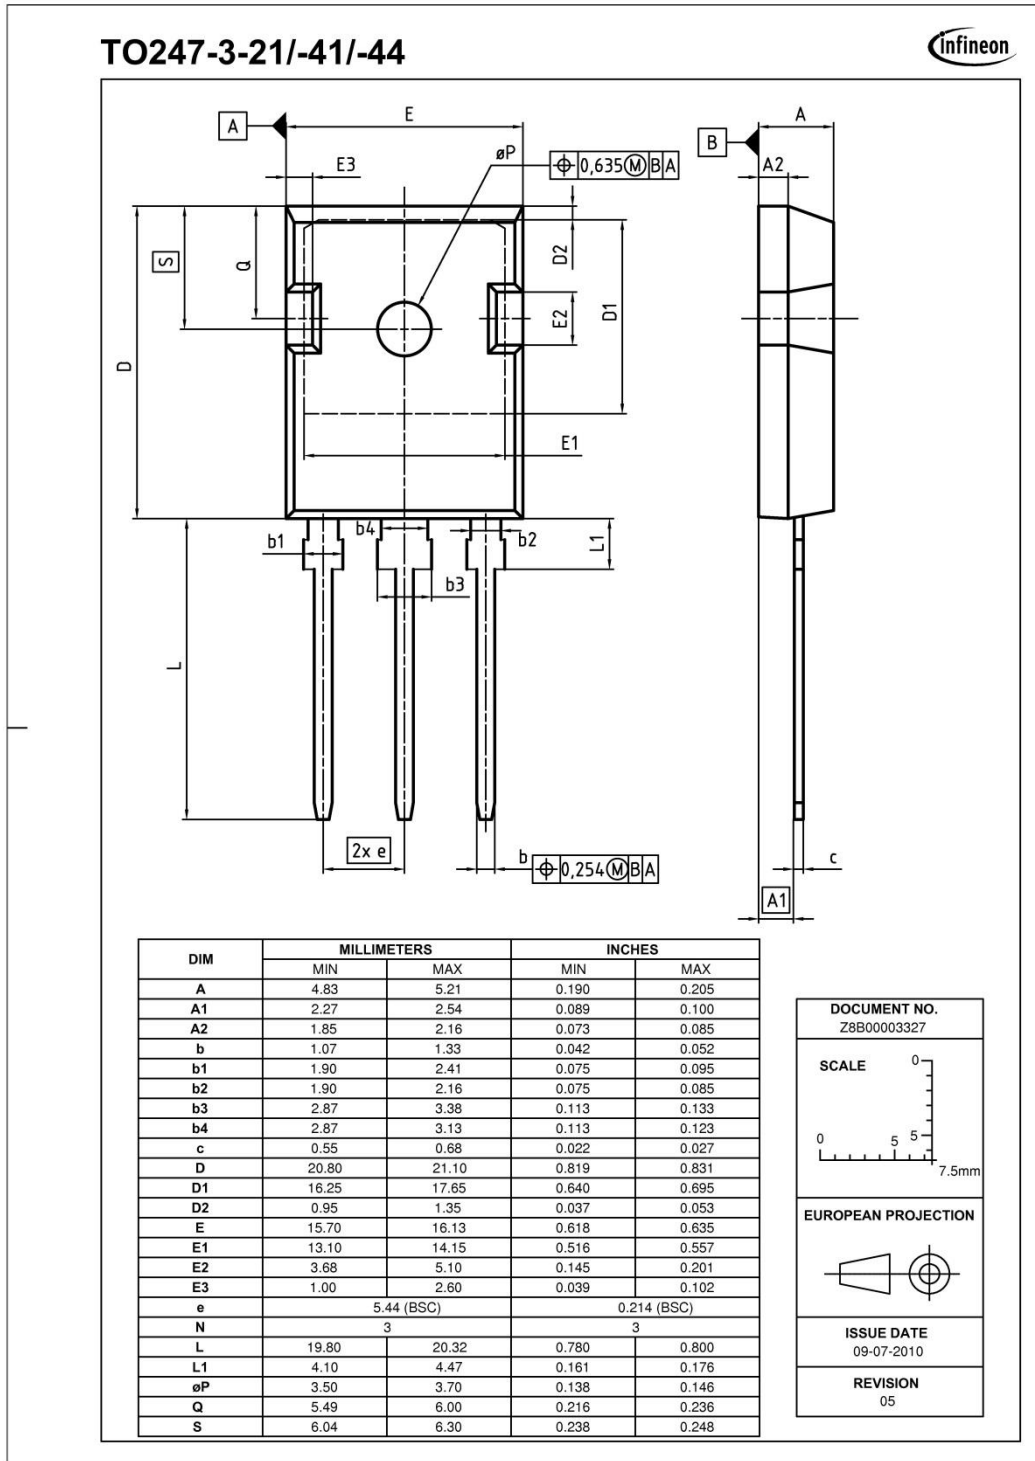

**Figure 1** Outlines TO-247, dimensions in mm/inches

- 1) Per Leg
- 2) Per Device

## 7 Revision History

### 5<sup>th</sup> Generation thinQ!<sup>TM</sup> SiC Schottky Diode

Revision History: 2015-04-13, Rev. 2.0

Previous Revision:

Revision	Subjects (major changes since last version)
2.0	Release of the final datasheet.

#### We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?  
Your feedback will help us to continuously improve the quality of this document.

Please send your proposal (including a reference to this document) to: [erratum@infineon.com](mailto:erratum@infineon.com)

Edition 2015-04-13

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2015 Infineon Technologies AG

All Rights Reserved.



#### Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

#### Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

#### Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support, automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

[www.infineon.com](http://www.infineon.com)

Published by Infineon Technologies AG



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331