

GSX A 0 1 A 1 A - 1

| CONDUIT OPENING |             |
|-----------------|-------------|
| CODE            | DESCRIPTION |
| A               | 1/2" NPT    |
| B               | PG 13.5     |
| C               | 20 MM       |
| D               | PF 1/2      |

| BASIC SWITCH |                                                   |
|--------------|---------------------------------------------------|
| CODE         | DESCRIPTION                                       |
| 01           | SNAP ACTION, 1 NC - 1 NO                          |
| 03           | SLOW ACTION, 1 NC - 1 NO, BREAK BEFORE MAKE       |
| 04           | SLOW ACTION, 1 NC - 1 NO, MAKE BEFORE BREAK       |
| 05           | SLOW ACTION, 2 NO                                 |
| 06           | SLOW ACTION, 2 NC                                 |
| 07           | SNAP ACTION, 1 NC - 1 NO, GOLD                    |
| 20           | SNAP ACTION, 2 NC - 2 NO                          |
| 22           | SNAP ACTION, 2 NC - 2 NO, GOLD                    |
| 33           | SLOW ACTION, 1 NC - 1 NO, BREAK BEFORE MAKE, GOLD |
| 34           | SLOW ACTION, 1 NC - 1 NO, MAKE BEFORE BREAK, GOLD |
| 35           | SLOW ACTION, 2 NO, GOLD                           |
| 36           | SLOW ACTION, 2 NC, GOLD                           |
| 40           | SLOW ACTION, 4 NC                                 |
| 41           | SLOW ACTION, 4 NC, GOLD                           |
| 42           | SLOW ACTION, 2 NC - 1 NO, BREAK BEFORE MAKE       |
| 43           | SLOW ACTION, 2 NC - 1 NO, BREAK BEFORE MAKE, GOLD |
| 44           | SLOW ACTION, 2 NC - 2 NO, BREAK BEFORE MAKE       |
| 45           | SLOW ACTION, 2 NC - 2 NO, BREAK BEFORE MAKE, GOLD |
| 46           | SLOW ACTION, 3 NC - 1 NO, BREAK BEFORE MAKE       |
| 47           | SLOW ACTION, 3 NC - 1 NO, BREAK BEFORE MAKE, GOLD |

| HEAD |                       |
|------|-----------------------|
| CODE | DESCRIPTION           |
| A    | SIDE ROTARY MOMENTARY |
| B    | TOP PIN PLUNGER       |
| C    | TOP ROLLER PLUNGER    |
| D    | TOP ROLLER LEVER      |

HEAD CODE RESTRICTIONS:

- HEAD CODE A USES MODIFICATION CODES 1, 2, 3, 4 & 5
- UNITS WITH HEAD CODES B, C & D DO NOT USE ACTUATOR CODE.

| ACTUATOR |                          |
|----------|--------------------------|
| CODE     | DESCRIPTION              |
| 1        | STD. FIXED LENGTH ROLLER |
| 3        | YOKE ROLLER              |
| 5        | OFFSET ROLLER            |

ACTUATOR CODE RESTRICTIONS:

- ACTUATOR CODES 1, 3, & 5 USED WITH HEAD CODE ONLY.
- ACTUATOR & MODIFICATION CODES DO NOT HAVE TO BE USED (UNLESS OTHERWISE NOTED ABOVE), BUT MODIFICATION CODE CAN BE USED WITHOUT ACTUATOR CODE. IN THAT CASE, THE "DASH" FOLLOWS THE HEAD CODE, FOLLOWED BY THE MODIFICATION CODE. IF NEITHER ACTUATOR OR MODIFICATION CODE IS USED, CATALOG LISTING ENDS WITH A HEAD CODE.

| ROLLER |                                        |
|--------|----------------------------------------|
| CODE   | DESCRIPTION                            |
| A      | 19 X 6.35 (3/4 X 1/4) NYLON ROLLER     |
| C      | 25.4 X 12.7 (1 X 1/2) NYLON ROLLER     |
| D      | 38.1 X 6.35 (1 1/2 X 1/4) NYLON ROLLER |
| E      | 19 X 6.35 (3/4 X 1/4) BRONZE ROLLER    |
| W      | 40 X 12.7 (1 1/2 X 1/2) RUBBER ROLLER  |
| Y      | 50.9 X 12.7 (2 X 1/2) RUBBER ROLLER    |


| MODIFICATIONS/ SPECIALS |                                                  |
|-------------------------|--------------------------------------------------|
| CODE                    | DESCRIPTION                                      |
| 1                       | CLOCKWISE ROTATION                               |
| 2                       | COUNTER CLOCKWISE ROTATION                       |
| 3                       | HEAD ASSEMBLED WITH ACTUATOR TO RIGHT SIDE       |
| 4                       | HEAD ASSEMBLED WITH ACTUATOR TO LEFT SIDE        |
| 5                       | HEAD ASSEMBLED WITH ACTUATOR TO MOUNTING SURFACE |
| 6                       | ROLLER PERPENDICULAR TO MOUNTING SURFACE         |
| C                       | PRE-LEAD CABLE                                   |
| Q                       | CONNECTOR                                        |

- HEAD CODE A STANDARD ROTATION IS CLOCKWISE AND COUNTER CLOCKWISE ROTATION
- STANDARD ORIENTATION IS HEAD ASSEMBLED WITH ACTUATOR TOWARD FRONT
- HEAD CODE D STANDARD HEAD ORIENTATION:  
ROLLER TO LEFT - HINGE TO RIGHT
- HEAD CODE D MODIFICATION CODE 5 HEAD ORIENTATION:  
ROLLER TO FRONT - HINGE TO REAR.
- HEAD CODE D MODIFICATION CODE 6 HEAD ORIENTATION:  
ROLLER TO REAR - HINGE TO FRONT.
- HEAD CODE D MODIFICATION CODE 4 HEAD ORIENTATION:  
ROLLER TO RIGHT - HINGE TO LEFT


| ELECTRICAL RATING  |        |         |        | ENVIRONMENTAL RATING                                             | APPROVALS                                                                                                                                                                                                                                                         |
|-------------------------------------------------------------------------------------------------------|--------|---------|--------|------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AC                                                                                                    |        | DC      |        | IP 67                                                            | UL 508 LISTED                                                                                                                                                                                                                                                     |
| A600                                                                                                  | AC15   | Q300    | DC13   | NEMA 1, 3, 4, 12 AND 13                                          | IEC 60947-5-1                                                                                                                                                                                                                                                     |
| Ue                                                                                                    | Ie     | Ue      | Ie     | NEMA TYPE 7, CLASS I FLAMABLE<br>GASES OR VAPORS - GROUP B, C, D | LOW VOLTAGE DIRECTIVE LVD<br>EN60947-1, EN60947-5-1                                                                                                                                                                                                               |
| (VOLTS)                                                                                               | (AMPS) | (VOLTS) | (AMPS) | NEMA TYPE 9, CLASS II COMBUSTABLE<br>DUSTS - GROUP E, F, G       | SIRA 08ATEX1073X<br>IECEX SIR 08.0021X                                                                                                                                                                                                                            |
| 120                                                                                                   | 6      | 24      | 2.8    | Ex d IIC T6 ta -40°C TO +70°C Gb / Ex t IIIC T85°C Db            |    |
| 240                                                                                                   | 3      | 125     | .55    |                                                                  |                                                                                                                                                                                                                                                                   |
| 380                                                                                                   | 1.9    | 250     | .27    |                                                                  |                                                                                                                                                                                                                                                                   |
| 480                                                                                                   | 1.5    |         |        |                                                                  |                                                                                                                                                                                                                                                                   |
| 500                                                                                                   | 1.4    |         |        |                                                                  |                                                                                                                                                                                                                                                                   |
| 600                                                                                                   | 1.2    |         |        |                                                                  |                                                                                                                                                                                                                                                                   |

## NOTES


- 1 - CONSTRUCTED IN ACCORDANCE WITH EN-50014/EN-50016 GROUP II C.
- 2 - EXPLOSION PROOF-UNDERWRITERS LAB INC. LISTED FOR HAZARDOUS LOCATIONS CLASS I, GROUPS B, C AND D; CLASS II GROUPS E, F, AND G.
- 3 - APPROVED DRAWING. NO MODIFICATIONS PERMITTED WITHOUT PRIOR APPROVAL FROM CERTIFICATION BODY.
- 4 - T-15 TAMPER PROOF TORX DRIVER BIT PROVIDED.
- 5 - HEAD MAY BE INDEXED IN 90° INCREMENTS.
- 6 - LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
- 7 - FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041.
- 8 - THE MAXIMUM VOLTAGE,  $V_e$  OF "06" AND "36" BASIC SWITCH CODE IS 500V (A500).

|                                                                                       |  |  |  |                 |  |     |  |         |       |                                                                                                                                                                 |       |  |           |  |                    |  |        |  |
|---------------------------------------------------------------------------------------|--|--|--|-----------------|--|-----|--|---------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--|-----------|--|--------------------|--|--------|--|
| DESIGN UNITS: MM                                                                      |  |  |  | DRAWN           |  | SJS |  | 10JAN08 |       | <div>Honeywell</div>                                                                                                                                            |       |  |           |  |                    |  |        |  |
| TOLERANCES UNLESS NOTED:                                                              |  |  |  | CHECK           |  | SS  |  | 10JAN08 |       |                                                                                                                                                                 |       |  |           |  |                    |  |        |  |
| NO PLACES                                                                             |  |  |  | X               |  | ±   |  | 1.000   |       | THIS DRAWING COVERS A PROPRIETARY ITEM<br>AND IS THE PROPERTY OF HONEYWELL.<br>THIS DRAWING IS NOT TO BE COPIED OR USED<br>WITHOUT THE PERMISSION OF HONEYWELL. |       |  |           |  |                    |  |        |  |
| ONE PLACE                                                                             |  |  |  | .X              |  | ±   |  | 0.400   |       |                                                                                                                                                                 |       |  |           |  |                    |  |        |  |
| TWO PLACE                                                                             |  |  |  | .XX             |  | ±   |  | 0.150   |       |                                                                                                                                                                 |       |  |           |  |                    |  |        |  |
| THREE PLACE                                                                           |  |  |  | .XXX            |  | ±   |  | 0.005   |       |                                                                                                                                                                 |       |  |           |  |                    |  |        |  |
| ANGLES                                                                                |  |  |  | X               |  | ±   |  | 3.0°    |       | INTERPRET PER ASME Y14.5M-1994<br>OTHER HONEYWELL ENGINEERING<br>STANDARDS MAY APPLY                                                                            |       |  |           |  |                    |  |        |  |
| THIRD ANGLE PROJECTION                                                                |  |  |  |                 |  |     |  |         |       |                                                                                                                                                                 |       |  |           |  |                    |  |        |  |
|  |  |  |  |                 |  |     |  |         | SIZE  |                                                                                                                                                                 | TYPE  |  | CAGE CODE |  | DRAWING NAME       |  | REV    |  |
|                                                                                       |  |  |  |                 |  |     |  |         | D     |                                                                                                                                                                 | I     |  | -         |  | GSX_SERIES.CHART.1 |  | D      |  |
|                                                                                       |  |  |  | Pro/ENGINEER 3D |  |     |  |         | SCALE |                                                                                                                                                                 | 1 : 1 |  |           |  | SHEET              |  | 1 OF 3 |  |

D

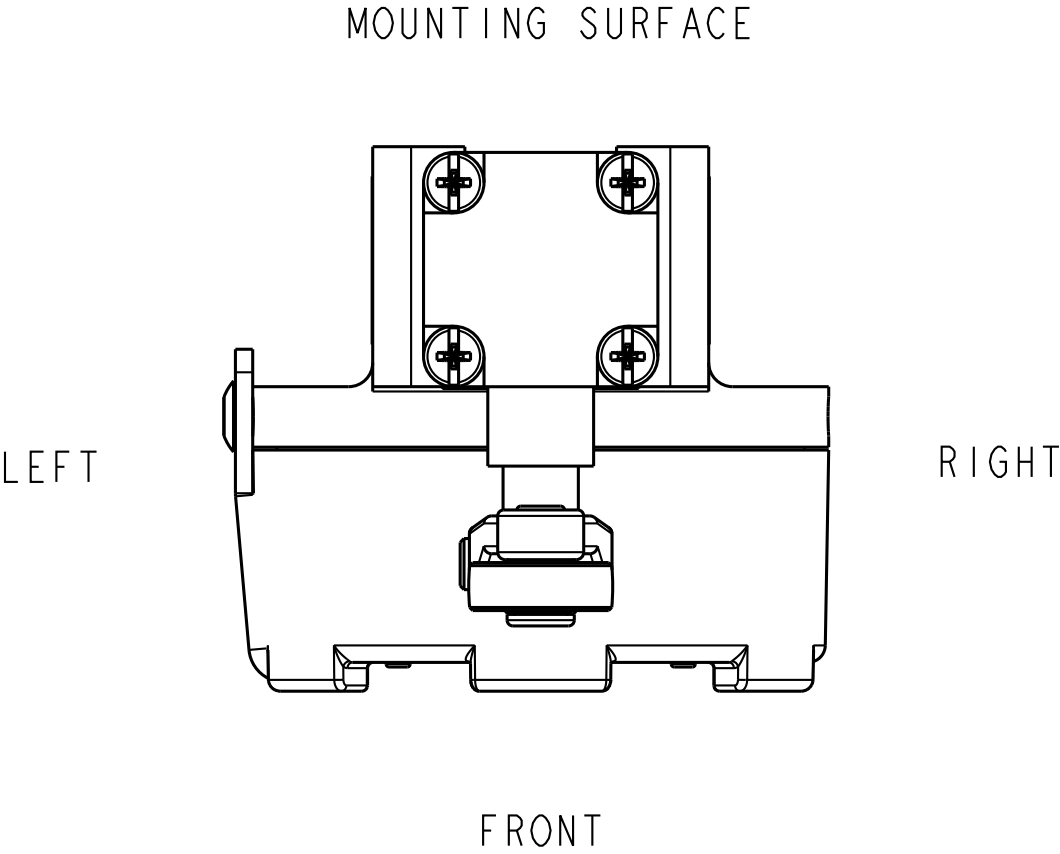


| ACTUATOR CODE | LEVER  | ROLLER MATL | "X" DIM<br>Ø | "Y" DIM     | ("Z") DIM<br>WIDTH |
|---------------|--------|-------------|--------------|-------------|--------------------|
| 1A            | GLZ51A | NYLON       | 19,0 [ .75]  | 55,9 [2.20] | 6,4 [ .25]         |
| 1C            | GLZ51C | NYLON       | 25,4 [1.00]  | 59,2 [2.33] | 12,7 [ .50]        |
| 1D            |        | NYLON       | 38,1 [1.50]  | 55,9 [2.20] | 6,4 [ .25]         |
| 1E            | GLZ51D | BRONZE      | 19,0 [ .75]  | 55,9 [2.20] | 6,4 [ .25]         |
| 1W            |        | RUBBER      | 38,1 [1.50]  | 59,2 [2.33] | 12,7 [ .50]        |
| 1Y            | GLZ51Y | RUBBER      | 50,0 [1.97]  | 57,7 [2.27] | 9,9 [ .39]         |
| 3A            | GLZ53A | NYLON       | 19,0 [ .75]  | 55,9 [2.20] | 6,4 [ .25]         |
| 3C            |        | NYLON       | 25,4 [1.00]  | 59,2 [2.33] | 12,7 [ .50]        |
| 3D            |        | NYLON       | 38,1 [1.50]  | 55,9 [2.20] | 6,4 [ .25]         |
| 3E            | GLZ53C | BRONZE      | 50,0 [1.97]  | 55,9 [2.20] | 6,4 [ .25]         |
| 3W            |        | RUBBER      | 38,1 [1.50]  | 59,2 [2.33] | 12,7 [ .50]        |
| 3Y            |        | RUBBER      | 50,0 [1.97]  | 57,7 [2.27] | 9,9 [ .39]         |
| 5A            | GLZ55A | NYLON       | 50,0 [1.97]  | 55,9 [2.20] | 6,4 [ .25]         |
| 5C            |        | NYLON       | 25,4 [1.00]  | 59,2 [2.33] | 12,7 [ .50]        |
| 5D            |        | NYLON       | 38,1 [1.50]  | 55,9 [2.20] | 6,4 [ .25]         |
| 5E            | GLZ55C | BRONZE      | 50,0 [1.97]  | 55,9 [2.20] | 6,4 [ .25]         |
| 5W            |        | RUBBER      | 38,1 [1.50]  | 59,2 [2.33] | 12,7 [ .50]        |
| 5Y            |        | RUBBER      | 50,0 [1.97]  | 57,7 [2.27] | 9,9 [ .39]         |


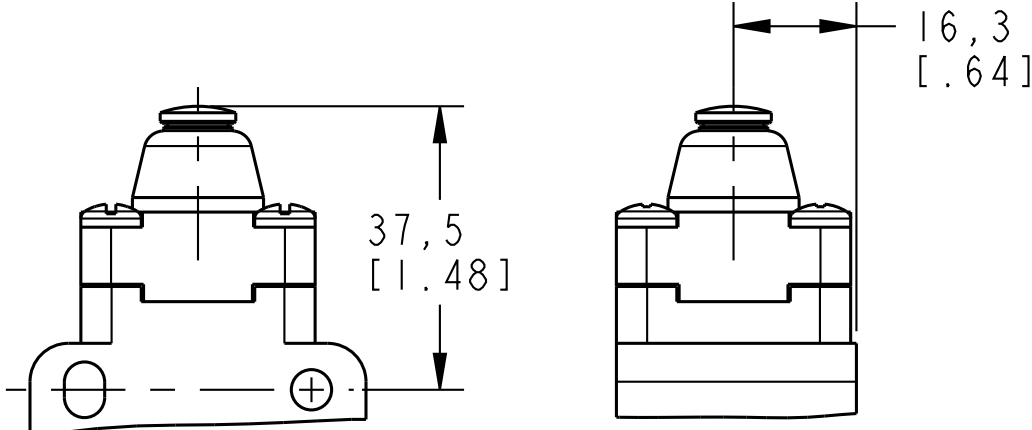


HEAD CODE B  
TOP PIN PLUNGER HEAD

C

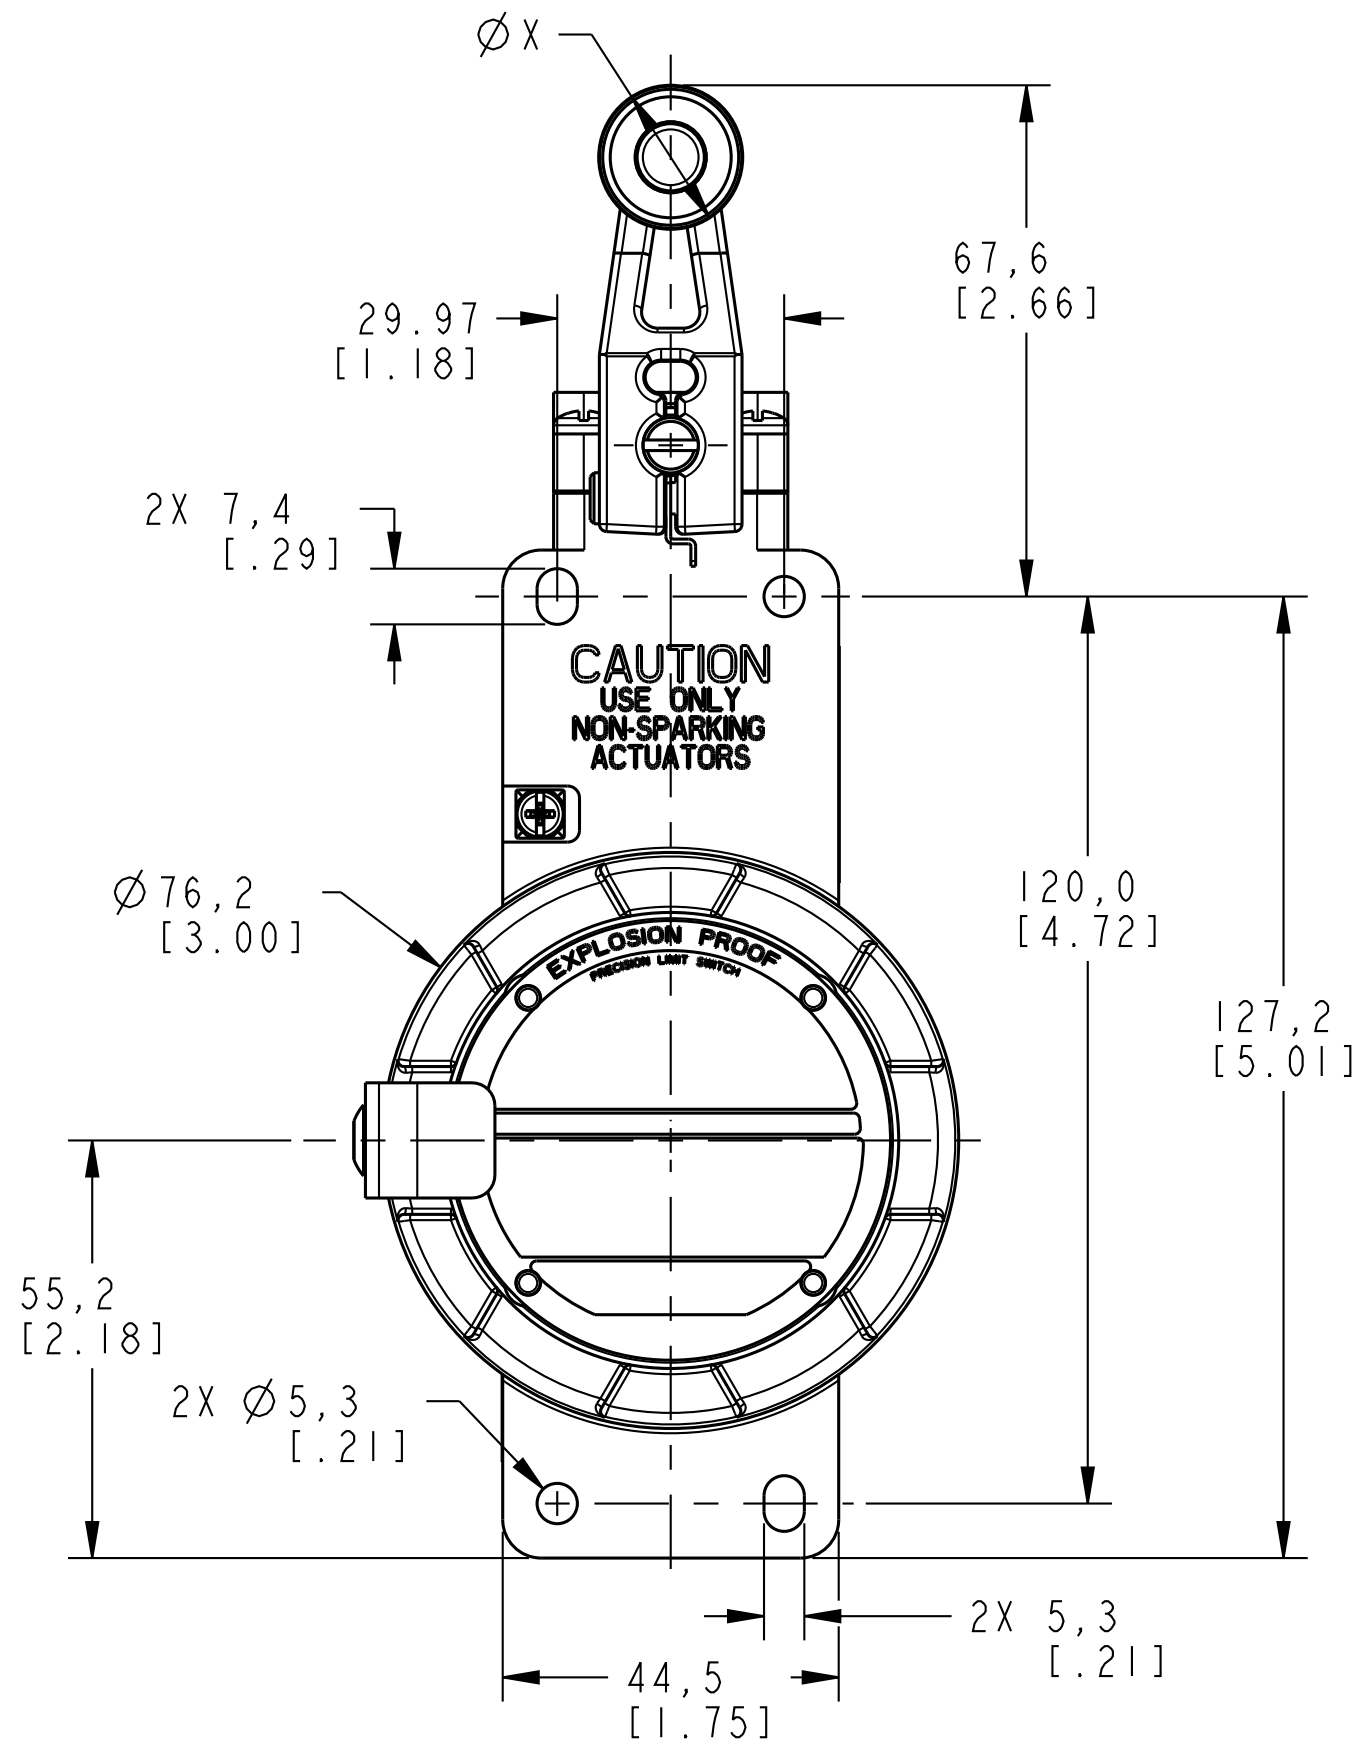


HEAD CODE A  
SIDE ROTARY HEAD WITH GLZ51 SERIES LEVER

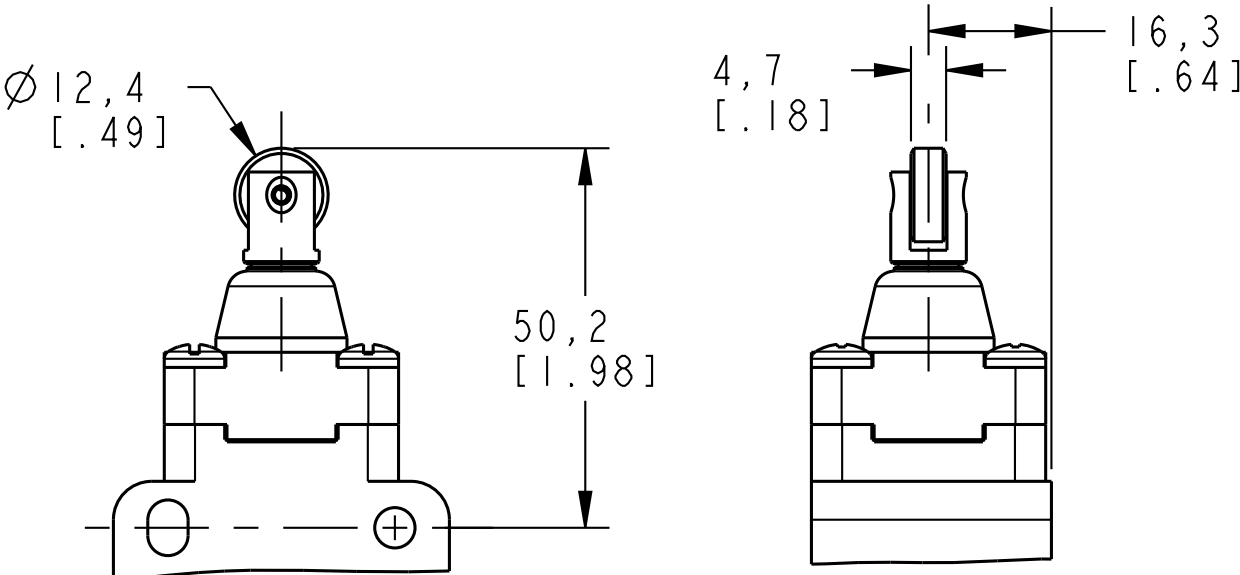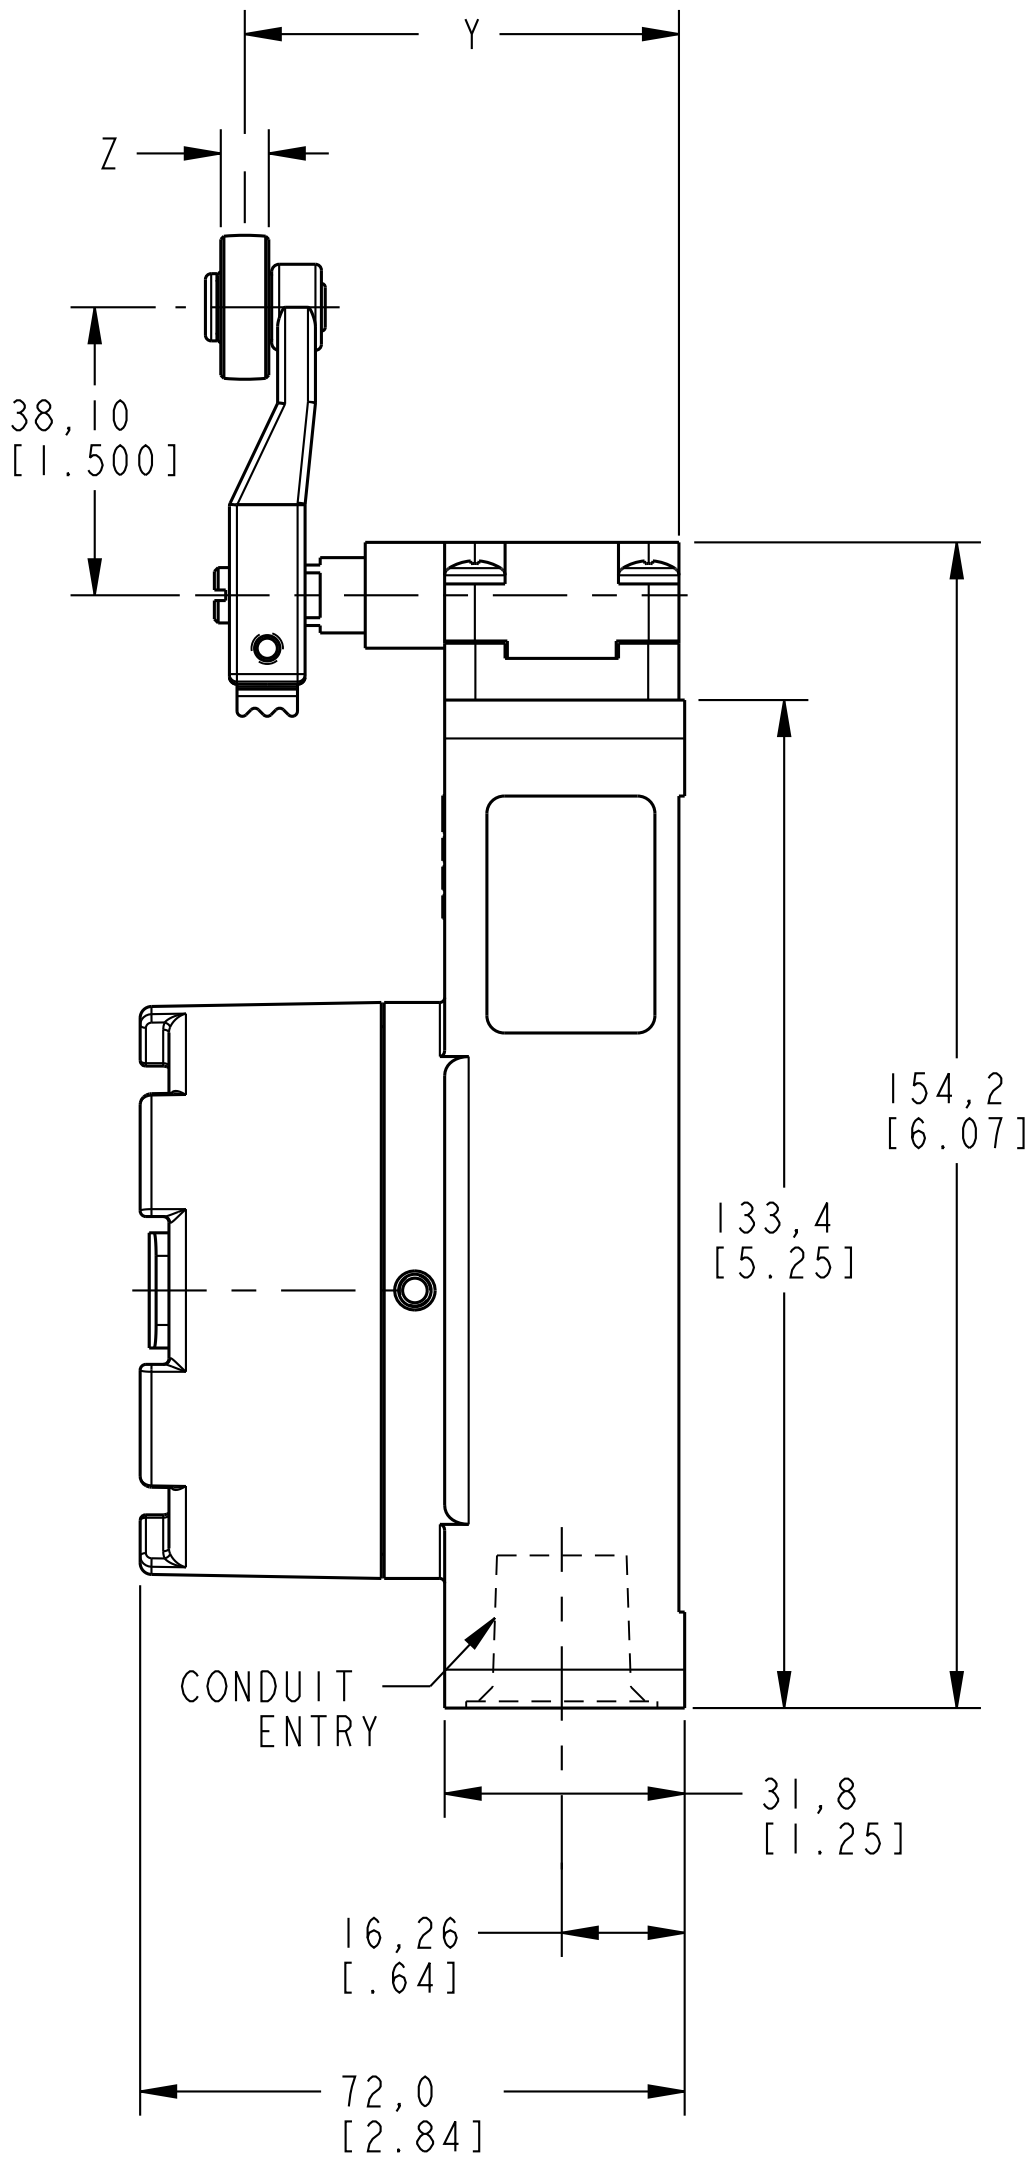

HEAD CODE C  
TOP ROLLER PLUNGER HEAD

B

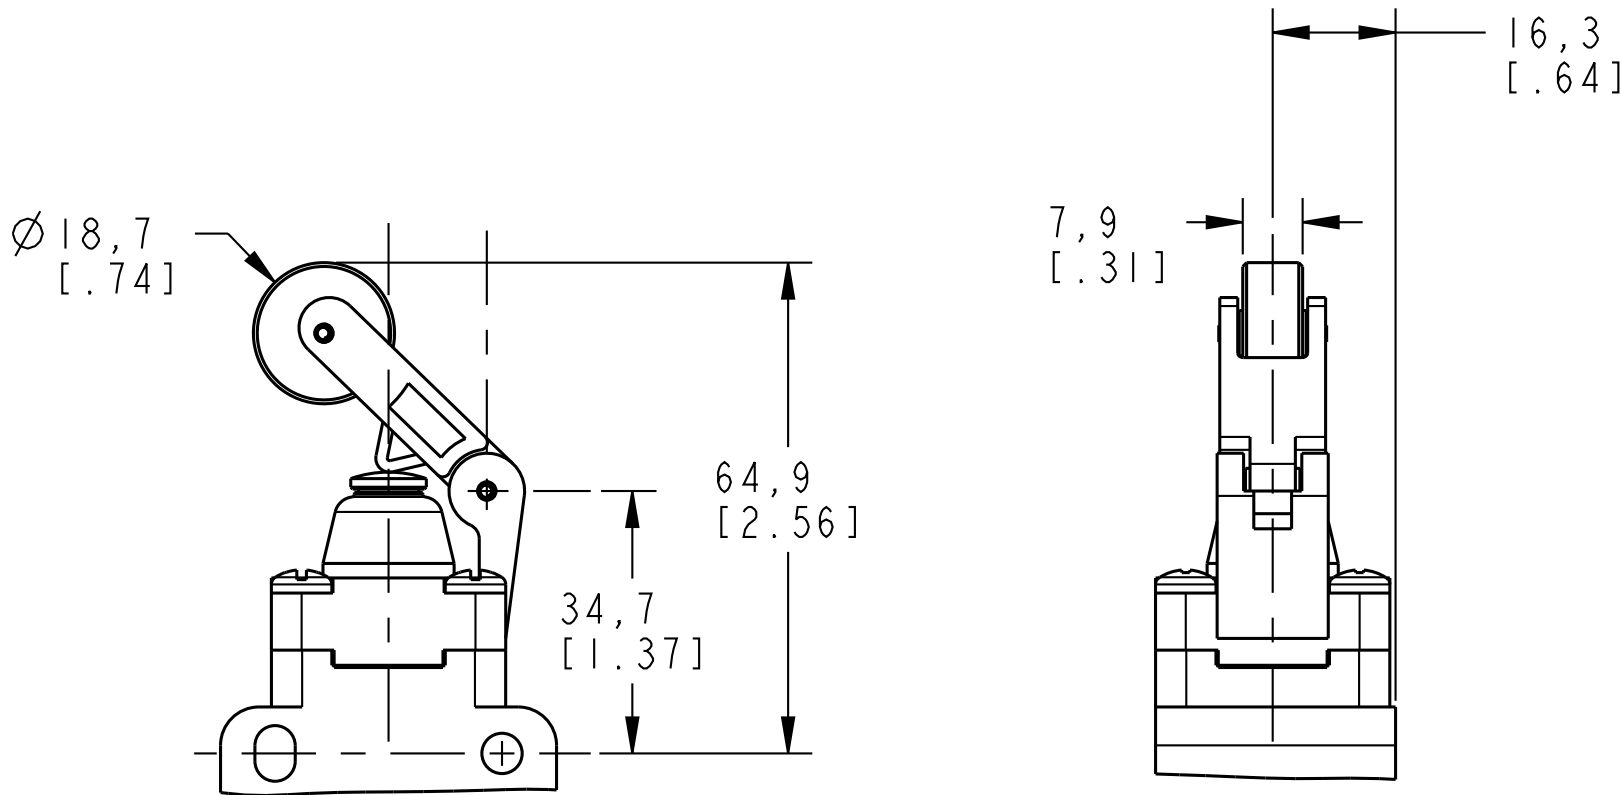

HEAD CODE D  
TOP ROLLER LEVER HEAD

A

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

| Honeywell |      |           |                    |  |     |
|-----------|------|-----------|--------------------|--|-----|
| SIZE      | TYPE | CAGE CODE | DRAWING NAME       |  | REV |
| D         | I    | -         | GSX SERIES CHART 1 |  | D   |
| SCALE     |      | 1 : 1     | SHEET 2 OF 3       |  |     |

|                    |   |                    |                         |                                      |                                      |                               |                      |                                      |                                             |                                                |                                 |                                 |                               |            |     |
|--------------------|---|--------------------|-------------------------|--------------------------------------|--------------------------------------|-------------------------------|----------------------|--------------------------------------|---------------------------------------------|------------------------------------------------|---------------------------------|---------------------------------|-------------------------------|------------|-----|
| FO-55113-C         |   | 8                  | 7                       |                                      | 6                                    | 5                             | 4                    | 3                                    | 2                                           | 1                                              |                                 |                                 |                               |            |     |
| HEAD STYLE         |   | CATALOG LISTING    | FP FREE POSITION mm[in] | OP1 OPERATE POINT NC CONTACTS mm[in] | OP2 OPERATE POINT NO CONTACTS mm[in] | DT DIFFERENTIAL TRAVEL mm[in] | FOT FULL OVER TRAVEL | POSITIVE BREAK TO IEC 947-5-1 mm[in] | MAX OPERATE TORQUE/FORCE N·m[lb·in] / N[lb] | MAX DISCONNECT TORQUE/FORCE N·m[lb·in] / N[lb] | MAX OPERATE VELOCITY m/s [in/s] | MIN OPERATE VELOCITY m/s [in/s] | MAX OPERATE FREQUENCY OPS/MIN |            |     |
| A                  |   | GSX*01A<br>GSX*07A | 0°                      | 26°                                  | 26°                                  | 12°                           | 85°                  | 55°                                  | 0,3 [2.6]                                   | 0,4 [3.5]                                      | 1290 */SEC                      | 13 */SEC                        | 250                           |            |     |
|                    |   | GSX*03A<br>GSX*33A | 0°                      | 26°                                  | 38°                                  | N/A                           | 85°                  | 26°                                  | 0,3 [2.6]                                   | 0,4 [3.5]                                      | 1290 */SEC                      | 13 */SEC                        | 250                           |            |     |
|                    |   | GSX*04A<br>GSX*34A | 0°                      | 38°                                  | 26°                                  | N/A                           | 85°                  | 38°                                  | 0,3 [2.6]                                   | 0,4 [3.5]                                      | 1290 */SEC                      | 13 */SEC                        | 250                           |            |     |
|                    |   | GSX*05A<br>GSX*35A | 0°                      | N/A°                                 | 38°                                  | N/A                           | 85°                  | N/A                                  | 0,3 [2.6]                                   | 0,4 [3.5]                                      | 1290 */SEC                      | 13 */SEC                        | 250                           |            |     |
|                    |   | GSX*06A<br>GSX*36A | 0°                      | 26°                                  | N/A                                  | N/A                           | 85°                  | 26°                                  | 0,3 [2.6]                                   | 0,4 [3.5]                                      | 1290 */SEC                      | 13 */SEC                        | 250                           |            |     |
|                    |   | GSX*20A<br>GSX*22A | 0°                      | 26°                                  | 26°                                  | 12°                           | 85°                  | 55°                                  | 0,3 [2.6]                                   | 0,4 [3.5]                                      | 1290 */SEC                      | 13 */SEC                        | 250                           |            |     |
|                    |   | GSX*40A<br>GSX*41A | 0°                      | 26°                                  | N/A                                  | N/A                           | 85°                  | 26°                                  | 0,3 [2.6]                                   | 0,4 [3.5]                                      | 1290 */SEC                      | 13 */SEC                        | 250                           |            |     |
|                    |   | GSX*42A<br>GSX*43A | 0°                      | 26°                                  | 38°                                  | N/A                           | 85°                  | 26°                                  | 0,3 [2.6]                                   | 0,4 [3.5]                                      | 1290 */SEC                      | 13 */SEC                        | 250                           |            |     |
|                    |   | GSX*44A<br>GSX*45A | 0°                      | 26°                                  | 38°                                  | N/A                           | 85°                  | 26°                                  | 0,3 [2.6]                                   | 0,4 [3.5]                                      | 1290 */SEC                      | 13 */SEC                        | 250                           |            |     |
|                    |   | GSX*46A<br>GSX*47A | 0°                      | 26°                                  | 38°                                  | N/A                           | 85°                  | 26°                                  | 0,3 [2.6]                                   | 0,4 [3.5]                                      | 1290 */SEC                      | 13 */SEC                        | 250                           |            |     |
|                    |   | A                  |                         | GSX*01A<br>GSX*07A                   | 0                                    | 20,0 [1.79]                   | 20,0 [1.79]          | 12,0 [1.47]                          | N/A                                         | 56,0 [2.20]                                    | 9,7 [2.2]                       | 11,4 [2.6]                      | 8,5 [334.6]                   | 8,5 [1.33] | 250 |
|                    |   |                    |                         | GSX*03A<br>GSX*33A                   | 0                                    | 20,0 [1.79]                   | 32,0 [1.26]          | N/A                                  | N/A                                         | 20,0 [1.79]                                    | 9,7 [2.2]                       | 11,4 [2.6]                      | 8,5 [334.6]                   | 8,5 [1.33] | 250 |
| GSX*04A<br>GSX*34A | 0 |                    |                         | 32,0 [1.26]                          | 20,0 [1.79]                          | N/A                           | N/A                  | 32,0 [1.26]                          | 9,7 [2.2]                                   | 11,4 [2.6]                                     | 8,5 [334.6]                     | 8,5 [1.33]                      | 250                           |            |     |
| GSX*05A<br>GSX*35A | 0 |                    |                         | N/A                                  | 32,0 [1.26]                          | N/A                           | N/A                  | N/A                                  | 9,7 [2.2]                                   | 11,4 [2.6]                                     | 8,5 [334.6]                     | 8,5 [1.33]                      | 250                           |            |     |
| GSX*06A<br>GSX*36A | 0 |                    |                         | 20,0 [1.79]                          | N/A                                  | N/A                           | N/A                  | 20,0 [1.79]                          | 9,7 [2.2]                                   | 11,4 [2.6]                                     | 8,5 [334.6]                     | 8,5 [1.33]                      | 250                           |            |     |
| GSX*20A<br>GSX*22A | 0 |                    |                         | 20,0 [1.79]                          | 20,0 [1.79]                          | 12,0 [1.47]                   | N/A                  | 56,0 [2.20]                          | 9,7 [2.2]                                   | 11,4 [2.6]                                     | 8,5 [334.6]                     | 8,5 [1.33]                      | 250                           |            |     |
| GSX*40A<br>GSX*41A | 0 |                    |                         | 20,0 [1.79]                          | N/A                                  | N/A                           | N/A                  | 20,0 [1.79]                          | 9,7 [2.2]                                   | 11,4 [2.6]                                     | 8,5 [334.6]                     | 8,5 [1.33]                      | 250                           |            |     |
| GSX*42A<br>GSX*43A | 0 |                    |                         | 20,0 [1.79]                          | 32,0 [1.26]                          | N/A                           | N/A                  | 20,0 [1.79]                          | 9,7 [2.2]                                   | 11,4 [2.6]                                     | 8,5 [334.6]                     | 8,5 [1.33]                      | 250                           |            |     |
| GSX*44A<br>GSX*45A | 0 |                    |                         | 20,0 [1.79]                          | 32,0 [1.26]                          | N/A                           | N/A                  | 20,0 [1.79]                          | 9,7 [2.2]                                   | 11,4 [2.6]                                     | 8,5 [334.6]                     | 8,5 [1.33]                      | 250                           |            |     |
| GSX*46A<br>GSX*47A | 0 |                    |                         | 20,0 [1.79]                          | 32,0 [1.26]                          | N/A                           | N/A                  | 20,0 [1.79]                          | 9,7 [2.2]                                   | 11,4 [2.6]                                     | 8,5 [334.6]                     | 8,5 [1.33]                      | 250                           |            |     |
| C                  |   |                    |                         | GSX*01B<br>GSX*07B                   | 37,5 [1.48]                          | 35,0 [1.38]                   | 35,0 [1.38]          | 0,9 [1.04]                           | 30,5 [1.20]                                 | 33,0 [1.30]                                    | 16,0 [3.6]                      | 27,0 [6.0]                      | 0,1 [3.9]                     | 1,0 [1.04] | 250 |
|                    |   |                    |                         | GSX*03B<br>GSX*33B                   | 37,5 [1.48]                          | 35,0 [1.38]                   | 34,0 [1.34]          | N/A                                  | 30,5 [1.20]                                 | 35,0 [1.38]                                    | 16,0 [3.6]                      | 27,0 [6.0]                      | 0,1 [3.9]                     | 1,0 [1.04] | 250 |
|                    |   | GSX*04B<br>GSX*34B | 37,5 [1.48]             | 34,0 [1.34]                          | 35,0 [1.38]                          | N/A                           | 30,5 [1.20]          | 34,0 [1.34]                          | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
|                    |   | GSX*05B<br>GSX*35B | 37,5 [1.48]             | N/A                                  | 34,0 [1.34]                          | N/A                           | 30,5 [1.20]          | N/A                                  | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
|                    |   | GSX*06B<br>GSX*36B | 37,5 [1.48]             | 35,0 [1.38]                          | N/A                                  | N/A                           | 30,5 [1.20]          | 35,0 [1.38]                          | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
|                    |   | GSX*20B<br>GSX*22B | 37,5 [1.48]             | 35,0 [1.38]                          | 35,0 [1.38]                          | 0,9 [1.04]                    | 30,5 [1.20]          | 33,0 [1.30]                          | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
|                    |   | GSX*40B<br>GSX*41B | 37,5 [1.48]             | 35,0 [1.38]                          | N/A                                  | N/A                           | 30,5 [1.20]          | 35,0 [1.38]                          | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
|                    |   | GSX*42B<br>GSX*43B | 37,5 [1.48]             | 35,0 [1.38]                          | 34,0 [1.34]                          | N/A                           | 30,5 [1.20]          | 35,0 [1.38]                          | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
|                    |   | GSX*44B<br>GSX*45B | 37,5 [1.48]             | 35,0 [1.38]                          | 34,0 [1.34]                          | N/A                           | 30,5 [1.20]          | 35,0 [1.38]                          | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
|                    |   | GSX*46B<br>GSX*47B | 37,5 [1.48]             | 35,0 [1.38]                          | 34,0 [1.34]                          | N/A                           | 30,5 [1.20]          | 35,0 [1.38]                          | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
|                    |   | GSX*01C<br>GSX*07C | 50,5 [1.99]             | 48,0 [1.89]                          | 48,0 [1.89]                          | 0,9 [1.04]                    | 43,5 [1.71]          | 46,0 [1.81]                          | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
|                    |   | GSX*03C<br>GSX*33C | 50,5 [1.99]             | 48,0 [1.89]                          | 47,0 [1.85]                          | N/A                           | 43,5 [1.71]          | 48,0 [1.89]                          | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
| C                  |   | GSX*04C<br>GSX*34C | 50,5 [1.99]             | 47,0 [1.85]                          | 48 MM                                | N/A                           | 43,5 [1.71]          | 47,0 [1.85]                          | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
|                    |   | GSX*05C<br>GSX*35C | 50,5 [1.99]             | N/A                                  | 47,0 [1.85]                          | N/A                           | 43,5 [1.71]          | N/A                                  | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
|                    |   | GSX*06C<br>GSX*36C | 50,5 [1.99]             | 48,0 [1.89]                          | N/A                                  | N/A                           | 43,5 [1.71]          | 48,0 [1.89]                          | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
|                    |   | GSX*20C<br>GSX*22C | 50,5 [1.99]             | 48,0 [1.89]                          | 48,0 [1.89]                          | 0,9 [1.04]                    | 43,5 [1.71]          | 46,0 [1.81]                          | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
|                    |   | GSX*40C<br>GSX*41C | 50,5 [1.99]             | 48,0 [1.89]                          | N/A                                  | N/A                           | 43,5 [1.71]          | 48,0 [1.89]                          | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
|                    |   | GSX*42C<br>GSX*43C | 50,5 [1.99]             | 48,0 [1.89]                          | 47,0 [1.85]                          | N/A                           | 43,5 [1.71]          | 48,0 [1.89]                          | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
|                    |   | GSX*44C<br>GSX*45C | 50,5 [1.99]             | 48,0 [1.89]                          | 47,0 [1.85]                          | N/A                           | 43,5 [1.71]          | 48,0 [1.89]                          | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
|                    |   | GSX*46C<br>GSX*47C | 50,5 [1.99]             | 48,0 [1.89]                          | 47,0 [1.85]                          | N/A                           | 43,5 [1.71]          | 48,0 [1.89]                          | 16,0 [3.6]                                  | 27,0 [6.0]                                     | 0,1 [3.9]                       | 1,0 [1.04]                      | 250                           |            |     |
|                    |   | GSX*01C<br>GSX*07C | 0                       | 15,0 [1.59]                          | 15,0 [1.59]                          | 1,8 [1.07]                    | N/A                  | 18, 3 [1.72]                         | 9,3 [2.1]                                   | 15,6 [3.5]                                     | 0,2 [1.9]                       | 2,0 [1.08]                      | 250                           |            |     |
|                    |   | GSX*03C<br>GSX*33C | 0                       | 15,0 [1.59]                          | 16,8 [1.66]                          | N/A                           | N/A                  | 15,0 [1.59]                          | 9,3 [2.1]                                   | 15,6 [3.5]                                     | 0,2 [1.9]                       | 2,0 [1.08]                      | 250                           |            |     |
|                    |   | GSX*04C<br>GSX*34C | 0                       | 16,8 [1.66]                          | 15,0 [1.59]                          | N/A                           | N/A                  | 16,8 [1.66]                          | 9,3 [2.1]                                   | 15,6 [3.5]                                     | 0,2 [1.9]                       | 2,0 [1.08]                      | 250                           |            |     |
|                    |   | B                  |                         | GSX*05C<br>GSX*35C                   | 0                                    | N/A                           | 16,8 [1.66]          | N/A                                  | N/A                                         | N/A                                            | 9,3 [2.1]                       | 15,6 [3.5]                      | 0,2 [1.9]                     | 2,0 [1.08] | 250 |
| GSX*06C<br>GSX*36C | 0 |                    |                         | 15,0 [1.59]                          | N/A                                  | N/A                           | N/A                  | 15,0 [1.59]                          | 9,3 [2.1]                                   | 15,6 [3.5]                                     | 0,2 [1.9]                       | 2,0 [1.08]                      | 250                           |            |     |
| GSX*20C<br>GSX*22C | 0 |                    |                         | 15,0 [1.59]                          | 15,0 [1.59]                          | 1,8 [1.07]                    | N/A                  | 18, 3 [1.72]                         | 9,3 [2.1]                                   | 15,6 [3.5]                                     | 0,2 [1.9]                       | 2,0 [1.08]                      | 250                           |            |     |
| GSX*40C<br>GSX*41C | 0 |                    |                         | 15,0 [1.59]                          | N/A                                  | N/A                           | N/A                  | 15,0 [1.59]                          | 9,3 [2.1]                                   | 15,6 [3.5]                                     | 0,2 [1.9]                       | 2,0 [1.08]                      | 250                           |            |     |
| GSX*42C<br>GSX*43C | 0 |                    |                         | 15,0 [1.59]                          | 16,8 [1.66]                          | N/A                           | N/A                  | 15,0 [1.59]                          | 9,3 [2.1]                                   | 15,6 [3.5]                                     | 0,2 [1.9]                       | 2,0 [1.08]                      | 250                           |            |     |
| GSX*44C<br>GSX*45C | 0 |                    |                         | 15,0 [1.59]                          | 16,8 [1.66]                          | N/A                           | N/A                  | 15,0 [1.59]                          | 9,3 [2.1]                                   | 15,6 [3.5]                                     | 0,2 [1.9]                       | 2,0 [1.08]                      | 250                           |            |     |
| GSX*46C<br>GSX*47C | 0 |                    |                         | 15,0 [1.59]                          | 16,8 [1.66]                          | N/A                           | N/A                  | 15,0 [1.59]                          | 9,3 [2.1]                                   | 15,6 [3.5]                                     | 0,2 [1.9]                       | 2,0 [1.08]                      | 250                           |            |     |
| GSX*01D<br>GSX*0   |   |                    |                         |                                      |                                      |                               |                      |                                      |                                             |                                                |                                 |                                 |                               |            |     |



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331