



**Is Now Part of**



**ON Semiconductor®**

**To learn more about ON Semiconductor, please visit our website at  
[www.onsemi.com](http://www.onsemi.com)**

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at [www.onsemi.com](http://www.onsemi.com). Please email any questions regarding the system integration to [Fairchild\\_questions@onsemi.com](mailto:Fairchild_questions@onsemi.com).

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## 74LVX4245

### 8-Bit Dual Supply Translating Transceiver with 3-STATE Outputs

#### General Description

The LVX4245 is a dual-supply, 8-bit translating transceiver that is designed to interface between a 5V bus and a 3V bus in a mixed 3V/5V supply environment. The Transmit/Receive ( $\overline{T/R}$ ) input determines the direction of data flow. Transmit (active-HIGH) enables data from A Ports to B Ports; Receive (active-LOW) enables data from B Ports to A Ports. The Output Enable input, when HIGH, disables both A and B Ports by placing them in a high impedance condition. The A Port interfaces with the 5V bus; the B Port interfaces with the 3V bus.

The LVX4245 is suitable for mixed voltage applications such as laptop computers using 3.3V CPU's and 5V LCD displays.

#### Features


- Bidirectional interface between 5V and 3V buses
- Control inputs compatible with TTL level
- 5V data flow at A Port and 3V data flow at B Port
- Outputs source/sink 24 mA at 5V bus; 12 mA at 3V bus
- Guaranteed simultaneous switching noise level and dynamic threshold performance
- Implements patented EMI reduction circuitry
- Functionally compatible with the 74 series 245

#### Ordering Code:


| Order Number | Package Number | Package Description                                                         |
|--------------|----------------|-----------------------------------------------------------------------------|
| 74LVX4245WM  | M24B           | 24-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide  |
| 74LVX4245QSC | MQA24          | 24-Lead Quarter Size Outline Package (QSOP), JEDEC MO-137, 0.150" Wide      |
| 74LVX4245MTC | MTC24          | 24-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide |

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

#### Logic Symbol



#### Connection Diagram



#### Pin Descriptions


| Pin Names        | Description                      |
|------------------|----------------------------------|
| $\overline{OE}$  | Output Enable Input              |
| $\overline{T/R}$ | Transmit/Receive Input           |
| $A_0-A_7$        | Side A Inputs or 3-STATE Outputs |
| $B_0-B_7$        | Side B Inputs or 3-STATE Outputs |

#### Truth Table

| Inputs          |                  | Outputs             |
|-----------------|------------------|---------------------|
| $\overline{OE}$ | $\overline{T/R}$ |                     |
| L               | L                | Bus B Data to Bus A |
| L               | H                | Bus A Data to Bus B |
| H               | X                | HIGH-Z State        |

H = HIGH Voltage Level  
L = LOW Voltage Level  
X = Immaterial

## Logic Diagram

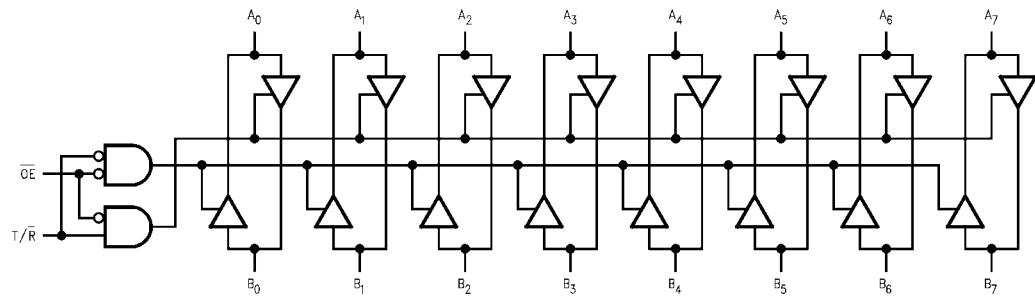

**Absolute Maximum Ratings**(Note 1)

|                                                                                                    |                                             |
|----------------------------------------------------------------------------------------------------|---------------------------------------------|
| Supply Voltage ( $V_{CCA}, V_{CCB}$ )                                                              | -0.5V to +7.0V                              |
| DC Input Voltage ( $V_I$ ) @ $\overline{OE}$ , $T/\overline{R}$                                    | -0.5V to $V_{CCA} + 0.5V$                   |
| DC Input/Output Voltage ( $V_{IO}$ )                                                               |                                             |
| @ $A_n$                                                                                            | -0.5V to $V_{CCA} + 0.5V$                   |
| @ $B_n$                                                                                            | -0.5V to $V_{CCB} + 0.5V$                   |
| DC Input Diode Current ( $I_{IN}$ )                                                                |                                             |
| @ $\overline{OE}$ , $T/\overline{R}$                                                               | $\pm 20$ mA                                 |
| DC Output Diode Current ( $I_{OK}$ )                                                               | $\pm 50$ mA                                 |
| DC Output Source or Sink Current ( $I_O$ )                                                         | $\pm 50$ mA                                 |
| DC $V_{CC}$ or Ground Current per Output Pin ( $I_{CC}$ or $I_{GND}$ ) and Max Current @ $I_{CCA}$ | $\pm 50$ mA                                 |
| @ $I_{CCB}$                                                                                        | $\pm 200$ mA                                |
| Storage Temperature Range ( $T_{STG}$ )                                                            | $-65^\circ\text{C}$ to $+150^\circ\text{C}$ |
| DC Latch-Up Source or Sink Current                                                                 | $\pm 300$ mA                                |

**Recommended Operating Conditions** (Note 2)

|                                                              |                                            |
|--------------------------------------------------------------|--------------------------------------------|
| Supply Voltage                                               | 4.5V to 5.5V                               |
| $V_{CCA}$                                                    | 2.7V to 3.6V                               |
| $V_{CCB}$                                                    | 0V to $V_{CCA}$                            |
| Input Voltage ( $V_I$ ) @ $\overline{OE}$ , $T/\overline{R}$ | 0V to $V_{CCA}$                            |
| Input/Output Voltage ( $V_{IO}$ )                            |                                            |
| @ $A_n$                                                      | 0V to $V_{CCA}$                            |
| @ $B_n$                                                      | 0V to $V_{CCB}$                            |
| Free Air Operating Temperature ( $T_A$ )                     | $-40^\circ\text{C}$ to $+85^\circ\text{C}$ |
| Minimum Input Edge Rate ( $\Delta t/\Delta V$ )              | 8 ns/V                                     |
| $V_{IN}$ from 30% to 70% of $V_{CC}$                         |                                            |
| $V_{CC}$ @ 3.0V, 4.5V, 5.5V                                  |                                            |

**Note 1:** The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

**Note 2:** Unused inputs must be held HIGH or LOW. They may not float.

**DC Electrical Characteristics**

| Symbol           | Parameter                                                                              |                                                         | V <sub>CCA</sub><br>(V) | V <sub>CCB</sub><br>(V) | T <sub>A</sub> +25°C |                   | T <sub>A</sub> = -40°C to +85°C | Units | Conditions                                                                                                                          |      |
|------------------|----------------------------------------------------------------------------------------|---------------------------------------------------------|-------------------------|-------------------------|----------------------|-------------------|---------------------------------|-------|-------------------------------------------------------------------------------------------------------------------------------------|------|
|                  |                                                                                        |                                                         |                         |                         | Typ                  | Guaranteed Limits |                                 |       |                                                                                                                                     |      |
| V <sub>IHA</sub> | Minimum HIGH Level                                                                     | A <sub>n</sub> , T/ $\overline{R}$ ,<br>$\overline{OE}$ | 5.5                     | 3.3                     |                      | 2.0               | 2.0                             | V     | V <sub>OUT</sub> ≤ 0.1V or<br>≥ V <sub>CC</sub> - 0.1V                                                                              |      |
| V <sub>IHB</sub> |                                                                                        | Input Voltage                                           | B <sub>n</sub>          | 5.0                     | 3.6                  |                   | 2.0                             |       |                                                                                                                                     | 2.0  |
|                  |                                                                                        |                                                         | 5.0                     | 2.7                     |                      | 2.0               | 2.0                             |       |                                                                                                                                     |      |
| V <sub>ILA</sub> | Maximum LOW Level                                                                      | A <sub>n</sub> , T/ $\overline{R}$ ,<br>$\overline{OE}$ | 5.5                     | 3.3                     |                      | 0.8               | 0.8                             | V     | V <sub>OUT</sub> ≤ 0.1V or<br>≥ V <sub>CC</sub> -0.1V                                                                               |      |
| V <sub>ILB</sub> |                                                                                        | Input Voltage                                           | B <sub>n</sub>          | 5.0                     | 2.7                  |                   | 0.8                             |       |                                                                                                                                     | 0.8  |
|                  |                                                                                        |                                                         | 5.0                     | 3.6                     |                      | 0.8               | 0.8                             |       |                                                                                                                                     |      |
| V <sub>OHA</sub> | Minimum HIGH Level Output Voltage                                                      |                                                         | 4.5                     | 3.0                     | 4.5                  | 4.4               | 4.4                             | V     | I <sub>OUT</sub> = -100 μA<br>I <sub>OH</sub> = -24 mA                                                                              |      |
|                  |                                                                                        |                                                         |                         | 4.5                     | 3.0                  | 4.25              | 3.86                            |       |                                                                                                                                     | 3.76 |
| V <sub>OHB</sub> |                                                                                        |                                                         | 4.5                     | 3.0                     | 2.99                 | 2.9               | 2.9                             | V     | I <sub>OUT</sub> = -100 μA<br>I <sub>OH</sub> = -12 mA<br>I <sub>OL</sub> = -8 mA                                                   |      |
|                  |                                                                                        |                                                         |                         | 4.5                     | 3.0                  | 2.8               | 2.4                             |       |                                                                                                                                     | 2.4  |
|                  |                                                                                        |                                                         |                         | 4.5                     | 2.7                  | 2.5               | 2.4                             |       |                                                                                                                                     | 2.4  |
| V <sub>OLA</sub> | Maximum LOW Level Output Voltage                                                       |                                                         | 4.5                     | 3.0                     | 0.002                | 0.1               | 0.1                             | V     | I <sub>OUT</sub> =100 μA<br>I <sub>OL</sub> = 24 mA                                                                                 |      |
|                  |                                                                                        |                                                         |                         | 4.5                     | 3.0                  | 0.18              | 0.36                            |       |                                                                                                                                     | 0.44 |
| V <sub>OLB</sub> |                                                                                        |                                                         | 4.5                     | 3.0                     | 0.002                | 0.1               | 0.1                             | V     | I <sub>OUT</sub> = 100 μA<br>I <sub>OL</sub> = 12 mA<br>I <sub>OL</sub> = 8 mA                                                      |      |
|                  |                                                                                        |                                                         |                         | 4.5                     | 3.0                  | 0.1               | 0.31                            |       |                                                                                                                                     | 0.4  |
|                  |                                                                                        |                                                         |                         | 4.5                     | 2.7                  | 0.1               | 0.31                            |       |                                                                                                                                     | 0.4  |
| I <sub>IN</sub>  | Maximum Input Leakage Current @ $\overline{OE}$ , T/ $\overline{R}$                    |                                                         | 5.5                     | 3.6                     |                      | ±0.1              | ±1.0                            | μA    | V <sub>I</sub> = V <sub>CCA</sub> , GND                                                                                             |      |
| I <sub>OZA</sub> | Maximum 3-STATE Output Leakage @ A <sub>n</sub>                                        |                                                         | 5.5                     | 3.6                     |                      | ±0.5              | ±5.0                            | μA    | V <sub>I</sub> = V <sub>IL</sub> , V <sub>IH</sub><br>$\overline{OE}$ = V <sub>CCA</sub><br>V <sub>O</sub> = V <sub>CCA</sub> , GND |      |
| I <sub>OZB</sub> | Maximum 3-STATE Output Leakage @ B <sub>n</sub>                                        |                                                         | 5.5                     | 3.6                     |                      | ±0.5              | ±5.0                            | μA    | V <sub>I</sub> = V <sub>IL</sub> , V <sub>IH</sub><br>$\overline{OE}$ = V <sub>CCA</sub><br>V <sub>O</sub> = V <sub>CCB</sub> , GND |      |
| ΔI <sub>CC</sub> | Maximum I <sub>CCT</sub> /Input @ A <sub>n</sub> , T/ $\overline{R}$ , $\overline{OE}$ |                                                         | 5.5                     | 3.6                     | 1.0                  | 1.35              | 1.5                             | mA    | V <sub>I</sub> = V <sub>CCA</sub> - 2.1V                                                                                            |      |
|                  | Input @ B <sub>n</sub>                                                                 |                                                         | 5.5                     | 3.6                     |                      | 0.35              | 0.5                             | mA    | V <sub>I</sub> = V <sub>CCB</sub> - 0.6V                                                                                            |      |

## DC Electrical Characteristics (Continued)

| Symbol                                 | Parameter                                       | V <sub>CCA</sub><br>(V) | V <sub>CCB</sub><br>(V) | T <sub>A</sub> = +25°C |                   | T <sub>A</sub> = −40°C to +85°C | Units | Conditions                                                                                                               |
|----------------------------------------|-------------------------------------------------|-------------------------|-------------------------|------------------------|-------------------|---------------------------------|-------|--------------------------------------------------------------------------------------------------------------------------|
|                                        |                                                 |                         |                         | Typ                    | Guaranteed Limits |                                 |       |                                                                                                                          |
| I <sub>CCA</sub>                       | Quiescent V <sub>CCA</sub><br>Supply Current    | 5.5                     | 3.6                     |                        | 8                 | 80                              | μA    | A <sub>n</sub> = V <sub>CCA</sub> or GND<br>B <sub>n</sub> = V <sub>CCB</sub> or GND,<br>OE = GND T/R = GND              |
| I <sub>CCB</sub>                       | Quiescent V <sub>CCB</sub><br>Supply Current    | 5.5                     | 3.6                     |                        | 5                 | 50                              | μA    | A <sub>n</sub> = V <sub>CCA</sub> or GND<br>B <sub>n</sub> = V <sub>CCB</sub> or GND,<br>OE = GND T/R = V <sub>CCA</sub> |
| V <sub>OLPA</sub><br>V <sub>OLPB</sub> | Quiet Output Maximum<br>Dynamic V <sub>OL</sub> | 5.0<br>5.0              | 3.3<br>3.3              |                        | 1.5<br>0.8        |                                 | V     | (Note 4)(Note 5)                                                                                                         |
| V <sub>OLVA</sub><br>V <sub>OLVB</sub> | Quiet Output Minimum<br>Dynamic V <sub>OL</sub> | 5.0<br>5.0              | 3.3<br>3.3              |                        | −1.2<br>−0.8      |                                 | V     | (Note 4)(Note 5)                                                                                                         |
| V <sub>IHDA</sub><br>V <sub>IHDB</sub> | Minimum HIGH Level<br>Dynamic Input Voltage     | 5.0<br>5.0              | 3.3<br>3.3              |                        | 2.0<br>2.0        |                                 | V     | (Note 4)(Note 6)                                                                                                         |
| V <sub>ILDA</sub><br>V <sub>ILDB</sub> | Maximum LOW Level<br>Dynamic Input Voltage      | 5.0<br>5.0              | 3.3<br>3.3              |                        | 0.8<br>0.8        |                                 | V     | (Note 4)(Note 6)                                                                                                         |

**Note 3:** Maximum test duration 2.0 ms, one output loaded at a time.

**Note 4:** Worst case package.

**Note 5:** Max number of outputs defined as (n). Data inputs are driven 0V to V<sub>CC</sub> level; one output at GND.

**Note 6:** Max number of Data Inputs (n) switching. (n-1) inputs switching 0V to V<sub>CC</sub> level. Input-under-test switching:  
V<sub>CC</sub> level to threshold (V<sub>IHD</sub>), 0V to threshold (V<sub>ILD</sub>), f = 1 MHz.

## AC Electrical Characteristics

| Symbol                                 | Parameters                                          | T <sub>A</sub> = +25°C<br>C <sub>L</sub> = 50 pF<br>V <sub>CCA</sub> = 5V (Note 7)<br>V <sub>CCB</sub> = 3.3V (Note 8) |            |              | T <sub>A</sub> = -40°C to +85°C<br>C <sub>L</sub> = 50 pF<br>V <sub>CCA</sub> = 5V (Note 7)<br>V <sub>CCB</sub> = 3.3V (Note 8) |              | T <sub>A</sub> = -40°C to +85°C<br>C <sub>L</sub> = 50 pF<br>V <sub>CCA</sub> = 5V (Note 7)<br>V <sub>CCB</sub> = 2.7V |              | Units |
|----------------------------------------|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|------------|--------------|---------------------------------------------------------------------------------------------------------------------------------|--------------|------------------------------------------------------------------------------------------------------------------------|--------------|-------|
|                                        |                                                     | Min                                                                                                                    | Typ        | Max          | Min                                                                                                                             | Max          | Min                                                                                                                    | Max          |       |
|                                        |                                                     |                                                                                                                        |            |              |                                                                                                                                 |              |                                                                                                                        |              |       |
| t <sub>PHL</sub><br>t <sub>PLH</sub>   | Propagation Delay<br>A to B                         | 1.0<br>1.0                                                                                                             | 5.1<br>5.3 | 8.5<br>8.5   | 1.0<br>1.0                                                                                                                      | 9.0<br>9.0   | 1.0<br>1.0                                                                                                             | 10.0<br>10.0 | ns    |
| t <sub>PHL</sub><br>t <sub>PLH</sub>   | Propagation Delay<br>B to A                         | 1.0<br>1.0                                                                                                             | 5.4<br>5.5 | 8.5<br>8.5   | 1.0<br>1.0                                                                                                                      | 9.0<br>9.0   | 1.0<br>1.0                                                                                                             | 10.0<br>10.0 | ns    |
| t <sub>PZL</sub><br>t <sub>PZH</sub>   | Output Enable Time<br>OE to B                       | 1.0<br>1.0                                                                                                             | 6.5<br>6.7 | 10.0<br>10.0 | 1.0<br>1.0                                                                                                                      | 10.5<br>10.5 | 1.0<br>1.0                                                                                                             | 11.5<br>11.5 | ns    |
| t <sub>PZL</sub><br>t <sub>PZH</sub>   | Output Enable Time<br>OE to A                       | 1.0<br>1.0                                                                                                             | 5.2<br>5.8 | 9.0<br>9.0   | 1.0<br>1.0                                                                                                                      | 9.5<br>9.5   | 1.0<br>1.0                                                                                                             | 10.0<br>10.0 | ns    |
| t <sub>PHZ</sub><br>t <sub>PLZ</sub>   | Output Disable Time<br>OE to B                      | 1.0<br>1.0                                                                                                             | 6.0<br>3.3 | 9.5<br>6.5   | 1.0<br>1.0                                                                                                                      | 10.0<br>7.0  | 1.0<br>1.0                                                                                                             | 10.0<br>7.5  | ns    |
| t <sub>PHZ</sub><br>t <sub>PLZ</sub>   | Output Disable Time<br>OE to A                      | 1.0<br>1.0                                                                                                             | 3.9<br>2.9 | 7.0<br>6.5   | 1.0<br>1.0                                                                                                                      | 7.5<br>7.0   | 1.0<br>1.0                                                                                                             | 7.5<br>7.5   | ns    |
| t <sub>OSHL</sub><br>t <sub>OSLH</sub> | Output to Output<br>Skew (Note 9)<br>Data to Output |                                                                                                                        | 1.0        | 1.5          |                                                                                                                                 | 1.5          |                                                                                                                        | 1.5          | ns    |

**Note 7:** Voltage Range 5.0V is 5.0V ± 0.5V.

**Note 8:** Voltage Range 3.3V is 3.3V ± 0.3V.

**Note 9:** Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t<sub>OSHL</sub>) or LOW-to-HIGH (t<sub>OSLH</sub>). Parameter guaranteed by design.

## Capacitance


| Symbol    | Parameter                               | Typ | Units | Conditions                           |
|-----------|-----------------------------------------|-----|-------|--------------------------------------|
| $C_{IN}$  | Input Capacitance                       | 4.5 | pF    | $V_{CC} = \text{Open}$               |
| $C_{I/O}$ | Input/Output Capacitance                | 15  | pF    | $V_{CCA} = 5.0V$<br>$V_{CCB} = 3.3V$ |
| $C_{PD}$  | Power Dissipation Capacitance (Note 10) | B→A | 55    | pF                                   |
|           |                                         | A→B | 40    | pF                                   |
|           |                                         |     |       | $V_{CCA} = 5.0V$<br>$V_{CCB} = 3.3V$ |

**Note 10:**  $C_{PD}$  is measured at 10 MHz

## 8-Bit Dual Supply Translating Transceiver

The LVX4245 is a dual supply device capable of bidirectional signal translation. This level shifting ability provides an efficient interface between low voltage CPU local bus with memory and a standard bus defined by 5V I/O levels. The device control inputs can be controlled by either the low voltage CPU and core logic or a bus arbitrator with 5V I/O levels.

Manufactured on a sub-micron CMOS process, the LVX4245 is ideal for mixed voltage applications such as notebook computers using 3.3V CPU's and 5V peripheral devices.

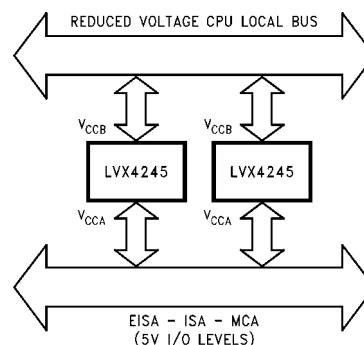

## Power Up Considerations

To insure the system does not experience unnecessary  $I_{CC}$  current draw, bus contention, or oscillations during power up, the following guidelines should be adhered to (refer to Table 1):

- Power up the control side of the device first. This is the  $V_{CCA}$ .
- $\overline{OE}$  should ramp with or ahead of  $V_{CCA}$ . This will help guard against bus contention.
- The Transmit/Receive control pin ( $T/\overline{R}$ ) should ramp with or ahead of  $V_{CCA}$ , this will ensure that the A Port data

pins are configured as inputs. With  $V_{CCA}$  receiving power first, the A I/O Port should be configured as inputs to help guard against bus contention and oscillations.

- A side data inputs should be driven to a valid logic level. This will prevent excessive current draw.

The above steps will ensure that no bus contention or oscillations, and therefore no excessive current draw occurs during the power up cycling of these devices. These steps will help prevent possible damage to the translator devices and potential damage to other system components.

**TABLE 1. Low Voltage Translator Power Up Sequencing Table**

| Device Type | $V_{CCA}$            | $V_{CCB}$            | $T/\overline{R}$       | $\overline{OE}$        | A Side I/O               | B Side I/O | Floatable Pin Allowed |
|-------------|----------------------|----------------------|------------------------|------------------------|--------------------------|------------|-----------------------|
| 74LVX4245   | 5V<br>(power up 1st) | 3V<br>(power up 2nd) | ramp<br>with $V_{CCA}$ | ramp<br>with $V_{CCA}$ | logic<br>0V or $V_{CCA}$ | outputs    | No                    |

Please reference Application Note AN-5001 for more detailed information on using Fairchild's LVX Low Voltage Dual Supply CMOS Translating Transceivers.

## Applications: Mixed Mode Dual Supply Interface Solution

LVX4245 is designed to solve 3V/5V interfacing issues when CMOS devices cannot tolerate I/O levels above their applied  $V_{CC}$ . If an I/O pin of 3V ICs is driven by 5V ICs, the P-Channel transistor in 3V ICs will conduct causing current flow from I/O bus to the 3V power supply. The resulting high current flow can cause destruction of 3V ICs through latchup effects. To prevent this problem, a current limiting resistor is used typically under direct connection of 3V ICs and 5V ICs, but it causes speed degradation.

In a better solution, the LVX4245 configures two different output levels to handle the dual supply interface issues. The "A" port is a dedicated 5V port to interface 5V ICs. The "B" port is a dedicated port to interface 3V ICs. Figure 2 shows how LVX4245 fits into a system with 3V subsystem and 5V subsystem.

This device is also configured as an 8-bit 245 transceiver, giving the designer 3-STATE capabilities and the ability to select either bidirectional or unidirectional modes. Since the center 20 pins are also pin compatible to 74 series 245, as shown in Figure 1, the designer could use this device in

either a 3V system or a 5V system without any further work to re-layout the board.




FIGURE 1. LVX4245 Pin Arrangement is Compatible to 20-Pin 74 Series 245




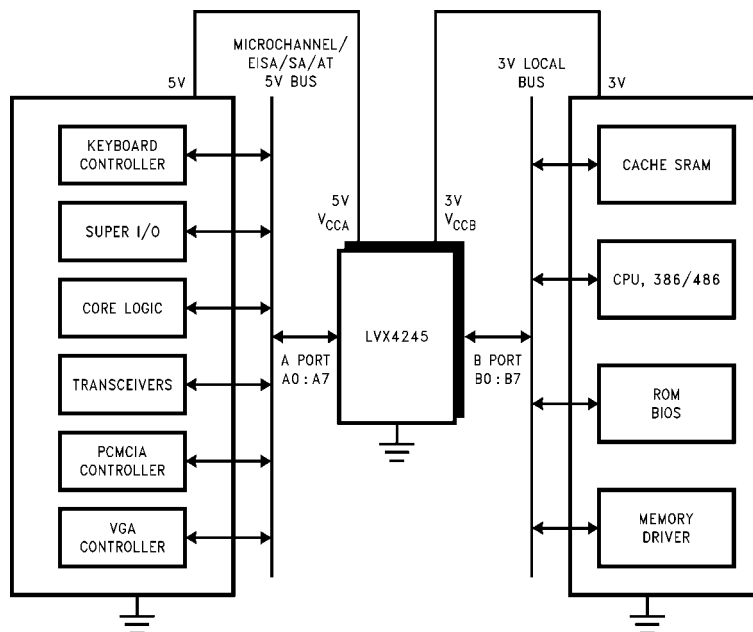


FIGURE 2. LVX4245 Fits into a System with 3V Subsystem and 5V Subsystem



## Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

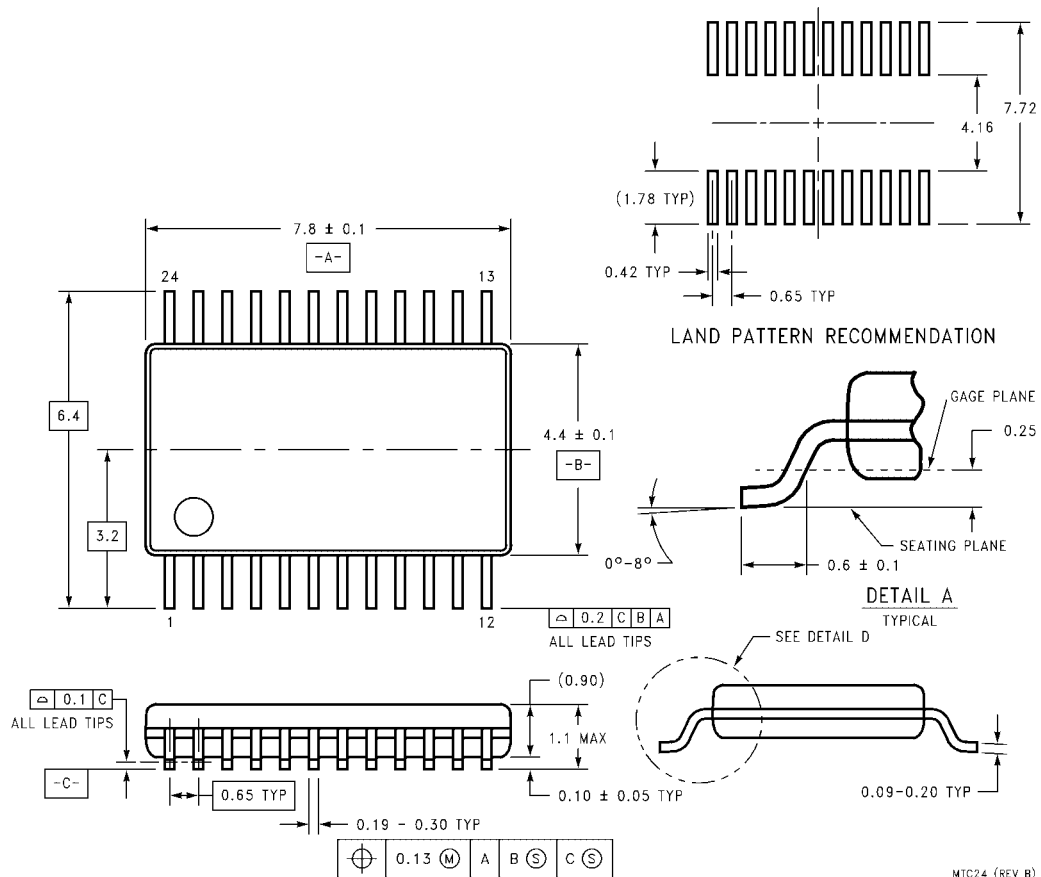

24-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide  
Package Number MTC24

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910

**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ON Semiconductor:](#)

[74LVX4245MTCX](#) [74LVX4245MTC](#) [74LVX4245WM](#) [74LVX4245QSCX](#) [74LVX4245WMX](#) [74LVX4245QSC](#)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331