

HCPL-T251

0.4 Amp Output Current IGBT Gate Drive Optocoupler

AVAGO
TECHNOLOGIES


Data Sheet



Description

The HCPL-T251 contains GaAsP LED. The LED is optically coupled to an integrated circuit with a power output stage. This optocoupler is ideally suited for driving power IGBTs and MOSFETs used in motor control inverter applications. The high operating voltage range of the output stage provides the drive voltages required by gate controlled devices. The voltage and current supplied by this optocoupler makes it ideally suited for directly driving small or medium power IGBTs.

Functional Diagram

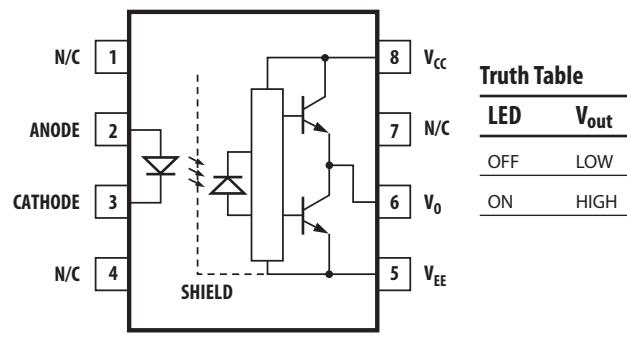

| Truth Table | |
|-------------|------------------|
| LED | V _{out} |
| OFF | LOW |
| ON | HIGH |

Features

- Supply current (I_{CC}): 11 mA (max.)
- Supply voltage (V_{CC}): 10-30V
- Output current (I_O): ±0.4 A (min.)
- Switching time (t_{PLH}/t_{PHL}): 1 µs (max.)
- Isolation voltage (V_{ISO}): 3750 Vrms (min.)
- UL 577 Recognized: File No. E55361
- CSA Approved
- 10 kV/µs Minimum Common Mode Rejection (CMR) at V_{cm} = 600 V
- Creepage distance: 7.4 mm
Clearance: 7.1 mm

Applications

- IGBT/MOSFET gate drive
- AC/brushless DC motor drives
- Industrial inverters
- Switch mode power supplies

CAUTION: It is advised that normal static precautions be taken in handling and assembly of this component to prevent damage and/or degradation which may be induced by ESD.

HCPL-T251

HCPL-T251 is UL Recognized with 3750 Vrms for 1 minute per UL1577.

| Option | | | | | | |
|-------------|----------------|--------------------|---------|---------------|-----------|---------------|
| Part Number | RoHS Compliant | Non RoHS Compliant | Package | Surface Mount | Gull Wing | Tape & Reel |
| HCPL-T251 | -000E | No option | 300mil | | | 50 per tube |
| | -300E | #300 | DIP-8 | X | X | 50 per tube |
| | -500E | #500 | | X | X | 1000 per reel |

To order, choose a part number from the part number column and combine with the desired option from the option column to form an order entry.

Example 1:

HCPL-T251-500E to order product of 300 mil DIP Gull Wing Surface Mount package in Tape and Reel and RoHS compliant.

Example 2:


HCPL-T251 to order product of 300 mil DIP package in tube packaging and non RoHS compliant.

Option datasheets are available. Contact your Avago sales representative or authorized distributor for information.


Remarks: The notation '#XXX' is used for existing products, while (new) products launched since 15th July 2001 and RoHS compliant option will use '-XXE'.

Package Outline Drawings

Standard DIP Package

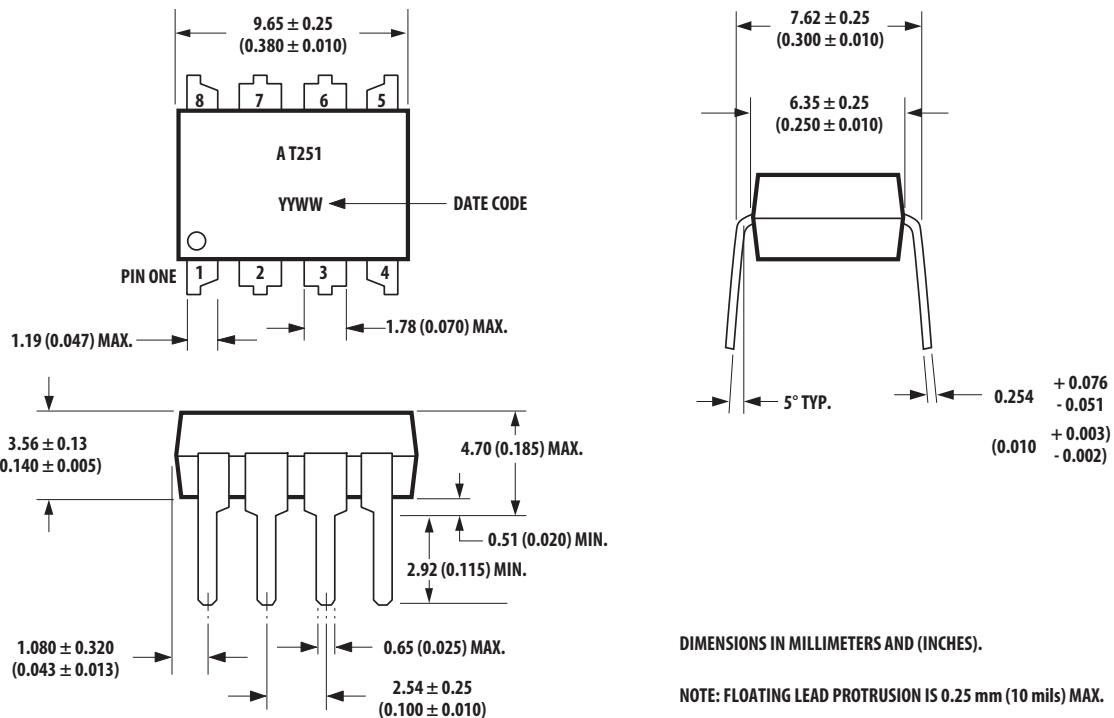

Gull Wing Surface Mount Option 300

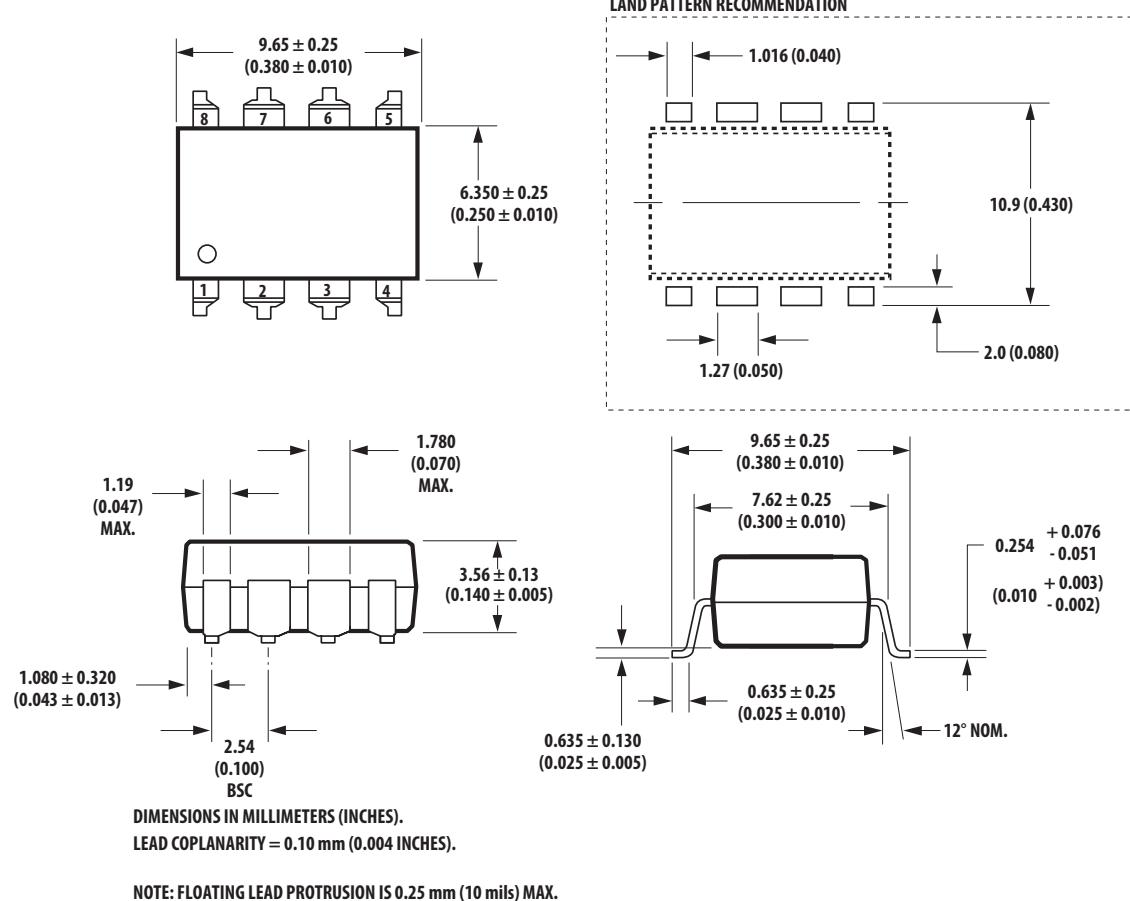

Regulatory Information

The HCPL-T251 is under approval by the following organizations:

UL

Approval under UL 1577, Component Recognition Program, File E55361.

CSA

Approval under CSA Component Acceptance Notice #5, File CA 88324.

Insulation and Safety Related

| Parameter | Symbol | Value | Units | Conditions |
|---|--------|-------|-------|--|
| Minimum External Air Gap (Clearance) | L(101) | 7.1 | mm | Measured from input terminals to output terminals, shortest distance through air. |
| Minimum External Tracking (Creepage) | L(102) | 7.4 | mm | Measured from input terminals to output terminals, shortest distance path along body. |
| Minimum Internal Plastic Gap (Internal Clearance) | | 0.08 | mm | Insulation thickness between emitter and detector; also known as distance through insulation |
| Tracking Resistance (Comparative Tracking Index) | CTI | ≥175 | Volts | DIN IEC 112/VDE 0303 Part 1 |
| Isolation Group | | IIIa | | Material Group (DIN VDE 0110, 1/89, Table 1) |

Absolute Maximum Ratings (Compared with HCPL-3140)

| Parameter | Symbol | Units | HCPL-3140 | | HCPL-T251 | | Note |
|---|--------------------------------------|-------|---|-----------------|-----------|-----------------|------|
| | | | Min. | Max. | Min. | Max. | |
| Operating Temperature | T _A | °C | -40 | 100 | -20 | 85 | |
| "High" Peak Output Current | I _{OH(Peak)} | A | | 0.6 | | 0.4 | 1 |
| "High" Peak Output Current | I _{OL(Peak)} | A | | 0.6 | | 0.4 | |
| Storage Temperature | T _S | °C | -55 | 125 | -55 | 125 | |
| Average Input Current | I _{F(Avg)} | mA | | 25 | | 20 | 2 |
| Peak Transient Input Current (<1 μs Pulse Width, 300 pps) | I _{F(TRAN)} | A | | 1.0 | | 1.0 | |
| Reverse Input Voltage | V _R | V | | 5 | | 5 | |
| Supply Voltage | (V _{CC} - V _{EE}) | V | -0.5 | 35 | -0.5 | 35 | |
| Output Voltage | V _O | V | 0 | V _{CC} | 0 | V _{CC} | |
| Output Power Dissipation | P _O | mW | | 250 | | 250 | 3 |
| Lead Solder Temperature | | | 260°C for 10 sec., 1.6 mm below seating plane | | | | |
| Solder Reflow Temperature Profile | | | See Package Outline Drawings section | | | | |

Notes:

1. Maximum pulse width = 10 μs, maximum duty cycle = 0.2%.
2. Derate linearly above 70°C free-air temperature at a rate of 0.3 mA/°C.
3. Derate linearly above 70°C free-air temperature at a rate of 4.8 mW/°C.

Recommended Operating Conditions

| Parameter | Symbol | Min. | Max. | Units |
|----------------------|-------------------|------|------|-------|
| Power Supply Voltage | $V_{CC} - V_{EE}$ | 15 | 30 | V |
| Input Current (ON) | $I_{F(ON)}$ | 8 | 12 | mA |
| Input Voltage (OFF) | $V_{F(OFF)}$ | 0 | 0.8 | V |

DC Electrical Specifications (Compared with HCPL-3140)

Over recommended operating conditions ($I_{F(ON)} = 8$ to 12 mA, $V_{F(OFF)} = 0$ to 0.8 V, $V_{CC} = 15$ to 30 V, $V_{EE} = \text{Ground}$) unless otherwise specified.

| Parameter | Symbol | Units | HCPL-3140 | | HCPL-T251 | | Test Conditions | Note |
|--|---------------------------|-------|--------------|----------------|--------------|----------------|-----------------|---|
| | | | Min. | Typ.* | Max. | Min. | | |
| Input Forward Voltage | V_F | V | 1.2 | 1.5 | 1.8 | 1.6 | 1.8 | $I_F = 10$ mA |
| Temperature Coefficient of Forward Voltage | $\Delta V_F / \Delta T_A$ | mV/°C | | -1.6 | | -2.0 | | $I_F = 10$ mA |
| Input Reverse Current | I_R | µA | | | 10 | | 10 | $V_R = 5$ V |
| Input Capacitance | C_{IN} | pF | | 60 | | 45 | 250 | $V_F = 0$ V, $F = 1$ MHz |
| High Level Output Current | I_{OH} | A | 0.2 0.4 | 0.5 | N.A. | 0.25 | | $V_O = V_{CC} - 4$ V $V_O = V_{CC} - 15$ V |
| Low Level Output Current | I_{OL} | A | 0.2 0.4 | 0.4 0.5 | 0.1 N.A. | 0.2 | | $V_O = V_{CC} - 4$ V $V_O = V_{CC} - 15$ V |
| High Level Output Voltage | V_{OH} | V | $V_{CC} - 4$ | $V_{CC} - 1.8$ | $V_{CC} - 4$ | $V_{CC} - 1.8$ | | $I_O = -100$ mA |
| Low Level Output Voltage | V_{OL} | V | | 0.4 | 1 | 0.5 | | $I_O = 100$ mA |
| High Level Supply Current | I_{CCH} | mA | | 0.7 | 3 | 7.5 | 11 | Output Open $I_F = 7$ to 16 mA |
| Low Level Supply Current | I_{CCL} | mA | | 1 - 2 | 3 | 8 | 11 | Output Open $V_F = -3.0$ to $+0.8$ V |
| Threshold Input Current Low to High | I_{FLH} | mA | | | 6 | | 7 | $I_O = 0$ mA, $V_O > 5$ V |
| Threshold Input Voltage High to Low | V_{FHL} | V | 0.8 | | 0.8 | | | |
| Supply Voltage | V_{CC} | V | 10 | | 30 | 10 | 30 | |
| Capacitance (Input-Output) | C_{I-O} | pF | | 60 | | 60 | | |
| Resistance (Input-Output) | R_{I-O} | Ω | | 10^{12} | | 10^{12} | | |

*All typical values at $T_A = 25^\circ\text{C}$ and $V_{CC} - V_{EE} = 3$ V, unless otherwise noted.

Switching Specifications (AC) (Compared with HCPL-3140)

Over recommended operating conditions ($T_A = -40$ to 100°C , $I_F(\text{ON}) = 8$ to 12 mA , $V_F(\text{OFF}) = -3.0$ to 0.8 V , $V_{CC} = 15$ to 30 V , $V_{EE} = \text{Ground}$) unless otherwise specified.

| Parameter | Symbol | Units | HCPL-3140 (-40°C ~ 100°C) | | | HCPL-T251 (-20°C ~ 70°C) | | | Test Conditions | Note |
|--|------------------------------|-------------------------|------------------------------|-------|------|-----------------------------|-------|--|---|------|
| | | | Min. | Typ.* | Max. | Min. | Typ.* | Max. | | |
| Propagation Delay Time to High Output Level | t_{PHL} | μs | 0.1 | 0.2 | 0.7 | 0.25 | 1 | Rg = 47 Ω $C_g = 3 \text{ nF}$, $f = 10 \text{ kHz}$, Duty Cycle = 50% | | |
| Propagation Delay Time to Low Output Level | T_{PLH} | μs | 0.1 | 0.3 | 0.7 | 0.25 | 1 | | | |
| Output Rise Time | t_R | ns | | 50 | | N.A. | | | | |
| Output Fall Time | t_F | ns | | 50 | | N.A. | | | | |
| Propagation Delay Difference Between Any Two Parts | $(t_{PHL} - t_{PLH})$ PDD | μs | -0.5 | | 0.5 | N.A. | | N.A. | | 1 |
| Output High Level Common Mode Transient Immunity | $ CM_H $ | $\text{kV}/\mu\text{s}$ | 10 | | 10 | | | | $T_A = 25^\circ\text{C}, V_{CC} = 30 \text{ V}$ | 2 |
| | | | | | | | | | HCPL -3140 $I_F = 10 \text{ mA}$ $V_{CM} = 1000 \text{ V}$ | |
| | | | | | | | | | HCPL -T251 $I_F = 8 \text{ mA}$ $V_{CM} = 600 \text{ V}$ | |
| Output Low Level Common Mode Transient Immunity | $ CM_L $ | $\text{kV}/\mu\text{s}$ | 10 | | 10 | | | | $T_A = 25^\circ\text{C}, V_F = 0 \text{ V}$ | 2 |
| | | | | | | | | | HCPL -3140 $V_{CM} = 1000 \text{ V}$ | |
| | | | | | | | | | HCPL -T251 $V_{CM} = 600 \text{ V}$ | |

*All typical values at $T_A = 25^\circ\text{C}$ and $V_{CC} - V_{EE} = 30 \text{ V}$, unless otherwise noted.

Notes:

1. The difference between t_{PHL} and t_{PLH} between any two HCPL-3140 parts under the same test condition.
2. Common mode transient immunity in the high state is the maximum tolerable dV_{CM}/dt of the common mode pulse, V_{CM} , to assure that the output will remain in the high state (i.e., $V_O > 15.0 \text{ V}$).
3. Common mode transient immunity in a low state is the maximum tolerable dV_{CM}/dt of the common mode pulse, V_{CM} , to assure that the output will remain in a low state (i.e., $V_O < 1.0 \text{ V}$).

For product information and a complete list of distributors, please go to our website: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries.
Data subject to change. Copyright © 2005-2010 Avago Technologies. All rights reserved. Obsolete AV01-0533EN
AV02-2364EN - February 22, 2010





**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литер Н,
помещение 100-Н Офис 331