

**Description**: 860-930MHz Embedded Helical Antenna

**PART NUMBER: W3136** 

**Series: SMD Helical Antenna** 



## **Features:**

- 860-930MHz
- Impedance 50 Ohm
- Plastic support helical antenna
- Length 29.5mm,
- Gain 2dBi
- SMD Mounting on PCB
- RoHS Compliant

# **Applications:**

- 868MHz and 915MHz ISM Band Systems
- IoT systems
- · Metering, Automation
- Security, surveillance
- Remote controls, toys

All dimensions are in mm / inches

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



**Power Withstanding** 

#### **TECHNICAL DATA SHEET**

Description: 860-930MHz Embedded Helical Antenna

2W

**Series: SMD Helical Antenna** 

**PART NUMBER: W3136** 

## **ELECTRICAL SPECIFICATIONS**

Antenna Type Helical monopole Frequency 860-930MHz Nominal Impedance  $50 \Omega$ **VSWR** Max 2.5 Radiation Pattern **Omni** Gain 2 dBi Efficiency 65% Polarization Linear

## **MECHANICAL SPECIFICATIONS**

Overall Length 29.5mm
Weight 2.52g
Antenna Color / Material White
Fix system SMD+Glue

Recommended Glue Resinlab EP1320LV Black

Solder Paste Thickness Min 0.15mm

MSL 3

# **ENVIRONMENTAL SPECIFICATIONS**

Operating Temperature  $-40^{\circ}$  C~+85° C Storage Temperature  $-40^{\circ}$  C~+85° C

RoHS Compliant Yes

# **OTHER SPECIFICATIONS**

Issue: 1943






**Description**: 860-930MHz Embedded Helical Antenna

**Series: SMD Helical Antenna** 

**PART NUMBER: W3136** 

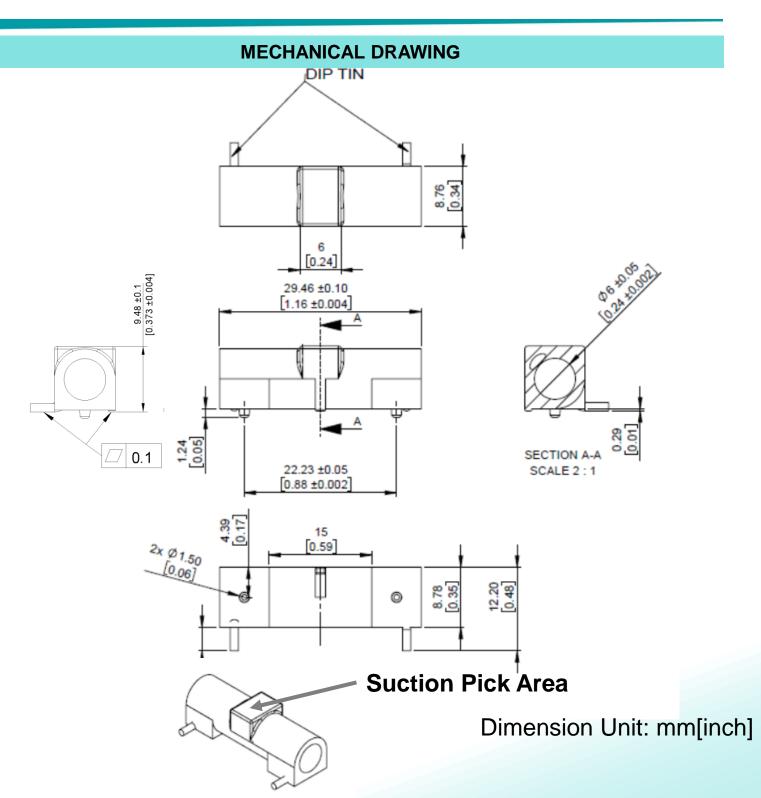

Issue: 1943





Description: 860-930MHz Embedded Helical Antenna


**Series: SMD Helical Antenna** 

**PART NUMBER: W3136** 

# **FIX SYSTEM RECOMMENDATION**

# Fix system

- 1. SMD process
- 2. Solder paste thickness: minimum 0.15mm
- 3. Glue is required, Recommended Glue: Resinlab EP1320LV Black, usage and position see below recommended area.

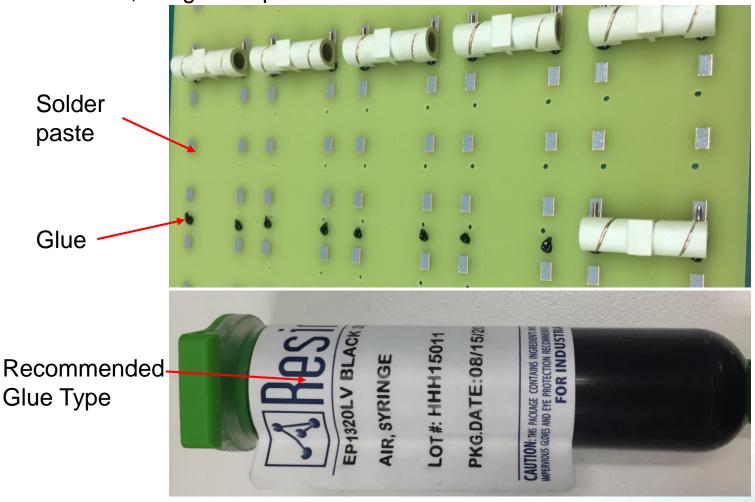

Issue: 1943





**Description**: 860-930MHz Embedded Helical Antenna

**Series: SMD Helical Antenna** 


**PART NUMBER: W3136** 

## **FIX SYSTEM RECOMMENDATION**

Fix system

1. Glue position on PCB for recommendation

Glue position on PCB for recommendation

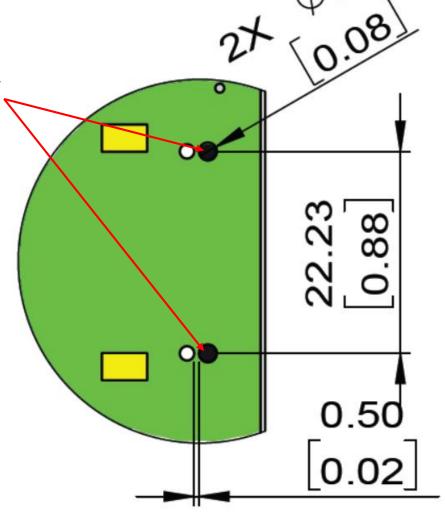




**Description**: 860-930MHz Embedded Helical Antenna

**Series: SMD Helical Antenna** 

**PART NUMBER: W3136** 

# **FIX SYSTEM RECOMMENDATION**

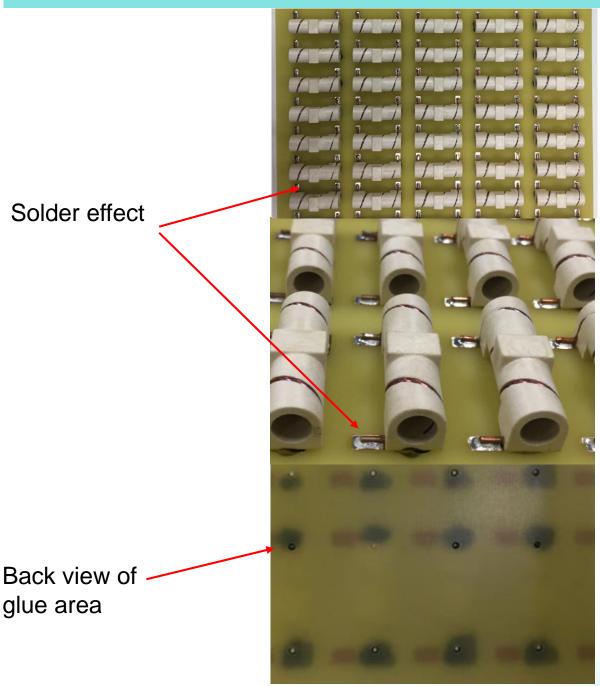






**Description**: 860-930MHz Embedded Helical Antenna


**Series: SMD Helical Antenna** 

**PART NUMBER: W3136** 

# **TEST SETUP**

# PWB Layout for W3136 SMD Helical Antenna



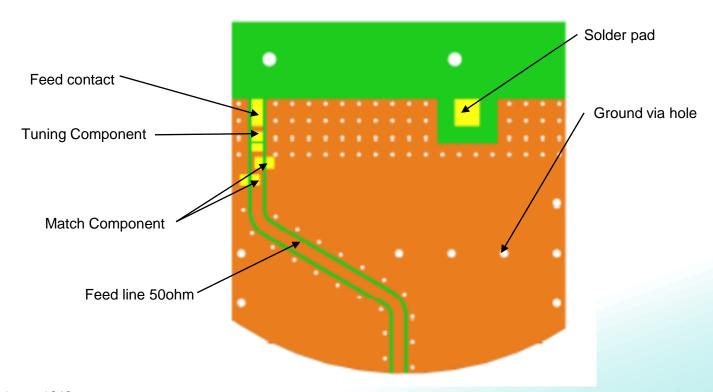

Issue: 1943

ROHS




**Description**: 860-930MHz Embedded Helical Antenna

**Series: SMD Helical Antenna** 

**PART NUMBER: W3136** 

## **TEST SETUP**

PWB ground clearance area (Top):40x9.5mm PWB ground clearance area (Bottom):40x9.5mm

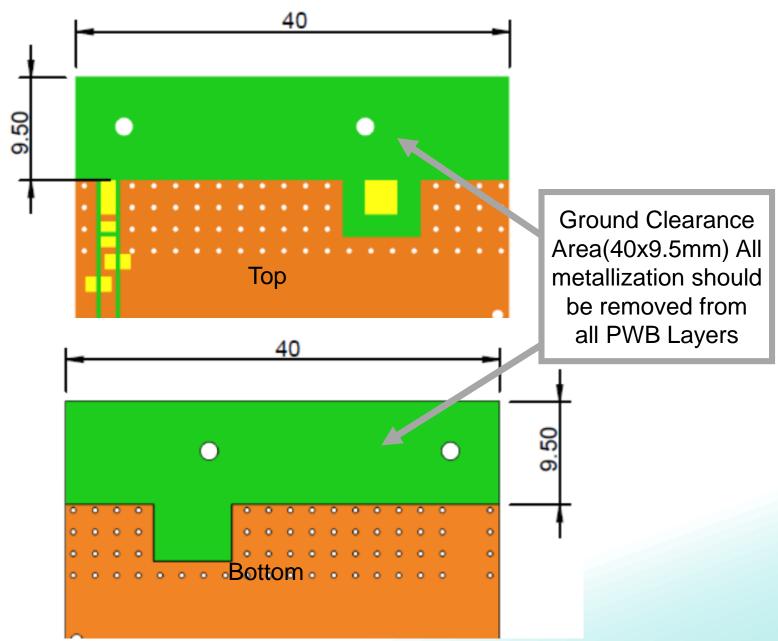

Issue: 1943

ROHS




**Description**: 860-930MHz Embedded Helical Antenna

**Series: SMD Helical Antenna** 

**PART NUMBER: W3136** 

# **TEST SETUP**

# PWB Pad dimension in top copper

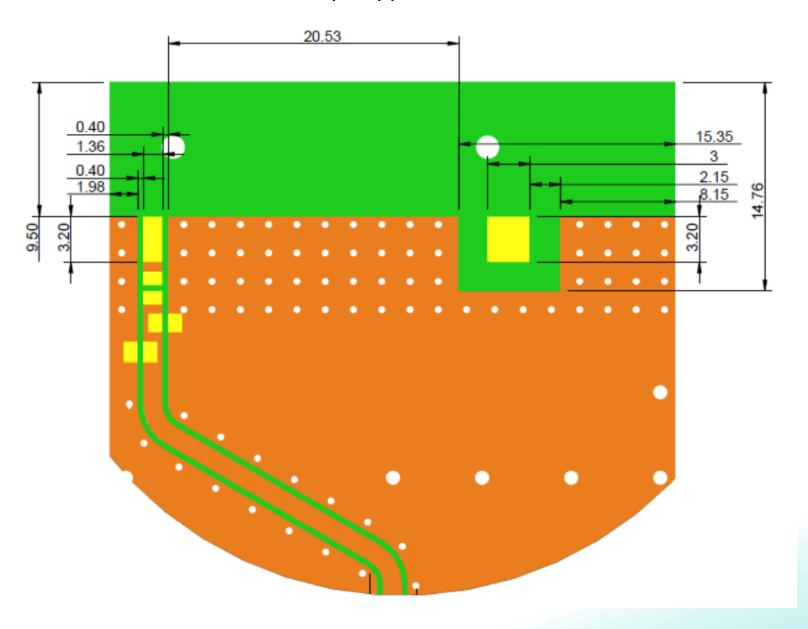








**Description**: 860-930MHz Embedded Helical Antenna


**PART NUMBER: W3136** 

# **Series: SMD Helical Antenna**

# **TEST SETUP**

PWB Layout, Pulse PWB size:121x40mm, Thickness 1.0mm, other size boards can be used depending on customer size.

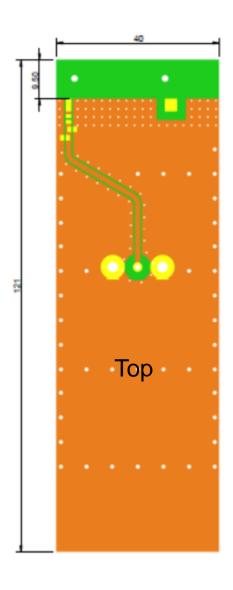

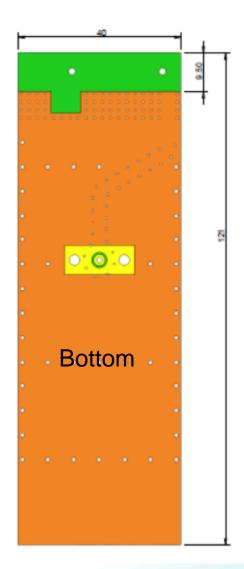




**Description**: 860-930MHz Embedded Helical Antenna

**Series: SMD Helical Antenna** 

**PART NUMBER: W3136** 

## **TEST SETUP**

PWB Layout, Pulse PWB size:121x40mm, Thickness 1.0mm, other size boards can be used depending on customer size.

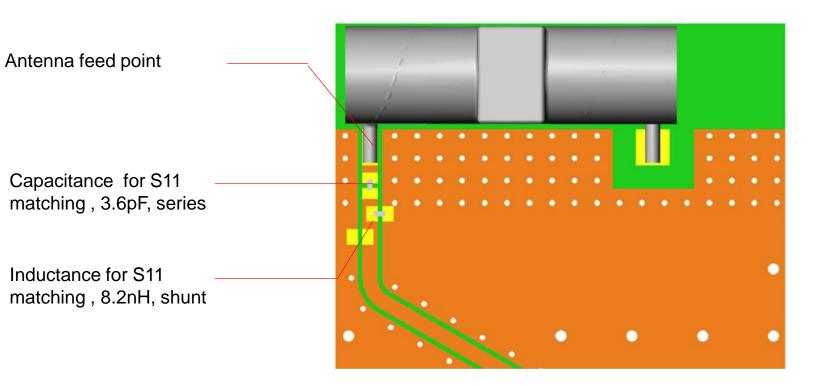

Note: Exact matching and tuning components value depend on application, board size, cover etc.




**Description**: 860-930MHz Embedded Helical Antenna

**Series: SMD Helical Antenna** 

**PART NUMBER: W3136** 

# **CHARTS**

# Measured on the 121x40mm test board with tuning and matching circuit

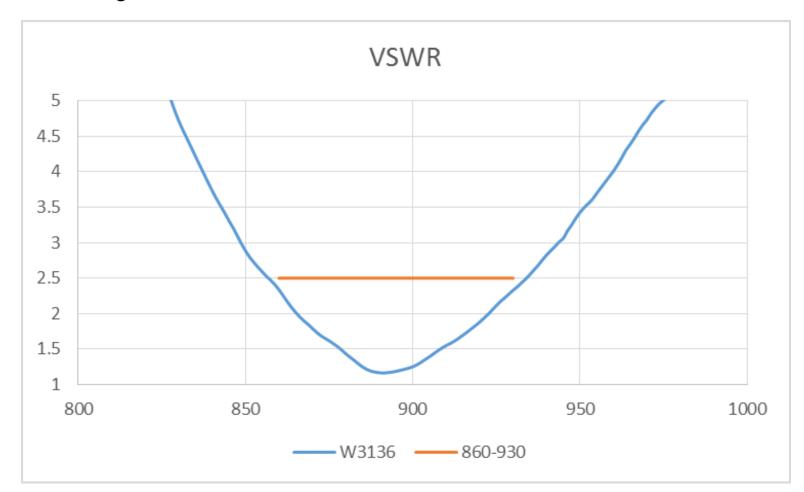





**Description**: 860-930MHz Embedded Helical Antenna


PART NUMBER: W3136

**Series: SMD Helical Antenna** 

# **TEST SETUP**

Measured on the 121x40mm test board with tuning and matching circuit.

Test in PSU China Chamber.

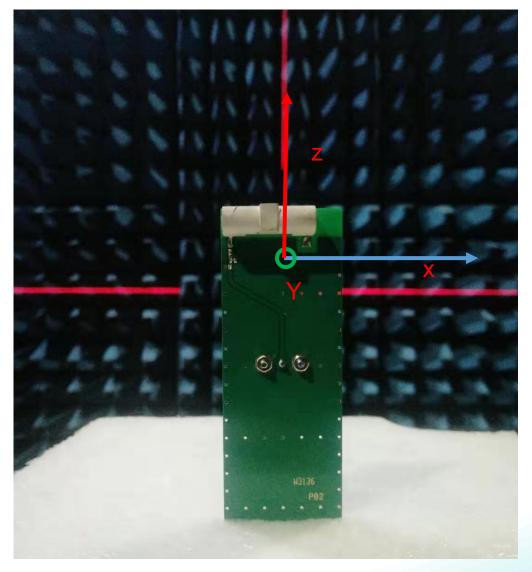




**Description**: 860-930MHz Embedded Helical Antenna

**Series: SMD Helical Antenna** 

**PART NUMBER: W3136** 

# **CHARTS**

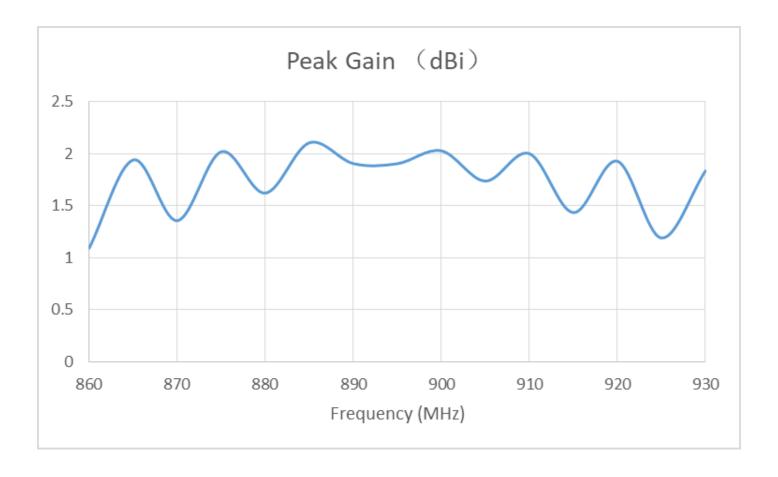




**Description**: 860-930MHz Embedded Helical Antenna

**Series: SMD Helical Antenna** 

**PART NUMBER: W3136** 

# **CHARTS**

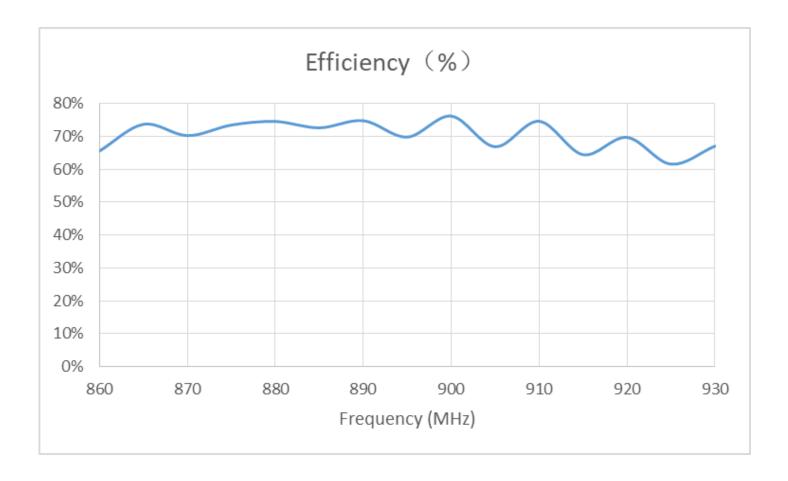




**Description**: 860-930MHz Embedded Helical Antenna

**Series: SMD Helical Antenna** 

**PART NUMBER: W3136** 

# **CHARTS**

# Typical radiation pattern in free space

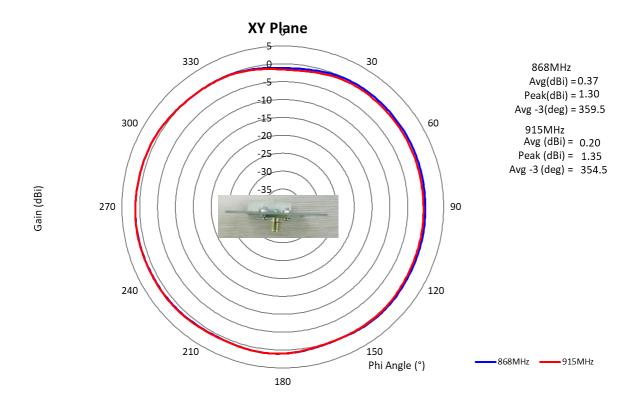




**Description**: 860-930MHz Embedded Helical Antenna

**Series: SMD Helical Antenna** 

**PART NUMBER: W3136** 

# **CHARTS**

# Typical radiation pattern in free space

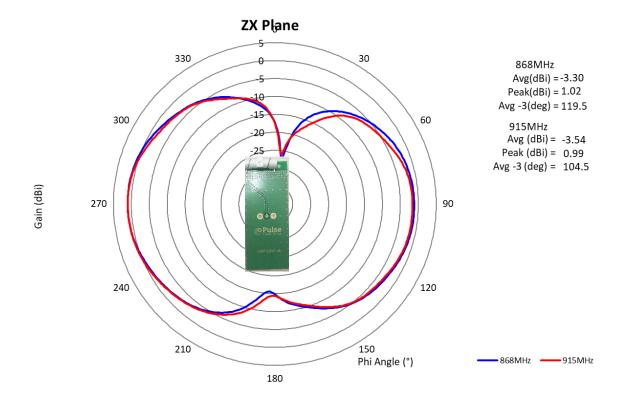




**Description**: 860-930MHz Embedded Helical Antenna

**Series: SMD Helical Antenna** 

**PART NUMBER: W3136** 

# **CHARTS**

# Typical radiation pattern in free space

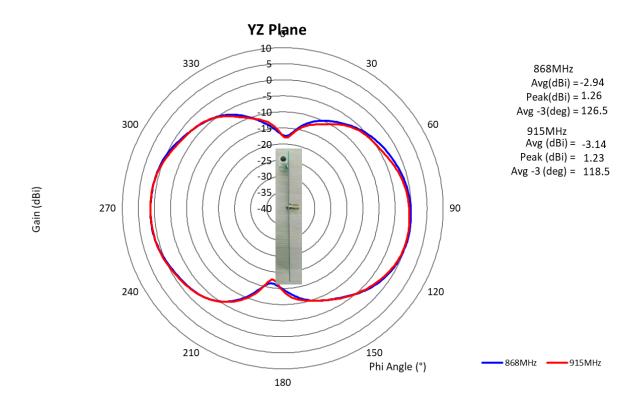



**Description**: 860-930MHz Embedded Helical Antenna


**Series: SMD Helical Antenna** 

**PART NUMBER: W3136** 

# **Recommendation for reflow soldering process**

Printing stencil thickness 0,15 - 0,25 mm is recommended for the solder paste. The maximum soldering temperature should not exceed 260°C. The temperature profile recommendations for reflow soldering process is presented in the Figures 1 and 2. The reflow profile presented in figure 1 describes minimum reflow temperatures. The reflow profile presented in figure 2 describes maximum reflow temperatures. located at the center of the coverage area.

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 30 sec
5	Peak temperature in reflow	230 ℃ for 10 seconds
6	Temperature gradient in cooling	Max -5 °C/s

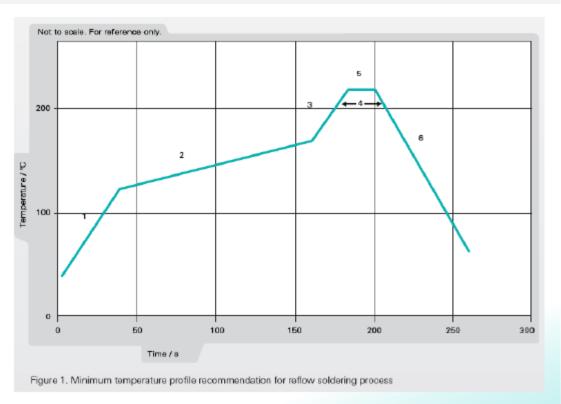



**Description**: 860-930MHz Embedded Helical Antenna

**Series: SMD Helical Antenna** 

**PART NUMBER: W3136** 

# Recommendation for reflow soldering process

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 60 sec
5	Time above 230 °C	Max 50 sec
6	Time above 250 °C	Max 10 sec
7	Peak temperature in reflow	260 °C for 5 seconds
8	Temperature gradient in cooling	Max -5 °C/s

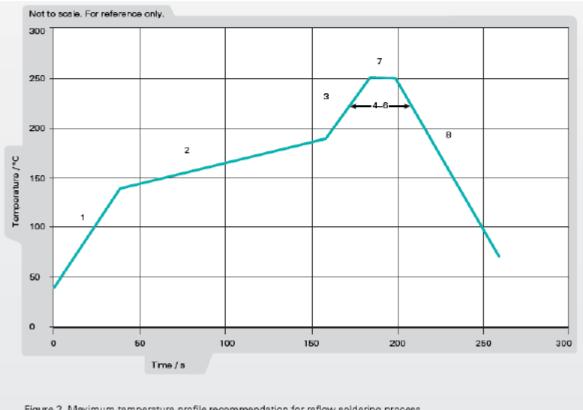


Figure 2. Maximum temperature profile recommendation for reflow soldering process







Description: 860-930MHz Embedded Helical Antenna

**Series: SMD Helical Antenna** 

**PART NUMBER: W3136** 

## **PACKAGING**

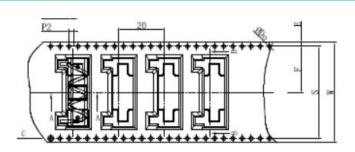



Manufacture Data

230PCS


13"/44


200PCS

Total PCS

Package Q

Reel





5. All the size design with reference to the EIA - 481 - C - 2003.

6. Loading within 250 mm length maximum curvature is less than

Comments of the Comments of th

Notes:

1. 10 side hole of the cumulative tolerance cannot be more than + / - 0.2 mm.

Material specifications: PS black antistatic, thickness of 0.50 mm.

3.13 inches (100) axis reel package length: 4.6 m. (the front air bag length: 0.33 m, parts packing length: 4 m, after a period of empty packet length: 0.33 meters).

4.13 inches (100) axis reel packaging components to the total number of stars: 230. (the front air bag star count: 15, actual packing parts the number: 200, after a period of empty bag star count: 15).

Total 200 PCS In Reel

Reel Size: 330MM[13INCH]

Total 2 PCS Reel In Package Box

Package Box Size:350x350x120mm



Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России, а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научноисследовательскими институтами России.

С нами вы становитесь еще успешнее!

#### Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,

Промышленная ул, дом № 19, литера Н,

помещение 100-Н Офис 331