



RF Power LDMOS Transistor

N-Channel Enhancement-Mode Lateral MOSFET

This 89 W asymmetrical Doherty RF power LDMOS transistor is designed for cellular base station applications requiring very wide instantaneous bandwidth capability covering the frequency range of 1805 to 1880 MHz.

1800 MHz

- Typical Doherty Single-Carrier W-CDMA Performance: $V_{DD} = 30$ Vdc, $I_{DQA} = 800$ mA, $V_{GSB} = 0.9$ Vdc, $P_{out} = 89$ W Avg., Input Signal PAR = 9.9 dB @ 0.01% Probability on CCDF.


Frequency	G_{ps} (dB)	η_D (%)	Output PAR (dB)	ACPR (dBc)
1805 MHz	16.6	47.1	7.9	-31.4
1840 MHz	16.7	47.5	8.0	-32.9
1880 MHz	16.5	47.7	7.9	-38.8

Features

- Advanced High Performance In-Package Doherty
- Designed for Wide Instantaneous Bandwidth Applications
- Greater Negative Gate-Source Voltage Range for Improved Class C Operation
- Able to Withstand Extremely High Output VSWR and Broadband Operating Conditions
- Designed for Digital Predistortion Error Correction Systems

A2T18H450W19SR6

1805–1880 MHz, 89 W AVG., 30 V
AIRFAST RF POWER LDMOS
TRANSISTOR



NI-1230S-4S4S

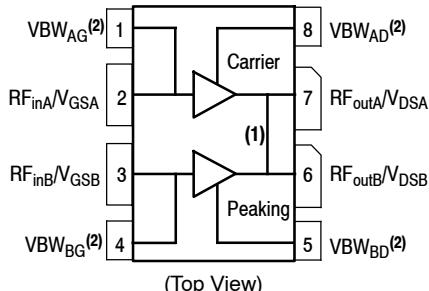


Figure 1. Pin Connections

- Pin connections 6 and 7 are DC coupled and RF independent.
- Device cannot operate with the V_{DD} current supplied through pins 1, 4, 5, and 8.

Table 1. Maximum Ratings

Rating	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	-0.5, +65	Vdc
Gate-Source Voltage	V_{GS}	-6.0, +10	Vdc
Operating Voltage	V_{DD}	32, +0	Vdc
Storage Temperature Range	T_{stg}	-65 to +150	°C
Case Operating Temperature Range	T_C	-40 to +125	°C
Operating Junction Temperature Range (1,2)	T_J	-40 to +225	°C

Table 2. Thermal Characteristics

Characteristic	Symbol	Value (2,3)	Unit
Thermal Resistance, Junction to Case Case Temperature 73°C, 89 W Avg., W-CDMA, 30 Vdc, $I_{DQA} = 800$ mA, $V_{GSB} = 0.9$ Vdc, 1840 MHz	$R_{\theta JC}$	0.27	°C/W

Table 3. ESD Protection Characteristics

Test Methodology	Class
Human Body Model (per JESD22-A114)	2
Machine Model (per EIA/JESD22-A115)	B
Charge Device Model (per JESD22-C101)	IV

Table 4. Electrical Characteristics ($T_A = 25^\circ C$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

Off Characteristics

Zero Gate Voltage Drain Leakage Current ($V_{DS} = 65$ Vdc, $V_{GS} = 0$ Vdc)	I_{DSS}	—	—	10	µAdc
Zero Gate Voltage Drain Leakage Current ($V_{DS} = 32$ Vdc, $V_{GS} = 0$ Vdc)	I_{DSS}	—	—	5	µAdc
Gate-Source Leakage Current (4) ($V_{GS} = 5$ Vdc, $V_{DS} = 0$ Vdc)	I_{GSS}	—	—	1	µAdc

On Characteristics - Side A, Carrier

Gate Threshold Voltage ($V_{DS} = 10$ Vdc, $I_D = 200$ µAdc)	$V_{GS(th)}$	0.8	1.2	1.6	Vdc
Gate Quiescent Voltage ($V_{DD} = 30$ Vdc, $I_{DA} = 800$ mAdc, Measured in Functional Test)	$V_{GSA(Q)}$	1.6	1.8	1.9	Vdc
Drain-Source On-Voltage ($V_{GS} = 10$ Vdc, $I_D = 2.0$ Adc)	$V_{DS(on)}$	0.05	0.15	0.3	Vdc

On Characteristics - Side B, Peaking

Gate Threshold Voltage ($V_{DS} = 10$ Vdc, $I_D = 360$ µAdc)	$V_{GS(th)}$	0.8	1.2	1.6	Vdc
Drain-Source On-Voltage ($V_{GS} = 10$ Vdc, $I_D = 3.6$ Adc)	$V_{DS(on)}$	0.05	0.15	0.3	Vdc

1. Continuous use at maximum temperature will affect MTTF.
2. MTTF calculator available at <http://www.nxp.com/RF/calculators>.
3. Refer to AN1955, *Thermal Measurement Methodology of RF Power Amplifiers*. Go to <http://www.nxp.com/RF> and search for AN1955.
4. Each side of device measured separately.

(continued)

Table 4. Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted) (continued)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

Functional Tests - 1805 MHz (1,2,3) (In Freescale Doherty Test Fixture, 50 ohm system) $V_{DD} = 30 \text{ Vdc}$, $I_{DQA} = 800 \text{ mA}$, $V_{GSB} = 0.9 \text{ Vdc}$, $P_{out} = 89 \text{ W Avg.}$, $f = 1805 \text{ MHz}$, Single-Carrier W-CDMA, IQ Magnitude Clipping, Input Signal PAR = 9.9 dB @ 0.01% Probability on CCDF. ACPR measured in 3.84 MHz Channel Bandwidth @ $\pm 5 \text{ MHz}$ Offset.

Power Gain	G_{ps}	15.5	16.6	18.5	dB
Drain Efficiency	η_D	45.0	47.1	—	%
Output Peak-to-Average Ratio @ 0.01% Probability on CCDF	PAR	7.5	7.9	—	dB
Adjacent Channel Power Ratio	ACPR	—	-31.4	-30.0	dBc

Functional Tests - 1880 MHz (1,2,3) (In Freescale Doherty Test Fixture, 50 ohm system) $V_{DD} = 30 \text{ Vdc}$, $I_{DQA} = 800 \text{ mA}$, $V_{GSB} = 0.9 \text{ Vdc}$, $P_{out} = 89 \text{ W Avg.}$, $f = 1880 \text{ MHz}$, Single-Carrier W-CDMA, IQ Magnitude Clipping, Input Signal PAR = 9.9 dB @ 0.01% Probability on CCDF. ACPR measured in 3.84 MHz Channel Bandwidth @ $\pm 5 \text{ MHz}$ Offset.

Power Gain	G_{ps}	15.5	16.5	18.5	dB
Drain Efficiency	η_D	45.0	47.7	—	%
Output Peak-to-Average Ratio @ 0.01% Probability on CCDF	PAR	7.5	7.9	—	dB
Adjacent Channel Power Ratio	ACPR	—	-33.8	-30.0	dBc

Load Mismatch (3) (In Freescale Doherty Test Fixture, 50 ohm system) $I_{DQA} = 800 \text{ mA}$, $V_{GSB} = 0.9 \text{ Vdc}$, $f = 1840 \text{ MHz}$, 12 $\mu\text{sec(on)}$, 10% Duty Cycle

VSWR 10:1 at 32 Vdc, 420 W Pulsed CW Output Power (3 dB Input Overdrive from 250 W Pulsed CW Rated Power)	No Device Degradation				
--	-----------------------	--	--	--	--


Typical Performance (3) (In Freescale Doherty Test Fixture, 50 ohm system) $V_{DD} = 30 \text{ Vdc}$, $I_{DQA} = 800 \text{ mA}$, $V_{GSB} = 0.9 \text{ Vdc}$, 1805–1880 MHz Bandwidth

P_{out} @ 1 dB Compression Point, CW	P1dB	—	199	—	W
P_{out} @ 3 dB Compression Point (4)	P3dB	—	550	—	W
AM/PM (Maximum value measured at the P3dB compression point across the 1805–1880 MHz frequency range)	Φ	—	-20	—	°
VBW Resonance Point (IMD Third Order Intermodulation Inflection Point)	VBW _{res}	—	140	—	MHz
Gain Flatness in 75 MHz Bandwidth @ $P_{out} = 89 \text{ W Avg.}$	G_F	—	0.4	—	dB
Gain Variation over Temperature (-30°C to +85°C)	ΔG	—	0.008	—	dB/°C
Output Power Variation over Temperature (-30°C to +85°C)	ΔP_{1dB}	—	0.027	—	dB/°C

Table 5. Ordering Information

Device	Tape and Reel Information	Package
A2T18H450W19SR6	R6 Suffix = 150 Units, 56 mm Tape Width, 13-inch Reel	NI-1230S-4S4S

1. V_{DDA} and V_{DDB} must be tied together and powered by a single DC power supply.
2. Part internally matched both on input and output.
3. Measurements made with device in an asymmetrical Doherty configuration.
4. $P_{3dB} = P_{avg} + 7.0 \text{ dB}$ where P_{avg} is the average output power measured using an unclipped W-CDMA single-carrier input signal where output PAR is compressed to 7.0 dB @ 0.01% probability on CCDF.

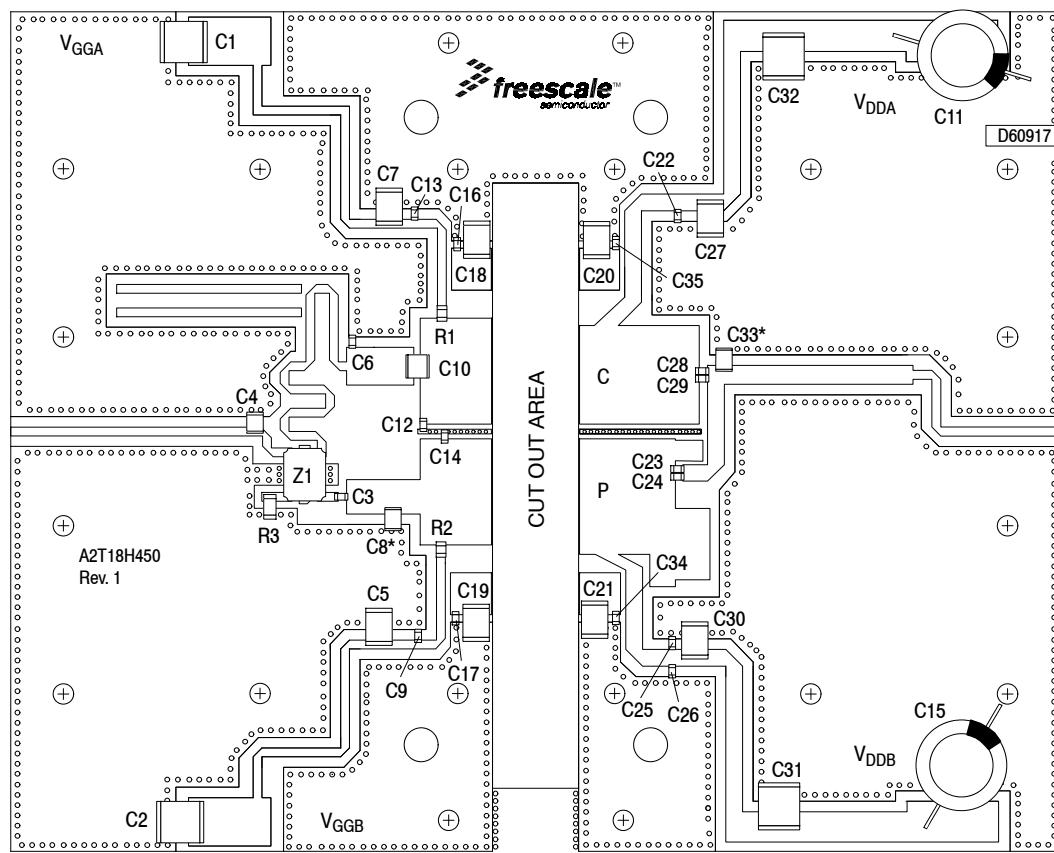

*C8 and C33 are mounted vertically.


Note: V_{DDA} and V_{DDB} must be tied together and powered by a single DC power supply.

Figure 2. A2T18H450W19SR6 Test Circuit Component Layout

Table 6. A2T18H450W19SR6 Test Circuit Component Designations and Values

Part	Description	Part Number	Manufacturer
C1, C2, C31, C32	10 μ F Chip Capacitors	C5750X7R1H106M230KB	TDK
C3, C9, C13, C16, C17, C22, C23, C24, C25, C26, C34, C35	22 pF Chip Capacitors	ATC600S220JT250XT	ATC
C4	0.4 pF Chip Capacitor	ATC100B0R4BT500XT	ATC
C5, C7, C18, C19, C20, C21, C27, C30	4.7 μ F Chip Capacitors	C4532X7R1H475M200KB	TDK
C6	0.2 pF Chip Capacitor	ATC600S0R2BT250XT	ATC
C8	1.8 pF Chip Capacitor	ATC100B1R8BT500XT	ATC
C10	22 pF Chip Capacitor	ATC100B220GT500XT	ATC
C11, C15	470 μ F, 63 V Electrolytic Capacitors	MCGPR63V477M13X26-RH	Multicomp
C12	3 pF Chip Capacitor	ATC600S3R0BT250XT	ATC
C14	2.4 pF Chip Capacitor	ATC600S2R4BT250XT	ATC
C28, C29	4.7 pF Chip Capacitors	ATC600S4R7CT250XT	ATC
C33	0.2 pF Chip Capacitor	ATC100B0R2BT500XT	ATC
R1	4.7 Ω , 1/8 W Chip Resistor	WCR0805-4R7F	Welwyn
R2	2.2 Ω , 1/8 W Chip Resistor	WCR0805-2R2F	Welwyn
R3	50 Ω , 10 W Chip Termination	060120A25X50-2	Anaren
Z1	1700–2000 MHz Band, 90°, 5 dB Directional Coupler	X3C19P1-05S	Anaren
PCB	Rogers RO4350B, 0.020", ϵ_r = 3.66	D60917	MTL

PACKAGE DIMENSIONS

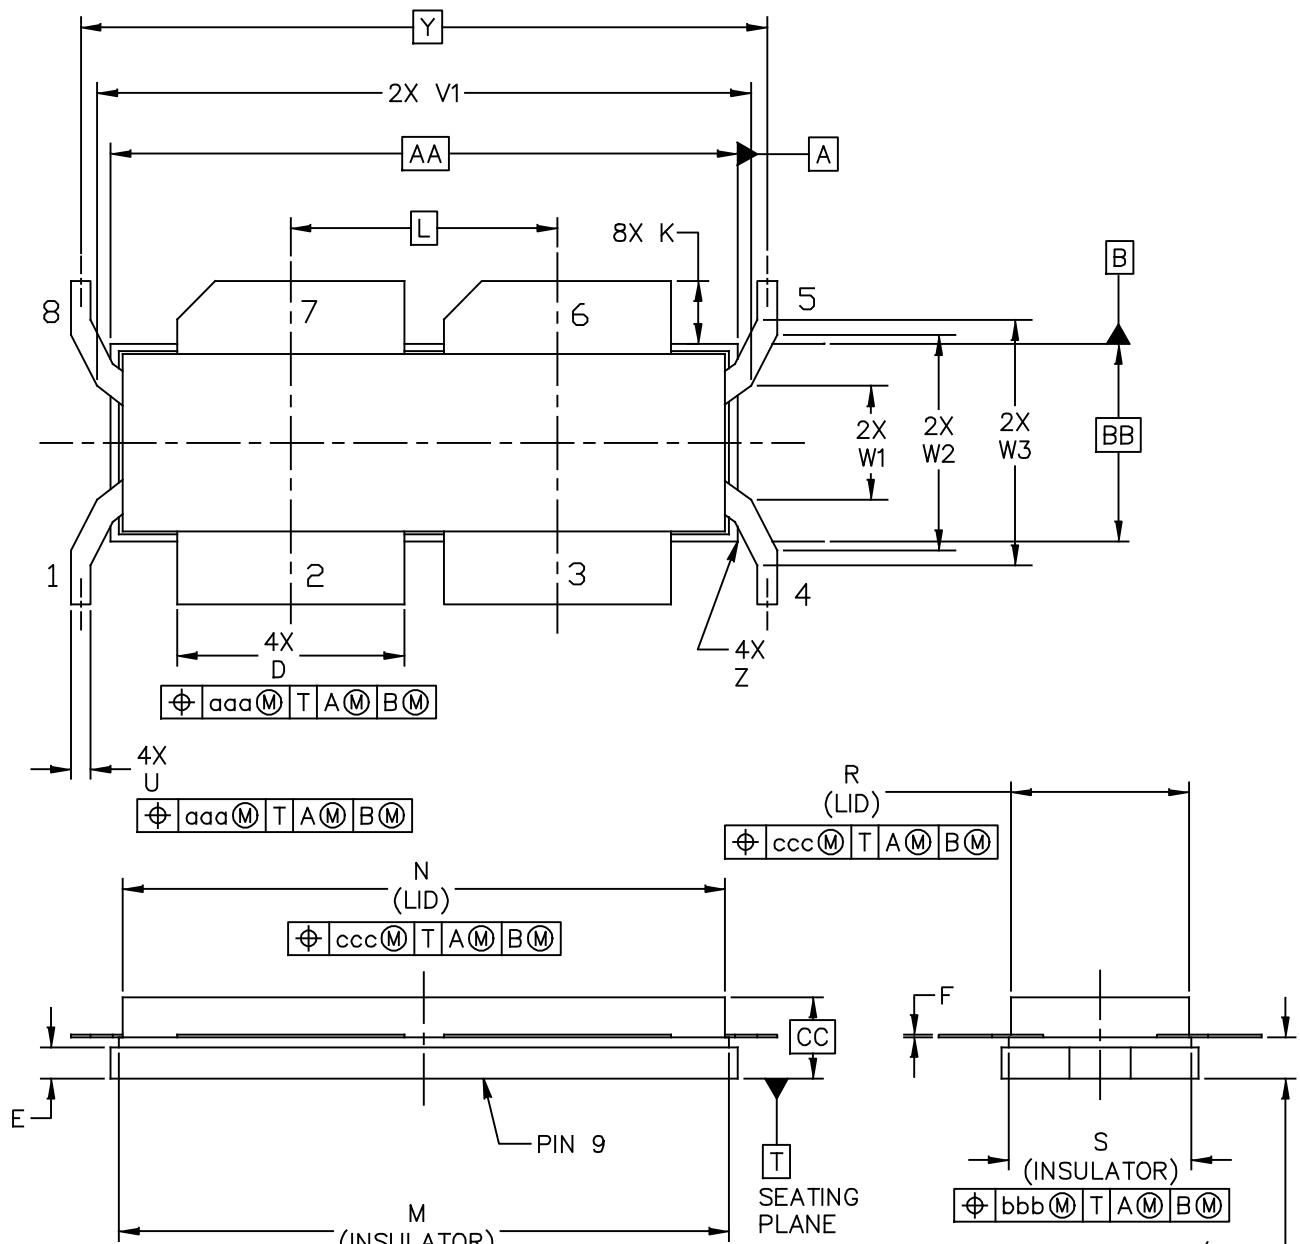

© NXP SEMICONDUCTORS N.V. ALL RIGHTS RESERVED	MECHANICAL OUTLINE	PRINT VERSION NOT TO SCALE
TITLE: NI-1230S-4S4S	DOCUMENT NO: 98ASA00155D	REV: D
	STANDARD: NON-JEDEC	
	SOT1795-1	31 MAY 2016

A2T18H450W19SR6

NOTES:

1.0 INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.

2.0 CONTROLLING DIMENSION: INCH

3.0 DIMENSION H1 AND H2 ARE MEASURED .030 (0.762 MM) AWAY FROM FLANGE TO CLEAR EPOXY FLOW OUT PARALLEL TO DATUM B. H1 APPLIES TO PINS 2,3,6,7. H2 APPLIES TO PINS 1,4,5,8.

4.0 -DELETED-

DIM	INCH		MILLIMETER		DIM	INCH		MILLIMETER	
	MIN	MAX	MIN	MAX		MIN	MAX	MIN	MAX
AA	1.265	1.275	32.13	32.39	N	1.218	1.242	30.94	31.55
BB	.397	.403	10.08	10.24	R	.365	.375	9.27	9.53
CC	.150	.200	3.81	5.08	S	.365	.375	9.27	9.53
D	.455	.465	11.56	11.81	U	.035	.045	0.89	1.14
E	.062	.066	1.57	1.68	V1	1.320	1.330	33.53	33.78
F	.004	.007	0.10	0.18	T3	DELETED		DELETED	
H1	.082	.090	2.08	2.29	W1	.225	.235	5.72	5.97
H2	.078	.094	1.98	2.39	W2	.431	.441	10.95	10.20
K	.117	.137	2.97	3.48	W3	.491	.501	12.47	12.73
L	.540 BSC		13.72 BSC		Y	1.390 BSC		35.31 BSC	
M	1.219	1.241	30.96	31.52	Z	---	R.040	---	R1.02
					aaa		.005		0.13
					bbb		.010		0.25
					ccc		.020		0.51
© NXP SEMICONDUCTORS N.V. ALL RIGHTS RESERVED			MECHANICAL OUTLINE			PRINT VERSION NOT TO SCALE			
TITLE: NI-1230S-4S4S					DOCUMENT NO: 98ASA00155D		REV: D		
					STANDARD: NON-JEDEC				
					SOT1795-1		31 MAY 2016		

PRODUCT DOCUMENTATION AND TOOLS

Refer to the following resources to aid your design process.

Application Notes

- AN1908: Solder Reflow Attach Method for High Power RF Devices in Air Cavity Packages
- AN1955: Thermal Measurement Methodology of RF Power Amplifiers

Engineering Bulletins

- EB212: Using Data Sheet Impedances for RF LDMOS Devices

Development Tools

- Printed Circuit Boards

To Download Resources Specific to a Given Part Number:

1. Go to <http://www.nxp.com/RF>
2. Search by part number
3. Click part number link
4. Choose the desired resource from the drop down menu

REVISION HISTORY

The following table summarizes revisions to this document.

Revision	Date	Description
0	Sept. 2016	• Initial release of data sheet

A2T18H450W19SR6

How to Reach Us:

Home Page:
freescale.com

Web Support:
freescale.com/support

Information in this document is provided solely to enable system and software implementers to use Freescale products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits based on the information in this document.

Freescale reserves the right to make changes without further notice to any products herein. Freescale makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale data sheets and/or specifications can and do vary in different applications, and actual performance may vary over time. All operating parameters, including "typicals," must be validated for each customer application by customer's technical experts. Freescale does not convey any license under its patent rights nor the rights of others. Freescale sells products pursuant to standard terms and conditions of sale, which can be found at the following address: freescale.com/SalesTermsandConditions.

Freescale and the Freescale logo are trademarks of Freescale Semiconductor, Inc., Reg. U.S. Pat. & Tm. Off. Airfast is a trademark of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners.

© 2016 Freescale Semiconductor, Inc.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литер Н,
помещение 100-Н Офис 331