



MICROWAVE CORPORATION

v02.1008



# HMC346C8

## GaAs MMIC SMT VOLTAGE-VARIABLE ATTENUATOR, DC - 8 GHz

### Typical Applications


The HMC346C8 is ideal for:

- Basestation Infrastructure
- Fiber Optics & Broadband Telecom
- Microwave Radio & VSAT
- Military Radios, Radar, & ECM
- Test Instrumentation

### Features

- Wide Bandwidth: DC - 8 GHz
- Low Phase Shift vs. Attenuation
- 30 dB Attenuation Range
- Surface Mount Ceramic Package

### Functional Diagram

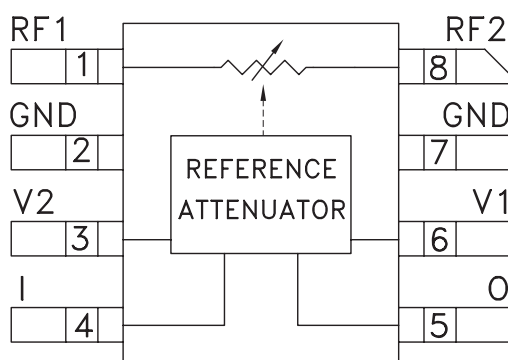

### General Description


The HMC346C8 is an absorptive Voltage Variable Attenuator (VVA) in a non-hermetic surface-mount ceramic package operating from DC - 8 GHz. It features an on-chip reference attenuator for use with an external op-amp to provide simple single voltage attenuation control, 0 to -3V. The device is ideal in designs where an analog DC control signal must control RF signal levels over a 30 dB amplitude range. Applications include AGC circuits and temperature compensation of multiple gain stages in microwave radios and test instrumentation.

### Electrical Specifications, $T_A = +25^\circ \text{C}$ , 50 ohm system


| Parameter                                                                              | Min                                                                                | Typical    | Max        | Units      |
|----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------|------------|------------|
| Insertion Loss                                                                         | DC - 6 GHz<br>DC - 8 GHz                                                           | 1.9<br>2.1 | 2.9<br>3.1 | dB<br>dB   |
| Attenuation Range                                                                      | DC - 8 GHz                                                                         | 30         |            | dB         |
| Return Loss                                                                            | DC - 8 GHz                                                                         | 10         |            | dB         |
| Switching Characteristics                                                              | $t_{RISE}$ , $t_{FALL}$ (10/90% RF)<br>$t_{ON}$ , $t_{OFF}$ (50% CTL to 10/90% RF) | 2<br>8     |            | ns<br>ns   |
| Input Power for 0.25 dB Compression (0.5 - 8 GHz)                                      | Min. Atten.<br>Atten. >2 dB                                                        | +8<br>-2   |            | dBm<br>dBm |
| Input Third Order Intercept (0.5 - 8 GHz)<br>(Two-tone Input Power = -8 dBm Each Tone) | Min. Atten.<br>Atten. >2 dB                                                        | +25<br>+10 |            | dBm<br>dBm |

**GaAs MMIC SMT VOLTAGE-VARIABLE ATTENUATOR, DC - 8 GHz**


**Insertion Loss vs. Temperature**

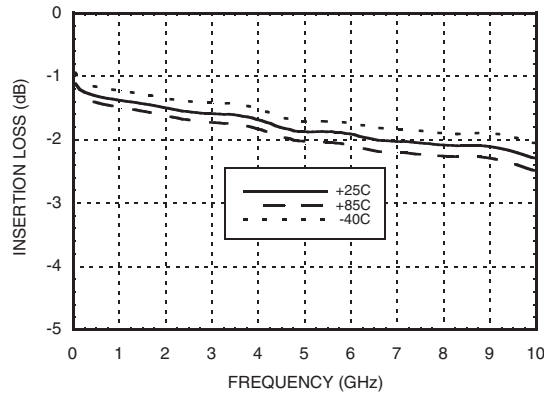


**Relative Attenuation, Control Voltage Optimized for 4 GHz Operation**

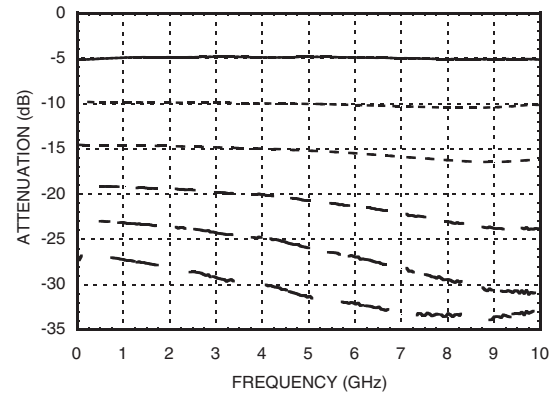


**Return Loss vs. Attenuation**

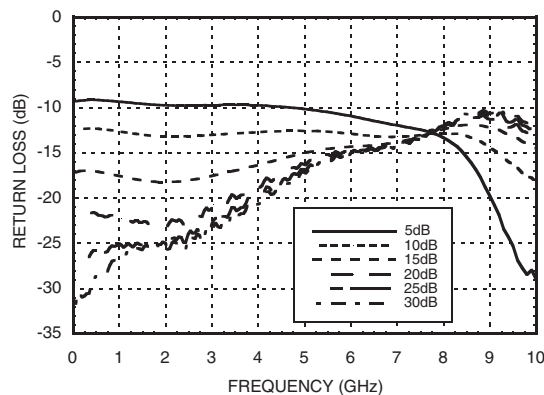


**Relative Attenuation, Control Voltage Optimized for 8 GHz Operation**

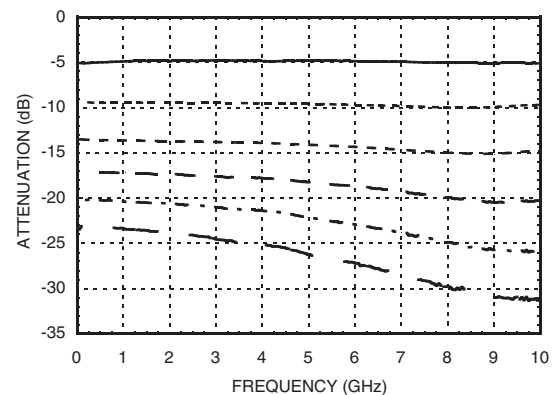

**Relative Attenuation vs. Control Voltage @ 4 GHz**

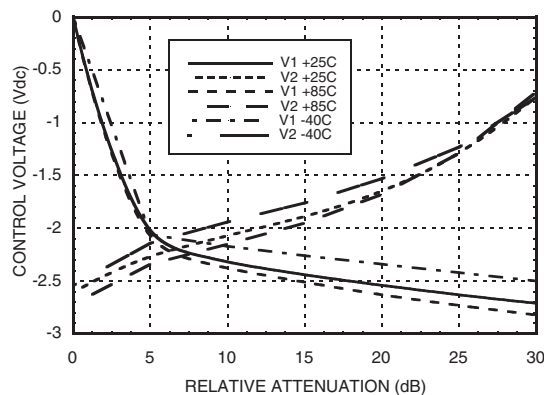

**Relative Attenuation vs. Control Voltage @ 8 GHz**

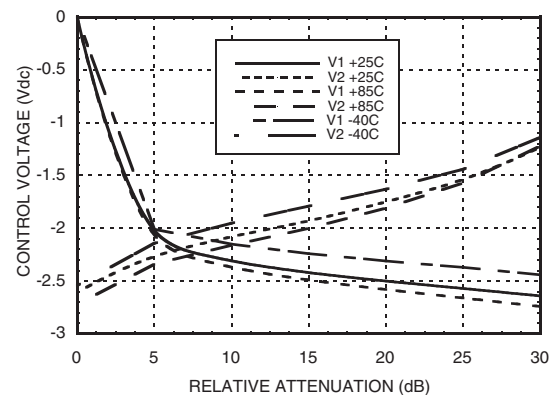


## GaAs MMIC SMT VOLTAGE-VARIABLE ATTENUATOR, DC - 8 GHz


5

ATTENUATORS - SMT


**Relative Phase**

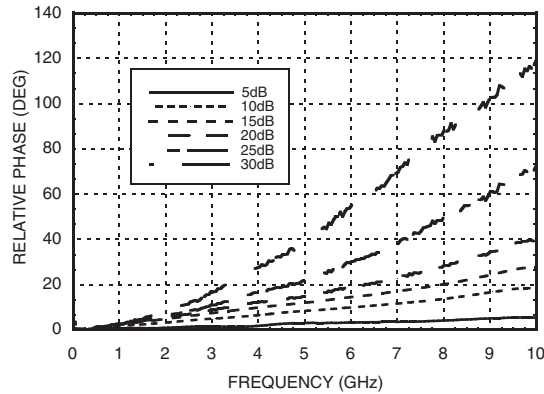


**Input Third Order Intercept vs. Attenuation\***

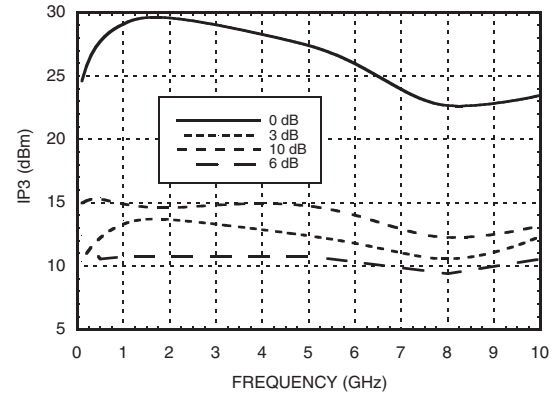


**Input Second Order Intercept vs. Attenuation\***

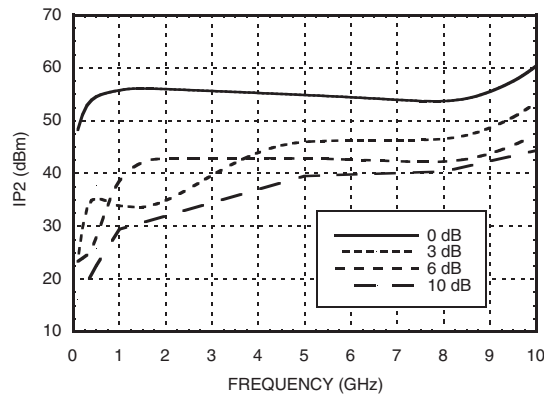


**Second Harmonic vs. Attenuation**

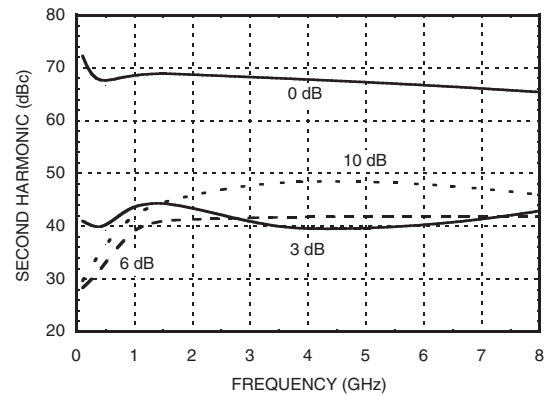

**0.25 dB Compression vs. Attenuation**

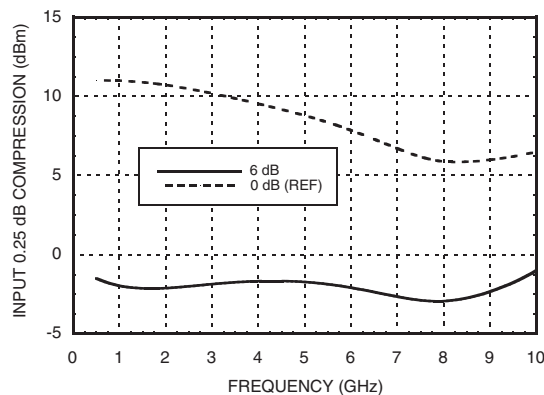

**1 dB Compression vs. Attenuation**

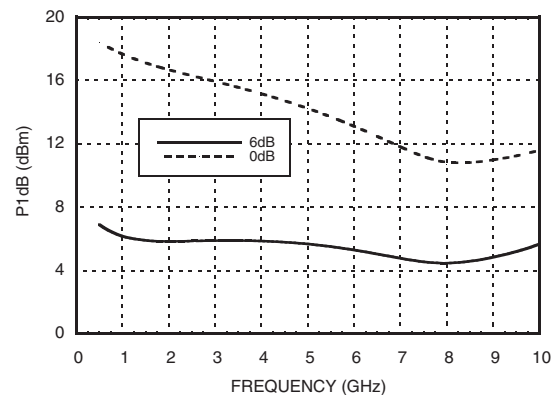

\*Two-tone input power = -8 dBm each tone.

## GaAs MMIC SMT VOLTAGE-VARIABLE ATTENUATOR, DC - 8 GHz


### Absolute Maximum Ratings

|                       |                |
|-----------------------|----------------|
| RF Input Power        | +18 dBm        |
| Control Voltage Range | +1.0 to -5V    |
| Channel Temperature   | 150 °C         |
| Thermal Resistance    | 190 °C/W       |
| Storage Temperature   | -65 to +150 °C |
| Operating Temperature | -40 to +85 °C  |
| ESD Sensitivity (HBM) | Class 1A       |



ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS


### Outline Drawing

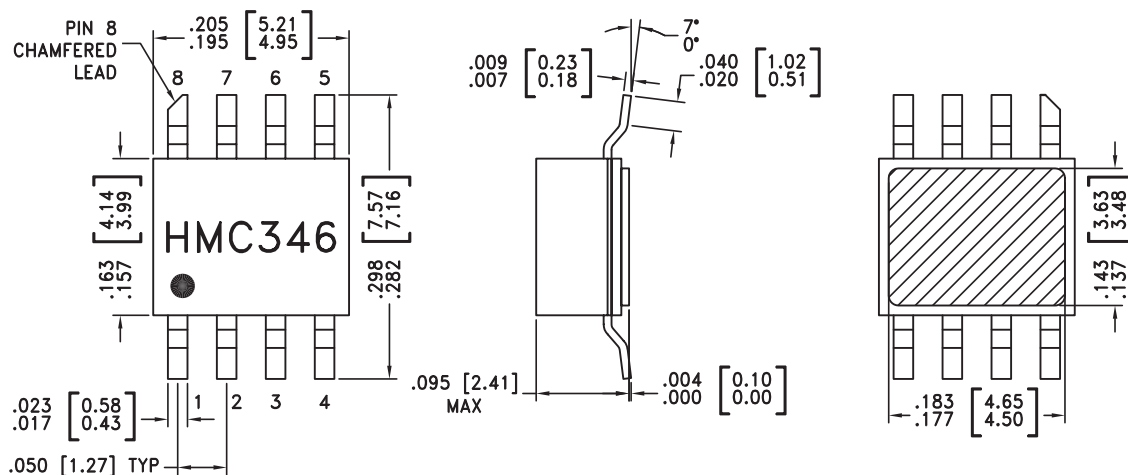


#### NOTES:

1. PACKAGE MATERIAL: ALUMINA LOADED BOROSILICATE GLASS.
2. LEAD, BASE, COVER MATERIAL: KOVAR™ (#7052 CORNING).
3. PLATING: ELECTROLYTIC GOLD 50 MICROINCHES MIN., OVER ELECTROLYTIC NICKEL 50 MICROINCHES MIN.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].
5. TOLERANCES: ±.005 [0.13] UNLESS OTHERWISE SPECIFIED.
6. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.

## Pin Descriptions


| Pin Number | Function | Description                                                                                                              | Interface Schematic                                                                 |
|------------|----------|--------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 1, 8       | RF1, RF2 | This pin is DC coupled and matched to 50 Ohms. Blocking capacitors are required if RF line potential is not equal to 0V. |                                                                                     |
| 2, 7       | GND      | This pin must be DC grounded.                                                                                            |  |
| 3, 6       | V2, V1   | Control Input (Master).                                                                                                  |  |
| 4          | I        | Control Input (Slave).                                                                                                   |  |
| 5          | O        | This pin must have an external 500 Ohm resistor to ground.                                                               |                                                                                     |

## Single-Line Control Driver

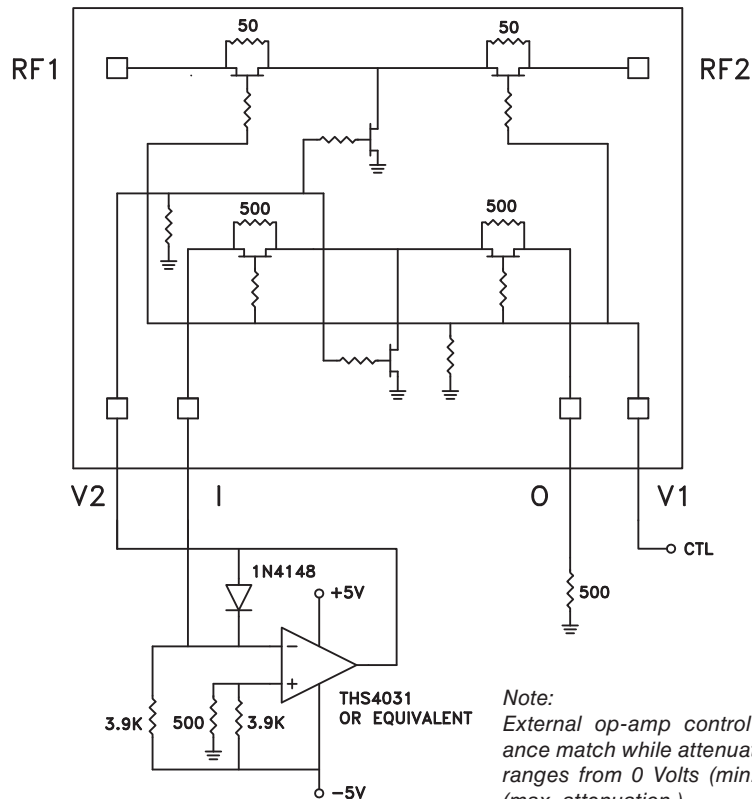

**Note:**  
External op-amp control circuit maintains impedance match while attenuation is varied. Input control ranges from 0 Volts (min. attenuation) to -2.5 Volts (max. attenuation.)

**Evaluation PCB**

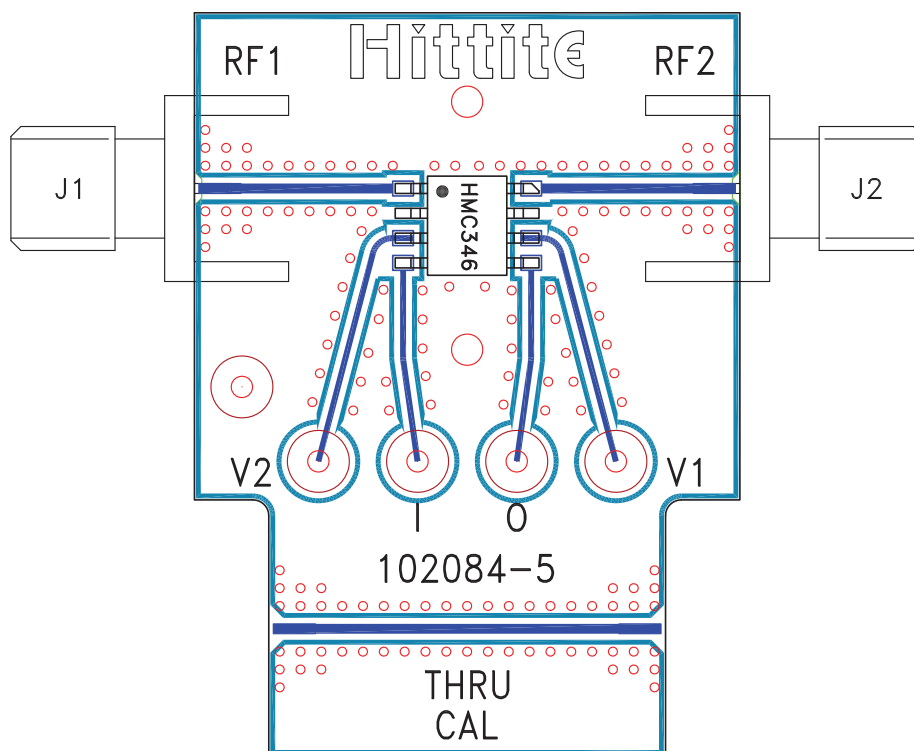

**List of Materials for Evaluation PCB 109023 <sup>[1]</sup>**

| Item    | Description                |
|---------|----------------------------|
| J1 - J2 | PCB Mount SMA RF Connector |
| J3 - J7 | DC PIN                     |
| U1      | HMC346C8                   |
| PCB [2] | Eval Board 102084-5        |

[1] Reference this number when ordering complete evaluation PCB

[2]Circuit Board Material: Rogers 4350

The circuit board used in the final application should be generated with proper RF circuit design techniques. Signal lines at the RF ports should be 50 ohm impedance and the package ground leads and package bottom should be connected directly to the PCB RF ground plane, similar to that shown above. The evaluation circuit board shown above is available from Hittite Microwave Corporation upon request.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331