



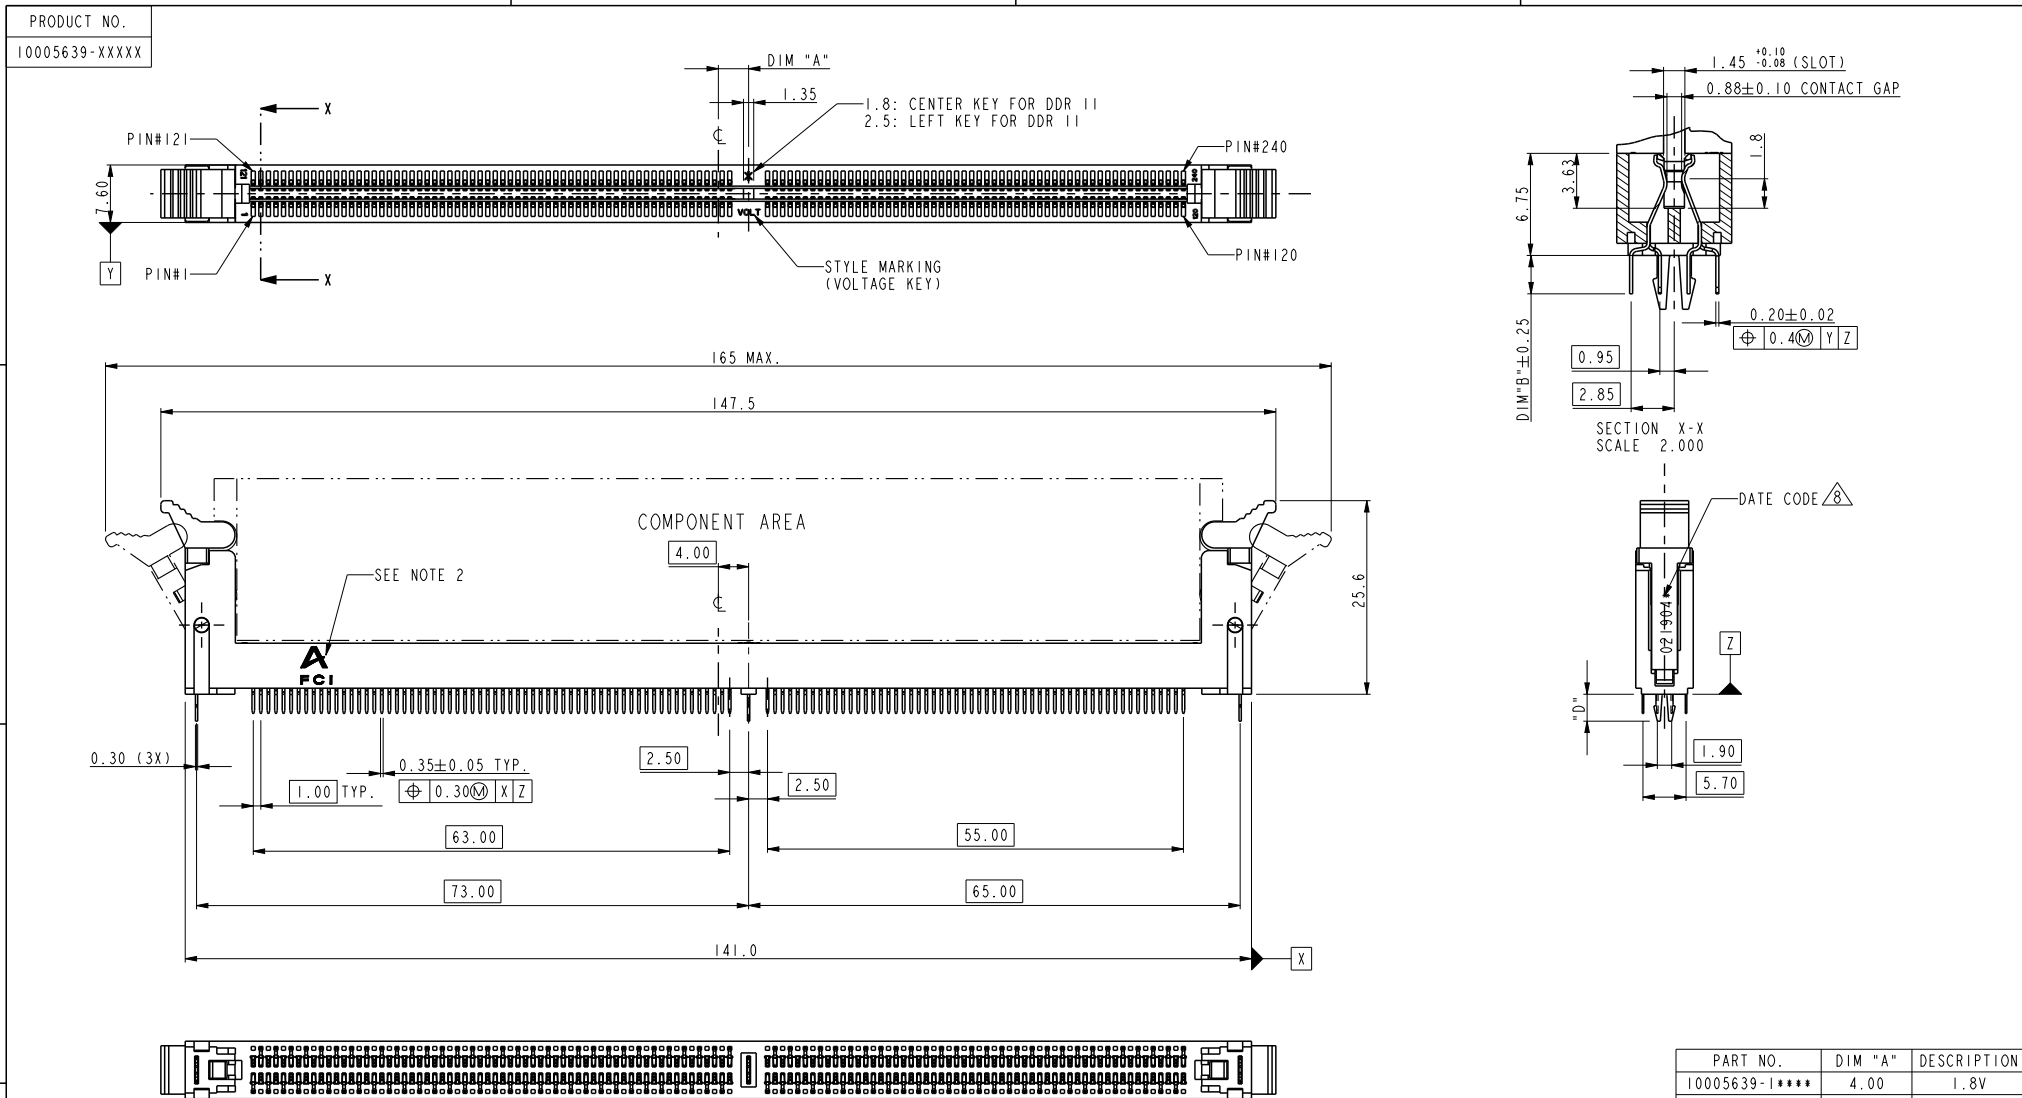







Copyright FCI.




spec ref *				dr Rick Bian 2010/07/08		projection 		size A4		scale 0.500		
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED						ecn no ELX-DG-008280-1				
-		eng Nickor Zuo 2011/11/30		chr Jian Huang 2011/12/02				rel level Released				
-		appr Pei-Ming Zheng 2011/12/02		product family								
surface ✓		linear	0.X ±0.38			title DDR II 240P V/T DDR II 240P METAL CLIP ASS'Y		dwg no 10005639		rev X		
		0.XX ±0.25										
		0.XXX ±0.13										
-		angular	0° ±2°	www.fci.com		cat. no. *		Product - Customer Drw			sheet 1 of 4	

Print File - REV C - 2009-06-09



TYPE "R"	X.X VOLTAGE
TYPE "L"	2.5 VOLTAGE
TYPE "C"	1.8 VOLTAGE
SUB KEY POS #1	DESCRIPTION

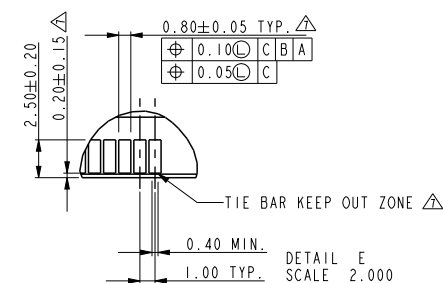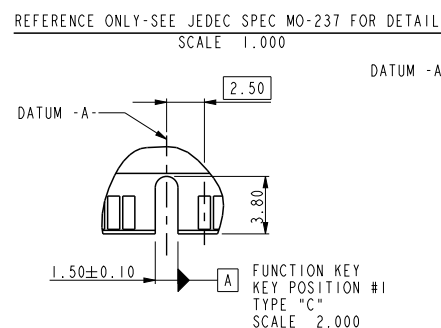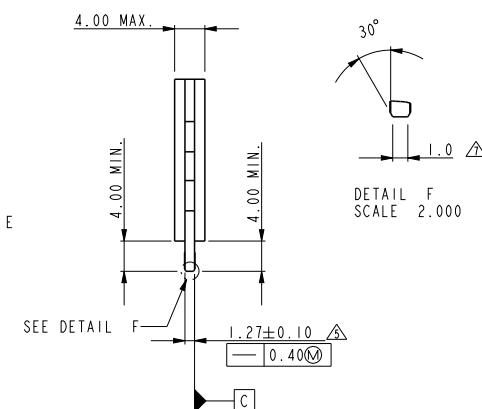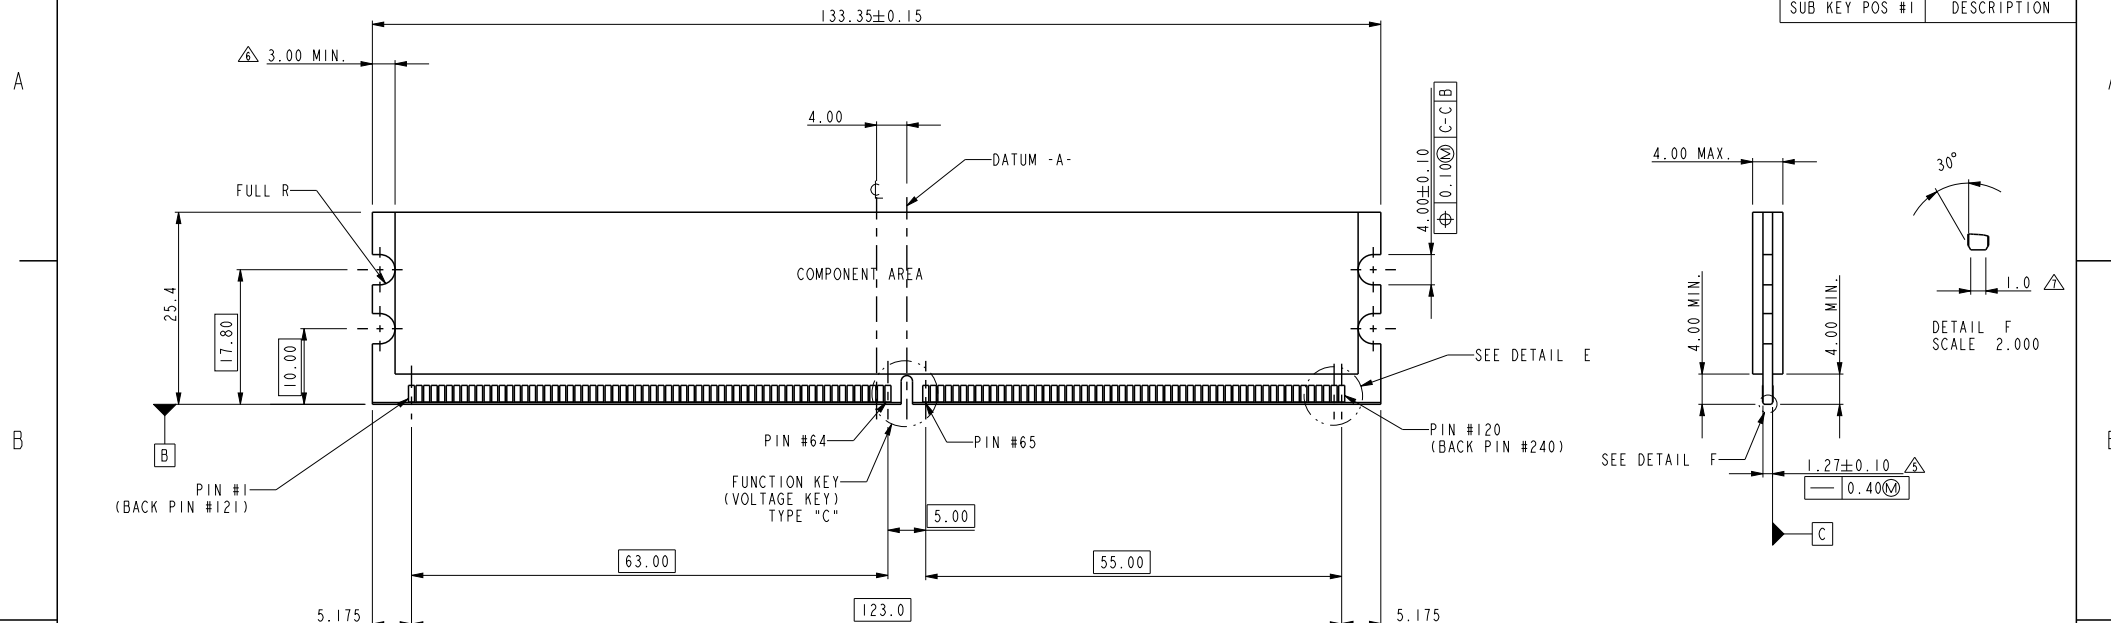


spec ref *				dr Rick Bian2010/07/08		projection 	mm 	sizeA4	scale0.500	
tolerance stdTOLERANCES UNLESS OTHERWISE SPECIFIED				eng Nickor Zuo2011/11/30				ecn noELX-DG-008280-1		
				chr Jian Huang2011/12/02				rel levelReleased		
				appr Pei-Ming Zheng2011/12/02						
product family						rel level		Released		
surface ✓	linear	0.X	±0.38		title	DDRII 240P V/T		dwg no	10005639	rev
		0.XX	±0.25			DDRII 240P METAL CLIP ASS'Y				
		0.XXX	±0.13							
	-	angular	0°	±2°	www.fci.com	cat. no.	*	Product - Customer Drw		sheet 2 of 4



Copyright FCI.

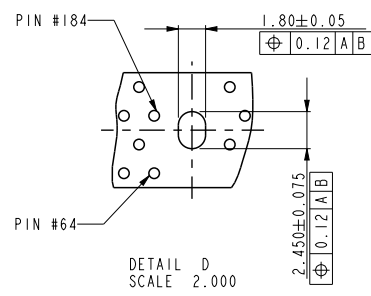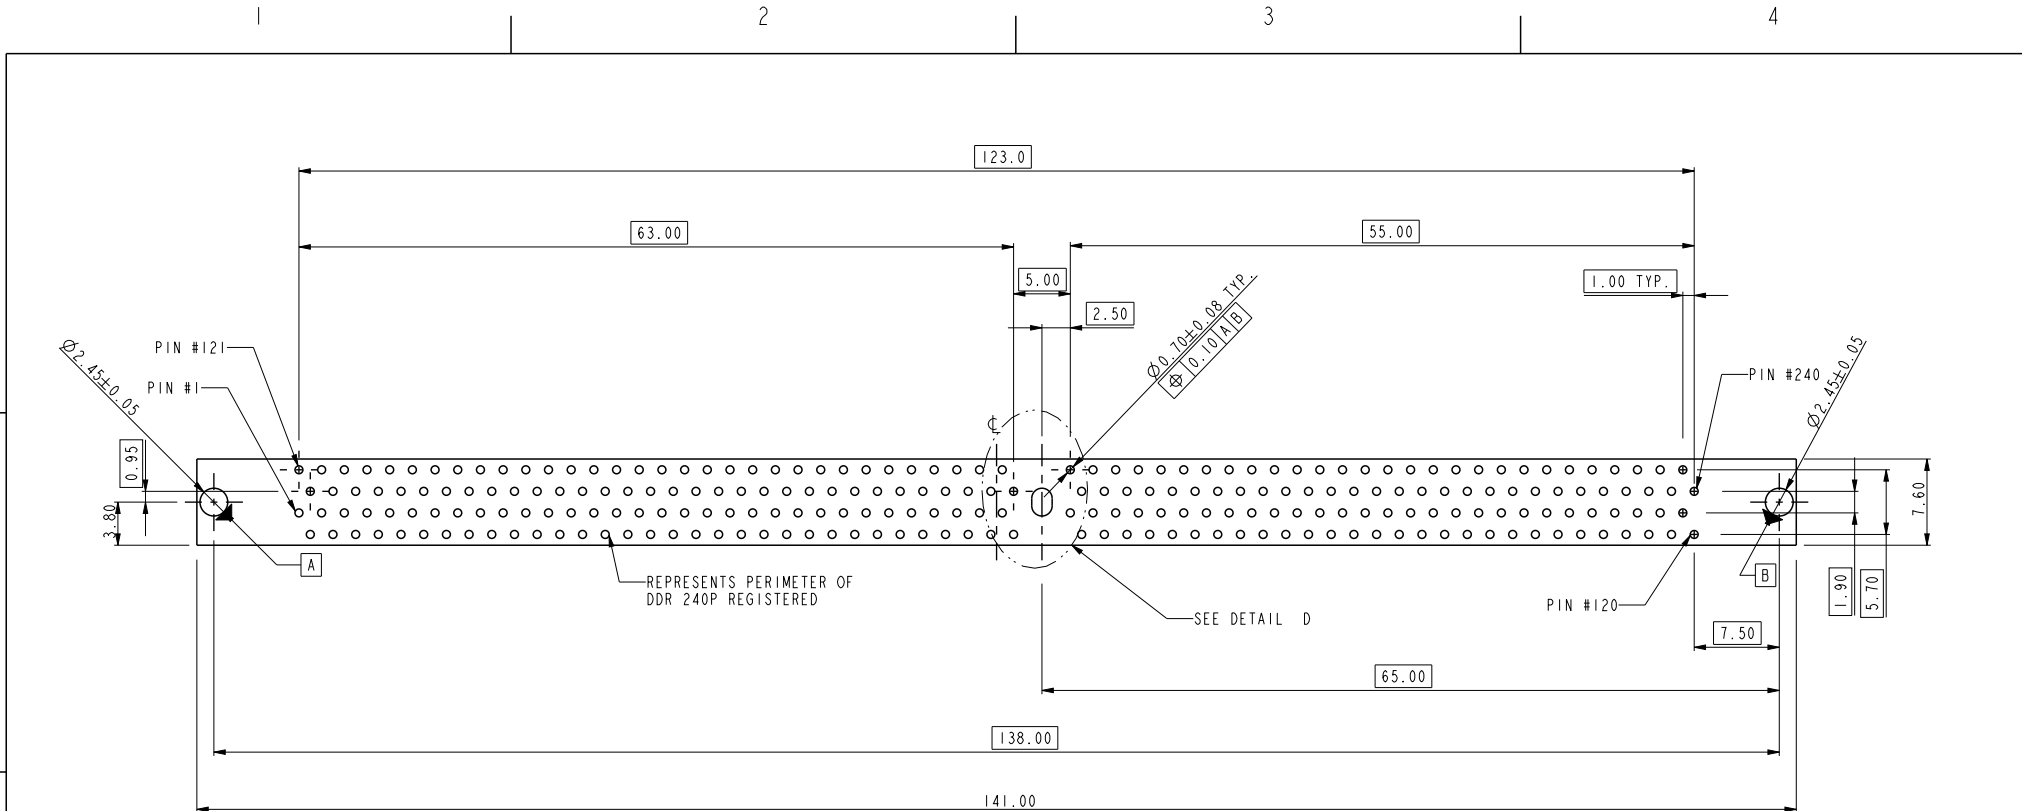

RECOMMENDED CIRCUIT BOARD HOLE LAYOUT

spec ref *				dr Rick Bian 2010/07/08		projection 	mm 	size A4	scale 0.500	
tolerance std		eng Nickor Zuo 2011/11/30		ecn no ELX-DG-008280-1						
- -		chr Jian Huang 2011/12/02								
		appr Pei-Ming Zheng 2011/12/02			product family			rel level Released		
surface 		linear	0.X	±0.38			title DDR II 240P V/T DDR II 240P METAL CLIP ASS'Y		dwg no 10005639	rev X
			0.XX	±0.25						
			0.XXX	±0.13						
-	angular	0°	±2°	www.fci.com	cat. no. *	Product - Customer Drw		sheet 3 of 4		

Print File - REV C - 2009-06-09



Copyright FCI.

10005639 - □ □ □ □ □

PLATING

STYLE : MECHAMICAL KEYING

- 1 : 1.8 VOLT. W/ CENTER KEY#1
- 2 : 2.5 VOLT. W/ LEFT KEY#1
- 3 : X.X VOLT. W/ RIGHT KEY#1

METAL CLIP

- 1 : WITH METAL CLIP + DIM "D"=3.05
- 2 : WITH METAL CLIP + DIM "D"=3.56
- 3 : WITH METAL CLIP + DIM "D"=3.43

TAIL LENGTH

CODE	DIM "B"
0	2.54
1	2.67
2	3.18
3	4.00

COLOR OF HOUSING AND EJECTOR

- 0 : BLACK HOUSING + IVORY EJECTOR
- 1 : BLUE HOUSING + IVORY EJECTOR
- 2 : BLACK HOUSING + BLACK EJECTOR
- 3 : PURPLE HOUSING + IVORY EJECTOR
- 4 : ORANGE HOUSING + IVORY EJECTOR
- 5 : GREEN HOUSING + IVORY EJECTOR
- 6 : RED HOUSING + IVORY EJECTOR
- 7 : IVORY HOUSING + IVORY EJECTOR
- 8 : YELLOW HOUSING + IVORY EJECTOR
- 9 : IVORY HOUSING + BLACK EJECTOR

CODE	CONTACT	SOLDERTAIL	UNDERPLATE
1	10u" (0.25um) MIN. GOLD	100u" (2.54um) MIN. TIN/LEAD	50u" (1.27um) MIN. NICKEL OVERALL
2	15u" (0.38um) MIN. GOLD		
3	30u" (0.76um) MIN. GOLD		
4	3u" (0.076um) MIN. GOLD		
6LF	10u" (0.25um) MIN. GOLD	100u" (2.54um) MIN. 100% TIN	50u" (1.27um) MIN. NICKEL OVERALL
7LF	15u" (0.38um) MIN. GOLD		
8LF	30u" (0.76um) MIN. GOLD		
9LF	3u" (0.076um) MIN. GOLD		
8HLF	30u" (0.76um) MIN. GOLD	GOLD FLASH	

NOTES:

- 1. MATERIAL:
HOUSING: HIGH PERFORMANCE RESINS, GLASS FILLED UL94V-0 RATED.
EJECTOR: HIGH PERFORMANCE RESINS, GLASS FILLED UL94V-0 RATED.
TERMINAL: PHOSPHOR BRONZE.
METAL CLIP: COPPER ALLOY.
- 2. FCI LOGO TO BE APPROXIMATELY LOCATED AS SHOWN ON PRINT.
- 3. PRODUCT SPECIFICATION: GS-12-251.
- 4. PACKAGING SPECIFICATION: GS-14-899.
- 5. CARD THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION.
- 6. 3.00 mm MINIMUM APPLIES TO BOTH 4.00 mm WIDE NOTCH LENGTH AND COMPONENT KEEPOUT AREA.
- 7. LEADING EDGE OF CONTACT PADS SPECIFIED BY THE KEEP OUT ZONE SHALL BE FREE OF BURRS AND EXTERNAL TIE BARS. FOR OPTIMUM PERFORMANCE, THE TIE BAR IS TO BE ON AN INTERNAL LAYER SO THAT THE REMNANT CANNOT CAUSE CONTACT DAMAGE.
- 8. THE DATE CODE IS SHOWN "MM-DD-YY*" "*" MEANS PRODUCTION LINE CODE.
- 9. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 10. THE HOUSING WILL WITH STAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

spec ref *				dr Rick Bian 2010/07/08		projection	mm	size A4		scale 0.500							
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED						ecn no ELX-DG-008280-1									
-																	
-																	
		eng Nickor Zuo 2011/11/30				product family											
		chr Jian Huang 2011/12/02															
		appr Pei-Ming Zheng 2011/12/02				rel level Released											
surface ✓		linear				title DDR II 240P V/T DDR II 240P METAL CLIP ASS'Y				dwg no 10005639				rev X			
																0.X ±0.38	
																0.XX ±0.25	
		0.XXX ±0.13															
-		angular 0° ±2°		www.fci.com		cat. no. *		Product - Customer Drw				sheet 4 of 4					



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331