

Description

The GM1117 is a positive low dropout regulator and is available in an adjustable version and fixed output voltage from 1.5V to 5.0V. All internal circuitry is designed to operate down to 800mV input to output differential and the dropout voltage is fully specified as a function of load current. On chip trimming adjusts the reference/output voltage to within $\pm 1\%$. Current limit is also trimmed in order to minimize the stress on both the regulator and the power source circuitry under overloaded conditions.

Features

- ◆ Adjustable or Fixed Output
- ◆ Output Current of 1.0A
- ◆ Dropout Voltage 1.5V max @ 1.0A
- ◆ Line Regulation 0.2% max.
- ◆ Load Regulation 0.4% max.
- ◆ Fast Transient Response
- ◆ Current Limit Protection
- ◆ Thermal Shutdown Protection

Application

High Efficiency Linear Regulators
Post Regulators for Switching Supplies
Microprocessor Supply


Battery Powered Equipment
Reference Voltage Sources
Hard Drive Controllers
Battery Chargers
Adjustable Power Supply

Typical Application Circuits




Adjustable Regulator

$$V_{OUT} = 1.25V \left(1 + \frac{R2}{R1} \right)$$

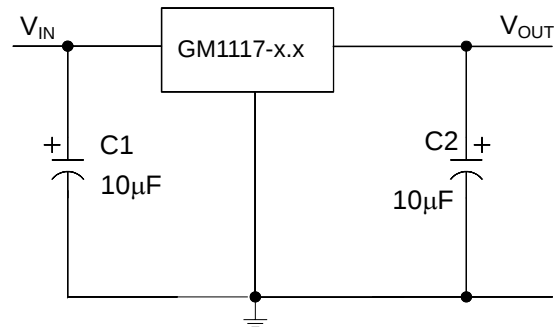

Fixed Output Voltage Regulator

Marking Information and Pin Configurations (Top View)

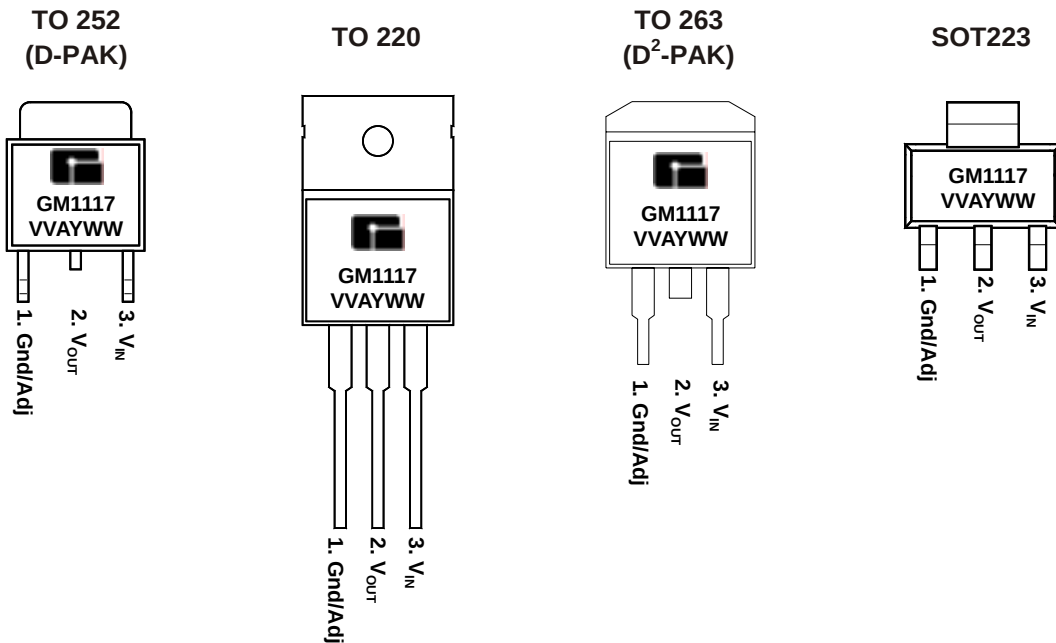

VV: Voltage suffix (15 = 1.5V, 50 = 5.0V...A = Adj)

A: Assembly / Test site code

Y: Year

WW: Week

Ordering Information

Ordering Number	Output Voltage	Package	Shipping
GM1117-AST3T	Adj	SOT-223	80 Units/Tube
GM1117-AST3R		SOT-223	2,500 Units / Tape & Reel
GM1117-ATC3T		TO-252	80 Units/Tube
GM1117-ATC3R		TO-252	2,500 Units / Tape & Reel
GM1117-ATB3T		TO-220	50 Units/Tube
GM1117-ATA3T		TO-263	50 Units/Tube
GM1117-ATA3R		TO-263	800 Units / Tape & Reel
GM1117-1.5ST3T	1.5V	SOT-223	80 Units/Tube
GM1117-1.5ST3R		SOT-223	2,500 Units / Tape & Reel
GM1117-1.5TC3T		TO-252	80 Units/Tube
GM1117-1.5TC3R		TO-252	2,500 Units / Tape & Reel
GM1117-1.5TB3T		TO-220	50 Units/Tube
GM1117-1.5TA3T		TO-263	50 Units/Tube
GM1117-1.5TA3R		TO-263	800 Units / Tape & Reel
GM1117-1.8ST3T	1.8V	SOT-223	80 Units/Tube
GM1117-1.8ST3R		SOT-223	2,500 Units / Tape & Reel
GM1117-1.8TC3T		TO-252	80 Units/Tube
GM1117-1.8TC3R		TO-252	2,500 Units / Tape & Reel
GM1117-1.8TB3T		TO-220	50 Units/Tube
GM1117-1.8TA3T		TO-263	50 Units/Tube
GM1117-1.8TA3R		TO-263	800 Units / Tape & Reel
GM1117-2.5ST3T	2.5V	SOT-223	80 Units/Tube
GM1117-2.5ST3R		SOT-223	2,500 Units / Tape & Reel
GM1117-2.5TC3T		TO-252	80 Units/Tube
GM1117-2.5TC3R		TO-252	2,500 Units / Tape & Reel
GM1117-2.5TB3T		TO-220	50 Units/Tube
GM1117-2.5TA3T		TO-263	50 Units/Tube
GM1117-2.5TA3R		TO-263	800 Units / Tape & Reel


Ordering Information (Continued)

Ordering Number	Output Voltage	Package	Shipping
GM1117-2.85ST3T	2.85V	SOT-223	80 Units/Tube
GM1117-2.85ST3R		SOT-223	2,500 Units / Tape & Reel
GM1117-2.85TC3T		TO-252	80 Units/Tube
GM1117-2.85TC3R		TO-252	2,500 Units / Tape & Reel
GM1117-2.85TB3T		TO-220	50 Units/Tube
GM1117-2.85TA3T		TO-263	50 Units/Tube
GM1117-2.85TA3R		TO-263	800 Units / Tape & Reel
GM1117-3.0ST3T	3.0V	SOT-223	80 Units/Tube
GM1117-3.0ST3R		SOT-223	2,500 Units / Tape & Reel
GM1117-3.0TC3T		TO-252	80 Units/Tube
GM1117-3.0TC3R		TO-252	2,500 Units / Tape & Reel
GM1117-3.0TB3T		TO-220	50 Units/Tube
GM1117-3.0TA3T		TO-263	50 Units/Tube
GM1117-3.0TA3R		TO-263	800 Units / Tape & Reel
GM1117-3.3ST3T	3.3V	SOT-223	80 Units/Tube
GM1117-3.3ST3R		SOT-223	2,500 Units / Tape & Reel
GM1117-3.3TC3T		TO-252	80 Units/Tube
GM1117-3.3TC3R		TO-252	2,500 Units / Tape & Reel
GM1117-3.3TB3T		TO-220	50 Units/Tube
GM1117-3.3TA3T		TO-263	50 Units/Tube
GM1117-3.3TA3R		TO-263	800 Units / Tape & Reel
GM1117-5.0ST3T	5.0V	SOT-223	80 Units/Tube
GM1117-5.0ST3R		SOT-223	2,500 Units / Tape & Reel
GM1117-5.0TC3T		TO-252	80 Units/Tube
GM1117-5.0TC3R		TO-252	2,500 Units / Tape & Reel
GM1117-5.0TB3T		TO-220	50 Units/Tube
GM1117-5.0TA3T		TO-263	50 Units/Tube
GM1117-5.0TA3R		TO-263	800 Units / Tape & Reel

Absolute Maximum Ratings

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage		V_{IN}	7	V
Thermal Resistance, Junction to Case	SOT-223	θ_{JA}	15.0	°W
	TO-252 (D PAK)		6.0	
	TO-263 (D ² PAK)		3.0	
Operating Junction Temperature	Control Section	T_J	0 to 125	
	Power Transistor		0 to 150	
Storage Temperature		T_{stg}	- 60 to 150	

Block Diagram

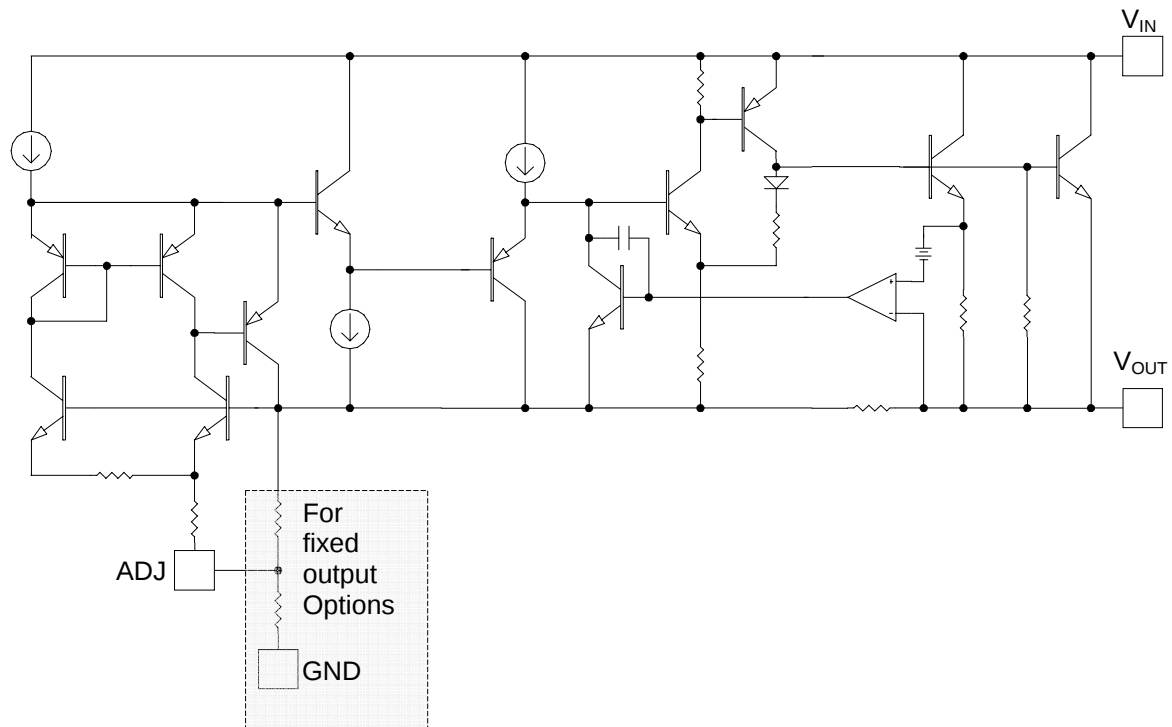

Electrical Characteristics ($T_A = 25^\circ\text{C}$, unless otherwise noted)

Parameter		Symbol	Condition	Min	Typ	Max	Unit
Reference Voltage	GM1117-Adj	V _{REF}	I _{OUT} =10mA, V _{IN} = 5V	1.238	1.250	1.262	V
			10mA ≤ I _{OUT} ≤ 1.0A, 2.65V ≤ V _{IN} ≤ 10V	1.225	1.250	1.275	
Output Voltage	GM1117-1.8	V _{OUT}	I _{OUT} =10mA, V _{IN} = 3.3V	1.782	1.800	1.818	V
			10mA ≤ I _{OUT} ≤ 1.0A, 3.3V ≤ V _{IN} ≤ 10V	1.764	1.800	1.836	
	GM1117-2.5		I _{OUT} =10mA, V _{IN} = 4V	2.475	2.500	2.525	
			10mA ≤ I _{OUT} ≤ 1.0A, 4V ≤ V _{IN} ≤ 10V	2.450	2.500	2.550	
	GM1117-3.3		I _{OUT} =10mA, V _{IN} = 4.8V	3.267	3.300	3.333	
			10mA ≤ I _{OUT} ≤ 1.0A, 4.8V ≤ V _{IN} ≤ 10V	3.234	3.300	3.366	
	GM1117-5.0		I _{OUT} =10mA, V _{IN} = 6.5V	4.950	5.000	5.050	
			10mA ≤ I _{OUT} ≤ 1.0A, 6.5V ≤ V _{IN} ≤ 10V	4.900	5.000	5.100	
Line Regulation	GM1117-Adj	ΔV _{OI}	I _{OUT} =10mA, 2.75V ≤ V _{IN} ≤ 7V		0.04	0.2	%V
	GM1117-1.8		I _{OUT} =10mA, 3.3V ≤ V _{IN} ≤ 7V				
	GM1117-2.5		I _{OUT} =10mA, 4V ≤ V _{IN} ≤ 7V				
	GM1117-3.3		I _{OUT} =10mA, 4.8V ≤ V _{IN} ≤ 7V				
	GM1117-5.0		I _{OUT} =10mA, 6.5V ≤ V _{IN} ≤ 7V				
Line Regulation		ΔV _{OL}	V _{IN} = V _{OUT} + 1V 10mA ≤ I _{OUT} ≤ 1.0A		0.2	0.4	%/mA
Dropout Voltage		ΔV	I _{OUT} =1A		1.15	1.3	V
Current Limit		I _{CL}	V _{IN} = V _{OUT} + 3V	1.1	3.1		A
Quiescent Current (Fixed Output Voltage Versions)		I _Q	V _{IN} = V _{OUT} + 1V 10mA ≤ I _{OUT} ≤ 1.0A		7	13	mA
Adjust Pin Current	GM1117-Adj	I _{Adj}	I _{OUT} =10mA, 2.75V ≤ V _{IN} ≤ 7V		55	90	μA
Temperature Coefficient			V _{IN} = V _{OUT} + 1.5V I _{OUT} =10mA		0.005		%/°C
Thermal Regulation		T _C	T _A =25°C, 30ms pulse		0.003		%/W
Ripple Rejection		R _A	V _{IN} = V _{OUT} + 1.5V I _{OUT} =10mA	60	72		dB

Typical Performance Characteristics



Figure 1. Dropout Voltage vs. Output Current

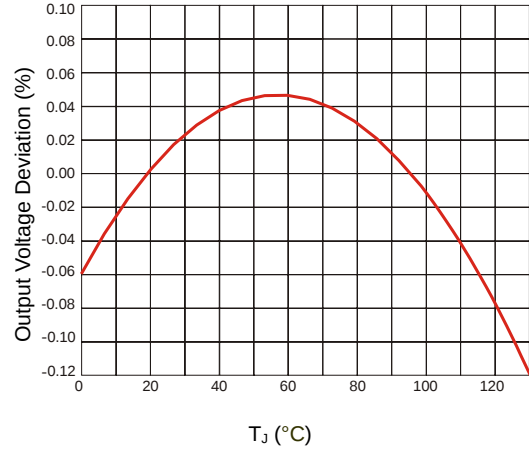


Figure 2. Reference Voltage vs. Temperature



Figure 3. Adjust Pin Current vs. Temperature

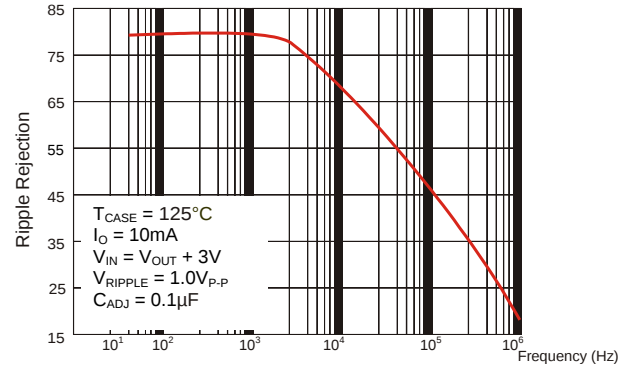


Figure 4. Ripple Rejection vs. Frequency

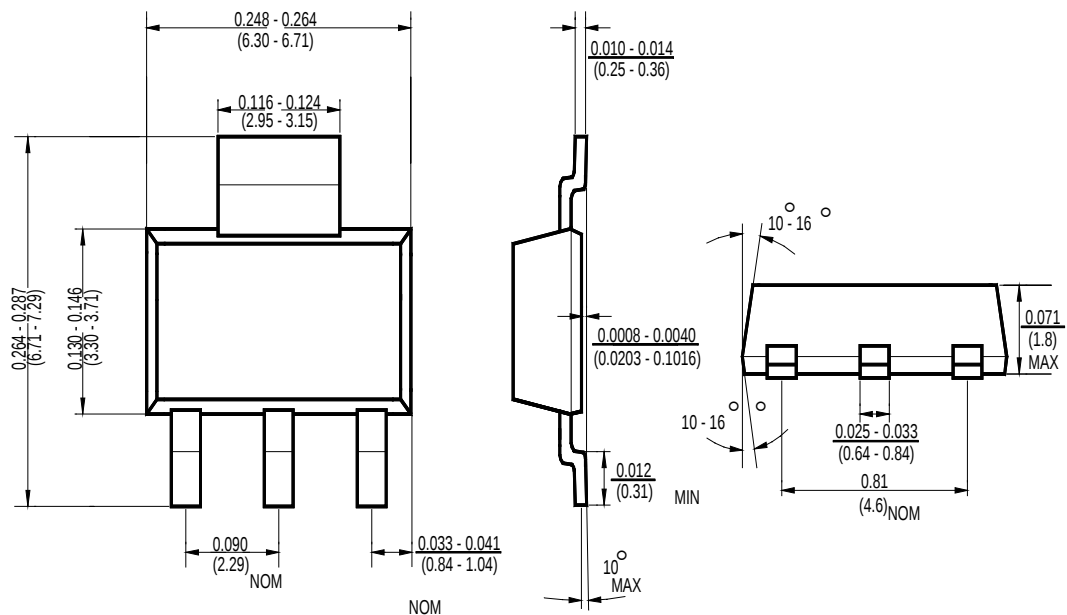


Figure 5. Transient Response

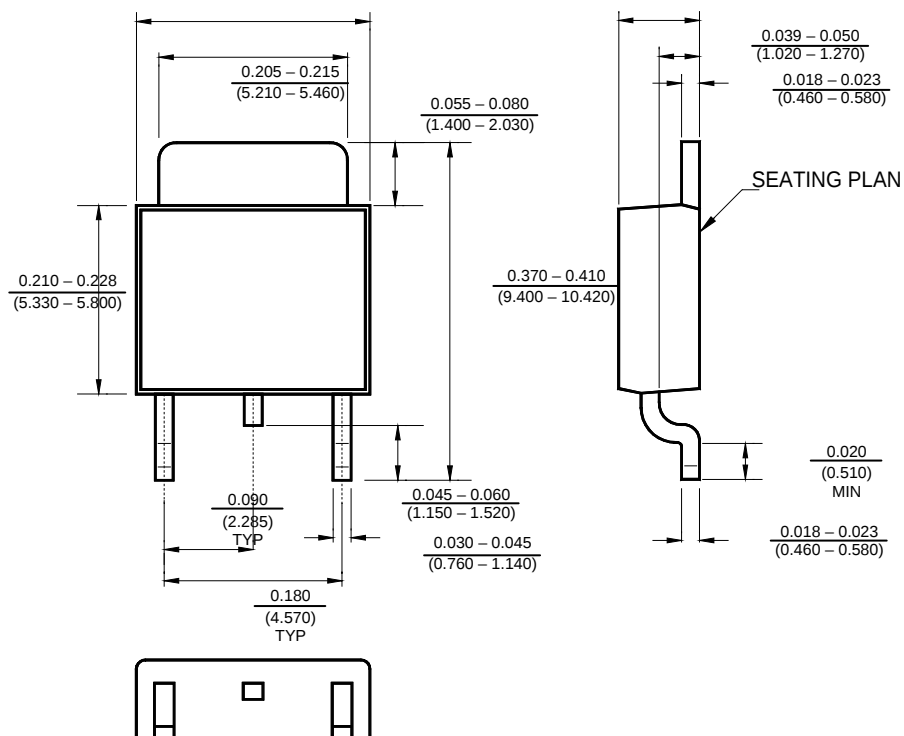


Figure 6. Short Circuit Current vs. $V_{IN} - V_{OUT}$

Package Outline Dimensions – SOT223



Package Outline Dimensions – TO252



The technical drawing shows two views of a mechanical component. The left view is a front elevation, and the right view is a side profile.

Front View Dimensions:

- Total width: $\frac{0.390 - 0.415}{(9.906 - 10.541)}$
- Top flange thickness: $\frac{0.060}{(1.524)} \text{ TYP}$
- Main body height: $\frac{0.330 - 0.370}{(8.382 - 9.398)}$
- Bottom flange thickness: $\frac{0.143 + 0.012}{(3.632 + 0.305)}$ and $\frac{0.143 - 0.002}{(3.362 - 0.508)}$
- Base width: $\frac{0.090 - 0.110}{(2.286 - 2.794)}$
- Internal feature width: $\frac{0.020 - 0.039}{(0.510 - 0.990)}$
- Small base feature width: $\frac{0.050}{(1.270)}$

Side Profile View Dimensions:

- Top flange thickness: $\frac{0.105 - 0.180}{(4.191 - 4.572)}$
- Top flange offset: $\frac{0.045 - 0.055}{(1.143 - 1.397)}$
- Internal feature depth: $\frac{0.059}{(1.499)} \text{ TYP}$
- Internal feature offset: $\frac{0.050 \pm 0.012}{(1.270 \pm 0.305)}$
- Base width: $\frac{0.013 - 0.023}{(0.330 - 0.584)}$

A 15° angle is indicated on the top flange of the front view.



GM1117

1A LOW DROPOUT
PRECISION VOLTAGE REGULATOR

Ordering Number

<u>GM</u>	<u>1117</u>	<u>A</u>	<u>ST3</u>	<u>R</u>
APM Gamma Micro	Circuit Type	Output Voltage A: Adj 1.8 =1.8V 2.5 =2.5V 3.3 = 3.3V 5.0 =5.0V	Package Type ST3: SOT223 TA3: TO263 TB3: TO220 TC3: TO252	Shipping Type R: Taping & Reel T: Tube



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331