

# Surface-mount Fuses Fundamentals

## Overview

TE Circuit Protection offers the widest selection of surface-mount fuses available for addressing a broad range of overcurrent protection applications. Helping to prevent costly damage and promote a safe environment for electronic and electrical equipment, our single-use chip fuses provide performance stability to support applications with current ratings from .5A up to 20A.

TE Circuit Protection also offers the telecom FT600 fuse for telecommunications applications. This telecom fuse helps comply with North American overcurrent protection requirements, including Telcordia, GR-1089, TIA-968-A (formerly FCC Part 68), and UL60950 3rd edition.



## Multi-layer Design for Chip Fuses

The multi-layer design has the benefit of exposing more fuse element surface area to the glass-ceramic absorption material. When the fuse elements open, there is more material for the vaporizing fuse metals to absorb into, resulting in a very efficient and effective quenching of the fuse arc.

Figure 1 compared the multi-layer design of our SFF fuses with standard glass coated designs. The glass coated designs rely on the coating on only one side of the fuse element to absorb the vaporizing fuse material when it opens. Therefore, there is much less absorption material available to absorb the fuse metals. The result can be prolonged arcing and possible coating breach.

Figure 2 shows how the absorption characteristics of the two designs differ. The multi-layer design indicates a clean separation with the fuse element evenly diffusing into the surrounding ceramic substrate. In the glass coated design, the element diffusion takes place in a small portion of the device and is only absorbed by the glass material directly above the area of failure.

Figure 1


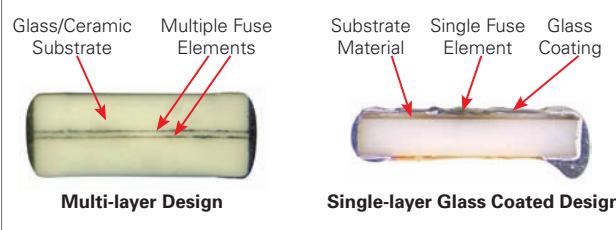


Figure 2

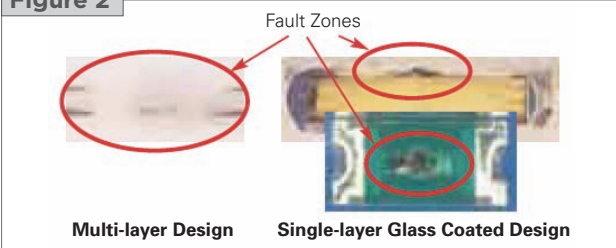


## Wire-In-Air Design for 2410SFV Fuses

The 2410(6125) is a Wire-In-Air SMD Fuse which is very suitable for secondary level over current protection applications.

Figure 3 compared our straight wire element design 2410SFV fuses with normal corrugating wire design fuse. The straight wire element in air performs consistent fusing and cutting characteristics together with excellent inrush current withstanding capability.

Introduced PCB assembly technology into 2410SFV fuses design and manufacture, we achieved on lead free completely and no end cap falling off risk comparing with traditional ceramic body with end cap fuse.


Figure 3

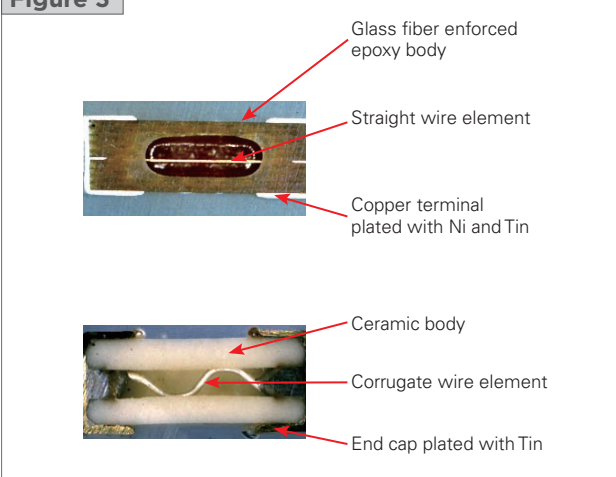

## Temperature Derating

A fuse is a temperature sensitive device. Therefore, operating temperature will have an effect on fuse performance and lifetime. Operating temperature should be taken into consideration when selecting the fuse current rating. The Thermal Derating Curve for surface mount fuses is presented in Figure 4. Use it to determine the derating percentage based on operating temperature and apply it to the derated system current.


**Figure 4**

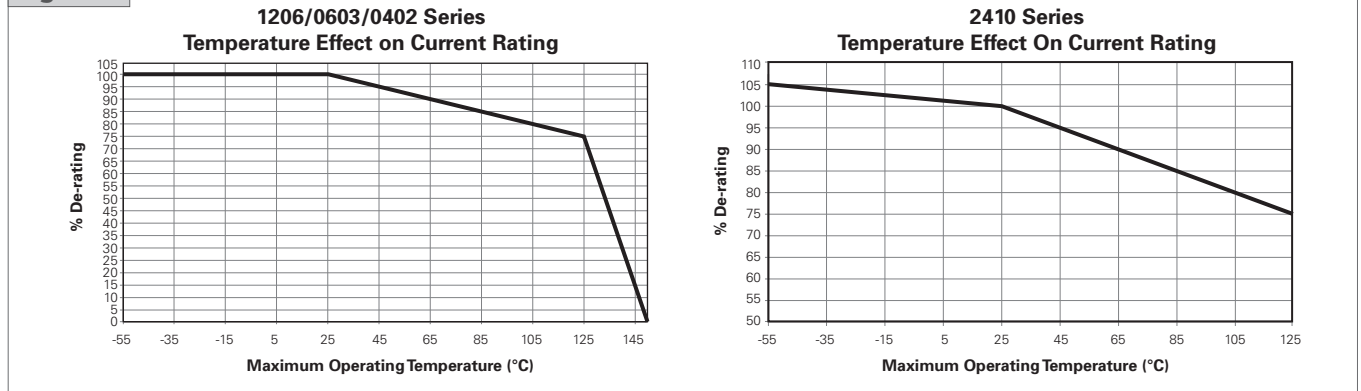

## Pulse Cycle Derating

Once the  $I^2t$  value for the application waveform has been determined, it must be derated based on the number of cycles expected over the system lifetime. Since the stress induced by the current pulse is mechanical in nature, the number of times the stress is applied has significant bearing on how much derating must be applied to the fuse rating. Figure 5 presents the current pulse derating curve for our surface-mount chip fuses up to 100,000 cycles.

**Figure 5**

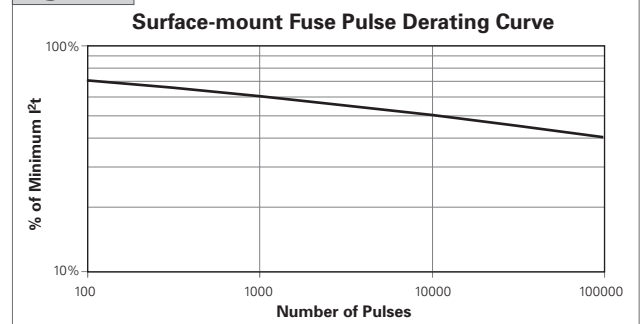


## Selecting Surface-mount Fuses

Fuse selection seems straightforward, in that, you pick one which has a current rating just a bit higher than your worstcase system operating current. Unfortunately, it's not that simple. There are derating considerations for operating current and application temperature. Turn-on and other system operations (like processor speed changes or motor start up) cause current surges or spikes that also require consideration when selecting a fuse. So selecting the right fuse for your application is not as simple as knowing the nominal current drawn by the system.

## Fuse Selection Flowchart

However, the basic considerations for fuse selection are shown in the flowchart presented in Figure 6. Following this flow chart will help you select a fuse best suited for your application conditions.

**Figure 6**

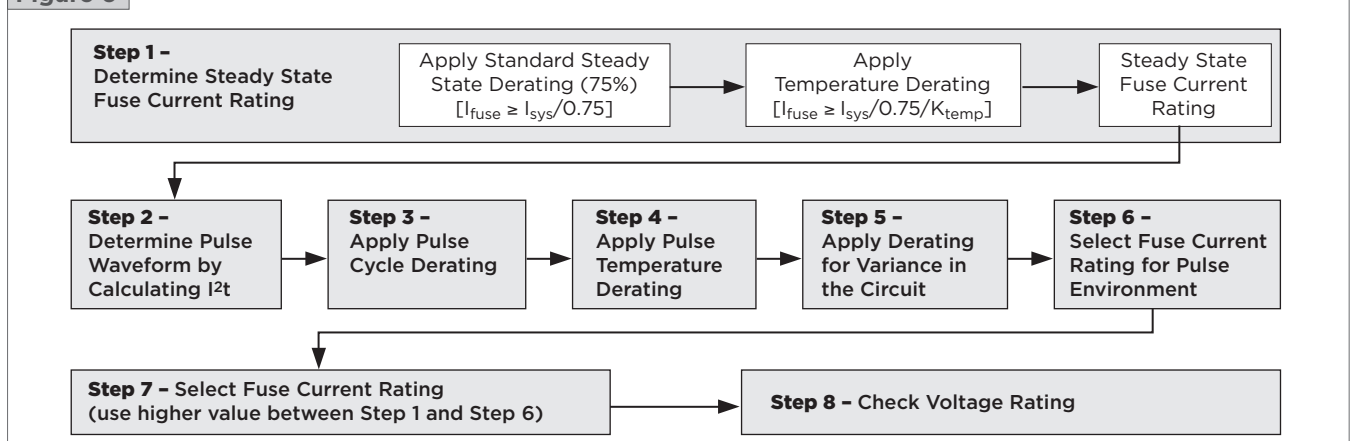



# Surface-mount Fuses

## Pulse Tolerant Chip Fuses



Pulse Tolerant chip fuses has high inrush current withstand capability and provide overcurrent protection on DC power systems. Silver fusing element, monolithic and multilayer design provides strong arc suppression characteristics.

These RoHS-compliant surface-mount devices facilitate the development of more reliable, high performance consumer electronics such as laptops, multimedia devices, cell phones, and other portable electronics.



### Benefits

- High inrush current withstanding capability
- Ceramic Monolithic structure
- Silver fusing element and silver termination with nickel and tin plating
- Excellent temperature stability
- Strong arc suppression characteristics

### Features

- Lead free materials and RoHS compliant
- Halogen free  
(refers to: Br≤900ppm, Cl≤900ppm, Br+Cl≤1500ppm)
- Monolithic, multilayer design
- High-temperature performance
- -55°C to +125°C operating temperature range

### Applications


- |                   |                        |                |
|-------------------|------------------------|----------------|
| • Laptops         | • Printers             | • Game systems |
| • Digital cameras | • DVD players          | • LCD monitors |
| • Cell phones     | • Portable electronics | • Scanners     |

**Table FP1 Clear Time Characteristics for Pulse Tolerant Chip Fuses**

| % of rated current | Clear time at 25°C   |                     |
|--------------------|----------------------|---------------------|
| 100%               | 4 hours (min.)       |                     |
| 200%               | 1 seconds (min.)     | 60 seconds (max.)   |
| 1000%              | 0.0002 second (min.) | 0.02 seconds (max.) |

**Table FP2 Typical Electrical Characteristics and Dimensions for Pulse Tolerant Chip Fuses**
**0603 (1608 mm) Pulse Tolerant Chip Fuses**

**Shape and Dimensions**  
mm (Inch)




|    | A       |         | B       |         | C       |         | D       |         |
|----|---------|---------|---------|---------|---------|---------|---------|---------|
|    | Min     | Max     | Min     | Max     | Min     | Max     | Min     | Max     |
| mm | 1.45    | 1.75    | 0.65    | 0.95    | 0.21    | 0.51    | 0.65    | 0.95    |
| in | (0.057) | (0.069) | (0.026) | (0.037) | (0.008) | (0.020) | (0.026) | (0.037) |

| Part Number      | Typical Electrical Characteristics |                                |                                                  | Max. Interrupt Ratings     |             |
|------------------|------------------------------------|--------------------------------|--------------------------------------------------|----------------------------|-------------|
|                  | Rated Current (A)                  | Nominal Cold DCR ( $\Omega$ )* | Nominal $I^2t$ (A <sup>2</sup> sec) <sup>†</sup> | Voltage (V <sub>DC</sub> ) | Current (A) |
| 0603SFP100F/32-2 | 1.0                                | 0.210                          | 0.080                                            | 32                         | 50          |
| 0603SFP150F/32-2 | 1.5                                | 0.101                          | 0.11                                             | 32                         | 50          |
| 0603SFP200F/32-2 | 2.0                                | 0.057                          | 0.24                                             | 32                         | 50          |
| 0603SFP250F/32-2 | 2.5                                | 0.042                          | 0.56                                             | 32                         | 50          |
| 0603SFP300F/32-2 | 3.0                                | 0.030                          | 0.72                                             | 32                         | 50          |
| 0603SFP350F/32-2 | 3.5                                | 0.022                          | 1.10                                             | 32                         | 50          |
| 0603SFP400F/32-2 | 4.0                                | 0.018                          | 2.08                                             | 32                         | 50          |
| 0603SFP450F/32-2 | 4.5                                | 0.014                          | 2.63                                             | 32                         | 50          |
| 0603SFP500F/32-2 | 5.0                                | 0.013                          | 3.25                                             | 32                         | 50          |

**1206 (3216 mm) Pulse Tolerant Chip Fuses**

**Shape and Dimensions**  
mm (Inch)




|    | A       |         | B       |         | C       |         | D       |         |
|----|---------|---------|---------|---------|---------|---------|---------|---------|
|    | Min     | Max     | Min     | Max     | Min     | Max     | Min     | Max     |
| mm | 3.00    | 3.40    | 0.77    | 1.17    | 0.26    | 0.76    | 1.40    | 1.80    |
| in | (0.118) | (0.134) | (0.030) | (0.046) | (0.010) | (0.030) | (0.055) | (0.071) |

| Part Number      | Typical Electrical Characteristics |                                |                                                  | Max. Interrupt Ratings     |             |
|------------------|------------------------------------|--------------------------------|--------------------------------------------------|----------------------------|-------------|
|                  | Rated Current (A)                  | Nominal Cold DCR ( $\Omega$ )* | Nominal $I^2t$ (A <sup>2</sup> sec) <sup>†</sup> | Voltage (V <sub>DC</sub> ) | Current (A) |
| 1206SFP100F/63-2 | 1.0                                | 0.340                          | 0.11                                             | 63                         | 50          |
| 1206SFP150F/63-2 | 1.5                                | 0.150                          | 0.33                                             | 63                         | 50          |
| 1206SFP200F/63-2 | 2.0                                | 0.090                          | 0.80                                             | 63                         | 50          |
| 1206SFP250F/32-2 | 2.5                                | 0.070                          | 1.19                                             | 32                         | 50          |
| 1206SFP300F/32-2 | 3.0                                | 0.035                          | 1.35                                             | 32                         | 50          |
| 1206SFP350F/32-2 | 3.5                                | 0.029                          | 1.84                                             | 32                         | 50          |
| 1206SFP400F/32-2 | 4.0                                | 0.023                          | 2.74                                             | 32                         | 50          |
| 1206SFP450F/32-2 | 4.5                                | 0.021                          | 3.20                                             | 32                         | 50          |
| 1206SFP500F/32-2 | 5.0                                | 0.017                          | 5.50                                             | 32                         | 50          |


\* Measured at  $\leq 10\%$  of rated current and 25°C ambient temperature.  
<sup>†</sup> Melting  $I^2t$  at 0.001 sec clear time.

**Figure FP1-FP4 Family Performance Curves for Pulse Tolerant Chip Fuses**

**Figure FP1**

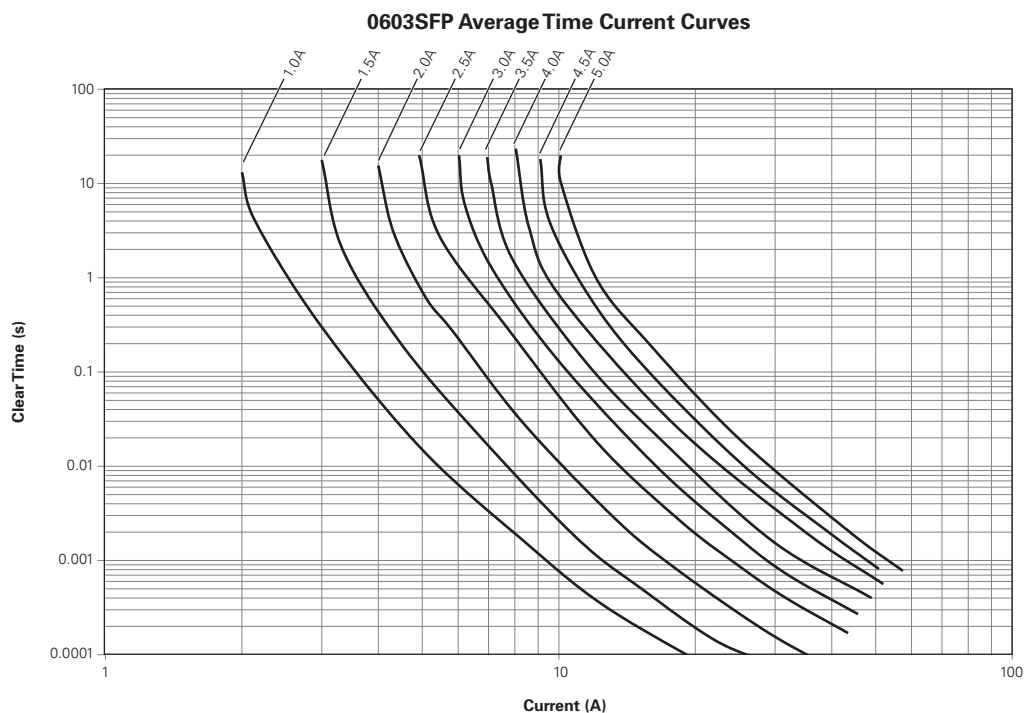

**Figure FP2**

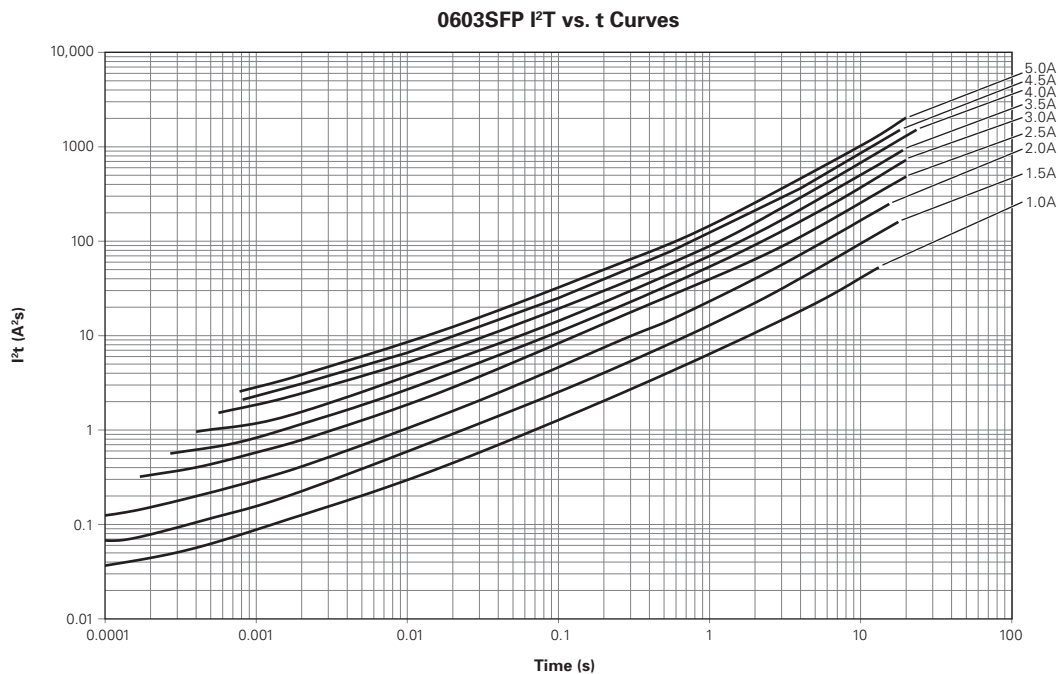

**Note:** Curves are nominal

Figure FP3


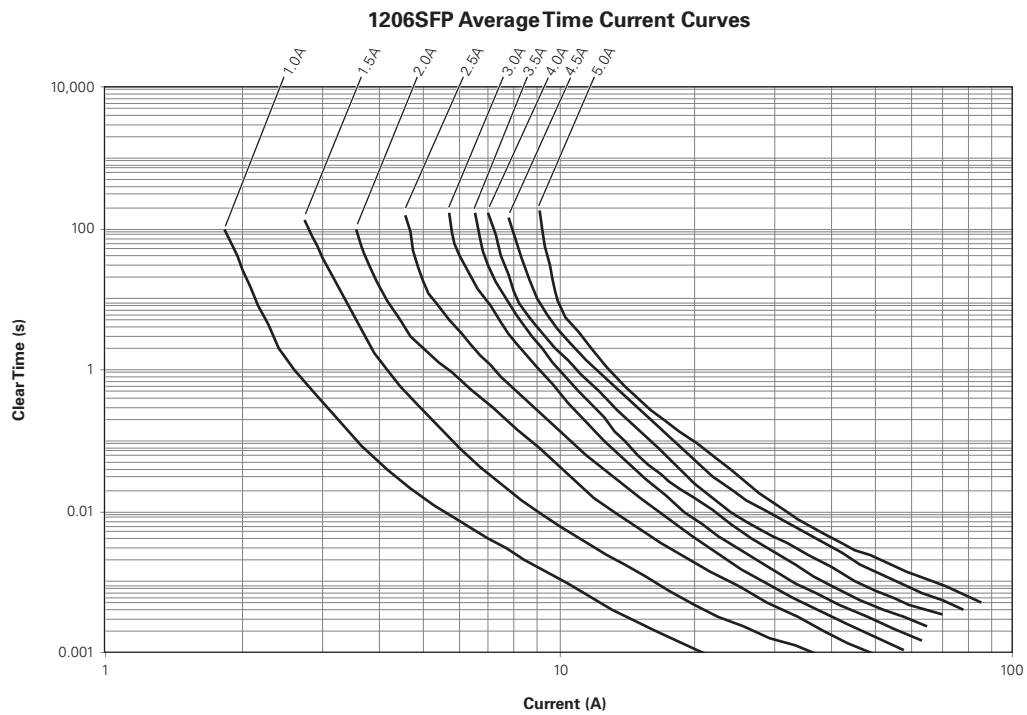


Figure FP4



Note: Curves are nominal

→ Please go to page 97 for more information for Pulse Tolerant Chip Fuses.

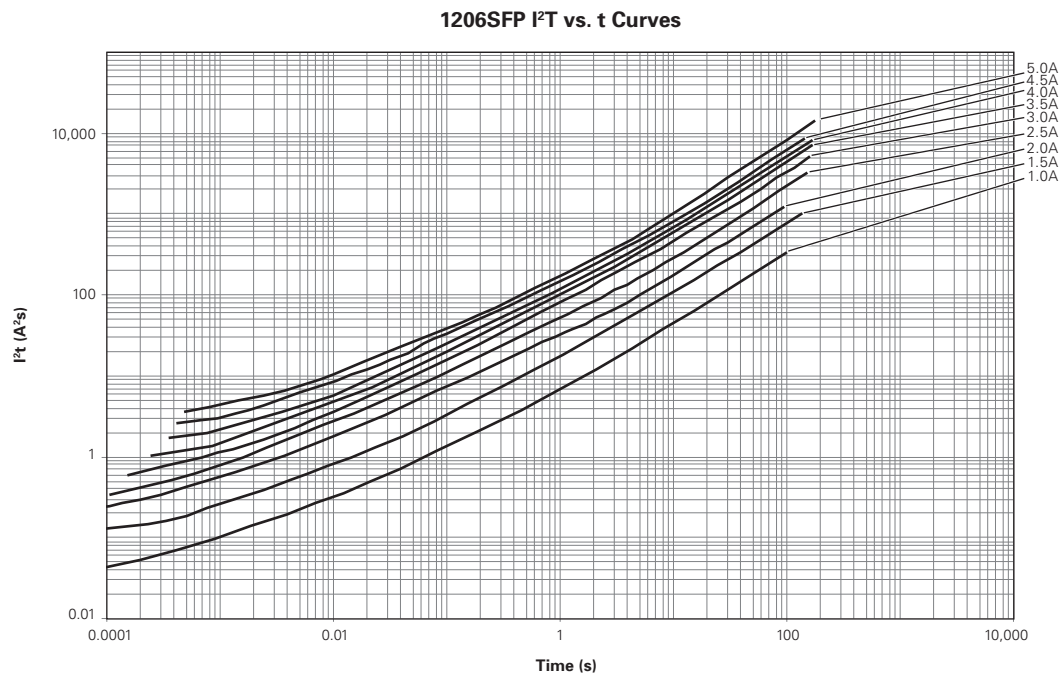

# Surface-mount Fuses

## 0603 Very Fast-Acting Chip Fuses



Very Fast-acting chip fuses help provide overcurrent protection on systems using DC power sources up to 32V<sub>DC</sub>. The fuse's monolithic, multilayer design provides the highest hold current in the smallest footprint, reduces diffusion-related aging, improves product reliability and resilience, and enhances high-temperature performance in a wide range of circuit designs.

These RoHS-compliant surface-mount devices offer strong arc suppression characteristics and facilitate the development of more reliable, high performance consumer electronics such as laptops, multimedia devices, cell phones, and other portable electronics.



### Benefits

- Very fast acting at 200% and 300% overloads
- Excellent inrush current withstanding capability at high overloads
- Thin body for space limiting applications
- Glass ceramic monolithic structure
- Silver fusing element and silver termination with nickel and tin plating
- RoHS compliant and lead-free materials
- Symmetrical design with marking on both sides (optional)

### Features

- Lead free materials and RoHS compliant
- Halogen free  
(refers to: Br≤900ppm, Cl≤900ppm, Br+Cl≤1500ppm)
- Monolithic, multilayer design
- High-temperature performance
- -55°C to +125°C operating temperature range

### Applications


- |                   |                        |                |
|-------------------|------------------------|----------------|
| • Laptops         | • Printers             | • Game systems |
| • Digital cameras | • DVD players          | • LCD monitors |
| • Cell phones     | • Portable electronics | • Scanners     |

**Table FV1 Clear Time Characteristics for Very Fast-Acting Chip Fuses**

| % of rated current | Clear time at 25°C  |                    |
|--------------------|---------------------|--------------------|
| 100%               | 4 hours (min.)      |                    |
| 200%               | 0.01 second (min.)  | 5 seconds (max.)   |
| 300%               | 0.001 second (min.) | 0.2 seconds (max.) |

**Table FV2 Typical Electrical Characteristics and Dimensions for Very Fast-Acting Chip Fuses**
**0603 (1608 mm) Very Fast-Acting Chip Fuses**



**Shape and Dimensions**  
mm (Inch)



|    | A       |         | B       |         | C       |         | D       |         |
|----|---------|---------|---------|---------|---------|---------|---------|---------|
|    | Min     | Max     | Min     | Max     | Min     | Max     | Min     | Max     |
| mm | 1.45    | 1.75    | 0.22    | 0.48    | 0.21    | 0.51    | 0.65    | 0.95    |
| in | (0.057) | (0.069) | (0.009) | (0.019) | (0.008) | (0.020) | (0.025) | (0.037) |

| Part Number      | Typical Electrical Characteristics |                                |                                     | Max. Interrupt Ratings     |             |
|------------------|------------------------------------|--------------------------------|-------------------------------------|----------------------------|-------------|
|                  | Rated Current (A)                  | Nominal Cold DCR ( $\Omega$ )* | Nominal $I^2t$ (A <sup>2</sup> sec) | Voltage (V <sub>DC</sub> ) | Current (A) |
| 0603SFV050F/32-2 | 0.5                                | 0.860                          | 0.0093                              | 32                         | 50          |
| 0603SFV075F/32-2 | 0.8                                | 0.450                          | 0.0191                              | 32                         | 50          |
| 0603SFV100F/32-2 | 1.0                                | 0.280                          | 0.0360                              | 32                         | 50          |
| 0603SFV125F/32-2 | 1.3                                | 0.205                          | 0.0630                              | 32                         | 35          |
| 0603SFV150F/32-2 | 1.5                                | 0.143                          | 0.0950                              | 32                         | 35          |
| 0603SFV175F/32-2 | 1.8                                | 0.095                          | 0.1400                              | 32                         | 35          |
| 0603SFV200F/32-2 | 2.0                                | 0.073                          | 0.2100                              | 32                         | 35          |
| 0603SFV250F/32-2 | 2.5                                | 0.046                          | 0.3000                              | 32                         | 35          |
| 0603SFV300F/32-2 | 3.0                                | 0.039                          | 0.4600                              | 32                         | 35          |
| 0603SFV350F/32-2 | 3.5                                | 0.028                          | 0.7300                              | 32                         | 35          |
| 0603SFV400F/32-2 | 4.0                                | 0.023                          | 1.1500                              | 32                         | 35          |
| 0603SFV450F/32-2 | 4.5                                | 0.019                          | 1.6800                              | 32                         | 35          |
| 0603SFV500F/32-2 | 5.0                                | 0.015                          | 2.6200                              | 32                         | 35          |

\* Measured at 10% of rated current and 25°C

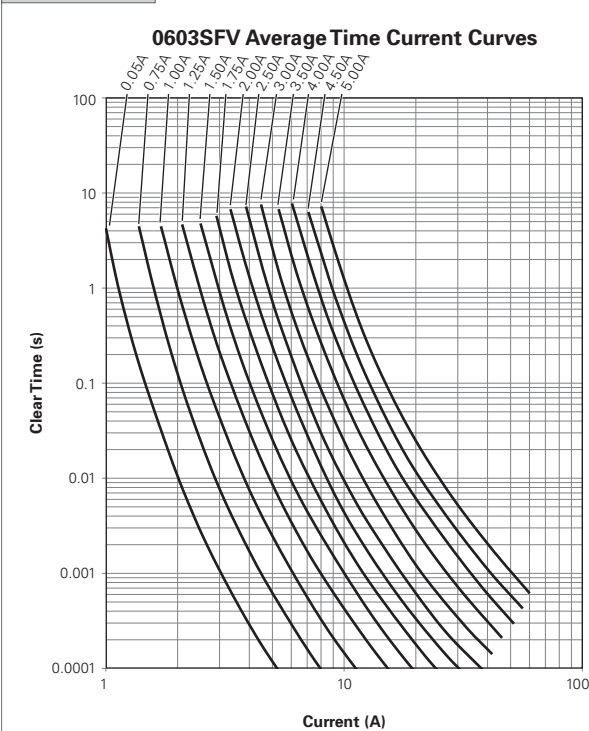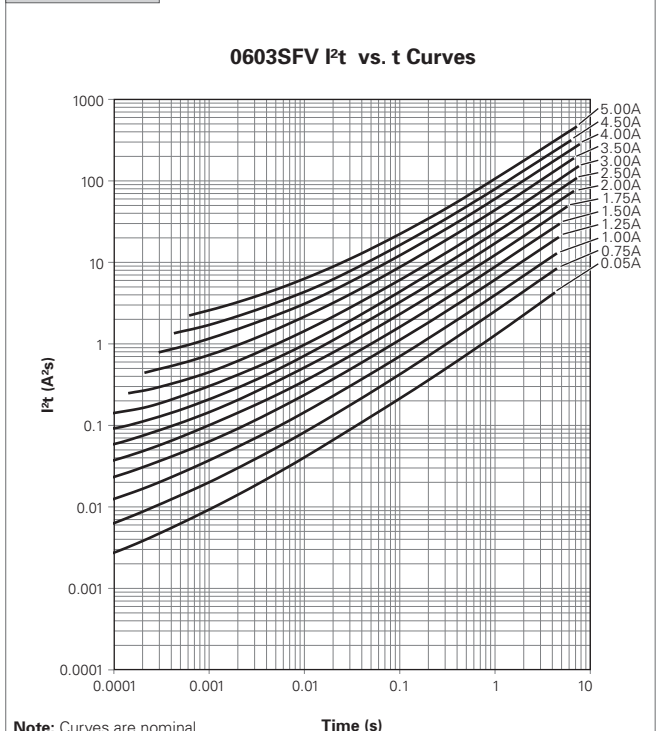**Figure FV1-FV2 Family Performance Curves for Very Fast-Acting Chip Fuses**
**Figure FV1**

**Figure FV2**


→ Please go to page 97 for more information for Very Fast-Acting Chip Fuses.



# Surface-mount Fuses

## Fast-Acting Chip Fuses

Fast-acting chip fuses help provide overcurrent protection on systems using DC power sources up to 63V<sub>DC</sub>. The fuse's monolithic, multilayer design provides the highest hold current in the smallest footprint, reduces diffusion-related aging, improves product reliability and resilience, and enhances high-temperature performance in a wide range of circuit designs.

These RoHS-compliant surface-mount devices offer strong arc suppression characteristics and facilitate the development of more reliable, high performance consumer electronics such as laptops, multimedia devices, cell phones, and other portable electronics.



### Benefits

- Small size with high-current ratings
- Excellent temperature stability
- High reliability and resilience
- Strong arc suppression characteristics

### Features

- Lead free materials and RoHS compliant
- Halogen free  
(refers to: Br≤900ppm, Cl≤900ppm, Br+Cl≤1500ppm)
- Monolithic, multilayer design
- High-temperature performance
- -55°C to +125°C operating temperature range

### Applications


- |                   |                        |                |
|-------------------|------------------------|----------------|
| • Laptops         | • Printers             | • Game systems |
| • Digital cameras | • DVD players          | • LCD monitors |
| • Cell phones     | • Portable electronics | • Scanners     |

**Table FF1 Clear Time Characteristics for Fast-Acting Chip Fuses**


| % of rated current | Clear time at 25°C |
|--------------------|--------------------|
| 100%               | 4 hours min.       |
| 250%               | 5 seconds max.     |
| 400%               | 0.05 seconds max.  |

**Table FF2 Typical Electrical Characteristics, Dimensions and Recommended Pad Layout for Fast-Acting Chip Fuses**
**0402 (1005mm) Fast-Acting Chip Fuses**

**Shape and Dimensions**  
Inch (mm)




**Recommended Pad Layout**  
Inch (mm)


**Typical Electrical Characteristics**
**Max. Interrupt Ratings**


| Part Number    | Rated Current (A) | Nominal Cold DCR (Ω)* | Nominal I <sup>2</sup> t (A <sup>2</sup> sec) <sup>†</sup> | Voltage (V <sub>DC</sub> ) | Current (A) |
|----------------|-------------------|-----------------------|------------------------------------------------------------|----------------------------|-------------|
| 0402SFF050F/24 | 0.50              | 0.380                 | 0.0043                                                     | 24                         | 35          |
| 0402SFF075F/24 | 0.75              | 0.210                 | 0.0076                                                     | 24                         | 35          |
| 0402SFF100F/24 | 1.00              | 0.120                 | 0.0170                                                     | 24                         | 35          |
| 0402SFF150F/24 | 1.50              | 0.056                 | 0.0490                                                     | 24                         | 35          |
| 0402SFF200F/24 | 2.00              | 0.035                 | 0.0700                                                     | 24                         | 35          |
| 0402SFF300F/24 | 3.00              | 0.021                 | 0.1250                                                     | 24                         | 35          |
| 0402SFF400F/24 | 4.00              | 0.014                 | 0.2250                                                     | 24                         | 35          |

**0603 (1608mm) Fast-Acting Chip Fuses**

**Shape and Dimensions**  
Inch (mm)




**Recommended Pad Layout**  
Inch (mm)


**Typical Electrical Characteristics**
**Max. Interrupt Ratings**


| Part Number    | Rated Current (A) | Nominal Cold DCR (Ω)* | Nominal I <sup>2</sup> t (A <sup>2</sup> sec) <sup>†</sup> | Voltage (V <sub>DC</sub> ) | Current (A) |
|----------------|-------------------|-----------------------|------------------------------------------------------------|----------------------------|-------------|
| 0603SFF050F/32 | 0.50              | 0.485                 | 0.0029                                                     | 32                         | 50          |
| 0603SFF075F/32 | 0.75              | 0.254                 | 0.0064                                                     | 32                         | 50          |
| 0603SFF100F/32 | 1.00              | 0.131                 | 0.0160                                                     | 32                         | 50          |
| 0603SFF150F/32 | 1.50              | 0.059                 | 0.0300                                                     | 32                         | 35          |
| 0603SFF200F/32 | 2.00              | 0.044                 | 0.0600                                                     | 32                         | 35          |
| 0603SFF250F/32 | 2.50              | 0.032                 | 0.1150                                                     | 32                         | 35          |
| 0603SFF300F/32 | 3.00              | 0.025                 | 0.1900                                                     | 32                         | 35          |
| 0603SFF350F/32 | 3.50              | 0.024                 | 0.2950                                                     | 32                         | 35          |
| 0603SFF400F/32 | 4.00              | 0.018                 | 0.4000                                                     | 32                         | 35          |
| 0603SFF500F/32 | 5.00              | 0.013                 | 0.7000                                                     | 32                         | 35          |
| 0603SFF600F/24 | 6.00              | 0.010                 | 1.1250                                                     | 24                         | 35          |

**1206 (3216mm) Fast-Acting Chip Fuses**

**Shape and Dimensions**  
Inch (mm)

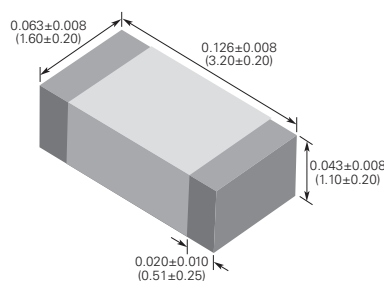

**Recommended Pad Layout**  
Inch (mm)



**Typical Electrical Characteristics**
**Max. Interrupt Ratings**

| Part Number    | Rated Current (A) | Nominal Cold DCR (Ω)* | Nominal I <sup>2</sup> t (A <sup>2</sup> sec) <sup>†</sup> | Voltage (V <sub>DC</sub> ) | Current (A) |
|----------------|-------------------|-----------------------|------------------------------------------------------------|----------------------------|-------------|
| 1206SFF050F/63 | 0.50              | 0.730                 | 0.0021                                                     | 63                         | 50          |
| 1206SFF075F/63 | 0.75              | 0.513                 | 0.0052                                                     | 63                         | 50          |
| 1206SFF100F/63 | 1.00              | 0.220                 | 0.0120                                                     | 63                         | 50          |
| 1206SFF150F/63 | 1.50              | 0.120                 | 0.0250                                                     | 63                         | 50          |
| 1206SFF175F/63 | 1.75              | 0.100                 | 0.0450                                                     | 63                         | 50          |
| 1206SFF200F/63 | 2.00              | 0.050                 | 0.0700                                                     | 63                         | 50          |
| 1206SFF250F/32 | 2.50              | 0.035                 | 0.1400                                                     | 32                         | 50          |
| 1206SFF300F/32 | 3.00              | 0.031                 | 0.2200                                                     | 32                         | 50          |
| 1206SFF400F/32 | 4.00              | 0.022                 | 0.3800                                                     | 32                         | 45          |
| 1206SFF500F/32 | 5.00              | 0.015                 | 0.6000                                                     | 32                         | 45          |
| 1206SFF600F/32 | 6.00              | 0.013                 | 1.0000                                                     | 32                         | 50          |
| 1206SFF700F/32 | 7.00              | 0.011                 | 1.7500                                                     | 32                         | 50          |
| 1206SFF800F/32 | 8.00              | 0.008                 | 2.5000                                                     | 32                         | 50          |
| 1206SFF600F/24 | 6.00              | 0.013                 | 1.0000                                                     | 24                         | 45          |
| 1206SFF700F/24 | 7.00              | 0.011                 | 1.7500                                                     | 24                         | 45          |
| 1206SFF800F/24 | 8.00              | 0.008                 | 2.5000                                                     | 24                         | 45          |


\* Measured at ≤10% of rated current and 25°C ambient temperature.  
† Melting I<sup>2</sup>t at 0.001 sec clear time.

**Figure FF1-FF6 Family Performance Curves for Fast-Acting Chip Fuses**


**Figure FF1**

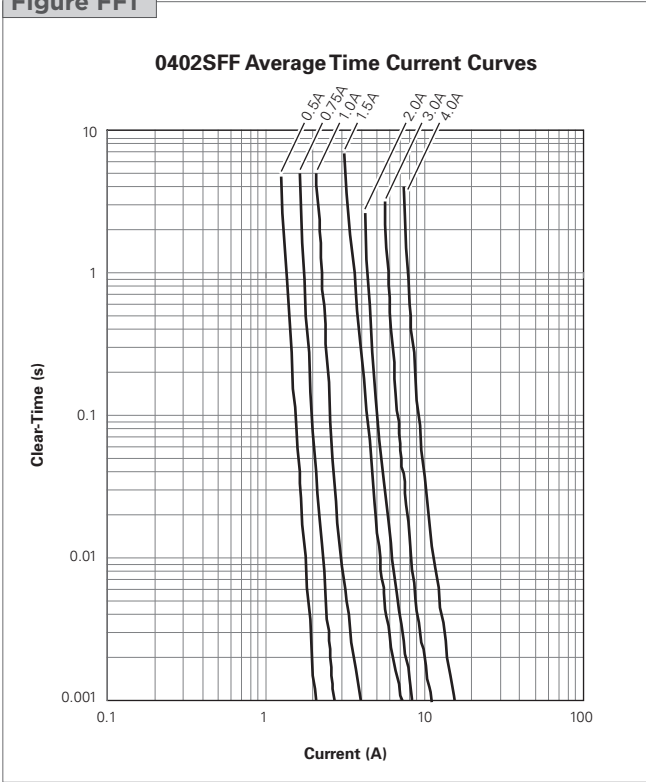


**Figure FF2**

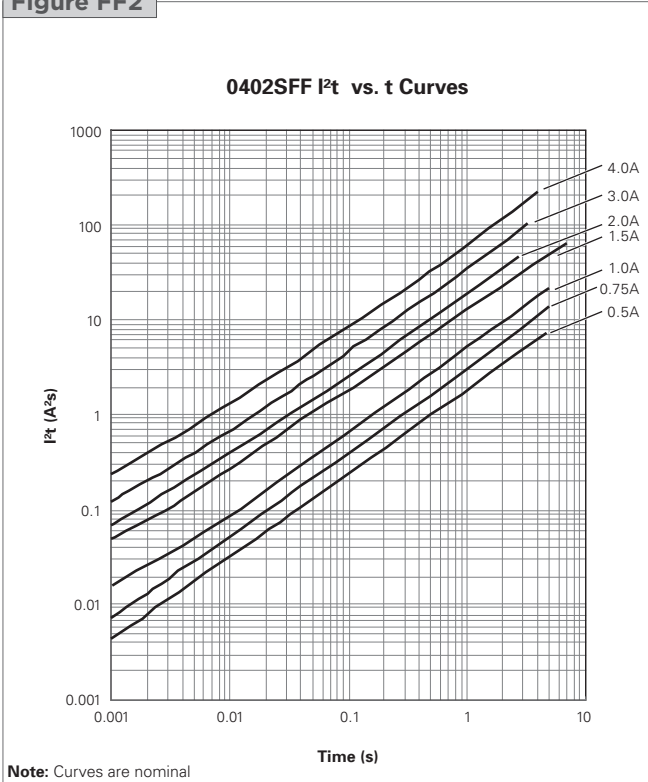


**Figure FF3**

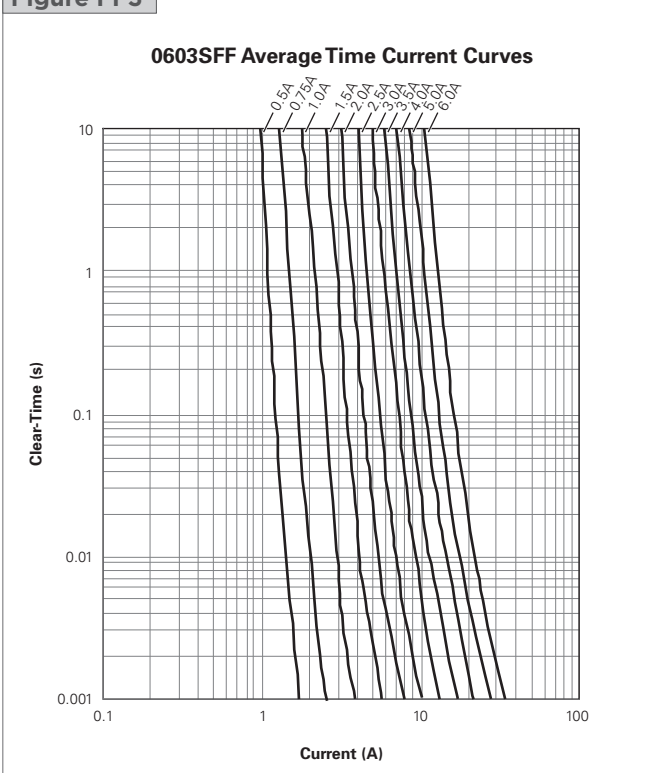


**Figure FF4**

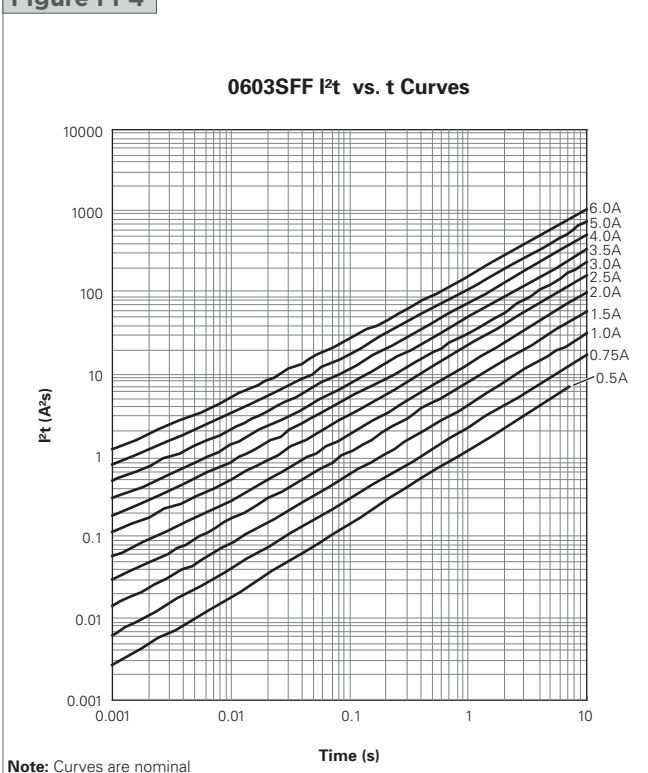

**Figure FF5**

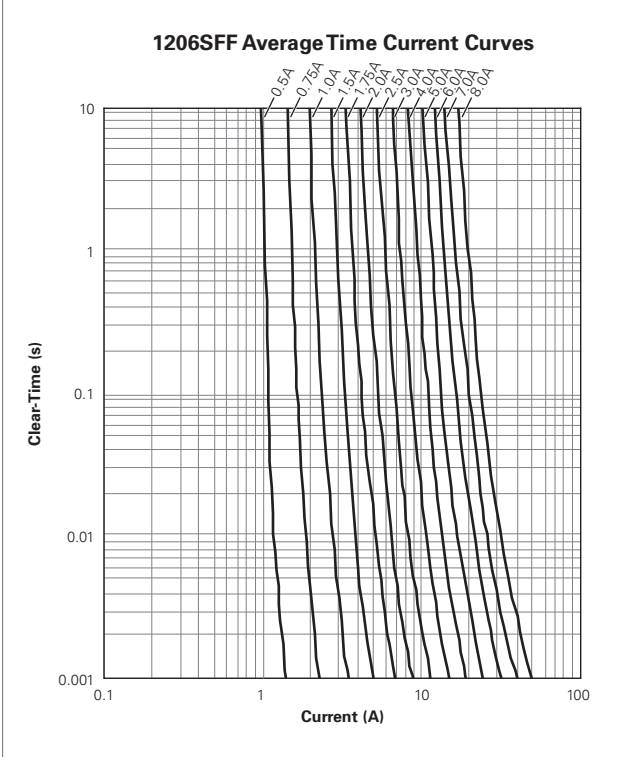

**Figure FF6**

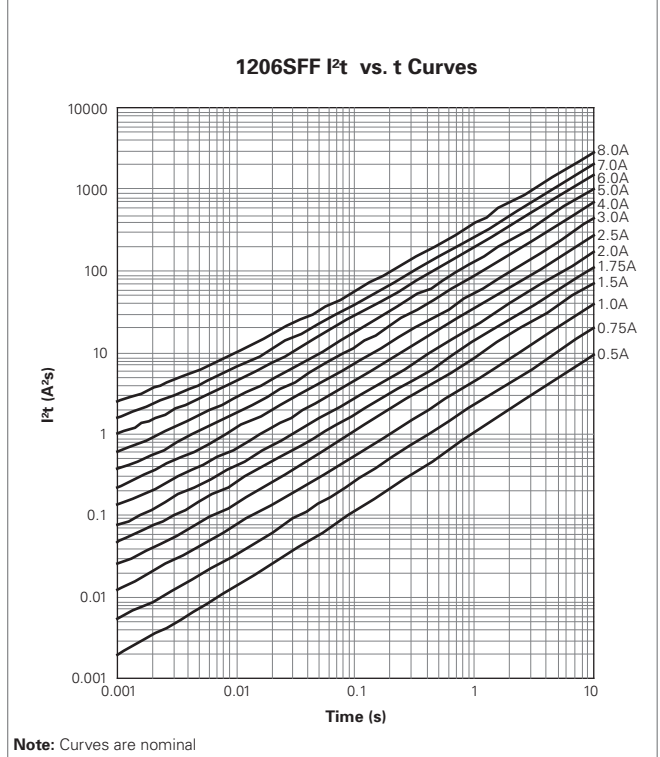


→ Please go to page 97 for more information for Fast-Acting Chip Fuses.



## Surface-mount Fuses

### High-Current-Rated Chip Fuses

The monolithic multilayer design of the TE Circuit Protection high-current-rated chip fuses helps to provide some of the highest current ratings available in the 1206 size and enhances high-temperature performance in a wide range of circuit protection designs. The devices' small size, high reliability and strong arc suppression characteristics make them suitable for overcurrent protection of power supplies, servers, communications equipment, voltage regulator modules, and other high-current, small size applications.

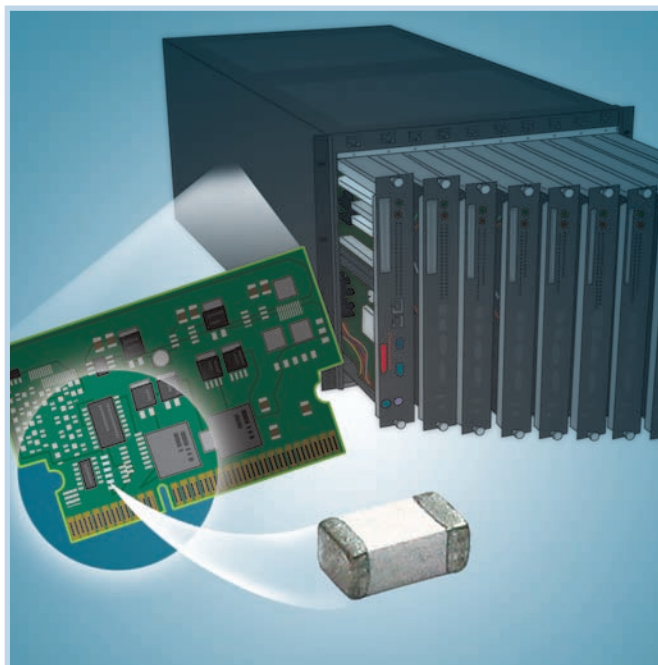

#### Benefits

- Glass ceramic monolithic structure provides stability in application cycling
- High-current rating in a small package allows more efficient use in system space
- Strong arc suppression in overcurrent conditions

#### Features

- Lead free materials and RoHS compliant
- Halogen free  
(refers to: Br≤900ppm, Cl≤900ppm, Br+Cl≤1500ppm)
- Monolithic multilayer design
- High-temperature performance
- -55°C to +125°C operating temperature range

#### Applications

- Communications equipment
- Voltage regulator modules
- Power supplies
- Servers

**Table FH1 Clear Time Characteristics for High-Current-Rated Chip Fuses**


**1206SFH Series**

| % of rated current | Clear time at 25°C |
|--------------------|--------------------|
| 100%               | 4 hours (min.)     |
| 250%               | 5 seconds (max.)   |


**Table FH2 Typical Electrical Characteristics, Dimensions and Recommended Pad Layout for High-Current-Rated Chip Fuses**

**1206 (3216mm) High-Current-Rated Chip Fuses**

**Shape and Dimensions**  
Inch (mm)

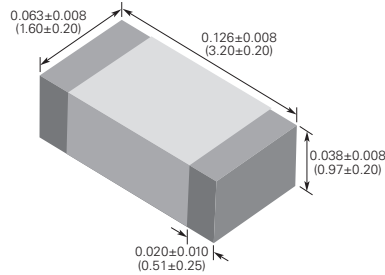

**Recommended Pad Layout**  
Inch (mm)



**Typical Electrical Characteristics**

**Max. Interrupt Ratings**


| Part Number    | Rated Current (A) | Nominal Cold DCR (Ω)* | Nominal I <sup>2</sup> t (A <sup>2</sup> sec) <sup>†</sup> | Voltage (V <sub>DC</sub> ) | Current (A) |
|----------------|-------------------|-----------------------|------------------------------------------------------------|----------------------------|-------------|
| 1206SFH100F/24 | 10                | 0.010                 | 9                                                          | 24                         | 100         |
| 1206SFH120F/24 | 12                | 0.008                 | 14                                                         | 24                         | 100         |
| 1206SFH150F/24 | 15                | 0.005                 | 26                                                         | 24                         | 100         |
| 1206SFH200F/24 | 20                | 0.003                 | 56                                                         | 24                         | 100         |

\* Measured at ≤10% of rated current and 25°C ambient temperature.


† Melting I<sup>2</sup>t at 0.001 sec clear time.

**Figure FH1-FH2 Family Performance Curves for High-Current-Rated Chip Fuses**

**Figure FH1**

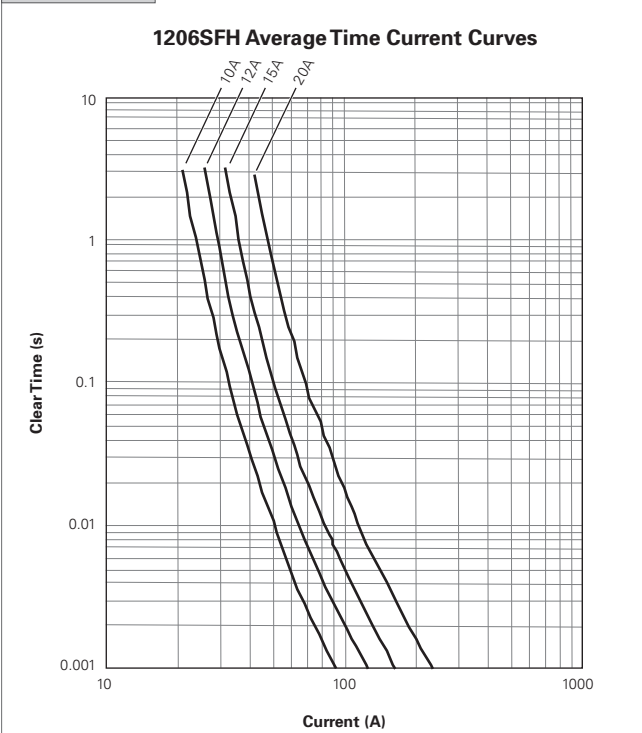

**Figure FH2**

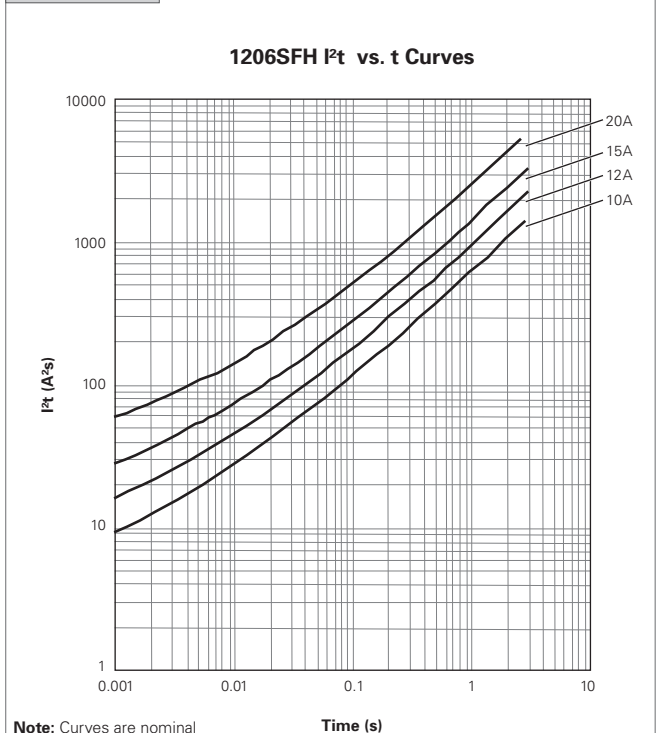

→ Please go to page 97 for more information for High-Current-Rated Chip Fuses.



## Surface-mount Fuses Slow-Blow Chip Fuses

Available in industry standard 1206 and 0603 chip sizes, TE Circuit Protection's slow-blow chip fuses help provide overcurrent protection on systems that experience large and frequent current surges as part of their normal operation.

The slow-blow chip fuse's monolithic, multilayer design helps provide some of the highest current ratings available in the 1206 and 0603 footprints and enhances high-temperature performance in a wide range of circuit protection designs. The devices' small size, high reliability and strong arc suppression characteristics make them suitable for overcurrent protection of power supplies, capacitor filter banks, LCD (Liquid Crystal Display) backlight inverters, electric motors and portable electronics.



### Benefits

- Time-delayed design prevents nuisance openings in pulsed and high inrush current applications
- Small size with high-current ratings
- Strong arc suppression characteristics

### Features

- Lead free materials and RoHS compliant
- Halogen free  
(refers to: Br≤900ppm, Cl≤900ppm, Br+Cl≤1500ppm)
- Monolithic multilayer design
- High-temperature performance
- -55°C to +125°C operating temperature range

### Applications



- |                        |                             |                   |
|------------------------|-----------------------------|-------------------|
| • Small motors systems | • Power over Ethernet (POE) | • Computer drives |
| • Portable electronics | • Test equipment            | • Displays        |
| • Input power ports    | • POL converter protection  | • Printers        |

**Table FS1 Clear Time Characteristics for Slow-Blow Chip Fuses**
**0603SFS Series**



| % of rated current | Clear time at 25°C   |                     |
|--------------------|----------------------|---------------------|
| 100%               | 4 hours (min.)       |                     |
| 200%               | 1 second (min.)      | 120 seconds (max.)  |
| 300%               | 0.1 second (min.)    | 3 seconds (max.)    |
| 800%(1.0A-1.5A)    | 0.0005 second (min.) | 0.05 seconds (max.) |
| 800%(2.0A-5.0A)    | 0.001 second (min.)  | 0.05 seconds (max.) |

**1206SFS Series**

| % of rated current | Clear time at 25°C   |                     |
|--------------------|----------------------|---------------------|
| 100%               | 4 hours (min.)       |                     |
| 200%               | 1 second (min.)      | 120 seconds (max.)  |
| 300%               | 0.1 second (min.)    | 3 seconds (max.)    |
| 800%(1.0A-1.5A)    | 0.0016 second (min.) | 0.05 seconds (max.) |
| 800%(2.0A-8.0A)    | 0.002 second (min.)  | 0.05 seconds (max.) |

**Table FS2 Typical Electrical Characteristics, Dimensions and Recommended Pad Layout for Slow-Blow Chip Fuses**
**0603 (1608mm) Slow-Blow Chip Fuses**
**Shape and Dimensions**  
Inch (mm)

**Recommended Pad Layout**  
Inch (mm)

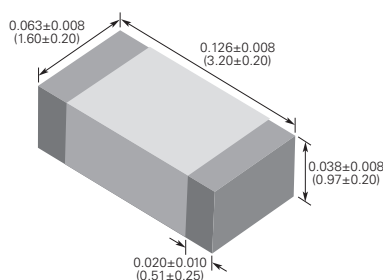
| Part Number    | Typical Electrical Characteristics |                       |                                                            | Max. Interrupt Ratings     |             |
|----------------|------------------------------------|-----------------------|------------------------------------------------------------|----------------------------|-------------|
|                | Rated Current (A)                  | Nominal Cold DCR (Ω)* | Nominal I <sup>2</sup> t (A <sup>2</sup> sec) <sup>†</sup> | Voltage (V <sub>DC</sub> ) | Current (A) |
| 0603SFS100F/32 | 1.0                                | 0.200                 | 0.093                                                      | 32                         | 50          |
| 0603SFS150F/32 | 1.5                                | 0.100                 | 0.18                                                       | 32                         | 50          |
| 0603SFS200F/32 | 2.0                                | 0.052                 | 0.32                                                       | 32                         | 50          |
| 0603SFS250F/32 | 2.5                                | 0.041                 | 0.63                                                       | 32                         | 50          |
| 0603SFS300F/32 | 3.0                                | 0.031                 | 0.87                                                       | 32                         | 50          |
| 0603SFS350F/32 | 3.5                                | 0.021                 | 1.20                                                       | 32                         | 50          |
| 0603SFS400F/32 | 4.0                                | 0.017                 | 2.30                                                       | 32                         | 50          |
| 0603SFS450F/32 | 4.5                                | 0.015                 | 2.70                                                       | 32                         | 50          |
| 0603SFS500F/32 | 5.0                                | 0.013                 | 3.20                                                       | 32                         | 50          |

**1206 (3216mm) Slow-Blow Chip Fuses**
**Shape and Dimensions**  
Inch (mm)

**Recommended Pad Layout**  
Inch (mm)


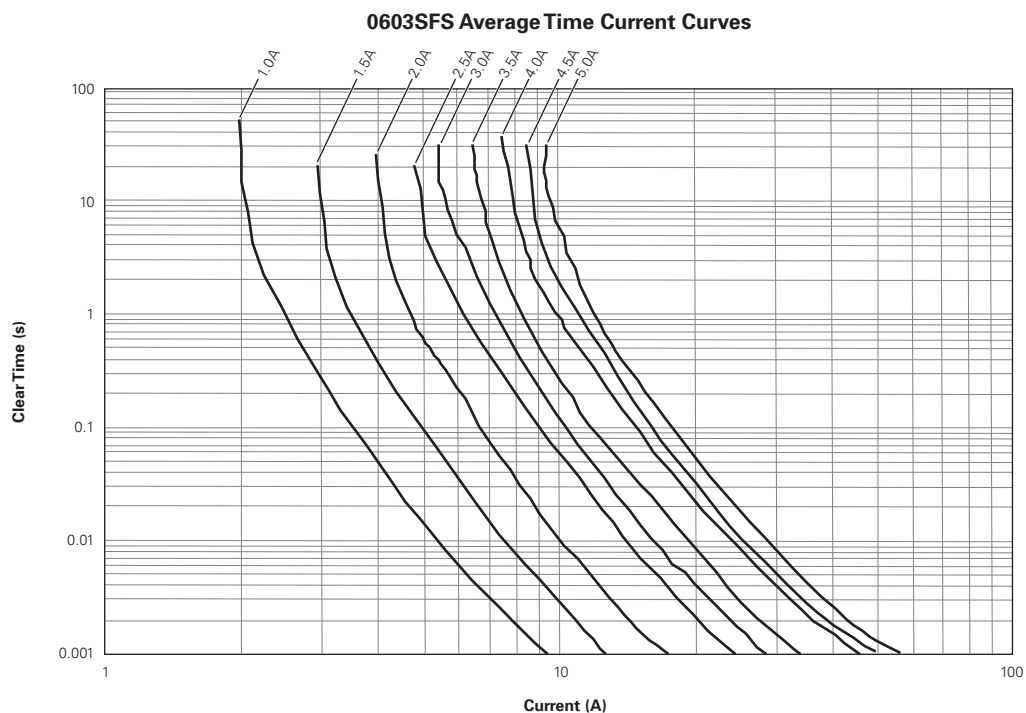
| Part Number    | Typical Electrical Characteristics |                       |                                                            | Max. Interrupt Ratings     |             |
|----------------|------------------------------------|-----------------------|------------------------------------------------------------|----------------------------|-------------|
|                | Rated Current (A)                  | Nominal Cold DCR (Ω)* | Nominal I <sup>2</sup> t (A <sup>2</sup> sec) <sup>†</sup> | Voltage (V <sub>DC</sub> ) | Current (A) |
| 1206SFS100F/63 | 1.0                                | 0.360                 | 0.11                                                       | 63                         | 50          |
| 1206SFS125F/63 | 1.25                               | 0.200                 | 0.22                                                       | 63                         | 50          |
| 1206SFS150F/63 | 1.5                                | 0.150                 | 0.23                                                       | 63                         | 50          |
| 1206SFS200F/63 | 2.0                                | 0.088                 | 0.63                                                       | 63                         | 50          |
| 1206SFS250F/32 | 2.5                                | 0.065                 | 0.90                                                       | 32                         | 50          |
| 1206SFS300F/32 | 3.0                                | 0.034                 | 1.20                                                       | 32                         | 50          |
| 1206SFS350F/32 | 3.5                                | 0.028                 | 1.60                                                       | 32                         | 50          |
| 1206SFS400F/32 | 4.0                                | 0.024                 | 2.20                                                       | 32                         | 50          |
| 1206SFS450F/32 | 4.5                                | 0.020                 | 3.60                                                       | 32                         | 50          |
| 1206SFS500F/32 | 5.0                                | 0.016                 | 5.30                                                       | 32                         | 50          |
| 1206SFS550F/24 | 5.5                                | 0.014                 | 6.40                                                       | 24                         | 50          |
| 1206SFS600F/24 | 6.0                                | 0.011                 | 8.50                                                       | 24                         | 60          |
| 1206SFS700F/24 | 7.0                                | 0.010                 | 10.00                                                      | 24                         | 60          |
| 1206SFS800F/24 | 8.0                                | 0.009                 | 16.90                                                      | 24                         | 60          |

\* Measured at ≤10% of rated current and 25°C ambient temperature.


† Melting I<sup>2</sup>t at 0.001 sec clear time.

**Figure FS1-FS4 Family Performance Curves for Slow-Blow Chip Fuses**

**Figure FS1**



**Figure FS2**

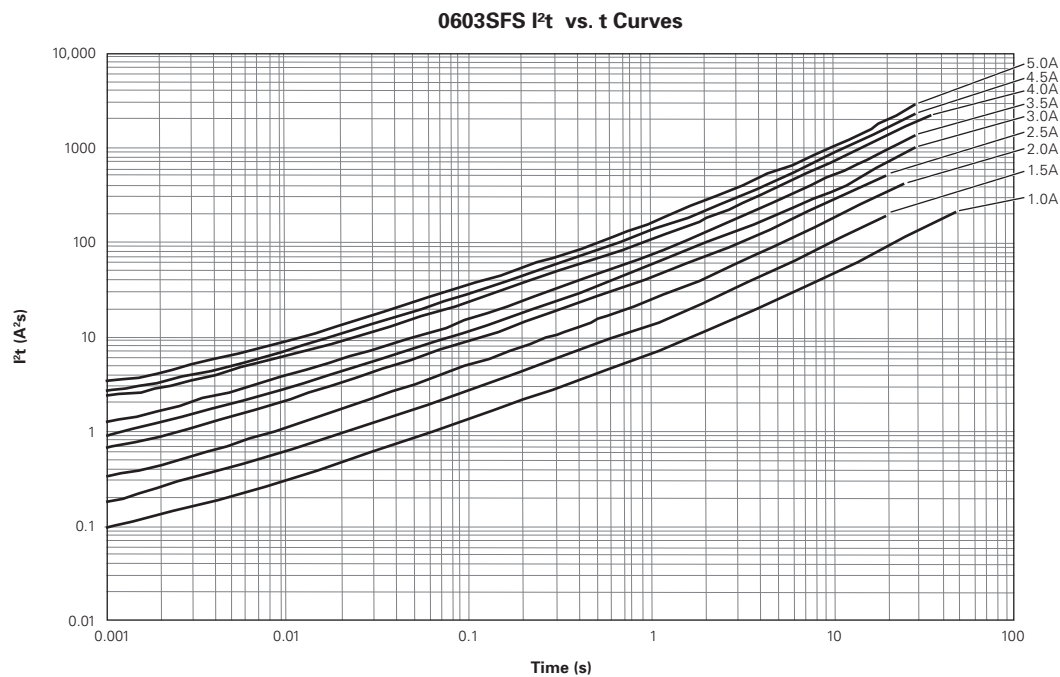

**Note:** Curves are nominal

Figure FS3


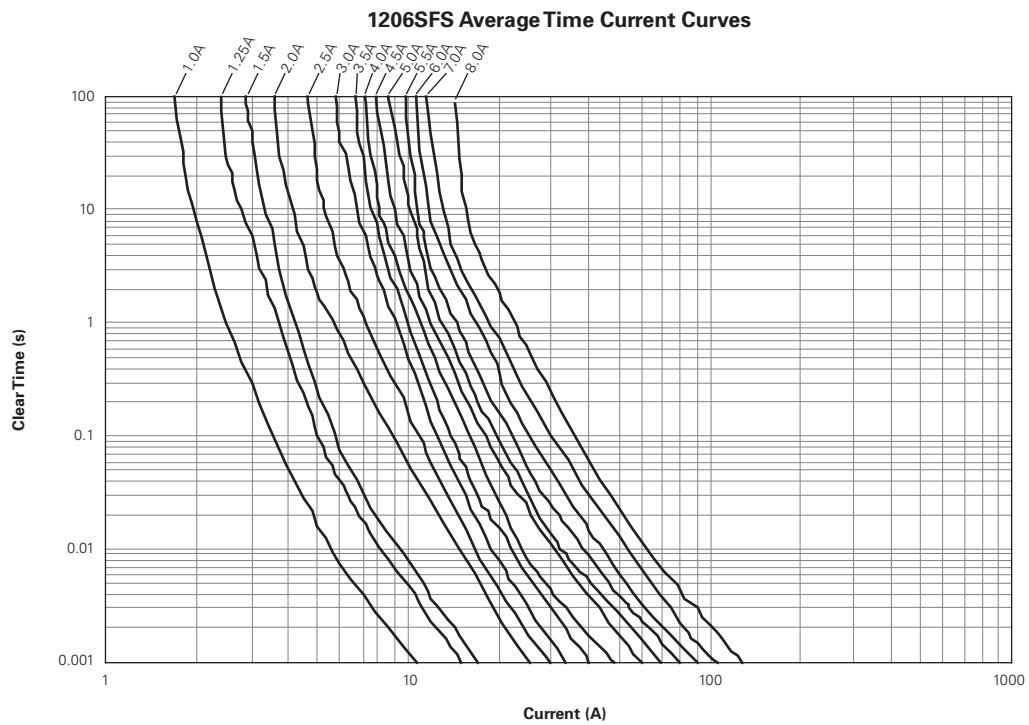


Figure FS4



Note: Curves are nominal

→ Please go to page 97 for more information for Slow-Blow Chip Fuses.

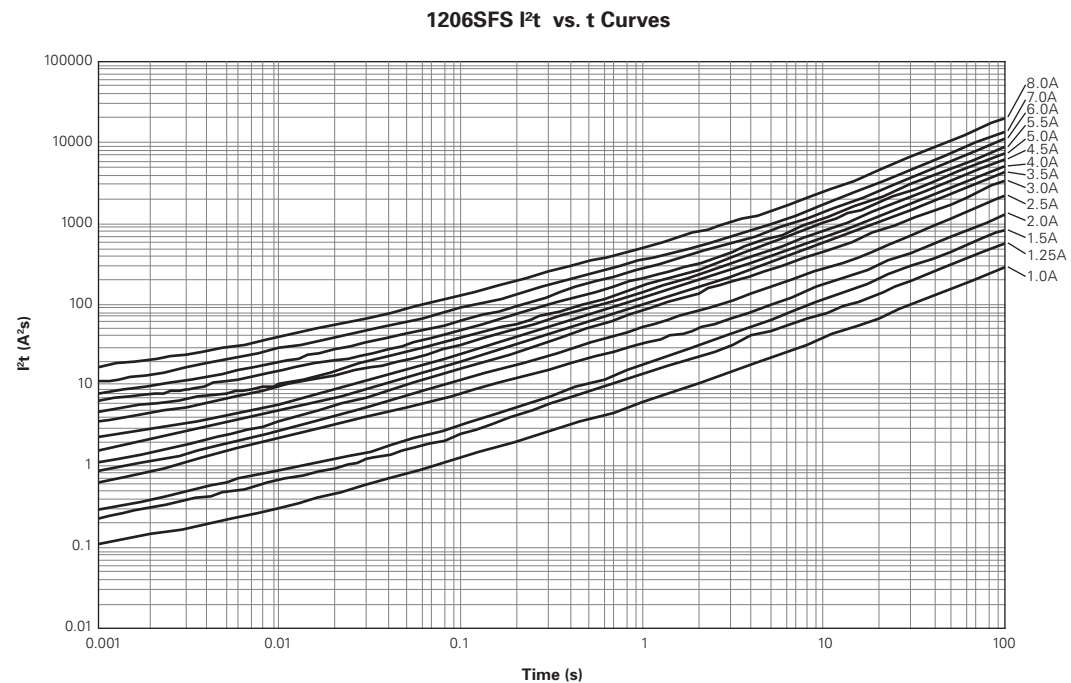

## Surface-mount Fuses

### 2410 Very Fast-Acting Fuses



The 2410(6125) is Wire-in Air SMD Fuse which is very suitable for secondary level overcurrent protection applications.

These lead-free surface mount devices offer more reliability and have no end cap falling off risk. Straight wire element in air performs consistent fusing and cutting characteristics.



#### Benefits

- Very fast acting at 200% overload current level
- Excellent inrush current withstanding capability
- High reliability and resilience
- Strong arc suppression characteristics
- Copper terminal with nickel and tin plated

#### Features


- Halogen free, RoHS compliant and 100% lead-free
- Copper or copper alloy composite fuse link
- Fiberglass enforced epoxy fuse body
- Wide range of current rating
- -55°C to +125°C operating temperature range (with de-rating)

#### Applications


- |                        |                  |                |
|------------------------|------------------|----------------|
| • Industrial equipment | • Power supplier | • Game systems |
| • LCD/PDP TV           | • Telecom system | • White goods  |
| • Backlight inverter   | • Networking     | • Automotive   |

**Table SFV1 Clear Time Characteristics for 2410 Very Fast-Acting Fuses**

| % of rated current | Clear time at 25°C |                   |
|--------------------|--------------------|-------------------|
| 100%               | 4 hours (min.)     |                   |
| 200% (0.5A-10.0A)  | 0.01 second (min.) | 5 seconds (max.)  |
| 200% (12.0A-20.0A) | 0.01 second (min.) | 20 seconds (max.) |

**Table SFV2 Typical Electrical Characteristics, Dimensions and Recommended Pad Layout for 2410 Very Fast-Acting Fuses**
**2410 (6125 mm) Very Fast-Acting Fuse**
**Shape and Dimensions**  
mm (Inch)


|    | A       |         | B       |         | C       |         | D       |         |
|----|---------|---------|---------|---------|---------|---------|---------|---------|
|    | Min     | Max     | Min     | Max     | Min     | Max     | Min     | Max     |
| mm | 5.95    | 6.25    | 1.96    | 2.36    | 0.97    | 1.73    | 2.34    | 2.64    |
| in | (0.234) | (0.246) | (0.077) | (0.093) | (0.038) | (0.068) | (0.092) | (0.104) |


**Recommended Pad Layout**  
mm (Inch)

**Typical Electrical Characteristics**
**Max. Interrupt Ratings**

| Part Number         | Marking Code | Rated Current (A) | Nominal Cold DCR (Ω)* | Nominal I <sup>2</sup> t (A <sup>2</sup> sec) | Voltage            |                    | Current (A)                                                                      |
|---------------------|--------------|-------------------|-----------------------|-----------------------------------------------|--------------------|--------------------|----------------------------------------------------------------------------------|
|                     |              |                   |                       |                                               | (V <sub>AC</sub> ) | (V <sub>DC</sub> ) |                                                                                  |
| 2410SFV0.50FM/125-2 | C            | 0.5               | 0.2310                | 0.10                                          | 250                | 125                | 50A @ 250V <sub>AC</sub><br>50A @ 125V <sub>DC</sub><br>300A @ 32V <sub>DC</sub> |
| 2410SFV0.63FM/125-2 | S            | 0.6               | 0.1740                | 0.16                                          | 250                | 125                |                                                                                  |
| 2410SFV0.75FM/125-2 | D            | 0.8               | 0.1480                | 0.23                                          | 250                | 125                |                                                                                  |
| 2410SFV1.00FM/125-2 | E            | 1.0               | 0.0930                | 0.59                                          | 250                | 125                |                                                                                  |
| 2410SFV1.25FM/125-2 | F            | 1.3               | 0.0700                | 0.96                                          | 250                | 125                |                                                                                  |
| 2410SFV1.50FM/125-2 | G            | 1.5               | 0.0620                | 1.19                                          | 125                | 125                | 50A @ 125V <sub>AC</sub><br>50A @ 125V <sub>DC</sub><br>300A @ 32V <sub>DC</sub> |
| 2410SFV2.00FM/125-2 | I            | 2.0               | 0.0420                | 2.75                                          | 125                | 125                |                                                                                  |
| 2410SFV2.50FM/125-2 | J            | 2.5               | 0.0310                | 1.21                                          | 125                | 125                |                                                                                  |
| 2410SFV3.00FM/125-2 | K            | 3.0               | 0.0249                | 1.73                                          | 125                | 125                |                                                                                  |
| 2410SFV3.15FM/125-2 | V            | 3.2               | 0.0232                | 2.20                                          | 125                | 125                |                                                                                  |
| 2410SFV3.50FM/125-2 | L            | 3.5               | 0.0220                | 2.50                                          | 125                | 125                |                                                                                  |
| 2410SFV4.00FM/125-2 | M            | 4.0               | 0.0172                | 4.10                                          | 125                | 125                |                                                                                  |
| 2410SFV5.00FM/125-2 | N            | 5.0               | 0.0143                | 5.90                                          | 125                | 125                |                                                                                  |
| 2410SFV6.30FM/125-2 | O            | 6.3               | 0.0100                | 12.50                                         | 125                | 125                |                                                                                  |
| 2410SFV7.00FM/125-2 | P            | 7.0               | 0.0094                | 14.20                                         | 125                | 125                |                                                                                  |
| 2410SFV8.00FM/125-2 | R            | 8.0               | 0.0086                | 20.30                                         | 125                | 125                |                                                                                  |
| 2410SFV10.0FM/125-2 | Q            | 10.0              | 0.0066                | 29.20                                         | 125                | 125                | 35A @ 125V <sub>AC</sub><br>50A @ 125V <sub>DC</sub><br>300A @ 32V <sub>DC</sub> |
| 2410SFV12.0FM/065-2 | X            | 12.0              | 0.0053                | 49.20                                         | 65                 | 65                 | 50A @ 65V <sub>AC</sub><br>50A @ 65V <sub>DC</sub><br>300A @ 32V <sub>DC</sub>   |
| 2410SFV15.0FM/065-2 | Y            | 15.0              | 0.0038                | 102.50                                        | 65                 | 65                 | 50A @ 65V <sub>AC</sub><br>50A @ 65V <sub>DC</sub><br>300A @ 32V <sub>DC</sub>   |
| 2410SFV20.0FM/065-2 | Z            | 20.0              | 0.0034                | 126.20                                        | 65                 | 65                 | 50A @ 65V <sub>AC</sub><br>50A @ 65V <sub>DC</sub><br>300A @ 32V <sub>DC</sub>   |


\* Measured at ≤10% of rated current and 25°C ambient temperature.

**Figure SFV1-SFV2** Family Performance Curves for 2410 Very Fast-Acting Fuses

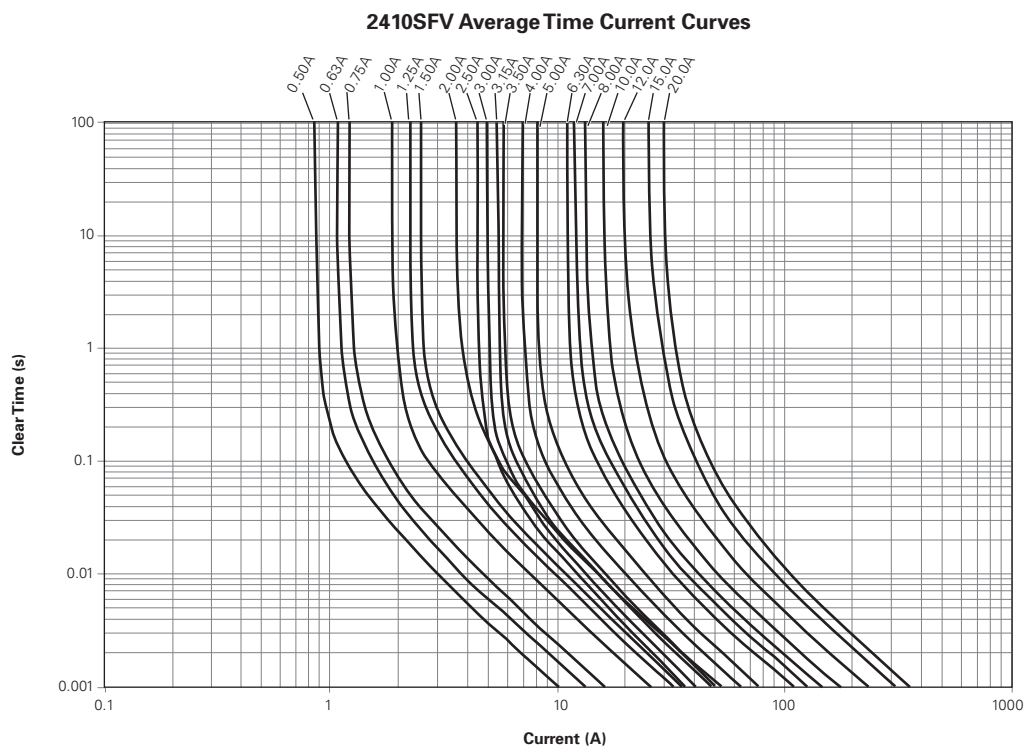**Figure SFV1**



**Figure SFV2**

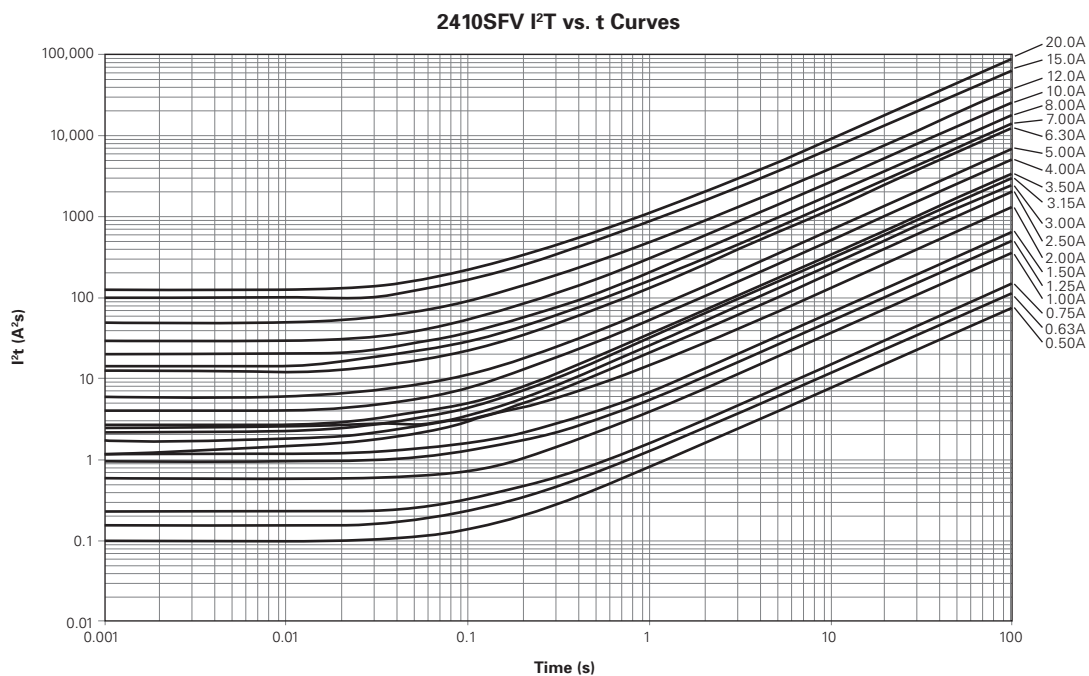

**Note:** Curves are nominal

→ Please go to page 97 for more information for 2410 Fast-Acting Fuses.





# Specifications, Packaging Information, Agency Approvals and Part Numbering Systems for All Fuses

**Table F1 Environmental Specifications for All Fuses**

|                              |                                                                                                   |
|------------------------------|---------------------------------------------------------------------------------------------------|
| Operating temperature        | -55°C to +125°C                                                                                   |
| Mechanical vibration         | Withstands 5-3000 Hz at 30 Gs when evaluated per Method 204 of MIL-STD-202                        |
| Mechanical shock             | Withstands 1500 Gs, 0.5 millisecond half-sine pulses when evaluated per Method 213 of MIL-STD-202 |
| Thermal shock                | Withstands 100 cycles from -65°C to +125°C when evaluated per Method 107 of MIL-STD-202           |
| Resistance to soldering heat | Withstands 60 seconds at +260°C when evaluated per Method 210 of MIL-STD-202                      |
| Solderability                | Meets 95% minimum coverage requirement when evaluated per Method 208 of MIL-STD-202               |
| Moisture resistance          | Withstands 10 cycles when evaluated per Method 106 of MIL-STD-202                                 |
| Salt spray                   | Withstands 48-hour exposure when evaluated per Method 101 of MIL-STD-202                          |
| Storage temperature          | ≤30°C/ 85% RH                                                                                     |
| Storage humidity             | Per MIL-STD-202F, Method 106F                                                                     |

**Table F2 Material Specifications for All Fuses**


|                            |                                                    |
|----------------------------|----------------------------------------------------|
| Construction body material | Ceramic (1206/0603/0402); Fiberglass/Epoxy (2410)  |
| Termination material       | Silver, Nickel, Tin                                |
| Fuse element               | Silver(1206/0603/0402); Copper/Copper Alloy (2410) |

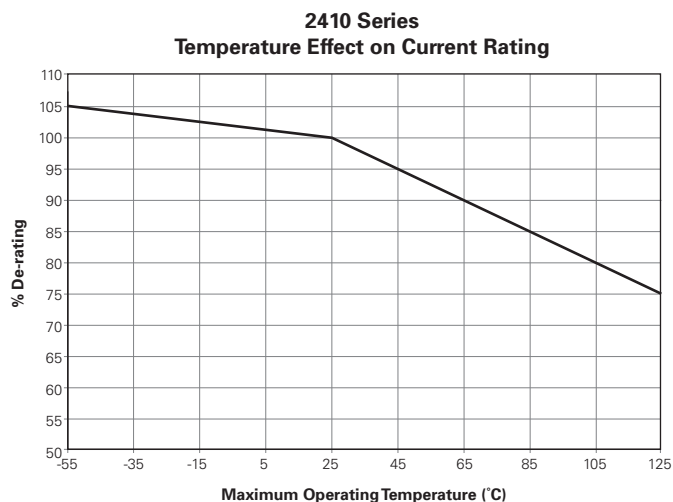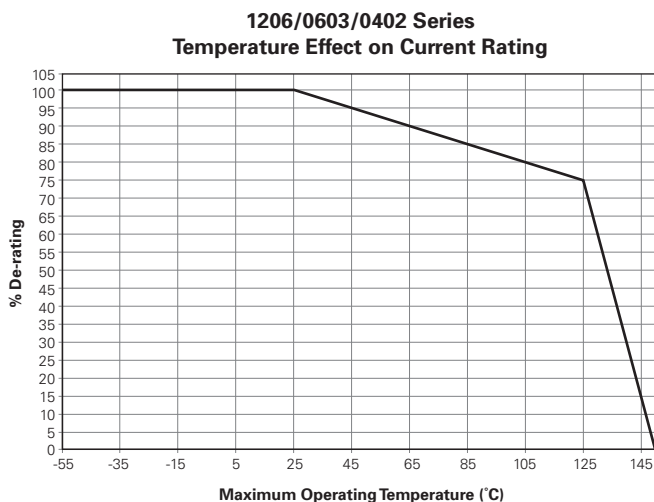**Figure F1 Thermal Derating Current for All Fuses**

**Table F3 Electrical Specifications for All Fuses**

|                                     |                                                                                                                                                                                                                                                               |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Insulation resistance after opening | 20,000Ω minimum @ rated voltage. Fuse clearing under low voltage conditions may result in lower - post-clearing insulation values. Under normal fault conditions TE Circuit Protection fuses provide sufficient insulation resistance for circuit protection. |
| Current carrying capacity           | Withstands 100% rated current at +25°C ambient for 4 hours when evaluated per MIL-PRF-23419.                                                                                                                                                                  |

**Table F4 Packaging Information for All Fuses**
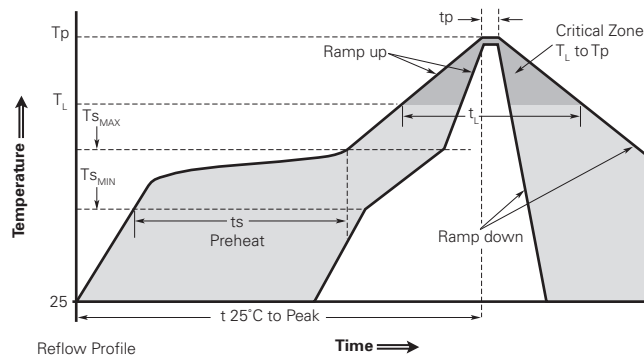
| Size          | Reel Quantity (pcs) | Reel Diameter       | Reel Width   | Carrier Tape Size | Tape Type | Reels per Outside Shipment Box | Outside Shipment Boxes per Overpack |
|---------------|---------------------|---------------------|--------------|-------------------|-----------|--------------------------------|-------------------------------------|
| 0402(1005)    | 10,000              | 178mm white plastic | 9.0 ± 0.5mm  | 8.00 ± 0.10mm     | Paper     | 5                              | 1 to 10                             |
| 0603(1608)    | 4,000               | 178mm white plastic | 9.0 ± 0.5mm  | 8.00 ± 0.10mm     | Paper     | 5                              | 1 to 10                             |
| 0603SFV(1608) | 6,000               | 178mm white plastic | 9.0 ± 0.5mm  | 8.00 ± 0.10mm     | Paper     | 5                              | 1 to 10                             |
| 1206(3216)    | 3,000               | 178mm white plastic | 9.0 ± 0.5mm  | 8.00 ± 0.10mm     | Plastic   | 5                              | 1 to 10                             |
| 2410(6125)    | 2,000               | 178mm white plastic | 13.4 ± 0.5mm | 12.00 ± 0.10mm    | Plastic   | 4                              | 1 to 10                             |

**Figure F2 Recommended Soldering Temperature Profile for All Fuses**

**Classification Reflow Profiles**


| Profile Feature                                                            | 1206/0603/0402  | 2410            |
|----------------------------------------------------------------------------|-----------------|-----------------|
| <b>Average ramp up rate (<math>T_{S_{MAX}}</math> to <math>T_p</math>)</b> | 3°C/second max. | 3°C/second max. |
| <b>Preheat</b>                                                             |                 |                 |
| • Temperature min. ( $T_{S_{MIN}}$ )                                       | 150°C           | 150°C           |
| • Temperature max. ( $T_{S_{MAX}}$ )                                       | 200°C           | 200°C           |
| • Time ( $t_{S_{MIN}}$ to $t_{S_{MAX}}$ )                                  | 60-180 seconds  | 40-100 seconds  |
| <b>Time maintained above:</b>                                              |                 |                 |
| • Temperature ( $T_L$ )                                                    | 217°C           | 200°C           |
| • Time ( $t_L$ )                                                           | 60-150 seconds  | 30-90 seconds   |
| <b>Peak/Classification temperature (<math>T_p</math>)</b>                  | 260°C max.      | 250°C max.      |
| <b>Time within 5°C of actual peak temperature</b>                          |                 |                 |
| Time ( $t_p$ )                                                             | 20-40 seconds   | 30-40 seconds   |
| <b>From 25°C to preheating (150°C)</b>                                     | 8 minutes max.  | 40-100 seconds  |
| <b>Ramp down rate</b>                                                      | 4°C/second max. | Natural cooling |

**Recommended conditions for hand soldering:**

- Using hot air rework station that can reflow the solder on both terminations at the same time is strongly recommended, do not directly contact the chip termination with the tip of soldering iron.
- Preheating: 150°C, 60s (min).  
Appropriate temperature (max) of soldering iron tip/soldering time (max): 280°C / 10s or 350°C / 3s.


**Table F5** Tape and Reel Specifications for All Fuses

| Mark           | Dimension in inches (mm)           |                                    |                                    |                                    |                                    |
|----------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
|                | 0402 (1005)                        | 0603 (1608)                        | 1206 (3216)                        | 0603SFV (1608)                     | 2410 (6125)                        |
| E <sub>1</sub> | 0.069 ± 0.004<br>(1.75 ± 0.10)     | 0.069 ± 0.004<br>(1.75 ± 0.10)     | 0.069 ± 0.004<br>(1.75 ± 0.10)     | 0.069 ± 0.004<br>(1.75 ± 0.10)     | 0.069 ± 0.004<br>(1.75 ± 0.10)     |
| F              | 0.138 ± 0.002<br>(3.50 ± 0.05)     | 0.138 ± 0.002<br>(3.50 ± 0.05)     | 0.138 ± 0.002<br>(3.50 ± 0.05)     | 0.138 ± 0.002<br>(3.50 ± 0.05)     | 0.217 ± 0.004<br>(5.50 ± 0.10)     |
| W              | 0.315 ± 0.004<br>(8.00 ± 0.10)     | 0.315 ± 0.004<br>(8.00 ± 0.10)     | 0.315 ± 0.004<br>(8.00 ± 0.10)     | 0.315 ± 0.004<br>(8.00 ± 0.10)     | 0.472 ± 0.004<br>(12.00 ± 0.10)    |
| P <sub>1</sub> | 0.079 ± 0.004<br>(2.00 ± 0.10)     | 0.157 ± 0.004<br>(4.00 ± 0.10)     | 0.157 ± 0.004<br>(4.00 ± 0.10)     | 0.157 ± 0.004<br>(4.00 ± 0.10)     | 0.157 ± 0.004<br>(4.00 ± 0.10)     |
| P <sub>0</sub> | 0.157 ± 0.004<br>(4.00 ± 0.10)     | 0.157 ± 0.004<br>(4.00 ± 0.10)     | 0.157 ± 0.004<br>(4.00 ± 0.10)     | 0.157 ± 0.004<br>(4.00 ± 0.10)     | 0.157 ± 0.004<br>(4.00 ± 0.10)     |
| P <sub>2</sub> | 0.079 ± 0.002<br>(2.00 ± 0.05)     | 0.079 ± 0.002<br>(2.00 ± 0.05)     | 0.079 ± 0.002<br>(2.00 ± 0.05)     | 0.079 ± 0.002<br>(2.00 ± 0.05)     | 0.079 ± 0.004<br>(2.00 ± 0.10)     |
| D <sub>0</sub> | 0.059 ± 0.004<br>(1.50+0.10/-0.00) | 0.059 ± 0.004<br>(1.50+0.10/-0.00) | 0.059 ± 0.004<br>(1.50+0.10/-0.00) | 0.059 ± 0.004<br>(1.50+0.10/-0.00) | 0.059 ± 0.004<br>(1.50+0.10/-0.00) |
| D <sub>1</sub> | —                                  | —                                  | 0.039 max<br>(1.00 max)            | —                                  | 0.61 ± 0.004<br>(1.55 ± 0.10)      |
| t              | —                                  | —                                  | 0.009 ± 0.001<br>(0.23 ± 0.02)     | —                                  | 0.010 ± 0.002<br>(0.25 ± 0.05)     |
| A <sub>0</sub> | 0.026 ± 0.004<br>(0.67 ± 0.10)     | 0.039 ± 0.004<br>(0.98 ± 0.10)     | 0.071 ± 0.004<br>(1.80 ± 0.10)     | 0.039 ± 0.004<br>(0.98 ± 0.10)     | 0.112 ± 0.004<br>(2.85 ± 0.10)     |
| B <sub>0</sub> | 0.046 ± 0.004<br>(1.17 ± 0.10)     | 0.071 ± 0.004<br>(1.80 ± 0.10)     | 0.138 ± 0.004<br>(3.50 ± 0.10)     | 0.071 ± 0.004<br>(1.80 ± 0.10)     | 0.252 ± 0.004<br>(6.40 ± 0.10)     |
| K <sub>0</sub> | 0.025 ± 0.004<br>(0.63 ± 0.10)     | 0.037 ± 0.003<br>(0.95 ± 0.08)     | 0.050 ± 0.004<br>(1.27 ± 0.10)     | 0.024 ± 0.003<br>(0.60 ± 0.08)     | 0.093 ± 0.004<br>(2.35 ± 0.10)     |

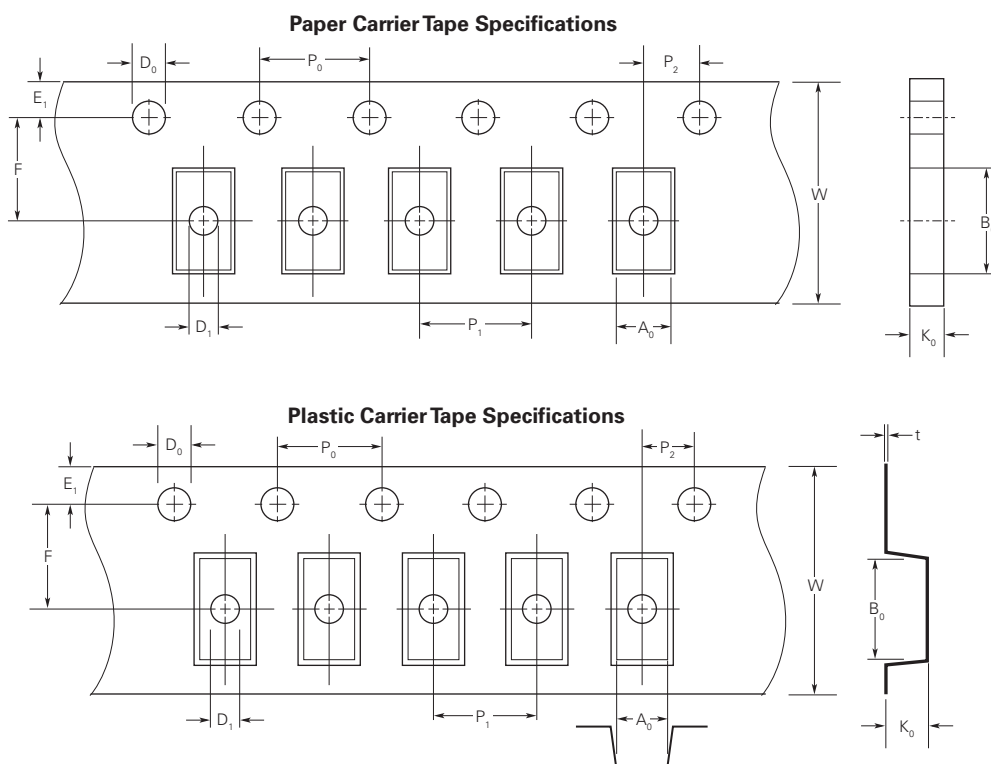**Figure F3** Component Tape Dimensions for All Fuses


**Figure F4 Reel Dimensions for All Fuses**

| Dimension Description | Mark           | Dimension (mm) |      |
|-----------------------|----------------|----------------|------|
|                       |                | 1206/0603/0402 | 2410 |
| Hub outer diameter    | B              | 60             | 60.2 |
| Reel inside width     | W <sub>1</sub> | 9              | 13.4 |
| Reel outside width    | W <sub>2</sub> | 11.4           | 16   |
| Tape width            |                | 8              |      |

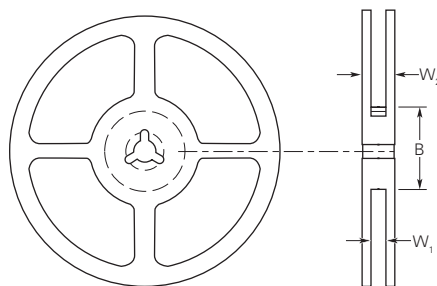


### Agency Approvals for All Fuses


UL

File # E197536


### Part Numbering System for Fast-Acting, Slow-Blow And 0603 Very Fast-Acting Chip Fuses

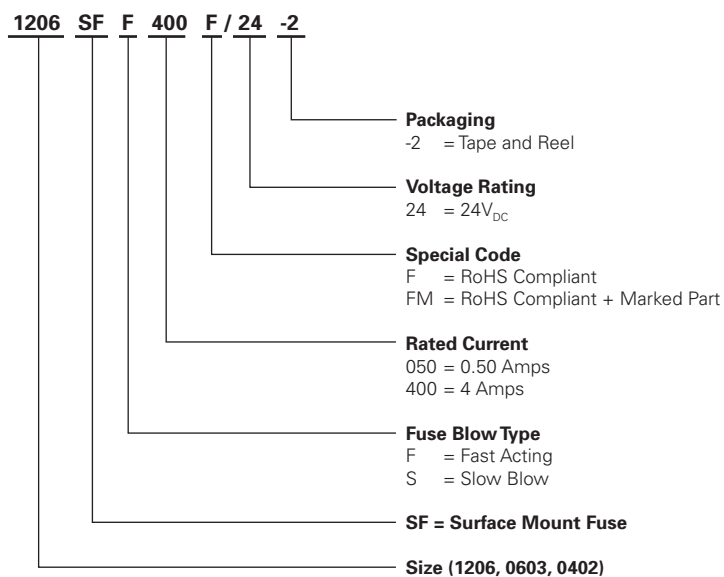

### Part Numbering System for High-Current-Rated Chip Fuses

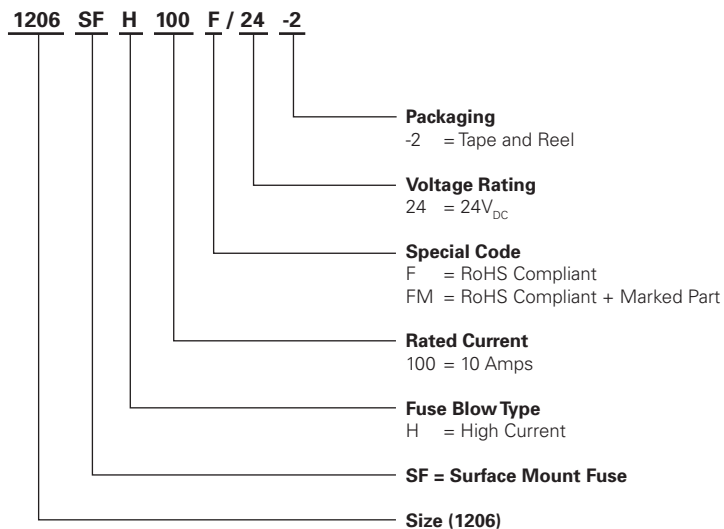

## Part Numbering System for 2410 Very Fast-Acting Fuses

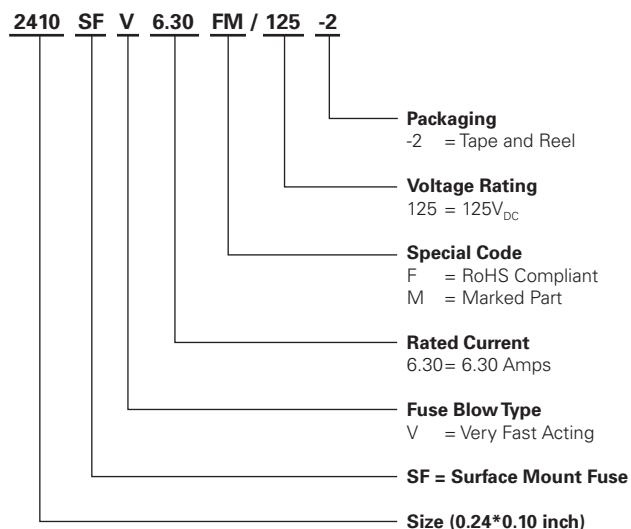

### Warning :

All information, including illustrations, is believed to be accurate and reliable. Users, however, should independently evaluate the suitability of and test each product selected for their application. Tyco Electronics Corporation and/or its Affiliates in the TE Connectivity Ltd. family of companies ("TE") makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. TE's only obligations are those in the TE Standard Terms and Conditions of Sale for this product, and in no case will TE be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, TE reserves the right to make changes to materials or processing that do not affect compliance with any applicable specification without notification to Buyer.





**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331