

Non Magnetic MELF PIN Diode


V2

Features

- ◆ Non-Magnetic Package Suitable for MRI Applications
- ◆ Rectangular MELF SMQ Ceramic Package
- ◆ Low R_s for Low Series Loss
- ◆ Longer τ_L for Low Inter-Modulation Distortion
- ◆ High Average Incident Power Handling
- ◆ RoHS Compliant

Description and Applications

The MA4P7435NM-1091T is a surface mountable PIN diode in a non-magnetic, Metal Electrode Leadless Faced (MELF) package. The device incorporates M/A-COM Technology's proven HIPAX technology to produce a low inductance ceramic package with no ribbons or whisker wires. The package utilizes M/A-COM Technology's new non-magnetic plating process to provide an extremely low magnetic permeability, hermetically sealed package. Incorporated in the package is a glass passivated PIN chip that is full face bonded on both the cathode and anode to maximize surface area for lower series and thermal resistance. The MA4P7435NM-1091T has been comprehensively characterized both electrically and mechanically to ensure repeatable and predictable performance. The diode is well suited for use in low loss, low distortion, high power switching circuits and is especially designed for use in high magnetic field environments from HF through UHF frequencies. The low thermal resistance of this device also provides excellent performance at high incident RF power levels. This device has been designed to perform well in the most rigorous electrical and mechanical MRI environments.

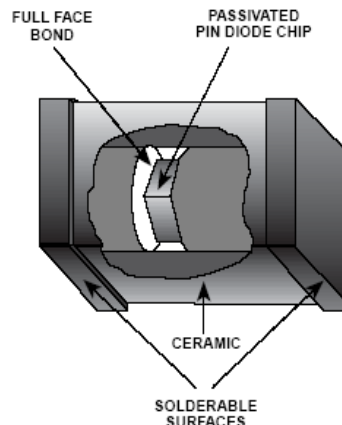

Designed for Automated Assembly

These SMQ PIN diodes are designed for high volume tape and reel assembly. The rectangular package design provides for ease of use in most automatic pick and place assembly operations. The parallel flat surfaces are suitable for key jaw or vacuum pickup techniques. All solder able surfaces are tin plated and compatible with reflow and vapor phase soldering methods.

Absolute Maximum Ratings¹ @ 25°C

Parameter	Absolute Maximum
Operating Temperature	-65°C to +125°C
Storage Temperature	-65°C to +150°C
Diode Junction Temperature	+175°C Continuous
Diode Mounting Temperature	+265°C for 10 seconds
RF C.W. Incident Power	+ 60dBm C.W.
Forward D.C. Current	+500mA
Reverse D.C. Voltage @ -10 μ A	-1100V

1. Exceeding these limits may cause permanent damage.

Non Magnetic MELF PIN Diode

V2

Electrical Specifications @ $T_{AMB} = +25^{\circ}\text{C}$

Test Parameters	Symbol	Units	Conditions	Min.	Typ.	Max.
Total Capacitance	C_T	pF	1MHz / 100V	-	-	3.0 ¹
Series Resistance	R_S	Ω	63.6MHz / 100mA	-	-	0.30 ^{2,3}
Series Resistance	R_S	Ω	63.6MHz / 200mA	-	-	0.25 ^{2,3}
Series Resistance	R_S	Ω	63.6MHz / 300mA	-	-	0.20 ^{2,3}
Parallel Resistance	R_p	Ω	63.6MHz / 0V	4K	-	-
Forward Voltage	V_F	V	+100mA		.9	1.0
Reverse Voltage	V_R	V	-10 μ A	1100	-	-
Reverse Current	I_R	nA	-880V	-	-	100
Carrier Lifetime ⁴	T_L	μ S	I_F 10mA/ I_R 6mA	10	14	-
Thermal Resistance	θ	$^{\circ}\text{C/W}$	-	-	3	5

1. Total capacitance is equivalent to the sum of the chip junction capacitance C_j plus package parasitic capacitance .

2. Series resistance R_S is the sum of the chip to package contact resistance plus junction resistance R_j .

3. R_S is measured on an HP4291A .

4. Measured from 50% of control voltage to 90% of output voltage


Environmental Capability

MELF devices are applicable for use in commercial and military applications and are designed to meet the environmental requirements of MIL-STD-750, MIL-STD-202 as well as other military standards. The table below lists some of the typical MIL-STD 750 tests the devices are designed to meet .

MIL-STD-750		
Test	Method	Description
High Temperature Storage	1031	+150 $^{\circ}\text{C}$, for 340 Hours
Temperature Shock	1051	-65 $^{\circ}\text{C}$ to +125 $^{\circ}\text{C}$, 20 Cycles
HTRB	1038	880V, +150 $^{\circ}\text{C}$, for 96 Hours
Moisture Resistance	1021	No Initial Conditioning, 85% RH, +85 $^{\circ}\text{C}$
Gross Leak	1071 Cond. E	Dye Penetrant Visual
Vibration Fatigue	2046	20,000G's, 60 Hz, x, y, z axis
Solderability	2026	Test Temperature = +245 $^{\circ}\text{C}$

Typical Non-Magnetic Performance


Comparison of Magnetic Moment for Non Magnetic MA4P7435NM-1091T & MA4P4001F-1091T Magnetic Devices

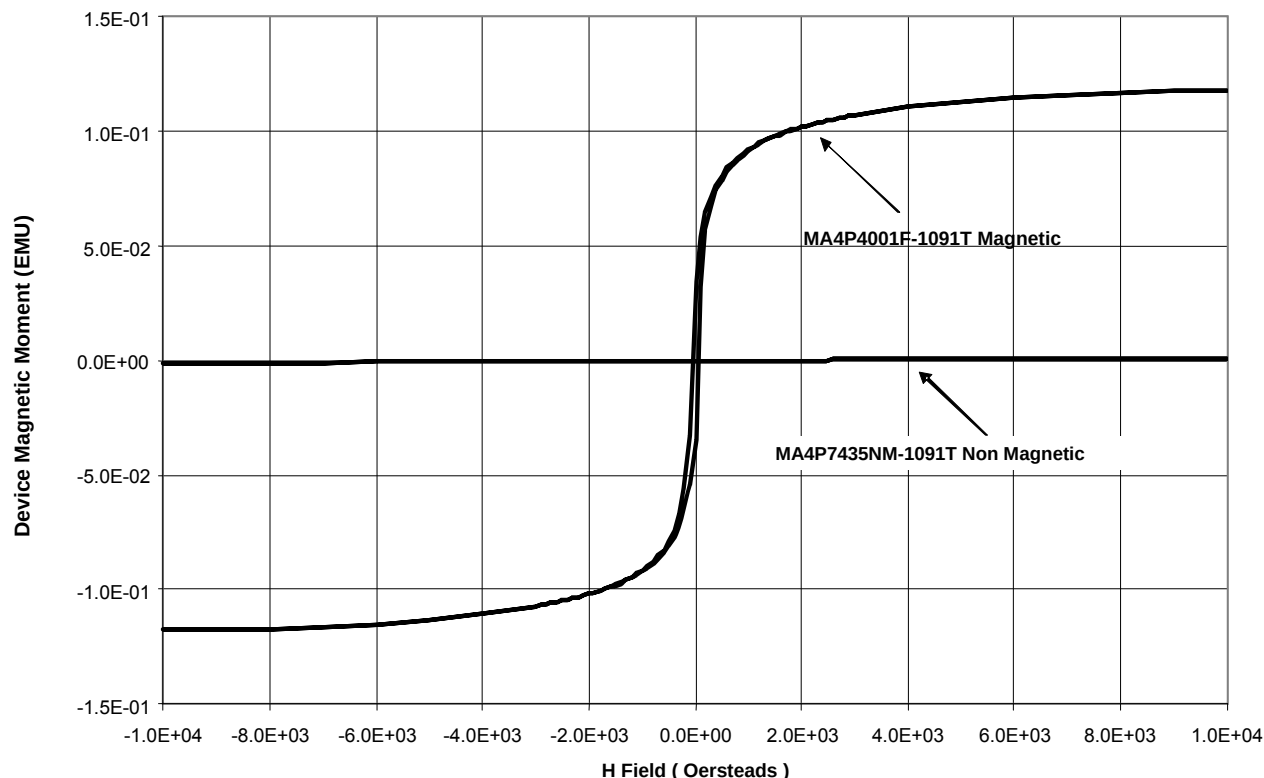**Table 1 - Typical Magnetic Properties**

**Non-Magnetic MA4P7435NM-1091T
vs.
Magnetic MA4P4001F-1091T**


Magnetic Property	MA4P7435NM-1091T Value	MA4P4001F-1091T Value
Saturation Moment (EMU) @ H = H _{MAX} Oersteds	1.0 x E-3	1.2 x E-1
Remanance Moment (EMU) @ H = 0 Oersteds	1.5 x E-6	3.4 x E-2
Coercivity (Oersteds) @ EMU = 0 Moment	3.0	51.3

Mechanical Outline

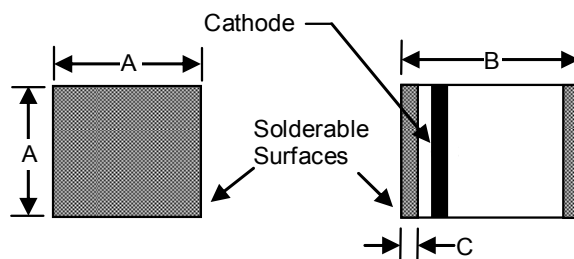

Case Style 1091 Dimensions in Inches (mm)		
A Square Min. / Max.	B Min. / Max.	C Min. / Max.
0.138 / 0.155 (3.50 / 3.94)	0.180 / 0.200 (4.57 / 5.08)	0.008 / 0.030 (.203 / .762)

Circuit Pad Layout



Dimension	Package Style 1091	
	inches	mm
A	0.150	3.81
B	0.050	1.27
C	0.100	2.54

Ordering Information

Part Number	Package
MA4P7435NM-1091T	Tape and Reel (500pcs/reel)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331