



QAE150W SERIES

QUARTER-BRICK DC-DC CONVERTER

4:1 ULTRA WIDE INPUT RANGE
UP TO 132Watts



FEATURES

- NO MINIMUM LOAD REQUIRED
- LOW STANDBY POWER CONSUMPTION
- SOFT-START
- 2250VDC INPUT TO OUTPUT BASIC INSULATION
- SAFETY MEETS UL60950-1, EN60950-1, IEC60950-1 AND EN50155
- CE MARK MEETS 2006/95/EC, 2011/95/EC and 2004/108/EC
- COMPLIANT TO ROHS EU DIRECTIVE 2011/65/EU

APPLICATIONS

- RAILWAY SYSTEM
- WIRELESS NETWORK
- TELECOM/DATACOM
- INDUSTRY CONTROL SYSTEM
- DISTRIBUTED POWER ARCHITECTURES
- SEMICONDUCTOR EQUIPMENT

2250VDC ISOLATION	REMOTE CONTROL	UVP	OCP	SCP	OVP	OTP	LOW STANDBY POWER
----------------------	-------------------	-----	-----	-----	-----	-----	-------------------------

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

Model Number	Input Range VDC	Output Voltage VDC	Output Current @Full Load A	Input Current @ No Load mA	Efficiency %	Maximum Capacitor Load μF
QAE150-24S3P3W	8.5 ~ 36	3.3	30	25	88	91000
QAE150-24S05W	8.5 ~ 36	5	24	25	89	48000
QAE150-24S12W	8.5 ~ 36	12	10	25	88	8300
QAE150-24S15W	8.5 ~ 36	15	8	25	89	5300
QAE150-24S24W	8.5 ~ 36	24	5	25	88	2100
QAE150-24S30W	8.5 ~ 36	30	4	25	89	1300
QAE150-24S48W	8.5 ~ 36	48	2.5	25	88	520
QAE150-48S3P3W	16.5 ~ 75	3.3	30	15	88	91000
QAE150-48S05W	16.5 ~ 75	5	24	15	89	48000
QAE150-48S12W	16.5 ~ 75	12	10	15	89	8300
QAE150-48S15W	16.5 ~ 75	15	8	15	90	5300
QAE150-48S24W	16.5 ~ 75	24	5	15	90	2100
QAE150-48S30W	16.5 ~ 75	30	4	15	90	1300
QAE150-48S48W	16.5 ~ 75	48	2.5	15	90	520
QAE150-110S3P3W	40 ~ 160	3.3	30	8	88	91000
QAE150-110S05W	40 ~ 160	5	24	8	89	48000
QAE150-110S12W	40 ~ 160	12	11	8	88	9170
QAE150-110S15W	40 ~ 160	15	8.6	8	89	5730
QAE150-110S24W	40 ~ 160	24	5.5	8	89	2290
QAE150-110S30W	40 ~ 160	30	4.4	8	89	1470
QAE150-110S48W	40 ~ 160	48	2.7	8	89	560

PART NUMBER STRUCTURE

QAE150	-	48	S	05	W	-	P	HS
Series Name		Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range		Ctrl and Pin Options	Heat-sink and Mounting Hole Tread Options
		24:8.5~36 48:16.5~75 110:40~160	S:Single	3P3:3.3 05:5 12:12 15:15 24:24 30:30 48:48	4:1		□:Negative logic P:Positive logic	□:NC HS:H=0.24" Horizontal, 7G-0029A-F HS1:H=0.5" Horizontal, 7G-0030A-F HS2:H=0.24" Vertical, 7G-0031A-F HS3:H=0.5" Vertical, 7G-0032A-F TH:Through hole (No thread) ⁽¹⁾

(1) The module can't equip Heat-sink with TH option.

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	24Vin(nom) 48Vin(nom) 110Vin(nom)	8.5 16.5 40	24 48 110	36 75 160	VDC
Start-up voltage	24Vin(nom) 48Vin(nom) 110Vin(nom)			9 18 43	VDC
Shutdown voltage	24Vin(nom) 48Vin(nom) 110Vin(nom)	7.3 15.5 33.0		8.1 16.3 36.0	VDC
Start up time	Constant resistive load Power up Remote ON/OFF		75 75	100 100	ms
Input surge voltage	1 second, max. 24Vin(nom) 48Vin(nom) 110Vin(nom)			50 100 185	VDC
Input filter ⁽¹⁾		Pi type			
Remote ON/OFF	Referenced to -INPUT pin Negative logic DC-DC ON (Standard) DC-DC OFF Positive logic DC-DC ON (Option) DC-DC OFF Input current of CTRL pin Remote off input current			Short or 0 ~ 1.2VDC Open or 3 ~ 12 VDC Open or 3 ~ 12 VDC Short or 0 ~ 1.2VDC -0.5 1 3	mA mA

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy		-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load	-0.1		+0.1	%
Load regulation	No Load to Full Load 3.3 & 5Vout Others	-0.2 -0.1		+0.2 +0.1	%
Voltage adjustability	Maximum output deviation is inclusive of remote sense	-20		+10	%
Remote sense	% of Vout(nom). If remote sense is not being used, sense pins should connect to the output pins with the same polarity.			10	%
Ripple and noise	Measured by 20MHz bandwidth With a 22μF/25V X7R MLCC With a 22μF/25V X7R MLCC With a 4.7μF/50V X7R MLCC With a 2.2μF/100V X7R MLCC		75 100 200 300		mVp-p
Temperature coefficient		-0.02		+0.02	%/°C
Transient response recovery time	25% load step change		250		μs
Over voltage protection	% of Vout(nom); Hiccup mode	115		130	%
Over load protection	% of Iout rated; Hiccup mode	110		140	%
Short circuit protection		Continuous, automatic recovery			

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute (Basic insulation) Input to Output Input (Output) to Base-Plate	2250 2250			VDC
Isolation resistance	500VDC	1			GΩ
Isolation capacitance				1500	pF
Switching frequency		270	300	330	kHz
Design meet safety standard		IEC60950-1, UL60950-1, EN60950-1, EN50155			
Case material		Aluminum base-plate with plastic case			
Potting material		Silicon (UL94-V0)			
Dimensions		2.28 X 1.45 X 0.50 Inch (57.9×36.8×12.7 mm)			
Weight		64g (2.26oz)			
MTBF	BELLCORE TR-NWT-000332 Case 1: 50% Stress, Ta= 40°C. MIL-HDBK-217F Ta=25°C, Full load (G/B, controlled environment)			9.742 x 10 ⁵ hrs 8.573 x 10 ⁴ hrs	

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating base-plate temperature		-40		+100	°C
Over temperature protection			+110		°C
Storage temperature range		-55		+125	°C
Thermal impedance ⁽²⁾	Without Heat-sink Mount on 2U iron base-plate With 0.24" Height Heat-sink With 0.5" Height Heat-sink		9 2.8 7.1 5.5		°C/W
Thermal shock			EN61373, MIL-STD-810F		
Vibration			EN61373, MIL-STD-810F		
Relative humidity				5% to 95% RH	

EMC SPECIFICATIONS


Parameter	Conditions	Level
EMI ⁽³⁾	EN55011, EN55022	Class B
ESD	Air ± 8kV Contact ± 6kV	Perf. Criteria A
Radiated immunity	20 V/m	Perf. Criteria A
Fast transient ⁽⁴⁾	± 2kV	Perf. Criteria A
Surge ⁽⁴⁾	EN55024:±2kV EN50155:±2kV	Perf. Criteria A
Conducted immunity	10 Vr.m.s	Perf. Criteria A

Note:


- Input source impedance: The power modules will operate as specifications without external components, assuming that the source voltage has a very low impedance and reasonable input voltage regulation. Highly inductive source impedances can affect the stability of the power module. Since real-world voltage source has finite impedance, performance can be improved by adding external filter capacitor. The QAE150-24SXXW and QAE150-48SXXW recommended Nippon Chemi-con KY series, 100μF/100V. The QAE150-110SXXW recommended Ruby-con BFX series, 39μF/200V.
- The heat-sink is optional and P/N: 7G-0029A-F, 7G-0030A-F, 7G-0031A-F, 7G-0032A-F. Please refer to heat-sink selection guide.
- The QAE150W series standard module meets EMI Class A or Class B only with external components. For more detail information, please contact with P-DUKE.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5. The QAE150-24SXXW and QAE150-48SXXW recommended 2 pcs of aluminum electrolytic capacitor (Nippon chemi-con KY series, 220μF/100V) to connect in parallel. The QAE150-110SXXW recommended 3 pcs of aluminum electrolytic capacitor (Ruby-con BFX series, 100μF/250V) to connect in parallel.
- BASE-PLATE GROUNDING: When connect two screw bolts to shield plane, the EMI could be reduced.

CAUTION: This power module is not internally fused. An input line fuse must always be used.

CHARACTERISTIC CURVE

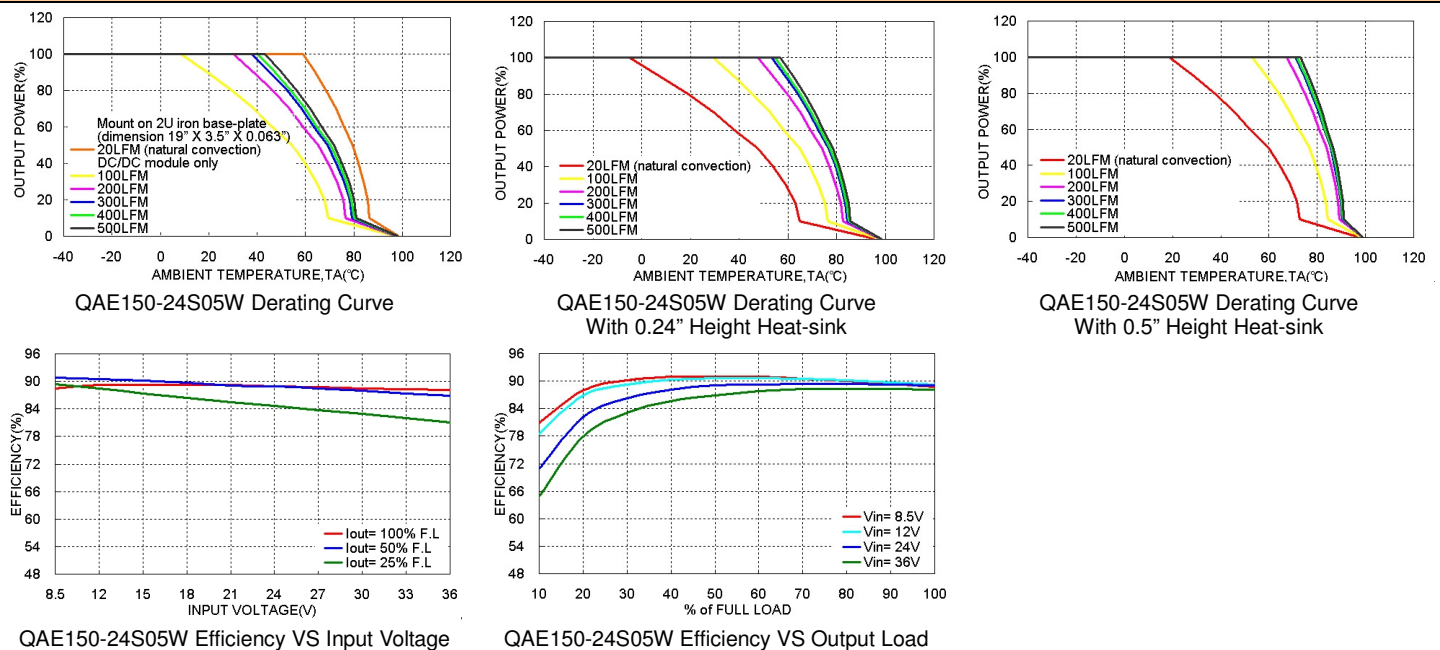

MECHANICAL DRAWING

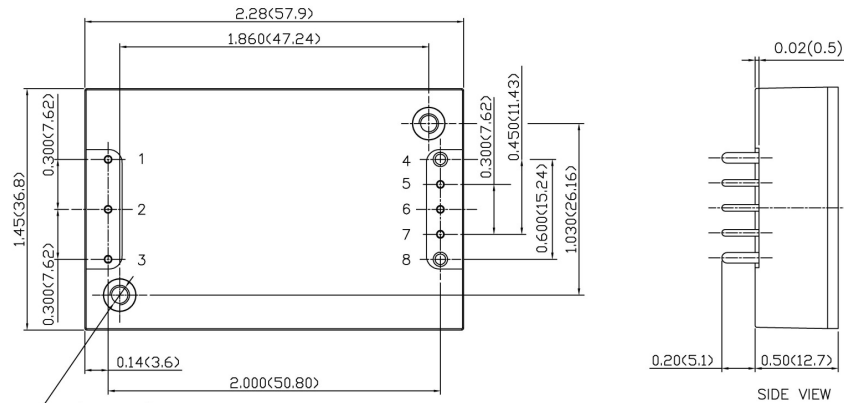

Threaded(Standard) 2-M3X0.5
Trough hole(Optional) 2-Ø0.13(Ø3.2)

BOTTOM VIEW


1. All dimensions in inch (mm)
2. Tolerance :x.xx±0.02 (x.x±0.5)
x.xxx±0.01 (x.xx±0.25)
3. Pin pitch tolerance ±0.01 (0.25)
4. Pin dimension tolerance ±0.004(0.1)

PIN CONNECTION

PIN	DEFINE	DIAMETER
1	- INPUT	0.04 Inch
2	CTRL	0.04 Inch
3	+ INPUT	0.04 Inch
4	- OUTPUT	0.06 Inch
5	- SENSE	0.04 Inch
6	TRIM	0.04 Inch
7	+ SENSE	0.04 Inch
8	+ OUTPUT	0.06 Inch

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.





$$R_U = \left(\frac{5.11V_{OUT}(100 + \Delta\%)}{1.225\Delta\%} - \frac{(511 + 10.22\Delta\%)}{\Delta\%} \right) k\Omega$$



$$R_D = \left(\frac{511}{\Delta\%} - 10.22 \right) k\Omega$$

HEAT-SINK TYPE OPTIONS

Vertical Fin Orientation, Suffix:-HS2, -HS3

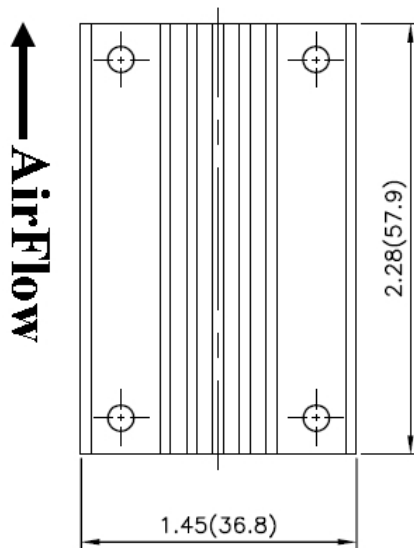

Horizontal Fin Orientation, Suffix:-HS, -HS1

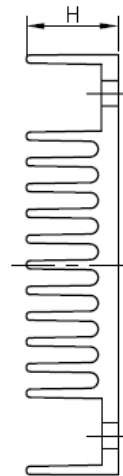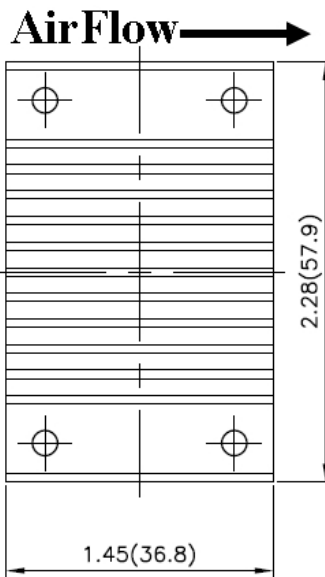

1. All dimensions in inch (mm)
2. Tolerance :x.xx±0.02 (x.x±0.5)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331