

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0855135002

Status:

Active

Description:

SMT Jack for Mating with F.C.C 68 Plugs, 6 Circuits

Documents:

3D Model

Drawing (PDF)

Application Specification (PDF)

Product Specification PS-85513-002 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

UL

E107635

General

Product Family

Series

Comments

Component Type

Magnetic

Performance Category

Power over Ethernet (PoE)

Product Name

Modular Jacks/Plugs

85513

Reel size:15"

PCB Jack

No

3

N/A

RJ12

Physical

Boot Color

Color - Resin

Durability (mating cycles max)

Flammability

Inverted / Top Latch

Lightpipes/LEDs

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Orientation

PCB Locator

PCB Retention

Packaging Type

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Pitch - Term. Interface (in)

Pitch - Term. Interface (mm)

Plating min: Mating (µin)

Plating min: Mating (µm)

Plating min: Termination (µin)

Plating min: Termination (µm)

Ports

Positions / Loaded Contacts

Surface Mount Compatible (SMC)

Temperature Range - Operating

Termination Interface: Style

Waterproof / Dustproof

Wire/Cable Type

N/A

Black

500

94V-0

No

None

Brass

Gold

Tin

High Temperature Thermoplastic

Vertical (Top Entry)

No

Yes

Embossed Tape on Reel

0.040 In

1.02 mm

0.050 In

1.27 mm

50.8

1.27

76

1.9

1

6/6

Yes

-40°C to +80°C

Surface Mount

No

N/A

Electrical

Current - Maximum per Contact

Shielded

1.5A

No




image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

85513Series

Mates With

90075 series

Voltage - Maximum	125V AC (RMS)
-------------------	---------------

Solder Process Data

Duration at Max. Process Temperature (seconds)	45
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	3
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Application Specification	AS-85513-001
Packaging Specification	PK-85513-001
Product Specification	PS-85513-002
Sales Drawing	SD-85513-010

This document was generated on 06/08/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

NOTES:

1- MATERIAL:

- HOUSING:LCP GLASS FILLED UL 94-V0, COLOUR BLACK,
- TERMINAL: BRASS PLATED WITH: 0.00127/.000050 MIN GOLD IN CONTACT AREA, 0.00190/.000075 MIN PURE TIN IN TAIL AREA, BOTH OVER 0.00127/.000050 MIN NICKEL OVERALL.

2- JACK FOR MATING WITH F.C.C.68 PLUGS (MOLEX 90075 SERIES).

3- PRODUCT SPECIFICATION: PS-85513-002.

4- PACKAGING SPECIFICATION (SEE CHART SHEET2):

PK-85513-001 SHEET 3 (BLISTER ON REEL 13")

PK-85513-001 SHEET 1 (BLISTER ON REEL 15")

PK-85513-001 SHEET 2 (BLISTER ON REEL 22")

5- FLAT SURFACE ON BOTH SIDES FOR PICK AND PLACE PURPOSE





6- COPLANARITY OF LEADS AND TABS: 0.10/.004 MAX

7- SEE RECOMMENDED PCB LAYOUT ON SHEET 2

8- FOR DRAWING PURPOSE, ONLY 4/4 VERSION SHOWN.

9- MANUFACTURING I.D CAN BE EITHER MXF,MG OR MXI.

10- APPLICATION SPEC AS-85513-001

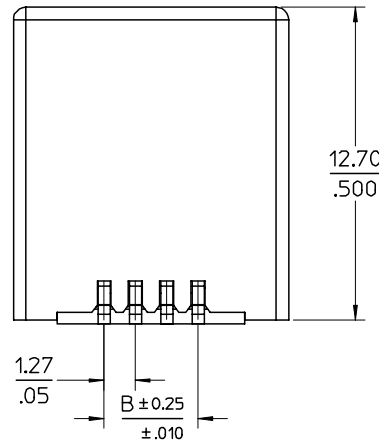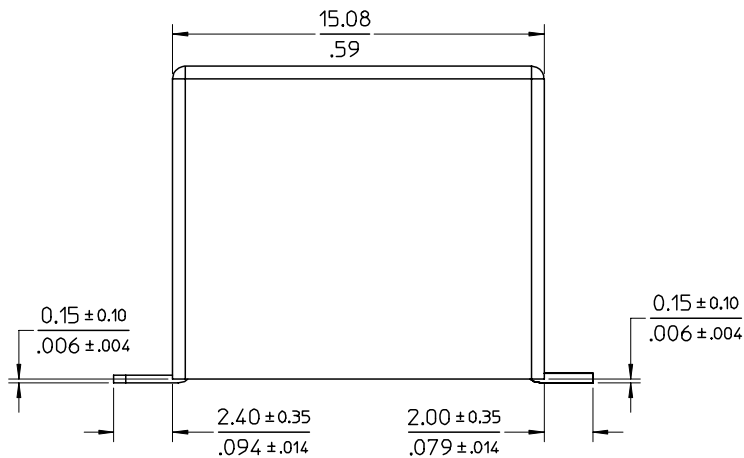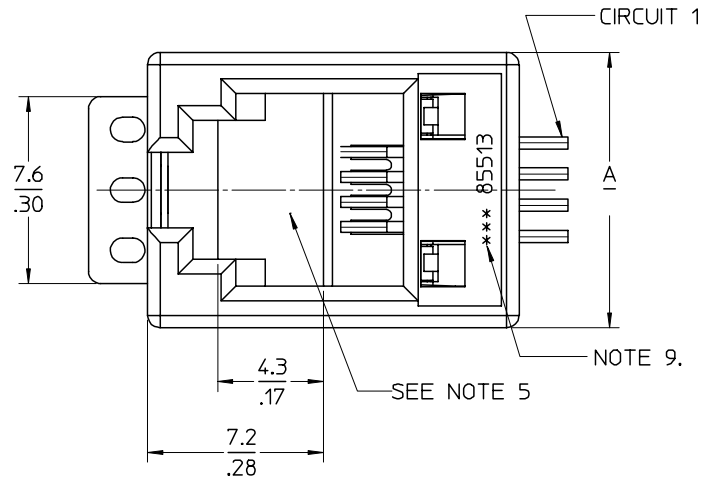

ISOMETRIC VIEW
(NOT SCALED)

MODIFIED MATERIAL. EC NO: E2007-0716 DRWN: DBYRNES CHKD: APPR: EOMAHONY	2007/02/15 2007/02/15 2007/02/15 2007/02/15	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION					
					mm	INCH	DRAWN BY	DATE	TITLE LOW PROFILE TOP ENTRY TRUE SMT JACK WITH P&P SURFACE(SHORT VERSION)						
				4 PLACES	± ---	± ---	DBYRNES	2006/08/17							
				3 PLACES	± ---	±.006	CHECKED BY	DATE							
				2 PLACES	± 0.15	±.010	EOMAHONY	2006/08/17	MOLEX INCORPORATED						
				1 PLACE	± 0.25	± ---	APPROVED BY	DATE							
				ANGULAR ± 2 °		EOMAHONY	2006/08/17	MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-85513-010		1 OF 2					
						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

F

FD



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331