


PCI-1612 Series

4-port RS-232/422/485 PCI Communication Cards

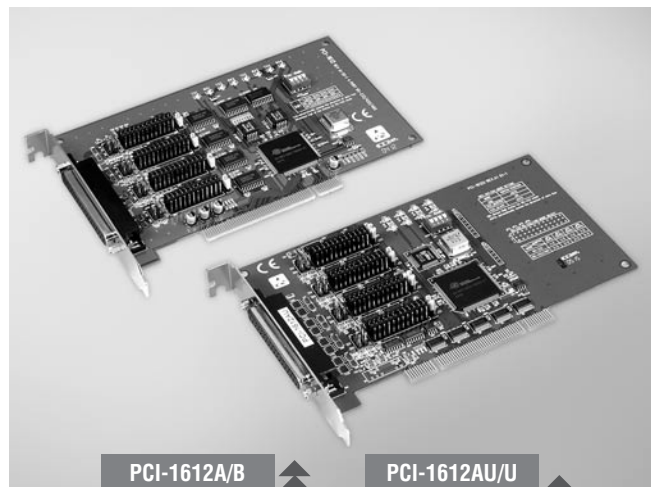

Features

- PCI bus 2.1 (PCI-1612A/1612B), 2.2 (PCI-1612AU/1612BU/1612CU) compliant
- Speeds up to 921.6 kbps
- 4-port RS-232/422/485
- 16PCI954 UARTs with 128-byte FIFOs standard
- I/O address automatically assigned by PCI Plug & Play
- OS supported: Windows® 98/ME/2000/XP/XP Embedded/Vista, Windows CE 5.0/6.0, Linux
- Interrupt status register for increased performance
- Space reserved for termination resistors
- Automatic RS-485 data flow control
- Powerful and easy to use utility (ICOM Tools)
- Universal PCI (Supports 3.3 V or 5 V PCI bus signal) (PCI-1612AU, PCI-1612BU, PCI-1612CU)
- 2,500 V_{DC} EFT Protection (PCI-1612B/1612BU/1612CU)
- 2,500 V_{DC} Isolation Protection (PCI-1612CU only)

Introduction

PCI-1612 is a 4-port RS-232/422/485 PCI communication card that is compatible with the PCI 2.1/2.2 bus specification and offer transmission rates up to 921.6 kbps. PCI-1612 comes with high-performance 16PCI954 UARTs with a 128-byte FIFO to reduce CPU load. These components make your system more stable and reliable. Thus, the PCI-1612 is especially suitable for multitasking environments. PCI-1612AU, PCI-1612BU and PCI-1612CU have universal PCI connectors that are compatible with both newer 3.3 V signaling systems and the traditional 5 V signaling system. This gives highly-compatibility and allows usage in diverse systems. To further increase reliability, PCI-1612B, PCI-1612BU and PCI-1612CU offers EFT protection for high voltages up to 2,500 V_{DC}. Meanwhile, PCI-1612CU provides 2,500 V_{DC} isolation to protect your PC and equipment against damages from ground loops in harsh environments. Advantech also provides a convenient utility program called ICOM Tools to help test the PCI card performance by analyzing the port status. The menu commands and toolbar buttons of ICOM Tools acts as a PC-based data scope that lets you set a trigger condition, capture the communications data and monitor the signal status. ICOM Tools is applicable to all series of Advantech ICOM cards.

Specifications

General

- **Card Interface** PCI V 2.1 (PCI-1612A, PCI-1612B)
Universal PCI V2.2 (PCI-1612BU, PCI-1612AU, 1612CU)
- **Certifications** CE, FCC class A
- **Connectors** 1 x DB37-F
- **Dimensions** 185 x 100 mm (7.3" x 3.9")
- **Power Consumption**

	Typical	Max
+12 V:	60 mA	80 mA
+5 V:	270 mA	338 mA

Communications

- **Communication Controller** 16PCI954
- **Data Bits** 5, 6, 7, 8
- **Data Signals** RS-232: Tx+, Rx+, RTS, CTS, DTR, DSR, DCD, RI, GND
RS-422: Tx+, Tx-, Rx+, Rx-, RTS+, RTS-, CTS+, CTS-
RS-485: Data+, Data-
- **FIFO** 128 bytes
- **Flow Control** RTS/CTS, Xon/Xoff
- **IRQ** Assigned by Plug & Play
- **Parity** None, even, odd
- **Speed** 50 bps ~ 921.6 kbps
- **Stop Bits** 1, 1.5, 2

Protection

- **ESD Protection** 8 kV
- **EFT Protection** 2,500 V_{DC} (PCI-1612B/1612BU/1612CU only)
- **Isolation Protection** 2,500 V_{DC} (PCI-1612CU only)

Software

- **Bundled Software** ICOM Tools
- **OS Support** Windows 98/ME/2000/XP/XP Embedded, Windows CE 5.0/6.0, Linux

Environment

- **Humidity (Operating)** 5 ~ 95% RH, non-condensing (refer to IEC 68-2-3)
- **Operating Temperature** 0 ~ 65° C (refer to IEC 68-2-1, 2), (32 ~ 149° F)
- **Storage Temperature** -25 ~ 85° C (-13 ~ 185° F)

Ordering Information

- **PCI-1612A** 4-port RS-232/422/485 PCI Comm, 4 x DB25
- **PCI-1612A/9** 4-port RS-232/422/485 PCI Comm, 4 x DB9
- **PCI-1612B** 4-port RS-232/422/485 PCI Comm w/EFT, 4 x DB25
- **PCI-1612B/9** 4-port RS-232/422/485 PCI Comm w/EFT, 4 x DB9
- **PCI-1612AU** 4-port RS-232/422/485 Uni PCI Comm, 4 x DB25
- **PCI-1612AU/9** 4-port RS-232/422/485 Uni PCI Comm, 4 x DB9
- **PCI-1612BU** 4-port RS-232/422/485 Uni PCI Comm w/EFT, 4 x DB25
- **PCI-1612BU/9** 4-port RS-232/422/485 Uni PCI Comm w/EFT, 4 x DB9
- **PCI-1612CU** 4-port RS-232/422/485 Uni PCI, Iso/EFT, 4 x DB25
- **PCI-1612CU/9** 4-port RS-232/422/485 Uni PCI, Iso/EFT, 4 x DB9

Note: 30 cm DB37 to 4 x DB25 or DB37 to 4 x DB9 cable included



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331