


SENSOR SWITCH

Item No.	RBS2001 Series	Description	TILT SWITCH	Version	10
Page	1 of 13		Date	Oct. 08, 2013	

● FUNCTIONS

1. 45° Tilt Detecting within a 360° radius
2. Rotation Detecting
3. Vibration Detecting

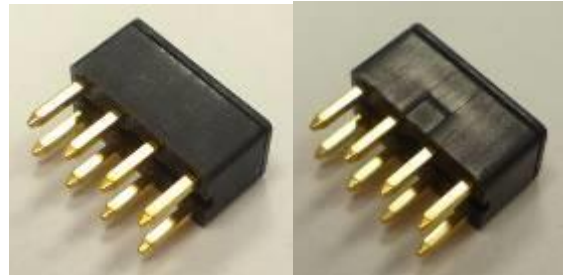

● APPLICATIONS

1. Wake up systems for power saving, such like remote controllers.
2. Position Detection for Iron
3. Automatically shut off for home appliances
4. Automatically shut off for Sporting equipment
5. Alarm system
6. Anti-theft / Anti-tamper devices
7. Being motion detection (personal locator)
8. Rotation Detection for kinds of monitor

RBS2001X0

RBS2001X4



SENSOR SWITCH

Item No.	RBS2001 Series	Description	TILT SWITCH	Version	10
Page	2 of 13		Date	Oct. 08, 2013	

● FEATURES

1. Suitable for horizontal and vertical PCB.
2. Tiny size, suitable for small space.
3. Gold-plated ball and terminals, low possibility of oxidization.
4. Housing made of high insulation plastic material, free from electric conduction and rust problem.
5. All plastic materials subject to industrial purpose, resist high temperature and meet fireproof function.
6. Simple ON and OFF signals, easy for design.
7. RoHS compliance, an ideal substitute for mercury switch.
8. A more economical tilt and vibration detection option than IC design solution.
9. All made in Taiwan and examined before shipment.
10. Switch State: Normal Close – RBS200100、RBS200124;
Normal Open – RBS200110、RBS200114

● PATENTS

1. TAIWAN Patent No. I 239025
2. U.S.A. Patent No. US 7,045,724 B1
3. CHINA Patent No. ZL 2004 1 0091589.7
4. CHINA Patent No. 201220308500.8




SENSOR SWITCH

Item No.	RBS2001 Series	Description	TILT SWITCH	Version	10
Page	3 of 13		Date	Oct. 08, 2013	

● DIMENSIONS / OPERATION / P.C.B. LAYOUT (Unit: mm, Tolerance: $\pm 0.25\text{mm}$)


Fig. 1

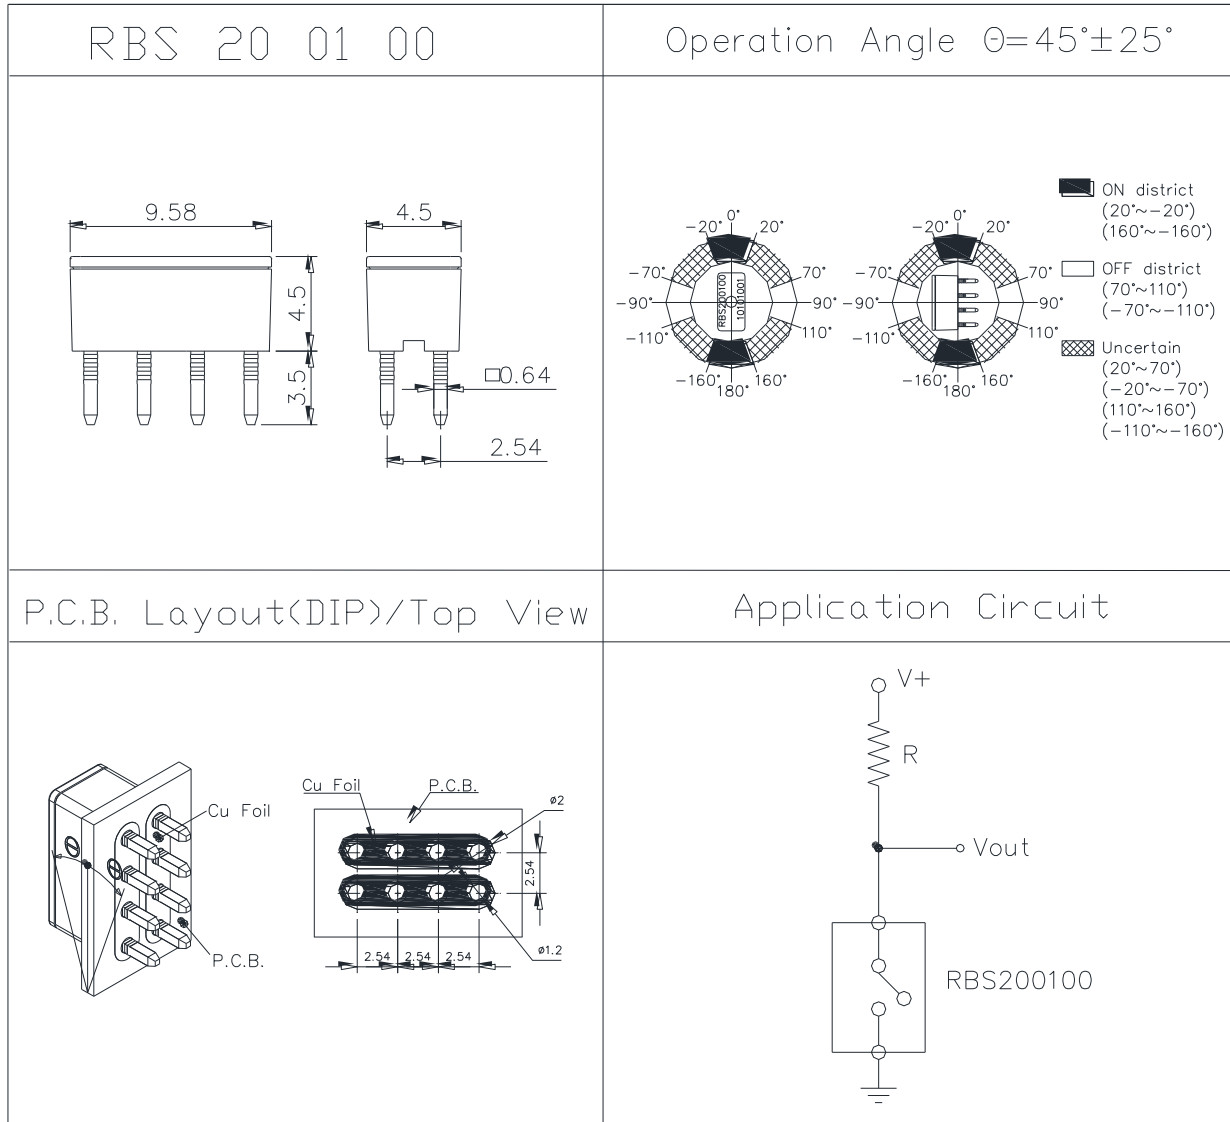

SENSOR SWITCH

Item No.	RBS2001 Series	Description	TILT SWITCH	Version	10
Page	4 of 13		Date	Oct. 08, 2013	

Fig. 2

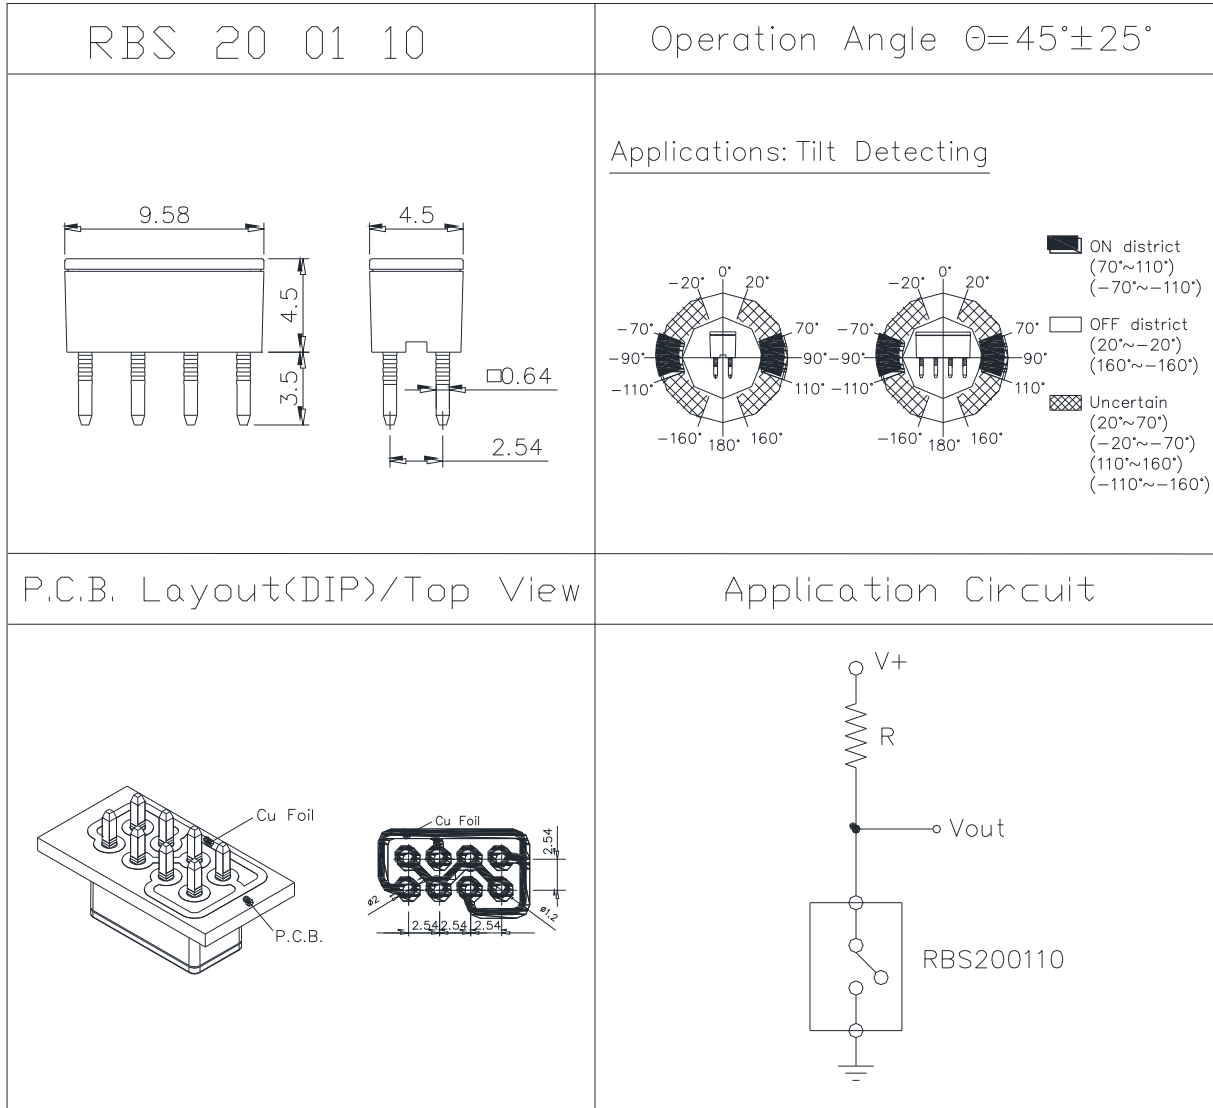

SENSOR SWITCH

Item No.	RBS2001 Series	Description	TILT SWITCH	Version	10
Page	5 of 13		Date	Oct. 08, 2013	

Fig. 3


<p>RBS 20 01 14</p>	<p>Operation angle $\Theta=10^\circ+20^\circ/-7^\circ$</p> <p>Applications: Tilt Detecting</p> <p> ON district (30°~150°) (-30°~-150°) OFF (3°~-3°) (177°~-177°) Uncertain (3°~30°) (-3°~-30°) (150°~177°) (-150°~-177°) </p> <p>Fleetingly ON/OFF When Be Vibrated from Any Position.</p> <p>Applications: Vibration Detecting</p>
<p>P.C.B. Layout(DIP)/Top View</p>	<p>Application Circuit</p>



SENSOR SWITCH

Item No.	RBS2001 Series	Description	TILT SWITCH	Version	10
Page	6 of 13		Date	Oct. 08, 2013	

Fig. 4

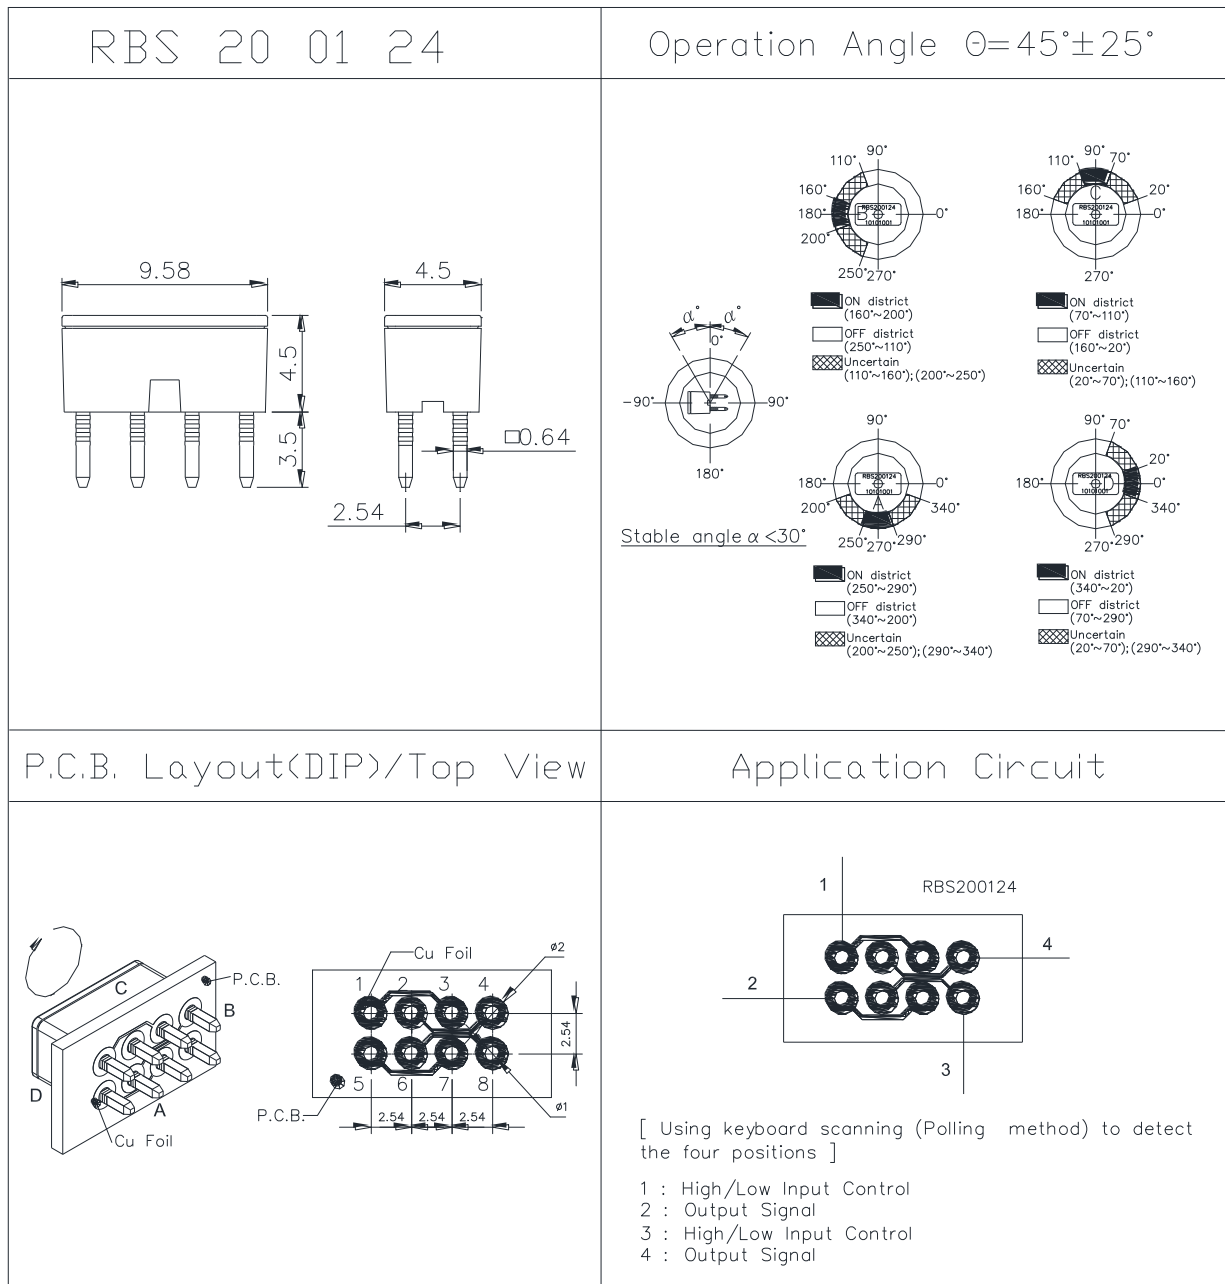

SENSOR SWITCH

Item No.	RBS2001 Series	Description	TILT SWITCH	Version	10
Page	7 of 13		Date	Oct. 08, 2013	

● Current/Voltage Suggested

Input Current (mA)	Operating Voltage (V)	Condition
10	5	--

● ELECTRICAL CHARACTERISTICS

1.	Contact Rating	10 mA · 5 VDC
2.	Contact Resistance	10 Ω max.
3.	Differential Angle	Refer to Fig. 1~ Fig. 4
4.	Insulation Resistance	1000 MΩ min. · 100 VDC
5.	Dielectric Strength	500 VDC min. · 1 minute
6.	Capacitance	5 pF max.
7.	Conductive Rate: 98% min.	RBS200100、RBS200110、RBS200114
8.	Conductive Rate: 96% min.	RBS200124



SENSOR SWITCH

Item No.	RBS2001 Series	Description	TILT SWITCH	Version	10
Page	8 of 13		Date	Oct. 08, 2013	

● RELIABLE TEST ITEMS

Reliable Test for RBS2001 Series

Test Item	Standard	Contents
IR Reflow	--	--
Operating Temperature	MIL-STD-202G, TEST METHOD 107G, TEST A	-25°C~85°C
Storage Temperature	MIL-STD-202G, TEST METHOD 107G, TEST A	-40°C~85°C
Humidity	MIL-STD-202G, TEST METHOD 103B	40°C/95%RH
Mechanical Life	--	2 Hz horizontal 1,000,000 times
Electrical Life	--	100,000 times



SENSOR SWITCH

Item No.	RBS2001 Series	Description	TILT SWITCH	Version	10
Page	9 of 13		Date	Oct. 08, 2013	

● SOLDERING CONDITION

Following soldering conditions are for reference only, please use soldering information that solder paste manufacturer recommends.

Condition Operation Method	Soldering Temperature	Soldering Time	Wattage of Manual Soldering	Suitable Production Process
IR Reflow	Please refer to following < Table of classification Reflow profile > and Fig. 5		-	SMT
Wave Soldering	260±5°C	< 5 seconds max.	-	DIP
Manual Soldering	260±5°C	< 5 seconds max.	20W or Temperature-controlled manual soldering	DIP · SMT



SENSOR SWITCH

Item No.	RBS2001 Series	Description	TILT SWITCH	Version	10
Page	10 of 13		Date	Oct. 08, 2013	

< Table of classification Reflow profile >


Item	Pb process	Pb free process
Pre-heat and Soak Temperature min.(T _{smin}) Temperature max.(T _{smax}) Time (T _{smin} to T _{smax})(ts)	100 °C 150 °C 60-120 seconds	150 °C 200 °C 60-120 seconds
Average Rate of temperature rising up (T _{smax} to T _p)	3 °C/second max.	3 °C/second max.
Liquidous Temperature (TL) Time at Liquidous (tL)	183 °C 60-150 seconds	217 °C 60-150 seconds
Peak package body Temperature (T _p)*	230 °C ~235 °C *	255 °C ~260 °C *
Classification temperature(T _c)	235 °C	260 °C
Time(tp)** within 5 °C of the specified classification temperature (T _c)	20** seconds	30** seconds
Average ram-down Rate (T _p to T _{smax})	6 °C/second max.	6 °C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.
* Tolerance for peak profile temperature (T _p) is defined as a supplier minimum and a user maximum. ** Tolerance for time at peak profile temperature (tp) is defined as a supplier minimum and a user maximum.		



SENSOR SWITCH

Item No.	RBS2001 Series	Description	TILT SWITCH	Version	10
Page	11 of 13		Date	Oct. 08, 2013	

Fig. 5

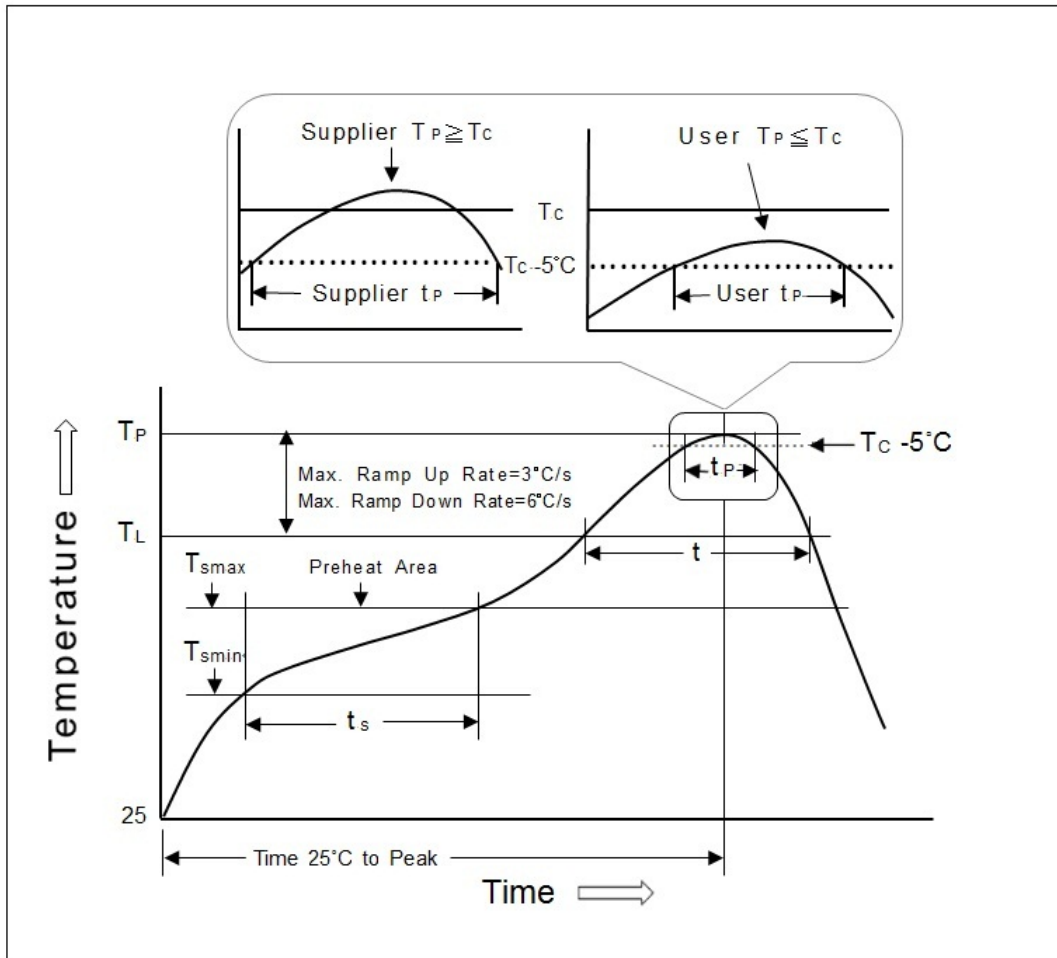

SENSOR SWITCH

Item No.	RBS2001 Series	Description	TILT SWITCH	Version	10
Page	12 of 13		Date	Oct. 08, 2013	

● PACKAGE

	Part Number	Package	Quantity	Total	Size(mm)
1.	RBS200100	PE bag	500 pcs	500 pcs	127L*178W
	RBS200110	Inner box	10 PE bags	5,000 pcs	360L*200W*90H
	RBS200114				
RBS200124	Carton	3 Boxes	15,000 pcs	360L*280W*230H	

※ Package shown as below for reference.



PE bag



Inner box



Carton



SENSOR SWITCH

Item No.	RBS2001 Series	Description	TILT SWITCH	Version	10
Page	13 of 13		Date	Oct. 08, 2013	

● NOTES

1. Suggestion for usage : For vibration usage or application , we suggest to add hysteresis for IC; if vibration is heavy , optical type of sensor switch is recommended.
2. For the continued product improvement as one of the company policy, specifications may change or update without notice. The latest information can be obtained through our sales offices. Normally, all products are supplied under our standard conditions.
3. If buyer's products will stay in power supply for a long time which needs very high stability, optical sensor switch is strongly recommended.

● PRECAUTIONS FOR USE

1. If the products is intended to be used for other endurance equipment requiring higher safety and reliability such as life support system, space and aviation devices, disaster and safety system, it's necessary to make verification of conformity or contact us for the details before using.
2. Do not try to clean the switch with a solvent or similar substance after the soldering process.
3. Use water-soluble flux may damage the switch.
4. If soldering temperature exceeds our specification, sensor switch could get apart.
5. Do not use switch in the environment of high humidity · because such an environment may cause the leakage current between the terminals.
6. More than the rated load may cause fire, so do not use more than the load.
7. In the circuit, switch should not be near or directly connected with the magnetic component solder joints (for example: relays, transformers, etc.).





Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331