


PCI-9221/9222/9223

16/32-CH 16-Bit 250/500 kS/s Multi-Function DAQ Cards with Encoder Input

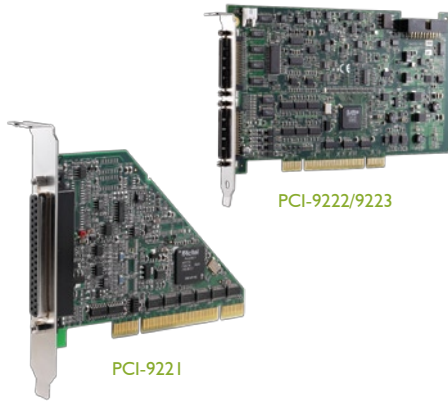

Introduction

The PCI-9221/9222/9223 are ADLINK's high performance DAQ cards. PCI-9221/9222/9223 are 16-bit, 16/32-CH, 250/500 kS/s multi-function DAQ cards with 4/8 different input ranges. They also feature 2-CH 16-bit simultaneous analog outputs and programmable function I/O. The software-programmable function I/O supports a variety of applications, including TTL digital I/O, high-speed DIO (PCI-9222/9223 only), general-purpose timer/counter, pulse generation, encoder input, and PWM output. Analog input, analog output, and function I/O can operate at full speed simultaneously.

For the PCI-9222/9223, multiple cards can be synchronized through the SSI (System Synchronization Interface) bus if more channels are needed. Ideal for mixed-signal tests, laboratory research, and factory automation, the PCI-9221/9222/9223 are the best single-board solutions on the market providing the best integration capability of multiple tasks with high performance and an affordable price.

Features

- Supports a 32-bit 3.3 V or 5 V PCI bus
- Programmable gains for analog input: 1, 2, 4, 5, 8, 10, 20, 40 (PCI-9222/9223) 1, 5, 10, 25 (PCI-9221)
- 2-CH 16-bit simultaneous analog outputs, up to 1 MS/s analog output update rate (PCI-9222/9223)
- Programmable function I/O, supporting modes:
 - TTL DI and TTL DO
 - 2 MHz High-Speed DIO (PCI-9222/9223 only)
 - General-purpose timer/counter
 - PWM outputs
 - Encoder inputs
- Dedicated 2-CH 4 MHz encoder inputs, supporting AB phase, and CW/CCW (PCI-9222/9223)
- Dedicated DMA channels for A/D, D/A, and high-speed DIO (PCI-9222/9223)
- External digital trigger for A/D, D/A, and high-speed DIO (PCI-9222/9223)
- Multiple card synchronization through SSI (System Synchronization Interface) bus (PCI-9222/9223)
- Auto-calibration

Operating Systems

- Windows 7/Vista/2000/XP/Server 2003
- Linux

Recommended Software

- AD-Logger
- VB.NET/VC.NET/VB/VC++/BCB
- DAQBench

Driver Support

- DAQPilot for LabVIEW™
- DAQ-MTLB for MATLAB®
- PCIS-DASK for Windows
- PCIS-DASK/X for Linux

Terminal Boards & Cables

DIN-68S-01 (for PCI-9222/9223)

Terminal Board with One 68-pin SCSI-II Connector and DIN-Rail Mounting (Cables are not included.)

TB-9221-01 (for PCI-9221)

General-purpose Terminal Board with One 37-pin D-Sub Connector. Supports Differential to Single-ended Encoder Signal Conversion of PCI-9221's Function I/O Through Jumper Switching. (Cables are not included.)

DIN-37D-01 (for PCI-9221)

Terminal Board with One 37-pin D-sub Connector and DIN-Rail Mounting (Cables are not included.)

ACL-10568-I (for PCI-9222/9223)

68-pin SCSI-VHDCI cable
(mating with AMP-787082-7), 1 M

ACL-10137-IMM (for PCI-9221)

37-pin D-sub male/male cable, 1 M

* For more information on mating cables, please refer to P2-61/62.

SSI Bus Cables (for PCI-9222/9223) (for multiple cards synchronization)

ACL-SSI-2/3/4

SSI Bus cable for two, three, and four devices

Ordering Information

PCI-9221

16-Bit Multi-Function DAQ Card with 2-CH Encoder Input

PCI-9222

16-CH 16-Bit 250 kS/s Multi-Function DAQ Card with Encoder Input

PCI-9223


32-CH 16-Bit 500 kS/s Multi-Function DAQ Card with Encoder Input



SSI bus cable for multiple cards synchronization



Terminal board DIN-68S-01 & 68-Pin SCSI-VHDCI cable ACL-10568-I

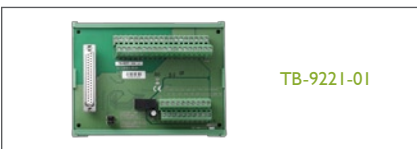

TB-9221-01

Pin Assignment

CNI pin assignment for PCI-9223

A10(AIH0)	34	68	A16(AIL0)
A11(AIH1)	33	67	A17(AIL1)
A12(AIH2)	32	66	A18(AIL2)
A13(AIH3)	31	65	A19(AIL3)
A14(AIH4)	30	64	A20(AIL4)
A15(AIH5)	29	63	A21(AIL5)
A16(AIH6)	28	62	A22(AIL6)
A17(AIH7)	27	61	A23(AIL7)
AGND	26	60	AISENSE
A18(AIH8)	25	59	A124(AIL8)
A19(AIH9)	24	58	A125(AIL9)
A110(AIH10)	23	57	A126(AIL10)
A111(AIH11)	22	56	A127(AIL11)
A112(AIH12)	21	55	A128(AIL12)
A113(AIH13)	20	54	A129(AIL13)
A114(AIH14)	19	53	A130(AIL14)
A115(AIH15)	18	52	A131(AIL15)
AGND	17	51	AGND
A00	16	50	AGND
A01	15	49	AGND
NC	14	48	NC
NC	13	47	NC
NC	12	46	NC
NC	11	45	NC
NC	10	44	NC
NC	9	43	NC
NC	8	42	NC
NC	7	41	NC
NC	6	40	NC
NC	5	39	NC
NC	4	38	NC
NC	3	37	NC
NC	2	36	NC
NC	1	35	NC

CNI pin assignment for PCI-9222

A10(AIH0)	34	68	A18(AIL0)
A11(AIH1)	33	67	A19(AIL1)
A12(AIH2)	32	66	A110(AIL2)
A13(AIH3)	31	65	A111(AIL3)
A14(AIH4)	30	64	A112(AIL4)
A15(AIH5)	29	63	A113(AIL5)
A16(AIH6)	28	62	A114(AIL6)
A17(AIH7)	27	61	A115(AIL7)
AGND	26	60	AISENSE
NC	25	59	NC
NC	24	58	NC
NC	23	57	NC
NC	22	56	NC
NC	21	55	NC
NC	20	54	NC
NC	19	53	NC
NC	18	52	NC
AGND	17	51	AGND
A00	16	50	AGND
A01	15	49	AGND
NC	14	48	NC
NC	13	47	NC
NC	12	46	NC
NC	11	45	NC
NC	10	44	NC
NC	9	43	NC
NC	8	42	NC
NC	7	41	NC
NC	6	40	NC
NC	5	39	NC
NC	4	38	NC
NC	3	37	NC
NC	2	36	NC
NC	1	35	NC

CNI pin assignment for PCI-9222/9223

GP01GP0TC_CLK0	34	68	GP01GP0TC_CLK2
GP01GP0TC_OUT0	33	67	GP01GP0TC_OUT2
GP01GP0TC_GATE0	32	66	GP01GP0TC_GATE2
GP01GP0TC_AUX0	31	65	GP01GP0TC_AUX2
GP01GP0TC_CLK1	30	64	GP01GP0TC_CLK3
GP01GP0TC_OUT1	29	63	GP01GP0TC_OUT3
GP01GP0TC_GATE1	28	62	GP01GP0TC_GATE3
GP01GP0TC_AUX1	27	61	GP01GP0TC_AUX3
D0ND	26	60	D0ND
GP01GP0TC_OUT0	25	59	GP08
GP01GP0TC_OUT1	24	58	GP08
GP01GP0TC_OUT2	23	57	GP010
GP01GP0TC_OUT3	22	56	GP011
GP04	21	55	GP012
GP05	20	54	GP013
GP06	19	53	GP014
GP07	18	52	GP015
D0ND	17	51	D0ND
D0ND	16	50	D0ND
D0ND	15	49	D0ND
+Vout	14	48	D0ND
NC	13	47	NC
NC	12	46	NC
NC	11	45	NC
NC	10	44	NC
E24V	9	43	NC
EGND	8	42	NC
EA0+	7	41	EA1+
EA0-	6	40	EA1-
ESB+	5	39	ESB+
ESB-	4	38	ESB-
E2B+	3	37	E2B+
E2B-	2	36	E2B-
CR00	1	35	CR01

CNI pin assignment for PCI-9221

GP02	1	20	GP01
D0ND	2	21	GP01GP0TC_OUT1
GP01GP0TC_GATE1	3	22	GP01GP0TC_GATE1
GP01GP0TC_AUX1	4	23	D0ND
GP01GP0TC_OUT1	5	24	GP01GP0TC_OUT1
GP01GP0TC_GATE1	6	25	GP01GP0TC_GATE1
D0ND	7	26	GP01GP0TC_OUT1
GP01GP0TC_CLK0	8	27	A01
AGND	9	28	A01
AGND	10	29	A18(AIL7)
A01(AH7)	11	30	A18(AIL8)
A01(AH8)	12	31	A18(AIL9)
A01(AH9)	13	32	A18(AIL10)
A01(AH10)	14	33	A18(AIL11)
AGND	15	34	A11(AIL12)
A01(AH11)	16	35	A11(AIL13)
A01(AH12)	17	36	A11(AIL14)
A01(AH13)	18	37	A11(AIL15)
A01(AH14)	19	38	A11(AIL16)

Specifications

Model Name	PCI-9221		PCI-9222	PCI-9223
Analog Input				
Resolution	16 bits			
Number of channels	16 SE/ 8 DIFF	16 SE/ 8 DIFF	32 SE/ 16 DIFF	
Maximum sampling rate (single channel)	250 kS/s	250 kS/s	500 kS/s	
Programmable gain	1, 5, 10, 25	1, 2, 4, 5, 8, 10, 20, 40	1, 2, 4, 5, 8, 10, 20, 40	
Input range	±5 V, ±1 V, ±500 mV, ±200 mV	±10 V, ±5 V, ±2.5 V, ±2 V, ±1.25 V, ±1 V, ±500 mV, ±250 mV		±10 V, ±5 V, ±2.5 V, ±2 V, ±1.25 V, ±1 V, ±500 mV, ±250 mV
Offset error	±2.6 mV typical, before calibration, ±0.5 mV typical, after calibration			
Gain error	±0.2% of FSR, before calibration, ±0.015% of FSR, after calibration			
-3 dB small signal bandwidth (gain=1)	1.8 MHz	1.5 MHz	1.5 MHz	
System noise (gain=1)	0.1 mVRMS	0.5 mVRMS	0.5 mVRMS	
CMRR (gain=1)	71 dB	93.5 dB	93.5 dB	
SFDR (Spurious-free dynamic range, gain=1)	95 dB	95 dB	88 dB	
SINAD (Signal-to-noise and distortion ratio, gain=1)	85 dB	86 dB	84 dB	
THD (Total harmonic distortion, gain=1)	-93 dB	-94 dB	-90 dB	
SNR (Signal-to-noise ratio, gain=1)	86 dB	87 dB	86 dB	
ENOB (gain=1)	13.5 bits	13.9 bits	13.5 bits	
FIFO buffer size	1 k samples			
Trigger sources	Software, external digital	Software, external digital, SSI	Software, external digital, SSI	
Trigger mode	Post trigger	Post trigger, retrigger, gate trigger	Post trigger, retrigger, gate trigger	
External conversion source	Yes (up to 250 kS/s)	Yes (up to 250 kS/s)	Yes (up to 500 kS/s)	
Input coupling	DC			
Overvoltage protection	±10 V	Continuous ±30 V	Continuous ±30 V	
Input impedance	High impedance > 1 GΩ			
Data Transfer	Programmed I/O, Interrupt, Bus Mastering DMA			
Analog Output				
Number of channels	2 voltage outputs			
Resolution	16-bit			
Maximum update rate	1.25 kS/s (static)	1 MHz (simultaneous update)	1 MHz (simultaneous update)	
FIFO	-	512	512	
Output range	±5 V	±10 V	±10 V	
Output driving capacity	±5 mA			
Slew rate	0.014 V/μs	20 V/μs	20 V/μs	
Setting time (0.1% of full scale)	1396 μs	2.6 μs	2.6 μs	
Offset error	±1 mV	±0.1 mV	±0.1 mV	
Gain error	±2 mV	±0.1 mV	±0.1 mV	
Rising time	390 μs	0.67 μs	0.67 μs	
Falling time	395 μs	0.705 μs	0.705 μs	
Function I/O				
Mode	Digital I/O ⁽¹⁾ , General Timer/Counter ⁽¹⁾ , Pulse Generation ⁽¹⁾	Digital I/O, General Timer/Counter, Pulse Generation	Digital I/O, General Timer/Counter, Pulse Generation	
Digital I/O	8 DI/4 DO (5 V TTL level)	16 DO (3.3 V TTL Level) / 16 DI (3.3 V or 5 V TTL Level)	16 DO (3.3 V TTL Level) / 16 DI (3.3 V or 5 V TTL Level)	
General Timer/Counter	Two 32-bit, Base clock: 40 MHz, external to 10 MHz	Four 32-bit, Base clock: 80 MHz, external to 10 MHz	Four 32-bit, Base clock: 80 MHz, external to 10 MHz	
Pulse generation	Two PWM outputs (Modulation frequency: 0.005 Hz to 5 MHz; Duty cycle: 1%-99%)	Four PWM outputs (Modulation frequency: 0.01 Hz to 5 MHz; Duty cycle: 1%-99%)	Four PWM outputs (Modulation frequency: 0.01 Hz to 5 MHz; Duty cycle: 1%-99%)	
Encoder Input				
Number of channels	2 ⁽²⁾			
Encoder type	CW/CCW encoder, x 1 AB phase encoder, x 2 AB phase encoder, x 4 AB phase encoder			
General Specifications				
PCI Bus	5 V and 3.3 V universal PCI bus			
Auto-calibration		Yes		
I/O Connector	One 37-pin D-Sub connector	Two 68-pin SCSI-VHDCI female	Two 68-pin SCSI-VHDCI female	
Operation temperature	0 to 45°C	0 to 55°C	0 to 55°C	
Storage temperature	-20 to 80°C	-20 to 70°C	-20 to 70°C	
Humidity		5 to 95% non-condensing		
Power requirements	+5 V 1A typical, +12 V 100mA typical, -12 V 100mA typical	+5 V 1.2 A typical +12 V 760 mA typical -12 V 50 mA typical	+5 V 1.2 A typical +12 V 760 mA typical -12 V 50 mA typical	
Dimensions	120 mm x 87 mm	175 mm x 107 mm (not including connectors)	175 mm x 107 mm (not including connectors)	

Note:

(1) The function I/O and encoder inputs share the same I/O pins of the PCI-9221. Only one of these modes can be selected.

(2) Dedicated



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331