



| Parameter | Rating | Units |
|-----------------------|----------|----------------------------------|
| AC Operating Voltage | 20 - 240 | V_{rms} |
| Load Current | 2 | A_{rms} |
| On-State Voltage Drop | 1.15 | V_{rms} (at $I_L = 2A_{rms}$) |
| Blocking Voltage | 600 | V_P |

Features

- Load Current up to $2A_{rms}$
- $600V_P$ Blocking Voltage
- 5mA Sensitivity
- Zero-Crossing Detection
- DC Control, AC Output
- Optically Isolated
- TTL and CMOS Compatible
- Low EMI and RFI Generation
- High Noise Immunity
- Machine Insertable, Wave Solderable

Applications

- Programmable Control
- Process Control
- Power Control Panels
- Remote Switching
- Gas Pump Electronics
- Contactors
- Large Relays
- Solenoids
- Motors
- Heaters

Description

CPC1976 is an AC Solid State Switch utilizing dual power SCR thyristor outputs. This device also includes zero-cross turn-on circuitry and is specified with a blocking voltage of $600V_P$.

In addition, tightly controlled zero-cross circuitry ensures low noise switching of AC loads by minimizing the generation of transients. The optically coupled input and output circuits provide $3750V_{rms}$ of isolation and noise immunity between the control and load circuits. As a result, the CPC1976 is well suited for industrial environments where electromagnetic interference would disrupt the operation of plant facility communication and control systems.


Approvals

- UL Recognized Component: File E69938
- CSA Certified Component: Certificate 1172007

Ordering Information

| Part # | Description |
|----------|----------------------------------|
| CPC1976Y | 4-Pin (8-Pin Body) SIP (25/Tube) |

Pin Configuration

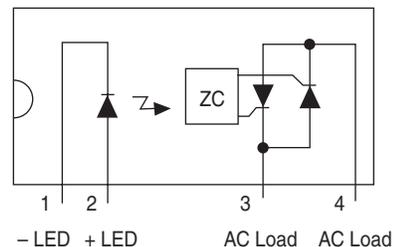

Absolute Maximum Ratings @ 25°C

| Parameter | Ratings | Units |
|--------------------------------------|-------------|-----------|
| Blocking Voltage (V_{DRM}) | 600 | V_P |
| Reverse Input Voltage | 5 | V |
| Input Control Current | 50 | mA |
| Peak (10ms) | 1 | A |
| Input Power Dissipation ¹ | 150 | mW |
| Total Power Dissipation ² | 2400 | mW |
| Isolation Voltage, Input to Output | 3750 | V_{rms} |
| Operational Temperature | -40 to +85 | °C |
| Storage Temperature | -40 to +125 | °C |

¹ Derate linearly 1.33 mW / °C

² Derate linearly 20 mW / °C

Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at conditions beyond those indicated in the operational sections of this data sheet is not implied.

Electrical Characteristics @ 25°C

| Parameters | Conditions | Symbol | Min | Typ | Max | Units |
|---|-----------------------|------------|-------|------|------|------------|
| Output Characteristics | | | | | | |
| Load Current, Continuous | $V_L=120-240V_{rms}$ | I_L | 0.005 | - | 2 | A_{rms} |
| Maximum Surge Current | $t \leq 16ms$ | I_{PK} | - | - | 20 | A |
| Off State Leakage Current | V_{DRM} | I_{LEAK} | - | - | 1 | mA |
| On-State Voltage Drop ¹ | $I_L=2A_{rms}$ | - | - | 0.86 | 1.15 | V_{rms} |
| Critical Rate of Rise | - | dv/dt | 1000 | 1200 | - | V/ μs |
| Switching Speeds | $I_F = 5 mA$ | | | | | |
| Turn-on | | t_{on} | - | - | 0.5 | cycles |
| Turn-off | | t_{off} | - | - | 0.5 | cycles |
| Zero-Cross Turn-On Voltage | 1st half-cycle | - | - | 2 | 10 | V |
| | Subsequent half-cycle | - | - | - | 2 | V |
| Holding Current | - | I_H | - | 0.82 | 5 | mA |
| Latching Current | - | I_L | - | 0.84 | 6 | mA |
| Operating Frequency ² | - | | 20 | - | 500 | Hz |
| Load Power Factor for Guaranteed Turn-On ³ | 60Hz | PF | 0.25 | - | - | - |
| Input Characteristics | | | | | | |
| Input Control Current to Activate ⁴ | 60Hz | I_F | - | - | 5 | mA |
| Input Drop-out Voltage | - | - | 0.8 | - | - | V |
| Input Voltage Drop | $I_F=5mA$ | V_F | 0.9 | 1.2 | 1.4 | V |
| Reverse Input Current | $V_R=5V$ | I_R | - | - | 10 | μA |
| Common Characteristics | | | | | | |
| Input to Output Capacitance | - | $C_{I/O}$ | - | - | 3 | pF |











¹ Tested at a peak value equivalent.

² Zero Cross 1st half-cycle @ <100Hz.

³ Snubber circuits may be required at low power factors.






⁴ For high-noise environments, or for high-frequency operation, use $I_F \geq 10mA$.

PERFORMANCE DATA*

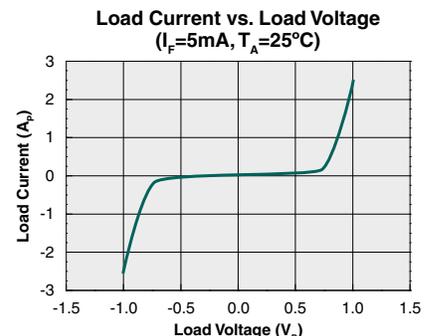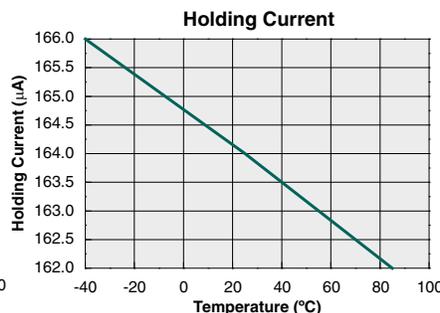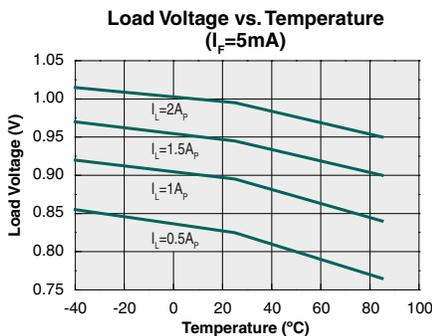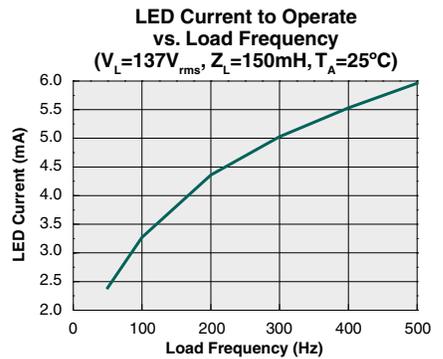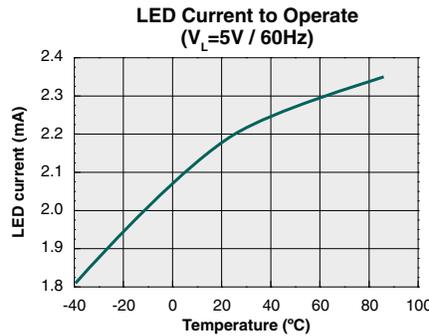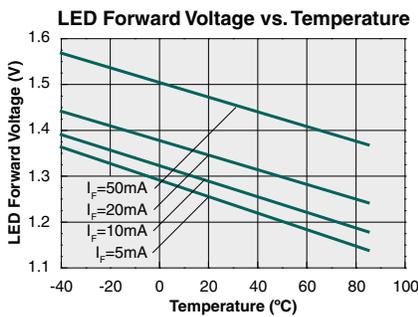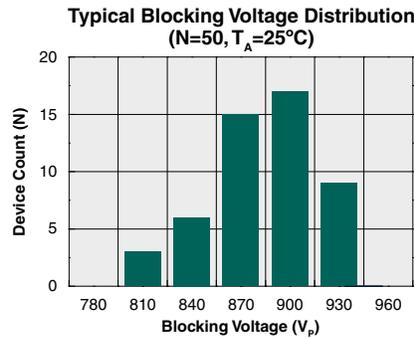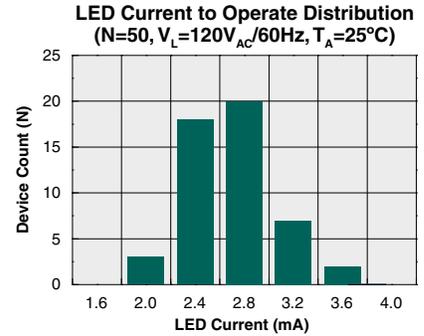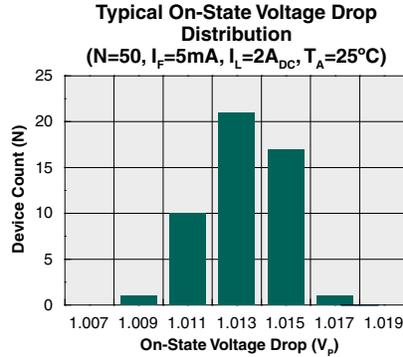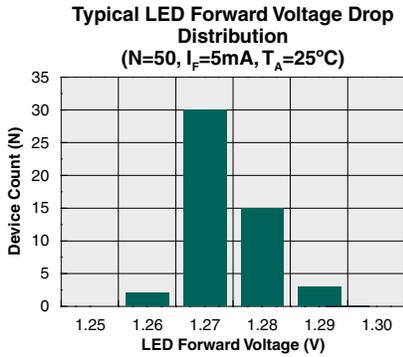

* The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

PERFORMANCE DATA*

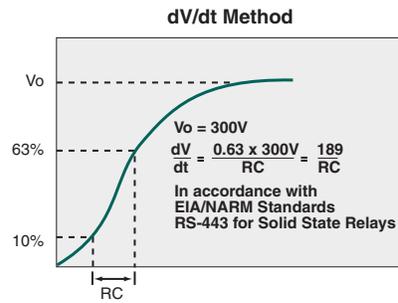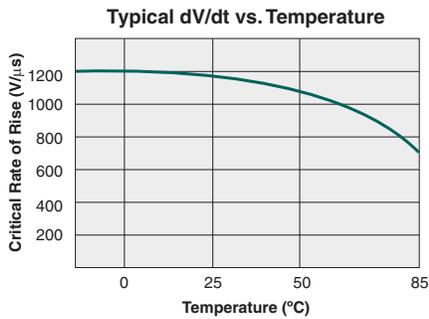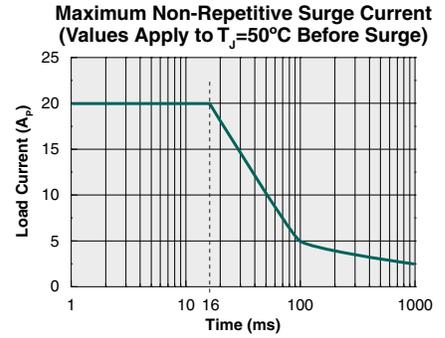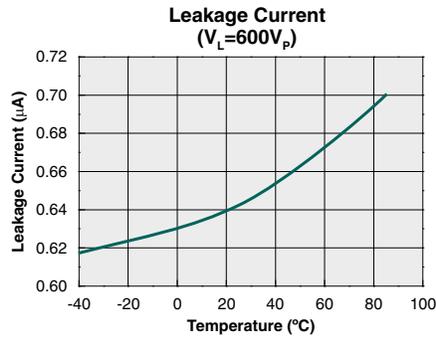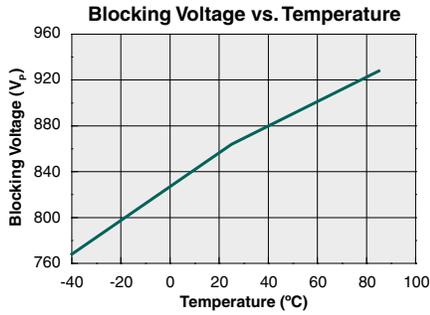

* The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

Manufacturing Information

Moisture Sensitivity



All plastic encapsulated semiconductor packages are susceptible to moisture ingress. IXYS Integrated Circuits Division classified all of its plastic encapsulated devices for moisture sensitivity according to the latest version of the joint industry standard, **IPC/JEDEC J-STD-020**, in force at the time of product evaluation. We test all of our products to the maximum conditions set forth in the standard, and guarantee proper operation of our devices when handled according to the limitations and information in that standard as well as to any limitations set forth in the information or standards referenced below.

Failure to adhere to the warnings or limitations as established by the listed specifications could result in reduced product performance, reduction of operable life, and/or reduction of overall reliability.

This product carries a **Moisture Sensitivity Level (MSL) rating** as shown below, and should be handled according to the requirements of the latest version of the joint industry standard **IPC/JEDEC J-STD-033**.

| Device | Moisture Sensitivity Level (MSL) Rating |
|----------|---|
| CPC1976Y | MSL 1 |

ESD Sensitivity



This product is **ESD Sensitive**, and should be handled according to the industry standard **JESD-625**.

Reflow Profile

This product has a maximum body temperature and time rating as shown below. All other guidelines of **J-STD-020** must be observed.

| Device | Maximum Temperature x Time |
|----------|----------------------------|
| CPC1976Y | 245°C for 30 seconds |

Board Wash

IXYS Integrated Circuits Division recommends the use of no-clean flux formulations. However, board washing to remove flux residue is acceptable. Since IXYS Integrated Circuits Division employs the use of silicone coating as an optical waveguide in many of its optically isolated products, the use of a short drying bake could be necessary if a wash is used after solder reflow processes. Chlorine- or Fluorine-based solvents or fluxes should not be used. Cleaning methods that employ ultrasonic energy should not be used.





Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331