

# BCR5PM-12LG

Triac

R07DS0086EJ0500

Medium Power Use

Rev.5.00

Sep 03, 2010

## Features

- $I_{T(RMS)}$  : 5 A
- $V_{DRM}$  : 600 V
- $I_{FGT}$ ,  $I_{RGT}$ ,  $I_{RGT III}$  : 20 mA
- $V_{iso}$  : 2000 V
- The Product guaranteed maximum junction temperature 150°C
- Insulated Type
- Planar Type
- UL Recognized : File No. E223904

## Outline

RENESAS Package code: PRSS0003AA-A  
(Package name: TO-220F)



1.  $T_1$  Terminal
2.  $T_2$  Terminal
3. Gate Terminal

## Applications

Switching mode power supply, light dimmer, electronic flasher unit, Television, Stereo system, refrigerator, Washing machine, infrared kotatsu, and carper, solenoid driver, small motor control, copying machine, electric tool, electric heater control, and other general purpose control applications

| Parameter                                              | Symbol    | Voltage class | Unit |
|--------------------------------------------------------|-----------|---------------|------|
|                                                        |           | 12            |      |
| Repetitive peak off-state voltage <sup>Note1</sup>     | $V_{DRM}$ | 600           | V    |
| Non-repetitive peak off-state voltage <sup>Note1</sup> | $V_{DSM}$ | 720           | V    |

| Parameter                      | Symbol       | Ratings     | Unit                 | Conditions                                                                           |
|--------------------------------|--------------|-------------|----------------------|--------------------------------------------------------------------------------------|
| RMS on-state current           | $I_{T(RMS)}$ | 5           | A                    | Commercial frequency, sine full wave 360°conduction, $T_c = 113^\circ\text{C}$       |
| Surge on-state current         | $I_{TSM}$    | 50          | A                    | 60Hz sinewave 1 full cycle, peak value, non-repetitive                               |
| $I^2t$ for fusion              | $I^2t$       | 10.4        | $\text{A}^2\text{s}$ | Value corresponding to 1 cycle of half wave 60Hz, surge on-state current             |
| Peak gate power dissipation    | $P_{GM}$     | 5           | W                    |                                                                                      |
| Average gate power dissipation | $P_{G(AV)}$  | 0.5         | W                    |                                                                                      |
| Peak gate voltage              | $V_{GM}$     | 10          | V                    |                                                                                      |
| Peak gate current              | $I_{GM}$     | 2           | A                    |                                                                                      |
| Junction Temperature           | $T_j$        | -40 to +150 | $^\circ\text{C}$     |                                                                                      |
| Storage temperature            | $T_{stg}$    | -40 to +150 | $^\circ\text{C}$     |                                                                                      |
| Mass                           | —            | 2.0         | g                    | Typical value                                                                        |
| Isolation voltage              | $V_{iso}$    | 2000        | V                    | $T_a = 25^\circ\text{C}$ , AC 1 minute, $T_1 \bullet T_2 \bullet G$ terminal to case |

Notes: 1. Gate open.

## Electrical Characteristics

| Parameter                                                               | Symbol                  | Min.    | Typ. | Max. | Unit                   | Test conditions                                                                         |
|-------------------------------------------------------------------------|-------------------------|---------|------|------|------------------------|-----------------------------------------------------------------------------------------|
| Repetitive peak off-state current                                       | $I_{\text{DRM}}$        | —       | —    | 2.0  | mA                     | $T_j = 150^\circ\text{C}$ , $V_{\text{DRM}}$ applied                                    |
| On-state voltage                                                        | $V_{\text{TM}}$         | —       | —    | 1.8  | V                      | $T_c = 25^\circ\text{C}$ , $I_{\text{TM}} = 7\text{ A}$ , instantaneous measurement     |
| Gate trigger voltage <sup>Note2</sup>                                   | I $V_{\text{FGTI}}$     | —       | —    | 1.5  | V                      | $T_j = 25^\circ\text{C}$ , $V_D = 6\text{ V}$ , $R_L = 6\ \Omega$ , $R_G = 330\ \Omega$ |
|                                                                         | II $V_{\text{RGTI}}$    | —       | —    | 1.5  | V                      |                                                                                         |
|                                                                         | III $V_{\text{RGTIII}}$ | —       | —    | 1.5  | V                      |                                                                                         |
| Gate trigger current <sup>Note2</sup>                                   | I $I_{\text{FGTI}}$     | —       | —    | 20   | mA                     | $T_j = 25^\circ\text{C}$ , $V_D = 6\text{ V}$ , $R_L = 6\ \Omega$ , $R_G = 330\ \Omega$ |
|                                                                         | II $I_{\text{RGTI}}$    | —       | —    | 20   | mA                     |                                                                                         |
|                                                                         | III $I_{\text{RGTIII}}$ | —       | —    | 20   | mA                     |                                                                                         |
| Gate non-trigger voltage                                                | $V_{\text{GD}}$         | 0.2/0.1 | —    | —    | V                      | $T_j = 125^\circ\text{C}/150^\circ\text{C}$ , $V_D = 1/2 V_{\text{DRM}}$                |
| Thermal resistance                                                      | $R_{\text{th (j-c)}}$   | —       | —    | 4.9  | $^\circ\text{C/W}$     | Junction to case <sup>Note3</sup>                                                       |
| Critical-rate of rise of off-state commutation voltage <sup>Note4</sup> | $(dv/dt)_c$             | 5/1     | —    | —    | $\text{V}/\mu\text{s}$ | $T_j = 125^\circ\text{C}/150^\circ\text{C}$                                             |







Notes: 2. Measurement using the gate trigger characteristics measurement circuit.

3. The contact thermal resistance  $R_{\text{th (c-f)}}$  in case of greasing is  $0.5^\circ\text{C/W}$ .


4. Test conditions of the critical-rate of rise of off-state commutation voltage is shown in the table below.

| Test conditions                                                                                                                                                                                                   | Commutating voltage and current waveforms (inductive load) |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| 1. Junction temperature<br>$T_j = 125^\circ\text{C}/150^\circ\text{C}$<br>2. Rate of decay of on-state commutating current<br>$(di/dt)_c = -2.5\text{ A/ms}$<br>3. Peak off-state voltage<br>$V_D = 400\text{ V}$ |                                                            |


## Performance Curves

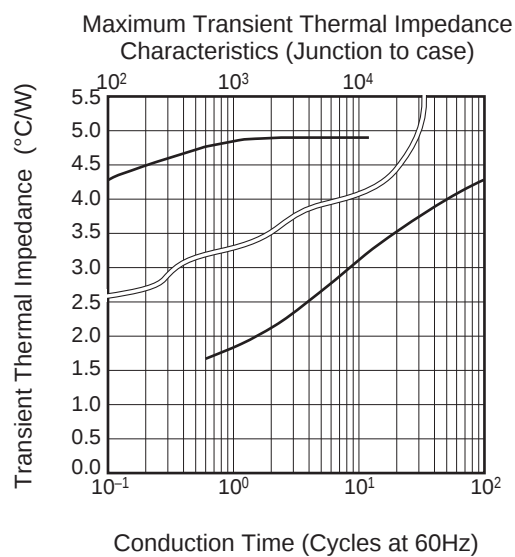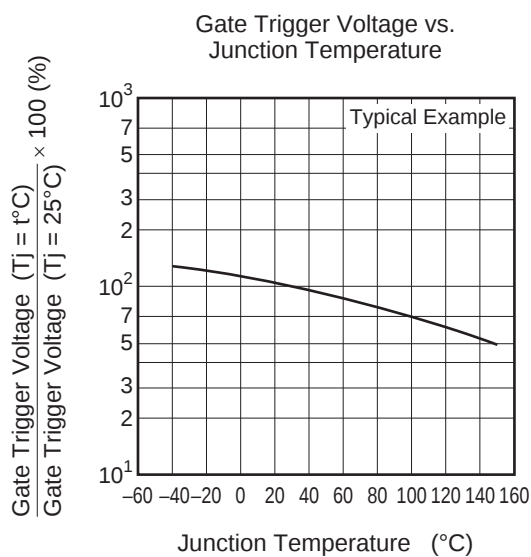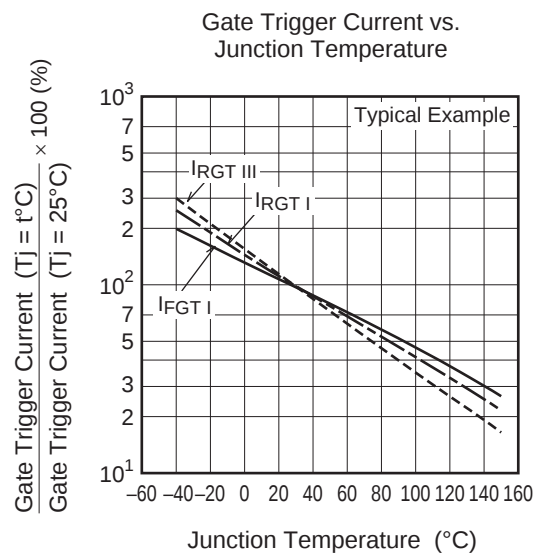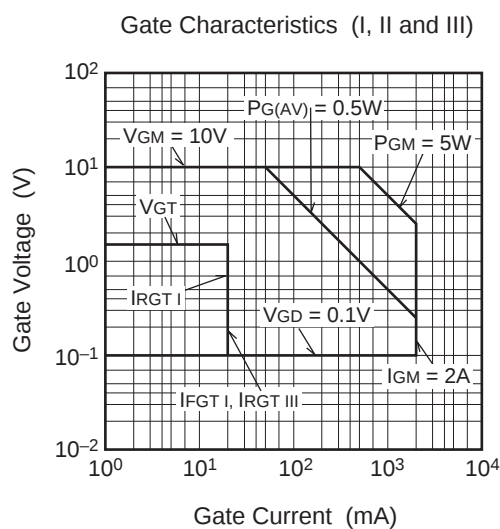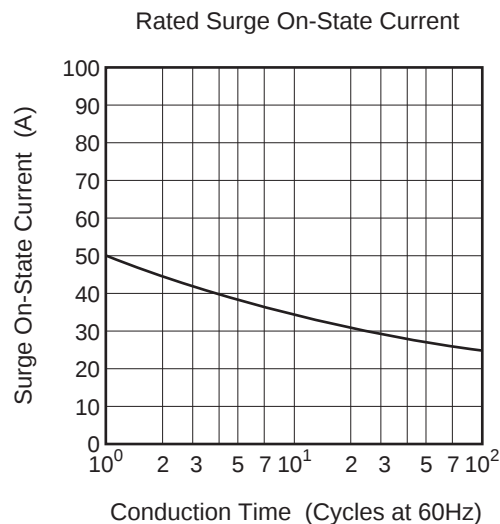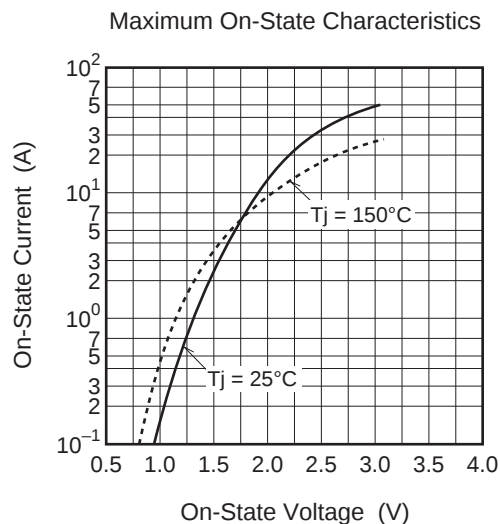


Maximum Transient Thermal Impedance Characteristics (Junction to ambient)

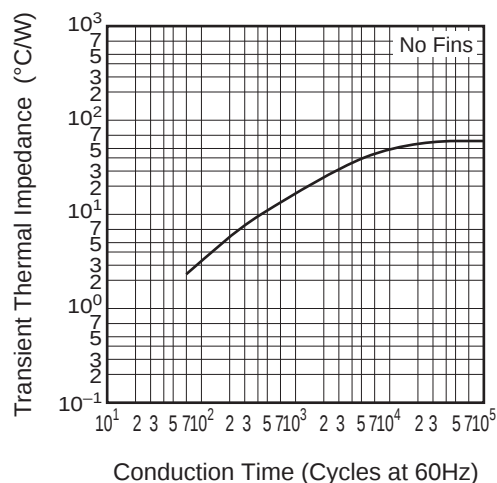


Maximum On-State Power Dissipation

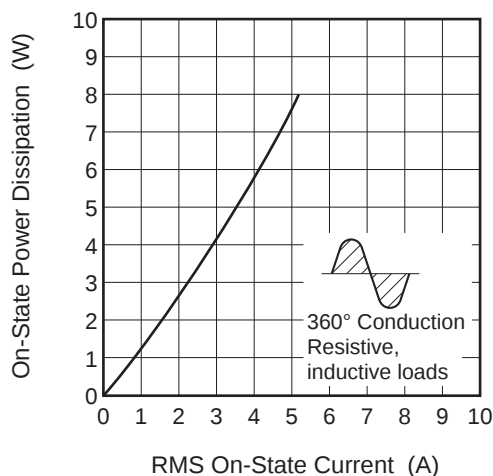


Allowable Case Temperature vs. RMS On-State Current

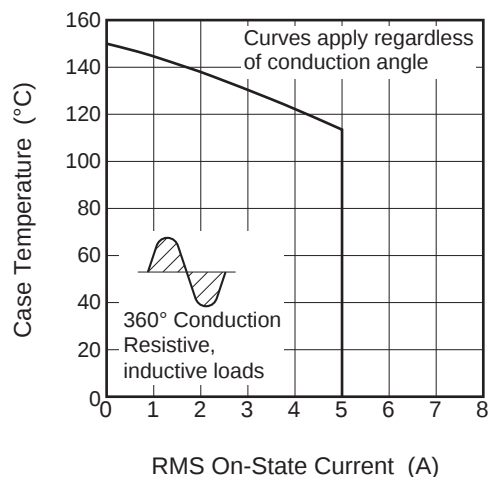


Allowable Ambient Temperature vs. RMS On-State Current






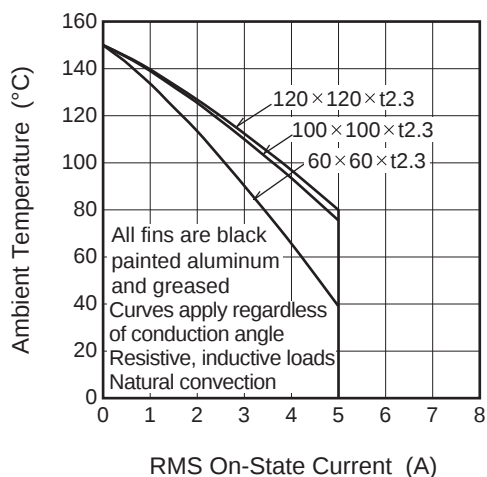



Allowable Ambient Temperature vs. RMS On-State Current

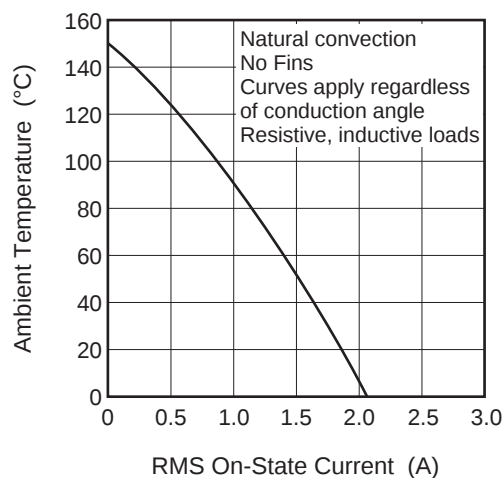


Repetitive Peak Off-State Current vs. Junction Temperature

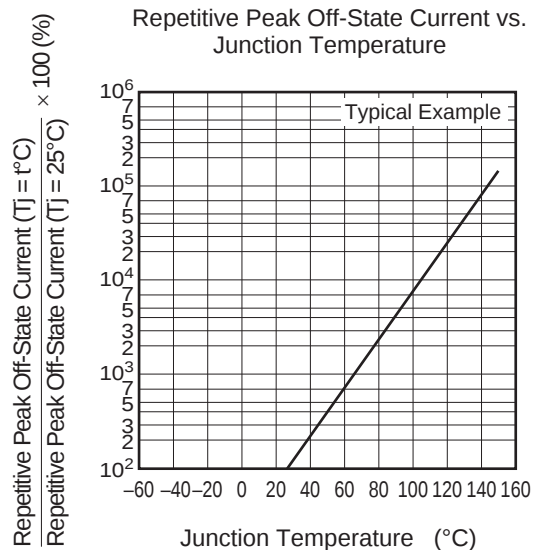

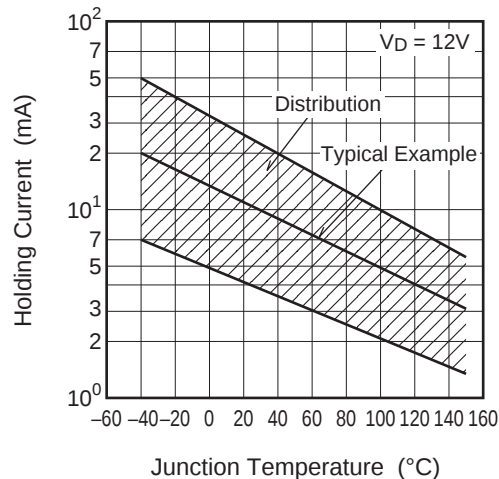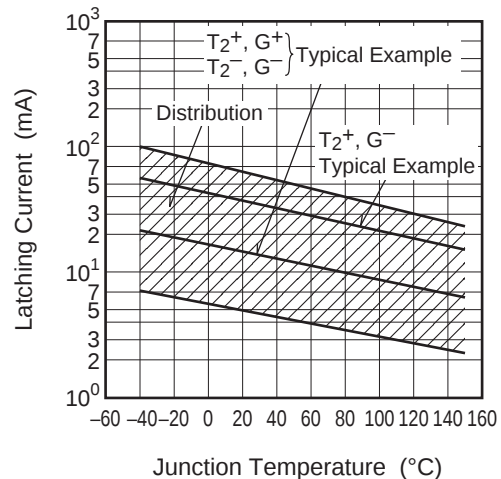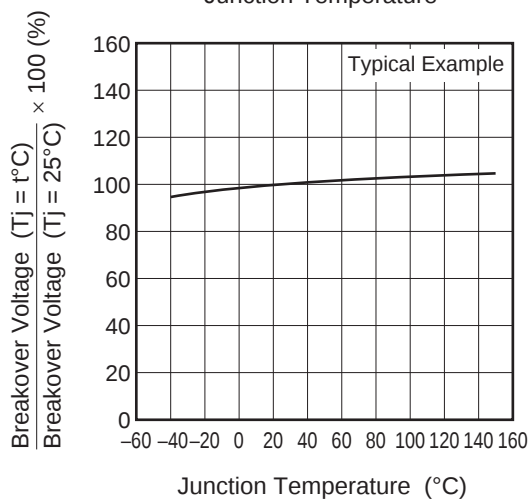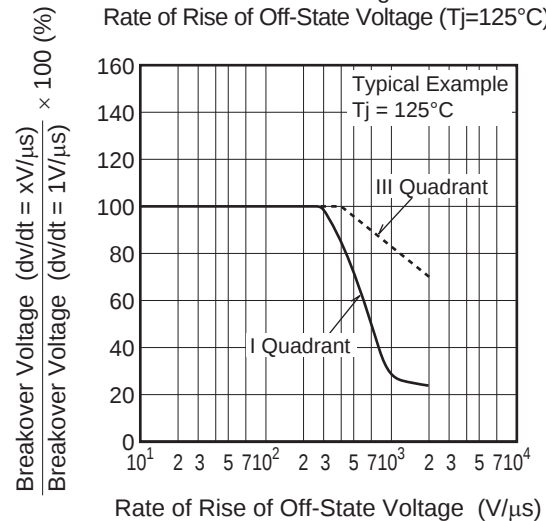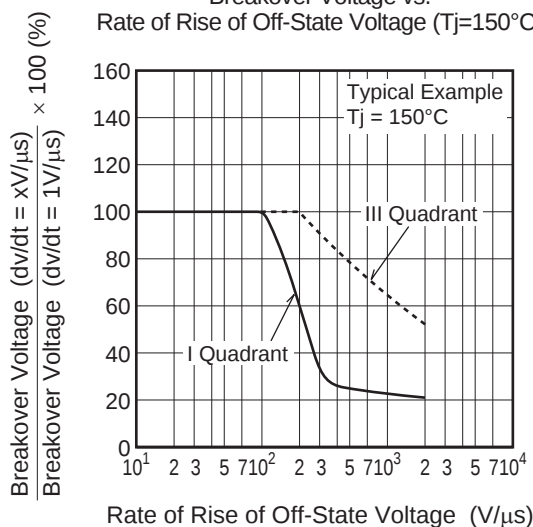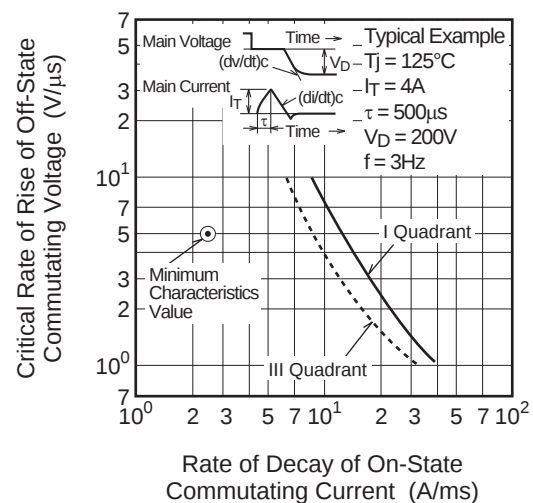
Holding Current vs.  
Junction TemperatureLatching Current vs.  
Junction TemperatureBreakover Voltage vs.  
Junction TemperatureBreakover Voltage vs.  
Rate of Rise of Off-State Voltage ( $T_J = 125^{\circ}\text{C}$ )Breakover Voltage vs.  
Rate of Rise of Off-State Voltage ( $T_J = 150^{\circ}\text{C}$ )Commutation Characteristics ( $T_J = 125^{\circ}\text{C}$ )

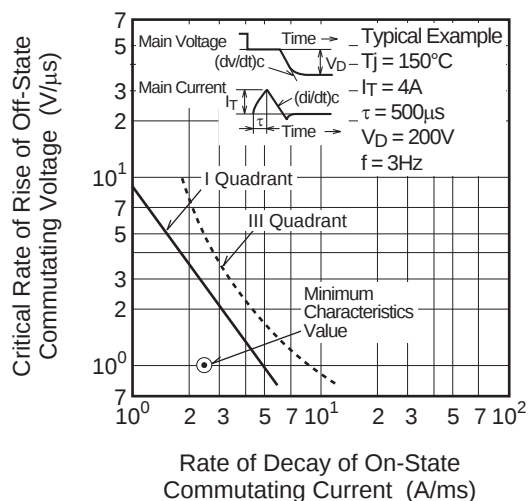Commutation Characteristics ( $T_j=150^\circ\text{C}$ )


Gate Trigger Current vs. Gate Current Pulse Width

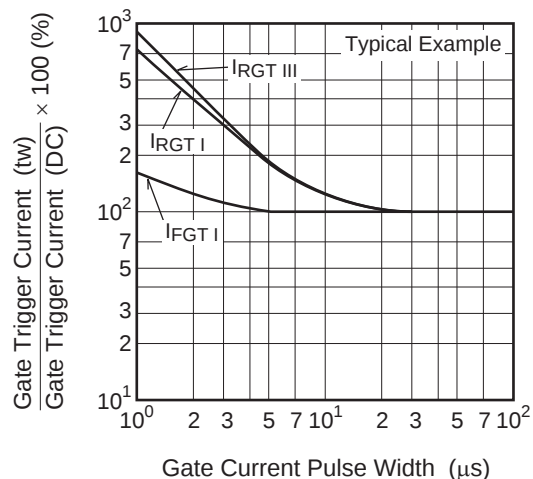

Gate Trigger Characteristics Test Circuits

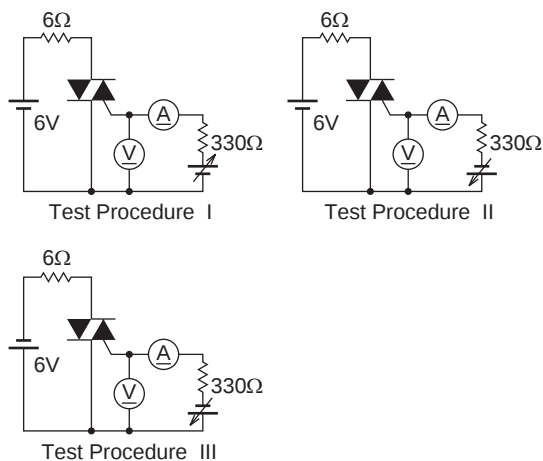


Recommended Circuit Values Around The Triac



## Package Dimensions

| Package Name | JEITA Package Code | RENESAS Code | Previous Code | MASS[Typ.] |
|--------------|--------------------|--------------|---------------|------------|
| TO-220F      | SC-67              | PRSS0003AA-A | —             | 2.0g       |

Unit: mm

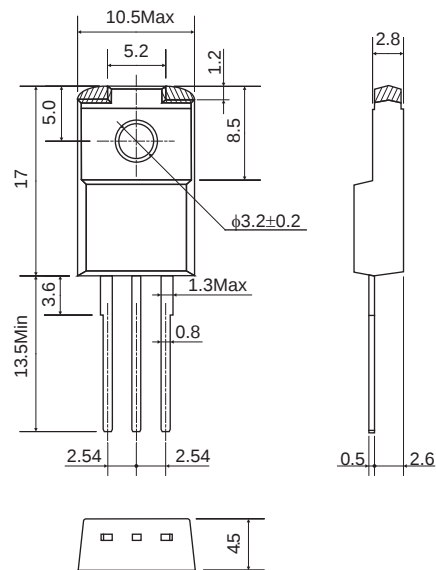

## Order Code

| Lead form     | Standard packing        | Quantity | Standard order code           | Standard order code example |
|---------------|-------------------------|----------|-------------------------------|-----------------------------|
| Straight type | Vinyl sack              | 100      | Type name                     | BCR5PM-12LG                 |
| Lead form     | Plastic Magazine (Tube) | 50       | Type name – Lead forming code | BCR5PM-12LG-A8              |

Note : Please confirm the specification about the shipping in detail.

## Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
  2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
  3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
  4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
  5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
  6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
  7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.

"Specific": Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
  8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
  9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
  10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
  11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
  12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



### SALES OFFICES

### Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

**Renesas Electronics America Inc.**  
2880 Scott Boulevard Santa Clara, CA 95050-2554, U.S.A.  
Tel: +1-408-588-6000, Fax: +1-408-588-6130

**Renesas Electronics Canada Limited**  
1101 Nicholson Road, Newmarket, Ontario L3Y 9C3, Canada  
Tel: +1-905-898-5441, Fax: +1-905-898-3220

**Renesas Electronics Europe Limited**  
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.  
Tel: +44-1628-585-100, Fax: +44-1628-585-900

**Renesas Electronics Europe GmbH**  
Arcadiastrasse 10, 40472 Düsseldorf, Germany  
Tel: +49-211-65030, Fax: +49-211-6503-1327

**Renesas Electronics (China) Co., Ltd.**  
7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China  
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

**Renesas Electronics (Shanghai) Co., Ltd.**  
Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd., Pudong District, Shanghai 200120, China  
Tel: +86-21-5877-1818, Fax: +86-21-6887-7858 / -7898

**Renesas Electronics Hong Kong Limited**  
Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong  
Tel: +852-2886-9318, Fax: +852-2886-9022/9044

**Renesas Electronics Taiwan Co., Ltd.**  
7F, No. 363 Fu Shing North Road Taipei, Taiwan  
Tel: +886-2-8175-9600, Fax: +886-2-8175-9670

**Renesas Electronics Singapore Pte. Ltd.**  
1 HarbourFront Avenue, #06-10, Keppel Bay Tower, Singapore 098632  
Tel: +65-6213-0200, Fax: +65-6278-8001

**Renesas Electronics Malaysia Sdn Bhd.**  
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia  
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

**Renesas Electronics Korea Co., Ltd.**  
11F., Samik Laviel' or Bldg., 720-2 Yeoksam-Dong, Kangnam-Ku, Seoul 135-080, Korea  
Tel: +82-2-558-3737, Fax: +82-2-558-5141



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331