



2N7002DW

Power MOSFET

300mA, 60V DUAL N-CHANNEL POWER MOSFET



DESCRIPTION

The UTC **2N7002DW** uses advanced technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with low gate voltages. This device is suitable for use as a load switch or in PWM applications.

FEATURES

- * High Density Cell Design for Low $R_{DS(ON)}$.
- * Voltage Controlled Small Signal Switch
- * Rugged and Reliable
- * High Saturation Current Capability

SYMBOL

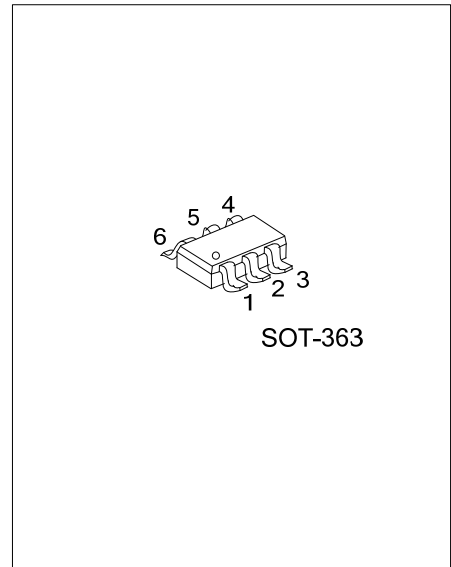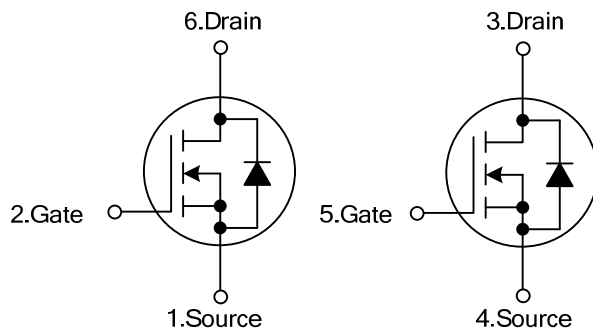


SOT-363

ORDERING INFORMATION

Ordering Number		Package	Pin Assignment						Packing
Lead Free	Halogen Free		1	2	3	4	5	6	
2N7002DWL-AL6-R	2N7002DWG-AL6-R	SOT-363	S1	G1	D2	S2	G2	D1	Tape Reel

2N7002DWG-AL6-R	(1)Packing Type	(1) R: Tape Reel
	(2)Package Type	(2) AL6: SOT-363
	(3)Halogen Free	(3) G: Halogen Free, L: Lead Free

MARKING



■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$, unless otherwise noted.)

PARAMETER	SYMBOL	RATINGS	UNIT
Drain-Source Voltage	V_{DS}	60	V
Drain-Gate Voltage ($R_{GS} \leq 1\text{M}\Omega$)	V_{DGR}	60	V
Gate Source Voltage	Continuous	± 20	V
	Non Repetitive($t_P < 50\mu\text{s}$)	± 40	
Drain Current	Continuous	300	mA
	Pulsed	800	
Power Dissipation	P_D	200	mW
Derated Above 25°C		1.6	$\text{mW}/^{\circ}\text{C}$
Junction Temperature	T_J	+ 150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55 ~ +150	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	625 (Note1)	$^{\circ}\text{C}/\text{W}$

■ ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =10μA	60			V
Drain-Source Leakage Current	I _{DSS}	V _{DS} =60V, V _{GS} =0V			1	μA
Gate-Source Leakage Current	I _{GSSF}	V _{GS} =20V, V _{DS} =0V			100	nA
	I _{GSSR}	V _{GS} =-20V, V _{DS} =0V			-100	nA
ON CHARACTERISTICS (Note 2)						
Gate Threshold Voltage	V _{GS(TH)}	V _{GS} = V _{DS} , I _D =250μA	1	2.1	2.5	V
Drain-Source On-Voltage	V _{DS (ON)}	V _{GS} = 10V, I _D =300mA		0.6	3.75	V
		V _{GS} = 5.0V, I _D =50mA		0.09	1.5	
Static Drain-Source On-Resistance	R _{DS (ON)}	V _{GS} =10V, I _D =300mA,T _J =125°C			13.5	Ω
		V _{GS} =5.0V, I _D =50mA			7.5	Ω
DYNAMIC CHARACTERISTICS						
Input Capacitance	C _{ISS}	V _{DS} =25V,V _{GS} =0V,f=1.0MHz		20	50	pF
Output Capacitance	C _{OSS}			11	25	pF
Reverse Transfer Capacitance	C _{RSS}			4	5	pF
Turn-On Time	t _{ON}	V _{DD} =30V, R _L =150Ω I _D =200mA, V _{GS} =10V R _{GEN} =25Ω			20	nS
Turn-Off Time	t _{OFF}	V _{DD} =30V, R _L =25Ω I _D =200mA, V _{GS} =10V R _{GEN} =25Ω			20	nS
DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS						
Drain-Source Diode Forward Voltage	V _{SD}	V _{GS} =0V, I _S =300mA (Note)		0.88	1.5	V
Maximum Pulsed Drain-Source Diode Forward Current	I _{SM}				0.8	A
Maximum Continuous Drain-Source Diode Forward Current	I _S				300	mA

Note: 1. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch. Minimum land pad size.

2. Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2.0\%$

■ TEST CIRCUIT AND WAVEFORM

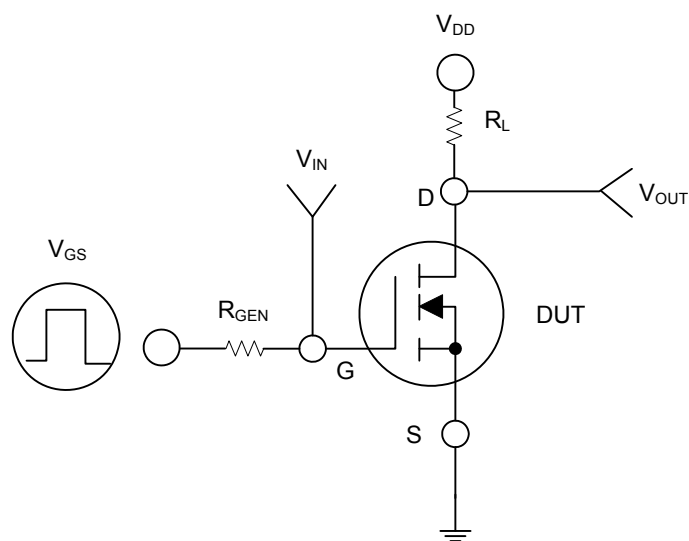


Fig. 1


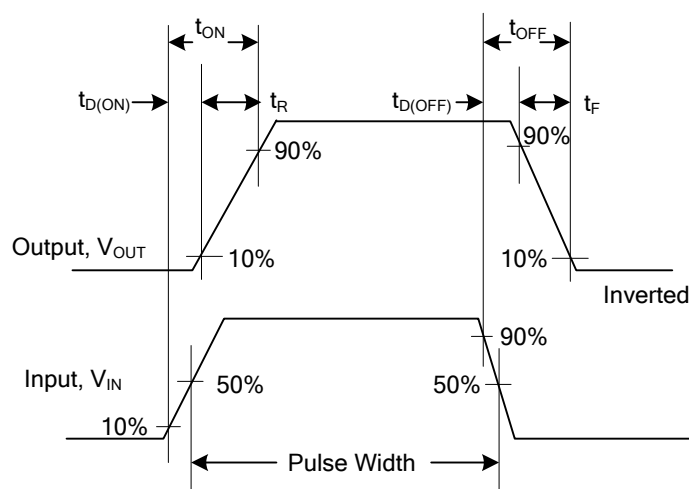



Fig. 2 Switching Waveforms

TYPICAL CHARACTERISTICS


On-Resistance Characteristics

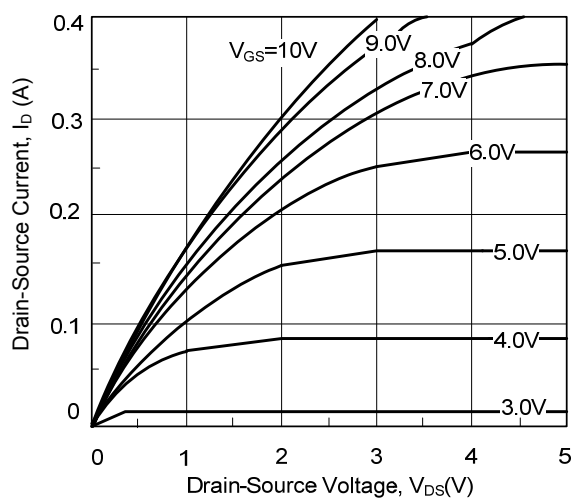


On-Resistance Variation with Gate Voltage and Drain Current

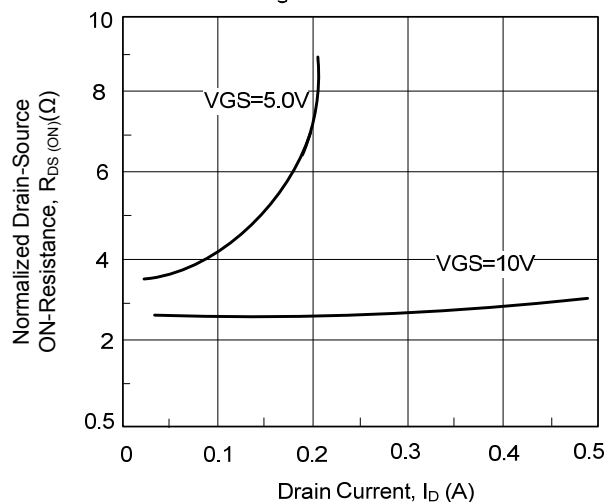


On-Resistance Variation with Temperature

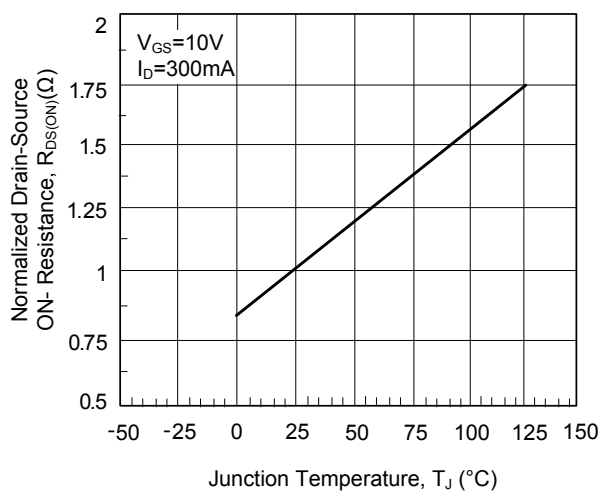


On-Resistance Variation with Drain Current and Temperature

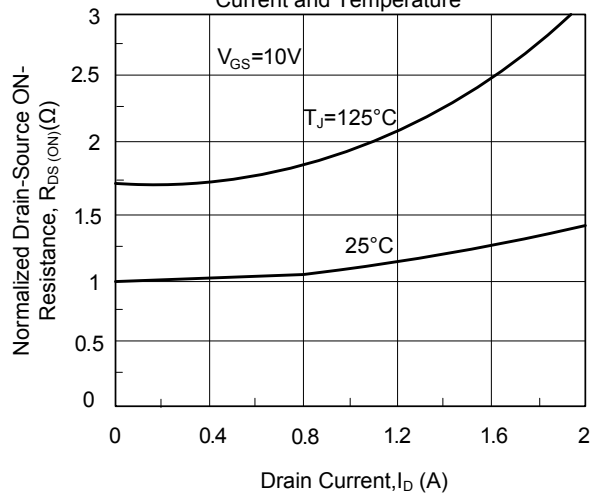

Transfer Characteristics

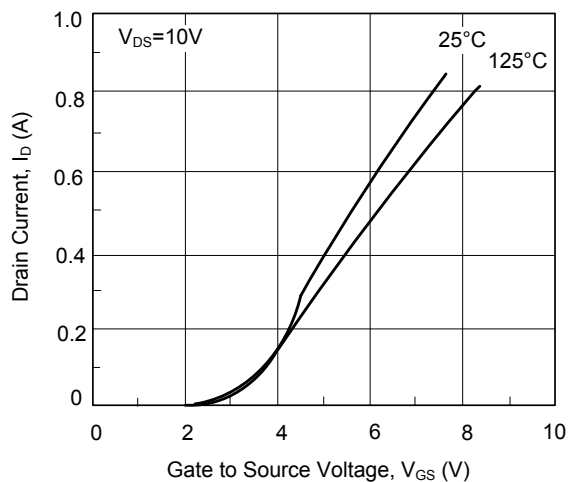


Gate Threshold Variation with Temperature

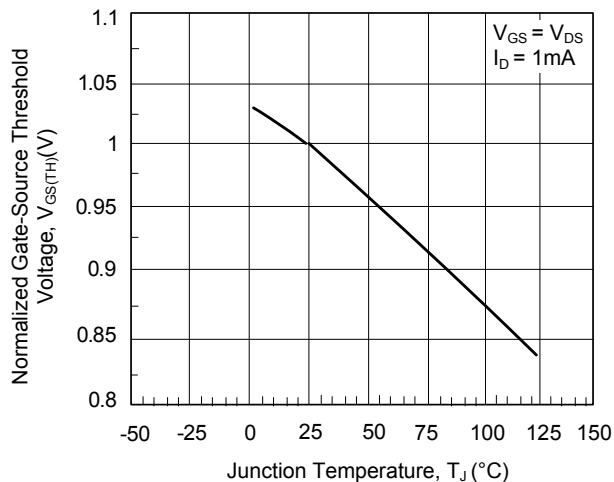


■ TYPICAL CHARACTERISTICS (Cont.)


Breakdown Voltage Variation
with Temperature

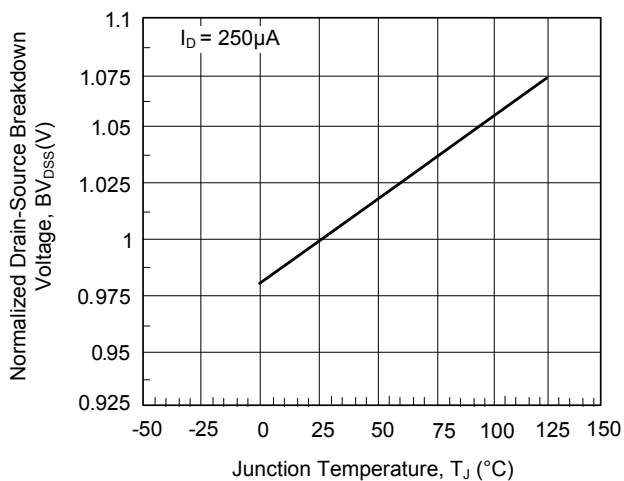


Body Diode Forward Voltage Variation
with Temperature

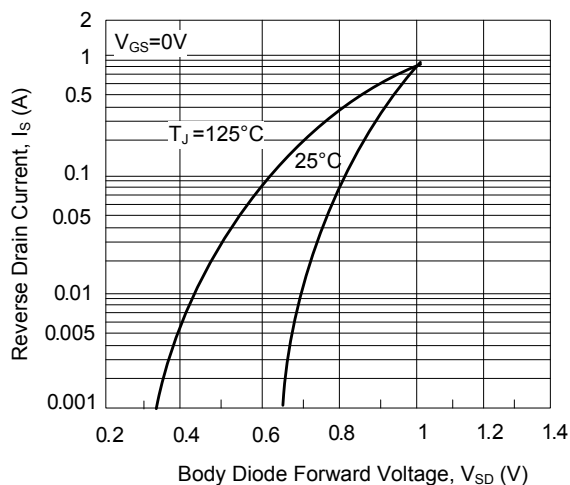


Capacitance Characteristics

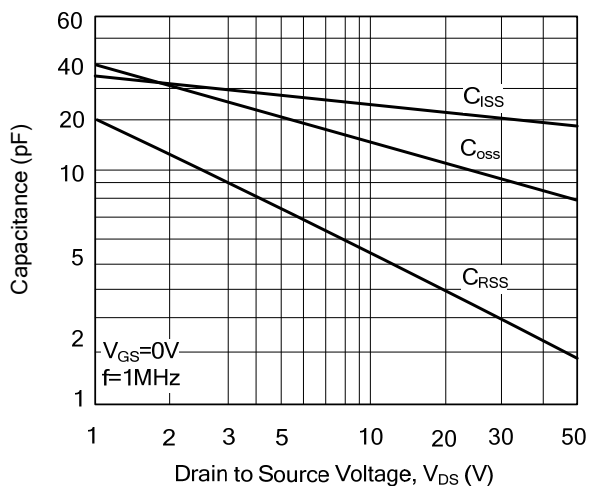


Gate Charge Characteristics

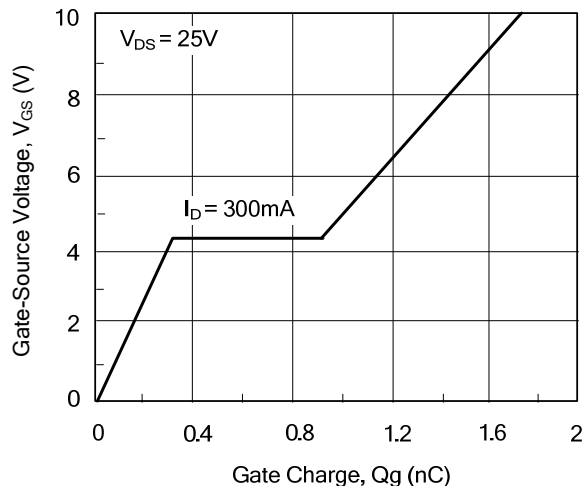

Maximum Safe Operating Area

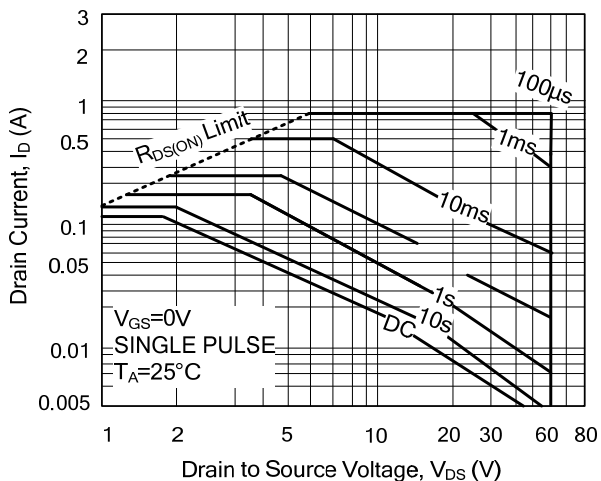

Transient Thermal Response Curve

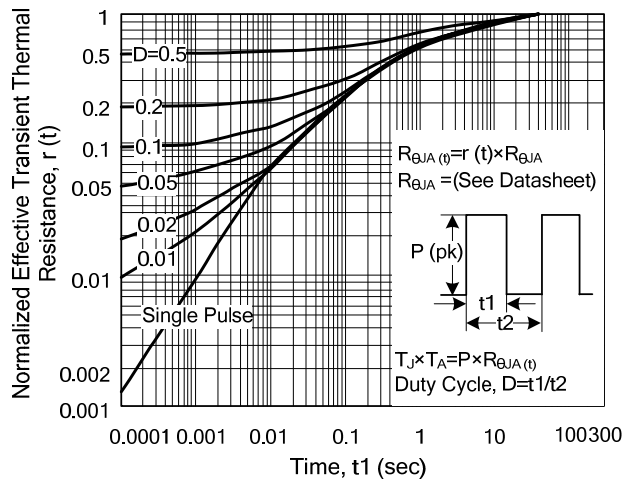

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331