

# Thermoelectric

SOLUTIONS



**Laird**  
TECHNOLOGIES®

Innovative Technology  
for a Connected World



Innovative Technology  
for a Connected World

## About Laird Technologies

Laird Technologies is the world leader in the design and manufacture of customized, performance-critical products for wireless and other advanced electronics applications. Laird Technologies partners with its customers to find solutions for applications in various industries such as:

Network Equipment  
Telecommunications  
Data Communications  
Automotive Electronics  
Computers  
Aerospace  
Military  
Medical Equipment  
Consumer Electronics

Laird Technologies offers its customers unique product solutions, dedication to research and development, as well as a seamless network of manufacturing and customer support facilities across the globe.

## A Brief Introduction to Thermoelectrics

An afterthought before, thermal management of electronics components and systems is now more challenging. Power densities continue to increase and product form factors continue to shrink; therefore, engineers must now consider thermal management technologies and their applications early in the product design process. Simple thermal management solutions, such as adding a fan or heat sink, are no longer typically viable to meet required performance and reliability specifications. In today's complex operating environment, thermoelectrics are required to provide precision cooling and heating in a variety of modular platforms including air conditioning, liquid, and direct contact designs.

### Solutions—FAST

With over 40 years' application experience, Laird Technologies finds optimal solutions – FAST! Exceptional engineering expertise in conducting in-depth thermal design studies via thermal modeling, analysis, and design allow accurate definition of your requirements. Our engineers work closely with you to determine the right solution for your application. Whether you need thermoelectric modules, commercial off-the-shelf or customized thermoelectric assemblies, Laird Technologies implements customized solutions from concept and prototype, to feasibility test and performance, through final production.

### Why do it yourself?

Due to the increasing complexities of thermal management and the constant pressure to produce more products faster, companies rely on external, specialized thermal management expertise. Laird Technologies is your thermal management partner to determine the best solution for your requirements. The company's expertise can positively change product design to deliver slimmer form factors, lower costs, and more efficient thermal management. Whether you require re-design of existing products or initial design, analysis, test of new product, Laird Technologies delivers global network support.

## Thermoelectric Applications

Whether cooling a single component or an entire cabinet, Laird Technologies provides robust units for outdoor applications and compact coolers for components in a wide array of applications. Numerous industry examples include:

### Telecom and Photonics Industry

Thermoelectrics can remove heat generated from electronic components located inside a telecom enclosure. Thermoelectrics can also be used to stabilize the sensitive optical components used in laser diodes, pump lasers, and passive optical components.

- Process fluid cooling
- Laser diode temperature stabilization
- Telecom Enclosure Cooling

### Medical and Laboratory Industry

Laird Technologies' wide range of small- and medium-size units handle most applications including temperature regulation of samples and stabilization of sensitive instruments. Our temperature controllers maintain key components with high precision. Applications include:

- Analytical instruments
- Medical lasers
- Laboratory equipment

### Food and Beverage Industry

Food and beverage temperature maintenance is crucial. Laird Technologies provides a comprehensive selection of assemblies to keep products fresh from the production line to the consumer. Applications include:

- Beverage coolers
- Small refrigerators
- Mobile food containers




## Benefits of Using Thermoelectrics

A special combination of benefits are attained by thermoelectrics that makes them the only effective solution for many thermal management applications:

- Precise temperature-control with tolerances of  $\pm 0.1^{\circ}\text{C}$  achieved under steady state conditions
- DC operation with reverse polarity to allow for heating and cooling in thermal cycling applications
- Rapid cool down below ambient temperatures
- Tight geometric space constraints and low weight requirements
- Reliable solid-state operation with no sound or vibration (lifetimes of more than 200,000 hours)
- Large temperature differentials,  $\Delta T$   $100^{\circ}\text{C}$ , with multistage cascade product line
- Power Generation from waste heat, patented ThermoTEC™ is operational up to  $225^{\circ}\text{C}$
- Virtually no electrical noise
- Environmentally friendly, no CFC refrigerants
- Low maintenance, easy to repair

## Air-Air Systems (AA)



Air-Air coolers are used to cool (or heat) objects in containers. Heat is absorbed and dissipated by heat exchangers equipped with fans. Simply cut a hole, plug in the assembly and connect it to a power source. Laird Technologies Air-Air coolers are designed for dependable, compact performance.

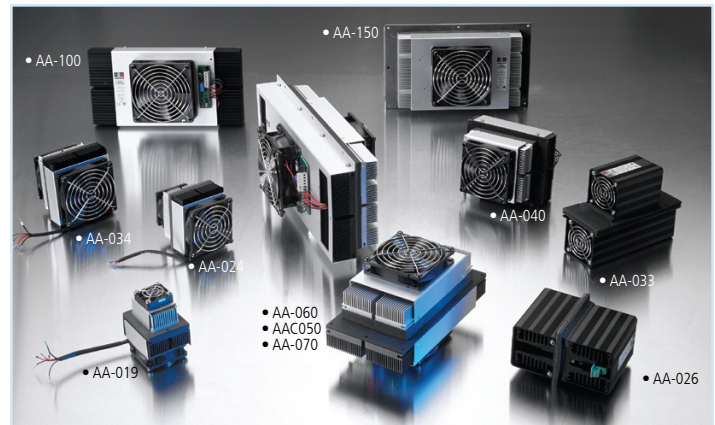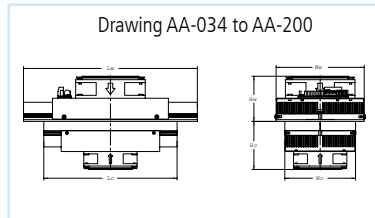

| PART NO.           | COOLING POWER | CURRENT (A) | POWER INPUT (W) | AMBIENT MAX (°C) | WEIGHT (kg) | DIMENSIONS (mm) |     |     |     |    |    |
|--------------------|---------------|-------------|-----------------|------------------|-------------|-----------------|-----|-----|-----|----|----|
|                    |               |             |                 |                  |             | Lw              | Lc  | Ww  | Wc  |    |    |
| AA-019-12-22-00-00 | 20            | 2.3         | 28              | 52               | 0.3         | 80              | 60  | 60  | 40  | 63 | 38 |
| AA-024-12-22-00-00 | 25            | 2.4         | 29              | 51               | 0.6         | 100             | 80  | 80  | 60  | 63 | 55 |
| AA-026-12-22-00-00 | 25            | 3.7         | 44              | 39               | 1.0         | 107             | 97  | 84  | 65  | 72 | 67 |
| AA-033-12-22-00-00 | 32            | 3.7         | 44              | 48               | 1.4         | 180             | 97  | 84  | 65  | 71 | 67 |
| AA-034-12-22-00-00 | 33            | 3.5         | 42              | 49               | 0.9         | 120             | 100 | 100 | 80  | 64 | 57 |
| AA-040-12-22-00-00 | 41            | 6.3         | 76              | 48               | 1.8         | 160             | 120 | 122 | 102 | 71 | 76 |
| AA-040-24-22-00-00 | 39            | 2.6         | 62              | 52               | 1.8         | 160             | 120 | 122 | 102 | 71 | 76 |
| AAC050-24-22-00-00 | 49            | 4.7         | 113             | 47               | 2.7         | 230             | 180 | 122 | 102 | 71 | 80 |
| AA-060-12-22-00-00 | 58            | 6.2         | 74              | 51               | 2.5         | 230             | 180 | 122 | 102 | 71 | 81 |
| AA-060-24-22-00-00 | 58            | 3.1         | 74              | 51               | 2.5         | 230             | 180 | 122 | 102 | 71 | 81 |
| AA-070-24-22-00-00 | 71            | 3.8         | 91              | 48               | 2.5         | 230             | 180 | 122 | 102 | 71 | 81 |
| AA-100-24-22-00-00 | 102           | 5.6         | 134             | 49               | 4.0         | 300             | 230 | 152 | 122 | 78 | 83 |
| AA-150-24-22-00-00 | 143           | 7.9         | 190             | 48               | 4.1         | 300             | 250 | 180 | 152 | 84 | 83 |
| AA-200-24-22-00-00 | 193           | 11.3        | 271             | 46               | 7.0         | 400             | 350 | 180 | 152 | 89 | 89 |

## Direct-Air Systems (DA)



Direct-Air assemblies are used in three key applications, including cooling/heating. The heat is absorbed by the cold plate, pumped through the TEC modules and then dissipated to the air by an air heat sink. Our Direct-Air coolers deliver compact and reliable cooling.

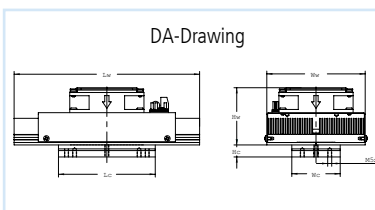

| PART NO.           | COOLING POWER | CURRENT (A) | POWER INPUT (W) | AMBIENT MAX (°C) | WEIGHT (kg) | DIMENSIONS (mm) |     |     |     |    |    |
|--------------------|---------------|-------------|-----------------|------------------|-------------|-----------------|-----|-----|-----|----|----|
|                    |               |             |                 |                  |             | Lw              | Lc  | Ww  | Wc  | Hw | Hc |
| DA-014-12-02-00-00 | 12            | 1.8         | 22              | 44               | 0.2         | 60              | 50  | 40  | 30  | 42 | 11 |
| DA-020-12-02-00-00 | 19            | 2.7         | 32              | 44               | 0.6         | 97              | 62  | 65  | 40  | 68 | 14 |
| DA-024-12-02-00-00 | 24            | 2.4         | 29              | 48               | 0.3         | 80              | 60  | 60  | 40  | 56 | 13 |
| DA-034-12-02-00-00 | 34            | 2.6         | 31              | 46               | 0.5         | 100             | 60  | 80  | 40  | 58 | 14 |
| DAC035-12-02-00-00 | 31            | 4.8         | 58              | 54               | 1.2         | 160             | 60  | 122 | 60  | 71 | 20 |
| DA-038-12-02-00-00 | 38            | 3.6         | 43              | 43               | 1.2         | 180             | 62  | 65  | 40  | 67 | 14 |
| DA-044-12-02-00-00 | 42            | 3.8         | 46              | 46               | 0.6         | 120             | 60  | 100 | 40  | 59 | 13 |
| DA-045-12-02-00-00 | 48            | 6.1         | 73              | 46               | 1.2         | 160             | 60  | 122 | 60  | 71 | 15 |
| DA-045-24-02-00-00 | 45            | 2.5         | 60              | 50               | 1.2         | 160             | 60  | 122 | 60  | 71 | 15 |
| DAC060-24-02-00-00 | 58            | 4.6         | 110             | 48               | 1.8         | 230             | 120 | 122 | 60  | 71 | 20 |
| DA-075-12-02-00-00 | 71            | 7.2         | 86              | 49               | 1.7         | 230             | 120 | 122 | 60  | 71 | 15 |
| DA-075-24-02-00-00 | 71            | 3.7         | 89              | 49               | 1.7         | 230             | 120 | 122 | 60  | 71 | 15 |
| DA-115-24-02-00-00 | 113           | 5.8         | 139             | 47               | 2.9         | 300             | 220 | 152 | 60  | 78 | 16 |
| DA-135-24-02-00-00 | 135           | 6.9         | 166             | 42               | 2.9         | 300             | 220 | 152 | 60  | 78 | 16 |
| DA-160-24-02-00-00 | 160           | 7.4         | 178             | 46               | 3.5         | 300             | 180 | 152 | 130 | 84 | 16 |

## PolarTEC™



- Porch style ceramic for increased heat dissipation
- Strong porch style lead attachments
- Full range of size, power and cooling capacities



| PART NO.             | Th=25°C                        |                |                 |              | N   | DIMENSIONS |    |    |     | WIRE<br>(152mm) |
|----------------------|--------------------------------|----------------|-----------------|--------------|-----|------------|----|----|-----|-----------------|
|                      | QMAX <sup>(1)</sup><br>(WATTS) | IMAX<br>(AMPS) | VMAX<br>(VOLTS) | TMAX<br>(°C) |     | A          | B  | C  | D   |                 |
| PT6,7,F2,3030,TA,W6  | 29                             | 6.0            | 8.1             | 65           | 71  | 30         | 30 | 34 | 3.8 | 18 AWG          |
| PT4,12,F2,3030,TA,W6 | 33                             | 3.9            | 14.4            | 65           | 127 | 30         | 30 | 34 | 3.2 | 24 AWG          |
| PT4,12,F2,4040,TA,W6 | 32                             | 3.7            | 14.4            | 67           | 127 | 40         | 40 | 44 | 4.1 | 18 AWG          |
| PT6,12,F2,4040,TA,W6 | 52                             | 6.0            | 14.4            | 65           | 127 | 40         | 40 | 44 | 3.8 | 18 AWG          |
| PT8,12,F2,4040,TA,W6 | 72                             | 8.5            | 14.4            | 64           | 127 | 40         | 40 | 44 | 3.3 | 18 AWG          |

## UltraTEC™

- High heat-pumping capacity within small surface area
- High efficiency
- Strong, porch style lead attachment
- Increased temperature differences (DT)
- Large hot side ceramic for extra heat dissipation







| PART NO.              | Th=25°C                        |                |                 |              | N   | DIMENSIONS |    |    |                  | WIRE<br>(152mm) |
|-----------------------|--------------------------------|----------------|-----------------|--------------|-----|------------|----|----|------------------|-----------------|
|                       | QMAX <sup>(1)</sup><br>(WATTS) | IMAX<br>(AMPS) | VMAX<br>(VOLTS) | TMAX<br>(°C) |     | A          | B  | C  | D <sup>(2)</sup> |                 |
| UT8,12,F2,3030,TA,W6  | 69                             | 7.9            | 14.4            | 69           | 127 | 30         | 30 | 34 | 2.6              | 20 AWG          |
| UT11,12,F2,3030,TA,W6 | 95                             | 11.0           | 14.4            | 69           | 127 | 30         | 30 | 34 | 2.4              | 22 AWG          |
| UT15,12,F2,4040,TA,W6 | 126                            | 14.6           | 14.4            | 69           | 127 | 40         | 40 | 44 | 2.8              | 20 AWG          |

## OptoTEC™


- Pb-free construction solders up to 271°C; pre-tinning available for packaging temperatures ranging from 93°C to 232°C
- Aluminum Nitride, Alumina, or Beryllia
- Custom sizes, power densities and ceramic patterns
- Wire bondable posts, metallized pads and wires

| INTERNAL SOLDERING TEMP. |     |     | PART NO.                  | Th=25°C             |      |      |            |    |    | Th=75°C             |      |            |    |    |    | DIMENSIONS |      |      |     |                |
|--------------------------|-----|-----|---------------------------|---------------------|------|------|------------|----|----|---------------------|------|------------|----|----|----|------------|------|------|-----|----------------|
| 138                      | 232 | 271 |                           | QMAX <sup>(1)</sup> | IMAX | VMAX | ΔTMAX (°C) |    |    | QMAX <sup>(1)</sup> | VMAX | ΔTMAX (°C) |    |    |    | N          | A    | B    | C   | D <sub>1</sub> |
| OT                       | -   | -   | 08,04,F0,0203,11,W2.25    | 0.22                | 0.8  | 0.5  | 67         | -  | -  | 0.24                | 0.57 | 84         | -  | -  | 4  | 1.8        | 3.4  | 3.4  | 2.4 |                |
| OT                       | -   | -   | 08,08,F0,0305,11,W2.25    | 0.44                | 0.8  | 0.9  | 67         | -  | -  | 0.49                | 1.12 | 84         | -  | -  | 8  | 3.3        | 3.3  | 4.9  | 2.4 |                |
| OT                       | -   | -   | 08,18,F2,0505,11,W2.25    | 0.97                | 0.8  | 2.2  | 67         | -  | -  | 1.09                | 2.59 | 84         | -  | -  | 18 | 5          | 5    | 6.7  | 2.4 |                |
| OT                       | -   | -   | 12,12,F0,0406,11,W2.25    | 0.97                | 1.2  | 1.5  | 67         | -  | -  | 1.09                | 1.72 | 84         | -  | -  | 12 | 4.2        | 6.2  | 6.2  | 2.7 |                |
| OT                       | -   | HOT | 12,18,F2A,0606,11,W2.25   | 1.46                | 1.2  | 2.1  | 67         | -  | 64 | 1.72                | 2.50 | 84         | -  | 81 | 18 | 6.0        | 6.2  | 7.2  | 2.7 |                |
| OT                       | -   | -   | 08,32,F2,0707,11,W2.25    | 1.72                | 0.8  | 3.9  | 67         | -  | -  | 1.95                | 4.60 | 84         | -  | -  | 32 | 6.6        | 6.6  | 8.3  | 2.4 |                |
| OT                       | -   | -   | 15,30,F2A,0610,11,W2.25   | 3.03                | 1.5  | 3.6  | 67         | -  | -  | 3.50                | 4.2  | 84         | -  | -  | 30 | 6.2        | 10.3 | 12.3 | 2.1 |                |
| OT                       | -   | -   | 08,66,F0,1009,11,W2.25    | 3.60                | 0.8  | 7.9  | 67         | -  | -  | 4.4                 | 9.2  | 84         | -  | -  | 66 | 9.8        | 8.9  | 11.4 | 2.4 |                |
| OT                       | ET  | -   | 20,30,F2A,0610,11,W2.25   | 4.0                 | 2.0  | 3.6  | 67         | 67 | -  | 4.7                 | 4.2  | 84         | 84 | -  | 30 | 6.2        | 10.3 | 12.3 | 1.8 |                |
| -                        | -   | HOT | 20,31,F2A,0909,11,W2.25   | 4.2                 | 2.0  | 3.5  | -          | -  | 64 | 4.7                 | 4.5  | -          | -  | 81 | 31 | 8.8        | 8.8  | 11.0 | 2.2 |                |
| -                        | ET  | -   | 20,31,F1A,0909,11,W2.25   | 4.2                 | 2.0  | 3.5  | -          | 67 | -  | 4.7                 | 4.5  | -          | 84 | -  | 31 | 8.8        | 8.8  | 8.8  | 2.2 |                |
| -                        | ET  | -   | 19,35,F1N,0612,11,W2.25** | 4.64                | 1.9  | 4.2  | -          | 65 | -  | 5.28                | 4.9  | -          | 81 | -  | 35 | 6.0        | 12.2 | 6.0  | -   |                |
| -                        | -   | HOT | 12,65,F2A,1312,11,W2.25   | 5.34                | 1.2  | 7.8  | -          | -  | 64 | 5.9                 | 9.3  | -          | -  | 81 | 65 | 13.2       | 12.1 | 13.2 | 2.7 |                |
| OT                       | -   | -   | 15,66,F0,1211,11,W2.25    | 6.7                 | 1.5  | 8.0  | 67         | -  | -  | 7.5                 | 9.5  | 84         | -  | -  | 66 | 12.3       | 11.3 | 14.4 | 2.4 |                |
| -                        | -   | HOT | 20,65,F2A,1312,11,W2.25   | 8.76                | 2.0  | 7.8  | -          | -  | 64 | 9.90                | 9.3  | -          | -  | 81 | 65 | 13.2       | 12.1 | 13.2 | 2.2 |                |
| OT                       | -   | -   | 20,66,F0,1211,11,W2.25    | 8.80                | 2.0  | 7.8  | 67         | -  | -  | 10.0                | 9.5  | 84         | -  | -  | 66 | 12.1       | 11.1 | 14.2 | 2.5 |                |



## Center Hole

- Features center hole for transmission of light, wires, probes or other hardware through the TEC
- Round or square configurations available





| PART NO.             | Th=25°C                        |                |                 |               | N   | DIMENSIONS |      |      |                  |      |
|----------------------|--------------------------------|----------------|-----------------|---------------|-----|------------|------|------|------------------|------|
|                      | QMAX <sup>(1)</sup><br>(WATTS) | IMAX<br>(AMPS) | VMAX<br>(VOLTS) | ΔTMAX<br>(°C) |     | A          | B    | C    | D <sup>(2)</sup> | E    |
| RH14,14,10,L1,W4.5   | 3.7                            | 3.9            | 1.7             | 68            | 14  | 26         | 26   | 26   | 4.7              | 14.0 |
| RH14,14,06,L1,W4.5   | 5.7                            | 6.0            | 1.7             | 67            | 14  | 26         | 26   | 26   | 3.8              | 14.0 |
| RH14,32,06,L1,W4.5   | 12.9                           | 6.0            | 3.9             | 67            | 32  | 44         | 55   | 55   | 3.8              | 27.0 |
| SH10,23,06,L1,W4.5   | 4.7                            | 3.0            | 2.8             | 67            | 23  | 15         | 15   | 15   | 3.6              | 7.2  |
| SH08,28,05,L1,W4.5   | 4.9                            | 2.6            | 3.9             | 67            | 28  | 14.7       | 10.3 | 14.7 | 3.1              | 4.4  |
| SH10,125,05,L1,W4.5  | 32.9                           | 3.9            | 15.2            | 67            | 125 | 30         | 30   | 30   | 3.2              | 3.6  |
| SH14,125,10,L1,W4.5  | 32.9                           | 3.9            | 15.2            | 68            | 125 | 40         | 40   | 40   | 4.7              | 4.7  |
| SH14,125,06,L1,W4.5  | 50.7                           | 6.0            | 15.2            | 67            | 125 | 40         | 40   | 40   | 3.8              | 4.7  |
| SH14,125,045,L1,W4.5 | 67.7                           | 8.5            | 15.2            | 65            | 125 | 40         | 40   | 40   | 3.3              | 4.7  |

Notes: 1) QMax rated value at  $T = 0^\circ$ , Imax and Vmax, Th = 25°C; 2) Thickness for non-metallized versions only. All modules are lead-free. For wiring options contact Laird Technologies.

## CP Series


- Low-cost, high-performance
- Designed for higher current, larger heat pumping applications
- Standard for consumer product and industrial cooling
- Ideal for instrumentation and consumer applications
- Excellent for applications from commercial to military



| PART NO.            | Th=25°C                        |                |                 |           | N   | DIMENSIONS (mm) |    |    |                  |
|---------------------|--------------------------------|----------------|-----------------|-----------|-----|-----------------|----|----|------------------|
|                     | QMAX <sup>(1)</sup><br>(WATTS) | IMAX<br>(AMPS) | VMAX<br>(VOLTS) | TMAX (°C) |     | A               | B  | C  | D <sup>(2)</sup> |
| CP08,31,06,L1,W4.5  | 4.4                            | 2.1            | 3.8             | 67        | 31  | 12              | 12 | 12 | 3.4              |
| CP10,31,08,L1,W4.5  | 5.3                            | 2.5            | 3.8             | 67        | 31  | 15              | 15 | 15 | 4                |
| CP10,31,05,L1,W4.5  | 8.2                            | 3.9            | 3.8             | 67        | 31  | 15              | 15 | 15 | 3.2              |
| CP08,63,06,L1,W4.5  | 9                              | 2.1            | 7.6             | 67        | 63  | 12              | 25 | 12 | 3.4              |
| CP10,63,06,L1,W4.5  | 12.7                           | 3              | 7.6             | 67        | 63  | 15              | 30 | 15 | 3.6              |
| CP10,71,06,L1,W4.5  | 14.4                           | 3              | 8.6             | 67        | 71  | 23              | 23 | 23 | 3.6              |
| CP10,63,05,L1,W4.5  | 16.6                           | 3.9            | 7.6             | 67        | 63  | 15              | 30 | 15 | 3.2              |
| CP08,127,06,L1,W4.5 | 18.1                           | 2.1            | 15.4            | 67        | 127 | 25              | 25 | 25 | 3.4              |
| CP14,35,045,L1,W4.5 | 19                             | 8.5            | 4.2             | 65        | 35  | 15              | 30 | 15 | 3.3              |
| CP10,127,08,L1,W4.5 | 21.4                           | 2.5            | 15.4            | 67        | 127 | 30              | 30 | 30 | 4                |
| CP10,127,06,L1,W4.5 | 25.7                           | 3              | 15.4            | 67        | 127 | 30              | 30 | 30 | 3.6              |
| CP14,71,06,L1,W4.5  | 28.7                           | 6              | 8.6             | 67        | 71  | 30              | 30 | 30 | 3.8              |
| CP10,127,05,L1,W4.5 | 33.4                           | 3.9            | 15.4            | 67        | 127 | 30              | 30 | 30 | 3.2              |
| CP14,71,045,L1,W4.5 | 38.5                           | 8.5            | 8.6             | 65        | 71  | 30              | 30 | 30 | 3.3              |
| CP14,127,06,L1,W4.5 | 51.4                           | 6              | 15.4            | 67        | 127 | 40              | 40 | 40 | 3.8              |

## ThermaTEC™



- High-temperature cooling
- Unique patented technology works up to +225°C
  - Full range of size, power, and cooling capacities
  - Superior cycling capacity
  - Solid state reliability
  - Strong, porch-style lead attachment
  - Generates power from waste heat



| PART NO.               | Th=25°C                        |                |                 |           | N   | DIMENSIONS (mm) |    |    |                  |
|------------------------|--------------------------------|----------------|-----------------|-----------|-----|-----------------|----|----|------------------|
|                        | QMAX <sup>(1)</sup><br>(WATTS) | IMAX<br>(AMPS) | VMAX<br>(VOLTS) | TMAX (°C) |     | A               | B  | C  | D <sup>(2)</sup> |
| HT4,6,F2,2143,TA,W6    | 16.0                           | 3.7            | 7.2             | 64        | 63  | 21              | 38 | 43 | 4.1              |
| HT4,7,F2,3030,TA,W6    | 18.0                           | 3.7            | 8.1             | 67        | 71  | 30              | 30 | 34 | 4.1              |
| HT2,12,F2,3030,TA,W6   | 20.0                           | 2.3            | 14.4            | 63        | 127 | 30              | 30 | 34 | 3.6              |
| HT9,3,F2,2525,11,TA,W6 | 20.0                           | 9.6            | 3.6             | 66        | 31  | 25              | 25 | 29 | 4.9              |
| HT3,12,F2,3030,TA,W6   | 24.0                           | 2.8            | 14.4            | 63        | 127 | 30              | 30 | 34 | 3.2              |
| HT4,12,F2,4040,TA,W6   | 32.0                           | 3.7            | 14.4            | 64        | 127 | 40              | 40 | 44 | 4.1              |
| HT4,12,F2,3030,TA,W6   | 33.0                           | 3.9            | 14.4            | 63        | 127 | 30              | 30 | 34 | 3.2              |
| HT8,7,F2,3030,TA,W6    | 39.0                           | 8.5            | 8.1             | 63        | 71  | 30              | 30 | 34 | 3.3              |
| HT6,12,F2,4040,TA,W6   | 51.0                           | 6.0            | 14.4            | 63        | 127 | 40              | 40 | 44 | 3.6              |
| HT8,12,F2,4040,TA,W6   | 72.0                           | 8.5            | 14.4            | 63        | 127 | 40              | 40 | 44 | 3.3              |

## Multistage

- Ideal for requirements with large temperature differentials ( $\Delta T$ ) up to 131°C
- Standard designs meet most multistage requirements
- Custom designs available to meet any multistage application



| PART NO.                  | Th=25°C                  |                                |                |                 | DIMENSIONS (mm) |      |      |      |                  |
|---------------------------|--------------------------|--------------------------------|----------------|-----------------|-----------------|------|------|------|------------------|
|                           | $\Delta T_{MAX}$<br>(°C) | QMAX <sup>(1)</sup><br>(WATTS) | IMAX<br>(AMPS) | VMAX<br>(VOLTS) | A               | B    | C    | D    | E <sup>(2)</sup> |
| MS2,010,06,06,11,11,11,W8 | 92                       | 0.35                           | 1.1            | 0.9             | 3.2             | 3.2  | 3.9  | 3.9  | 4.2              |
| MS2,024,06,06,11,11,11,W8 | 92                       | 0.81                           | 1.1            | 2.2             | 4.1             | 4.1  | 6.1  | 6.1  | 4.6              |
| MS2,049,10,10,15,15,11,W8 | 87                       | 3.4                            | 2.1            | 3.8             | 11.5            | 11.5 | 15   | 15   | 6.6              |
| MS2,049,14,14,15,15,11,W8 | 87                       | 6.6                            | 4.0            | 3.8             | 15              | 15   | 20   | 20   | 7.2              |
| MS2,107,10,10,12,12,11,W8 | 89                       | 9.2                            | 3              | 9.2             | 22.6            | 22.6 | 22.6 | 22.6 | 6.25             |
| MS2,190,10,10,12,12,11,W8 | 87                       | 16.4                           | 2.8            | 15.7            | 30              | 30   | 30   | 30   | 6.5              |
| MS2,192,14,20,11,18,11,W8 | 87                       | 39.9                           | 6.7            | 15.6            | 40              | 40   | 40   | 40   | 8.1              |
| MS2,192,14,20,15,25,11,W8 | 88                       | 27.3                           | 4.4            | 16              | 40              | 40   | 40   | 40   | 8.1              |
| MS3,070,20,25,11,W8       | 118                      | 3                              | 6.5            | 6.5             | 14              | 8    | 36   | 36   | 16               |
| MS3,119,14,15,11,W8       | 100                      | 7.5                            | 3.9            | 8               | 15              | 15   | 30   | 30   | 10.4             |
| MS3,119,20,15,11,W8       | 100                      | 14.9                           | 8              | 8.2             | 22              | 22   | 44   | 44   | 12.9             |
| MS3,231,10,15,11,W8       | 104                      | 6.9                            | 1.9            | 15.5            | 15              | 15   | 30   | 30   | 9.5              |
| MS4,115,14,15,11,W8       | 122                      | 2.6                            | 3.5            | 7.6             | 14.5            | 4.5  | 33   | 24   | 13.8             |
| MS4,129,10,15,11,W8       | 115                      | 1.9                            | 1.8            | 8.2             | 8               | 8    | 23   | 23   | 12.5             |
| MS5,257,10,15,11,W8       | 123                      | 2                              | 1.5            | 14.5            | 8               | 8    | 30   | 30   | 15.4             |

Notes: 1) QMax rated value at  $\Delta T = 0^\circ$ , Imax and Vmax, Th = 25°C; 2) Thickness for non-metallized versions only. All modules are lead-free. For wiring options contact Laird Technologies.


# MRC Series Recirculating Thermoelectric Chillers

| MODEL             | WATTS | CONTROL TEMP RANGE |
|-------------------|-------|--------------------|
| MRC300,DH2,HT,DVN | 299   | 2°C to 40°C        |
| MRC150,DH2,HT,DVN | 151   | 2°C to 40°C        |

MRC series chillers are designed to cool lasers and other applications in the medical, photonics and semiconductor industries. Cooling capacities range from 150 Watts to 300 Watts. All models come with a high precision temperature controller. Heating, RS232, 115VAC or 230VAC options available.



# AZTEC™ Thermoelectric Design Software

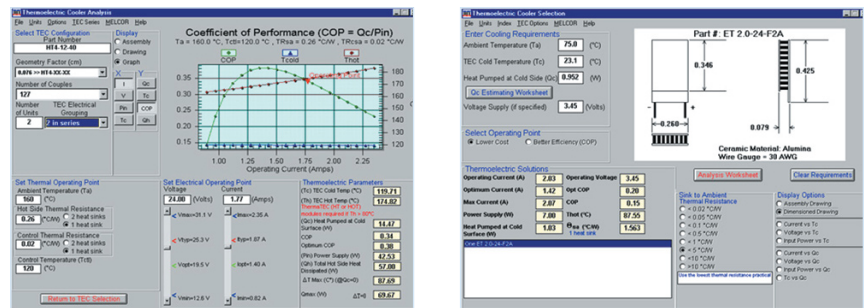

Leave it to a world leading manufacturer of thermoelectric cooling products to provide a handy, Windows-based software program that takes the engineer through every step of thermoelectric design from A to Z. AZTEC™ is an easy-to-use program that runs in most Windows versions. Available as a FREE download from our website, it includes thermal load estimating for both passive and active components, as well as for enclosures.

USA: +1 888.246.9050  
Europe: +46.31.420530  
Asia: +86.755.2714.1166

clv.customerpos@lairdtech.com  
www.lairdtech.com

## BRO-THRELECTRIC 1008

Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies domestic terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request. damages of any kind. All Laird Technologies' products are sold pursuant to the Laird Technologies' domestic terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© 2008 All Rights Reserved. Laird Technologies is a registered trademark of Laird Technologies, Inc.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331