

SERIES 1881 - SINGLE-POLE ROUND ROCKER SWITCHES

TO 12 (4) A 250 V AC



PRODUCT FEATURES

- ◆ Attractive round rocker switch
- ◆ High mechanical rating with at least 100 000 switching cycles
- ◆ Variants with IP 51
- ◆ Low depth with 18.7 mm
- ◆ Appliance cut-out with 20 mm

ON REQUEST


- ◆ Other colors
- ◆ Other printing variants
- ◆ Other terminal variants (e.g. PCB)
- ◆ Cable assembly
- ◆ Gold-plated contacts for low voltages
- ◆ Other switching functions (e.g. 1888 - middle off)
- ◆ Painted variants
- ◆ PVC-protection cap

Mechanical life endurance	10E4
Operating force	3 N
Inrush current (capacitive)	70 A
Contact resistance (new condition)	< 100 mOhm (1 A 12 V DC)
Insulation resistance (new condition)	> 100 MOhm (500 V DC)
Proof tracking	250 PTI
Protection type	IP 40 and IP 51 (product-dependent)
Ambient temperature	terminal side -20 °C ... +100 °C actuating side -20 °C ... +55 °C
Flammability	UL 94 V-2 UL 94 V-0 (product-dependent)
Glow wire test temperature	850 °C
Material	actuator PA housing PA terminals silver plated
Plug force of the terminals	≤ 80 N
Approval marks	 /  /  / 
Suitable for appliances of protection class II	



SERIES 1881 - SINGLE-POLE ROUND ROCKER SWITCHES

TO 12 (4) A 250 V AC

 single-pole	Actuator color / printing	Housing color	12 (4) A 250 V AC 1E4	10 (4) A 250 V AC 1E4	8 (8) A 250 V AC 5E4	6 (4) A 250 V AC 5E4	15 A 250 V AC 1 1/2 HP	15 A 125 V AC 3/4 HP	10 A 250 V AC 1/2 HP	10 A 125 V AC 1/3 HP	Terminal type	Terminal description	Contact distance in mm	Contact material	Actuator	EN 60335 cap. 30 conform "G"	Miscellaneous	Stock version
ON / OFF switch (SPST)																		
1881.1103			●	●	●	●	●	●	●	●		4.8	≥ 3	Ag	IP 40			●
1881.1104			●	●	●	●	●	●	●	●		4.8	≥ 3	Ag	IP 40			●
1881.1105			●	●	●	●	●	●	●	●		4.8	≥ 3	Ag	IP 40			
1881.1106			●	●	●	●	●	●	●	●		4.8	≥ 3	Ag	IP 40	●		
1881.1108			●	●	●	●	●	●	●	●		4.8	≥ 3	Ag	IP 51	●	with switching system cover	
1881.1109			●	●	●	●	●	●	●	●		4.8	≥ 3	Ag	IP 40			
1881.1111			●	●	●	●	●	●	●	●		4.8	≥ 3	Ag	IP 40			
1881.1112			●	●	●	●	●	●	●	●		1 mm longer 4.8	≥ 3	Ag	IP 51	●	with switching system cover	
Normally open contact (SPNO)																		
1881.1209			●	●	●	●	●	●	●	●		4.8	≥ 3	Ag	IP 51		with switching system cover opening terminal 1b closed	
Changeover switch (SPDT)																		
1883.1105			●	●	●	●	●	●	●	●		4.8	≥ 3	Ag	IP 40			
1883.1106			●	●	●	●	●	●	●	●		4.8	≥ 3	Ag	IP 40	●		

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES


SENSORS

SERIES 1881 - SINGLE-POLE ROUND ROCKER SWITCHES


TO 12 (4) A 250 V AC




Basic type 1881

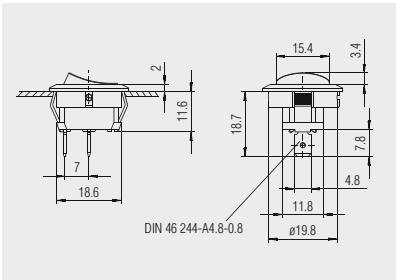

Quick-connect terminal 4.8 x 0.8

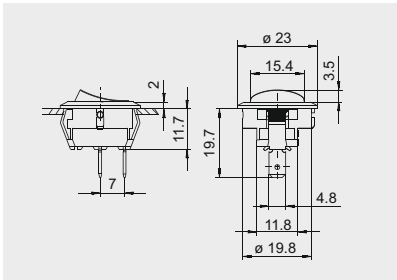

Quick-connect terminal 4.8 x 0.8
1 mm longer




X = wall thickness

X	Ø
0.75 ... 1.25	20.3
1.25 ... 2	20.8
2 ... 3	21.1



Protection cap
on request

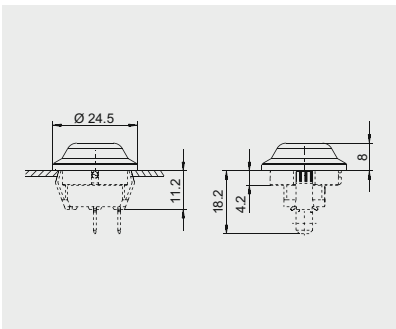

Transparent PVC-protection cap.
Serves as dust and water protection of
the actuation side.

SERIES 1855 - MINIATURE DOUBLE-POLE ROCKER SWITCHES

TO 4 (1) A 250 V AC



PRODUCT FEATURES

- ◆ Illuminated rocker switches
- ◆ Different lamp variants
- ◆ Powerful with 50 000 mechanical switching cycles
- ◆ Caulked terminals for reliable plugging of the receptacles

ON REQUEST

- ◆ Other colors
- ◆ Other printing variants
- ◆ Other terminal types
- ◆ Other lamp variants
- ◆ Cable assembly

Mechanical life endurance	5E4
Contact resistance (new condition)	< 100 mOhm (1 A 12 V DC)
Insulation resistance (new condition)	> 100 MOhm (500 V DC)
Proof tracking	250 PTI
Protection type	IP 40
Ambient temperature	terminal side -20 °C ... +85 °C actuating side -20 °C ... +55 °C
Flammability	UL 94 V-2
Glow wire test temperature	850 °C
Material	actuator PA housing PA terminals silver plated
Plug force of the terminals	≤ 80 N
Approval marks	 /  / 
Suitable for appliances of protection class II	



ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331