



SAW Filters for Infrastructure Systems

Series/Type: **B3898**

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39171B3898H810		2011-07-15	2011-12-31	2012-03-31

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.




Application

- High performance IF bandpass filter for W-CDMA
- Usable passband 8.84 MHz




Features

- Package size 7.0 x 5.0 x 1.33 mm³
- Package code QCC12E
- RoHS compatible
- Approx. weight 0.2 g
- Ceramic package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- **Electrostatic Sensitive Device (ESD)**
- Filter surface passivated

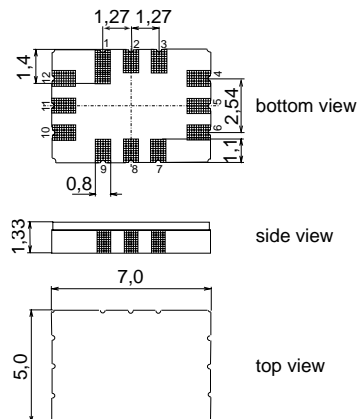

Pin configuration

- 10 Input
- 12 Input ground
- 4, 6 Balanced Output
- 2, 3, 8, 9 To be grounded
- 1, 5, 7, 11 Case ground

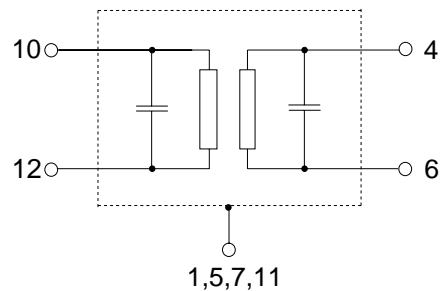


SAW Components
B3898
SAW IF filter
172.80 MHz
Data Sheet

Characteristics

Operating temperature range:	T = -10 to 85 °C
Terminating source impedance:	Z _S = 50 Ω single ended and matching network
Terminating load impedance:	Z _L = 200 Ω balanced and matching network
Group delay aperture:	100 kHz

		min.	typ. @ 25 °C	max.	
Nominal frequency	f _N	—	172.8	—	MHz
Minimum insertion attenuation (including matching network)	α _{min}	—	10.6	12.5	dB
Amplitude ripple (p-p) f _N ± 4.42 MHz	Δα	—	0.8	1.5	dB
Group delay ripple (p-p) f _N ± 4.42 MHz	Δτ	—	70	200	ns
Group delay @ f _N	τ	—	780	1000	ns
VSWR f _N ± 4.42 MHz		—	1.3:1	3.0:1	
Phase ripple (p-p) f _N ± 4.42 MHz	Δφ	—	10	13	°
Pass bandwidth α _{rel} ≤ 1.5 dB	B _{1.5dB}	8.84	9.2	—	MHz
Adjacent channel selectivity	ACS	17	22	—	dB
Relative attenuation (relative to α_{min}) f _N ± 8.0 ... f _N ± 11.0 MHz	α _{rel}	27	32	—	dB
f _N ± 11.0 ... f _N ± 25.0 MHz		35	45	—	dB
f _N ± 25.0 ... f _N ± 34.0 MHz		45	60	—	dB
f _N ± 34.0 ... f _N ± 100 MHz		55	70	—	dB
Impedance at f_N (without matching) Input: Z _{IN} = R _{IN} C _{IN} Output: Z _{OUT} = R _{OUT} C _{OUT}		—	646 13.4 932 10.4	—	Ω pF Ω pF
Temperature coefficient of frequency	TC _f	—	-18	—	ppm/K

Please read *cautions and warnings and important notes* at the end of this document.



SAW Components	B3898
SAW IF filter	172.80 MHz


Data Sheet



Maximum ratings

Operable temperature range	T	-40/+85	°C	
Storage temperature range	T _{stg}	-40/+125	°C	
DC voltage	V _{DC}	0	V	
ESD voltage	V _{ESD}	200	V	HBM, 1 pulse
Input power	P _{IN}	10	dBm	


Matching network to 50 Ω:(element values depend on PCB layout)

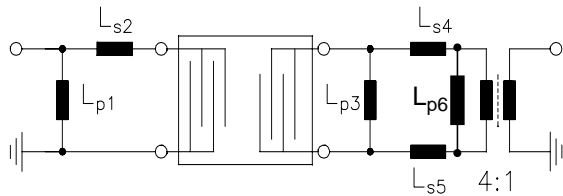


$$\begin{aligned}
 L_{p1} &= 22 \text{ nH} & L_{s2} &= 33 \text{ nH} & L_{p3} &= 120 \text{ nH} \\
 L_{s4} &= 82 \text{ nH} & L_{s5} &= 82 \text{ nH} & L_{p6} &= 220 \text{ nH}
 \end{aligned}$$



Transfer function

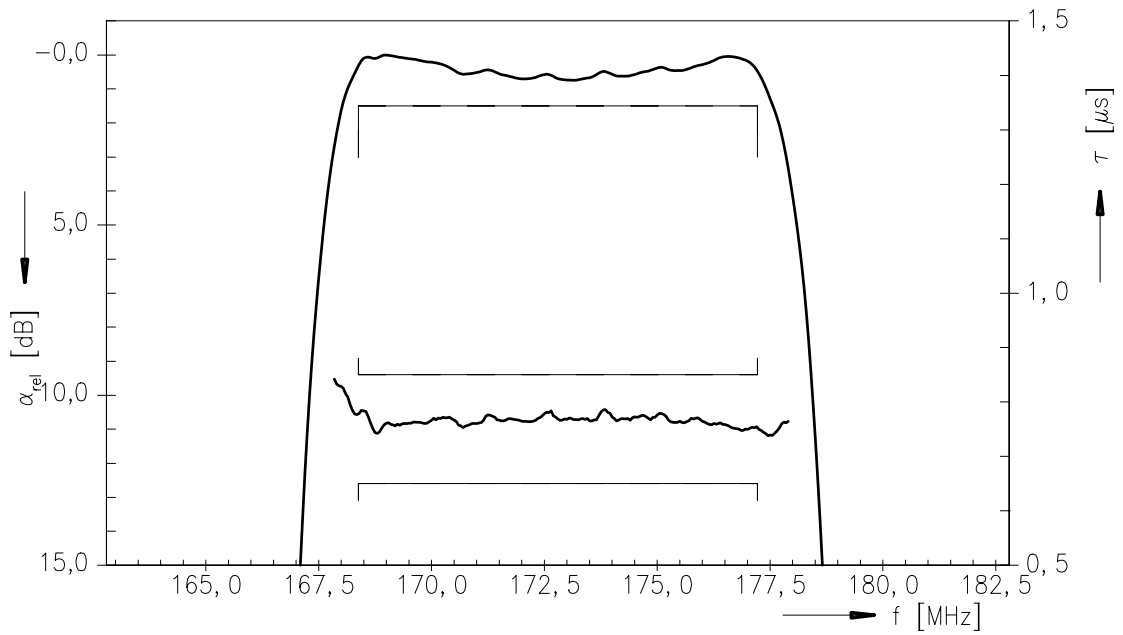

Transfer function (wideband)

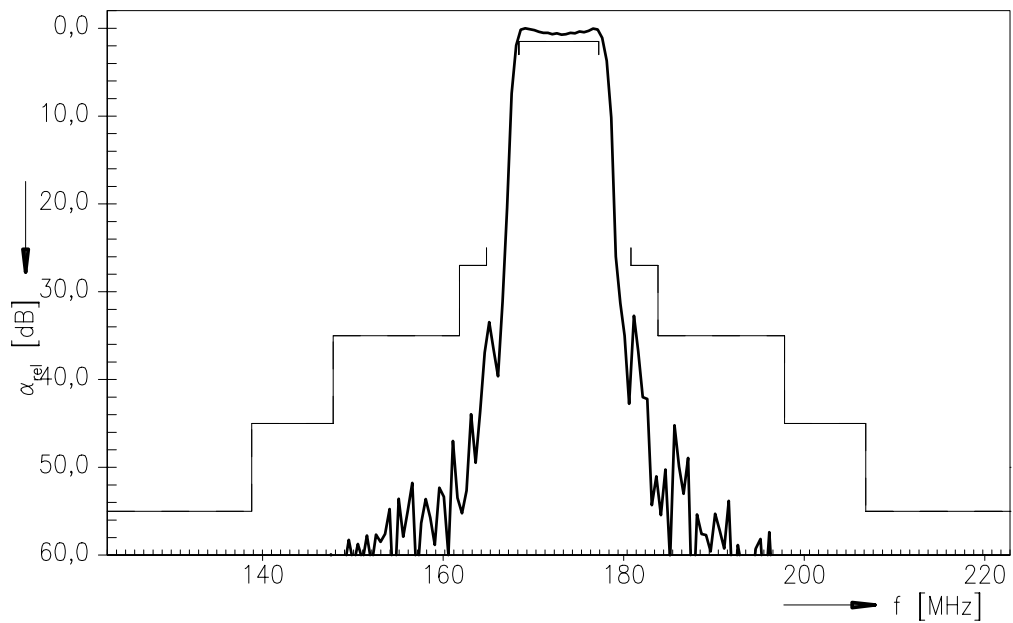



SAW Components

B3898

SAW IF filter

172.80 MHz

Data Sheet



References

Type	B3898
Ordering code	B39171-B3898-H810
Marking and package	C61157-A7-A103
Packaging	F61074-V8170-Z000
Date codes	L_1126
S-parameters	
Soldering profile	S_6001
RoHS compatible	defined as compatible with the following documents: "DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. 2005/618/EC from April 18th, 2005, amending Directive 2002/95/EC of the European Parliament and of the Council for the purposes of establishing the maximum concentration values for certain hazardous substances in electrical and electronic equipment."

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com .

**Published by EPCOS AG
Surface Acoustic Wave Components Division
P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2006. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Please read *cautions and warnings and important notes* at the end of this document.



Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
3. The warnings, cautions and product-specific notes must be observed.
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as "hazardous")**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, CeraDiode, CSSP, PhaseCap, PhaseMod, SIFI, SIKOREL, Silver-Cap, SIMID, SIOV, SIP5D, SIP5K, TOPcap, UltraCap, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331