


LLN Series Industrial sensors

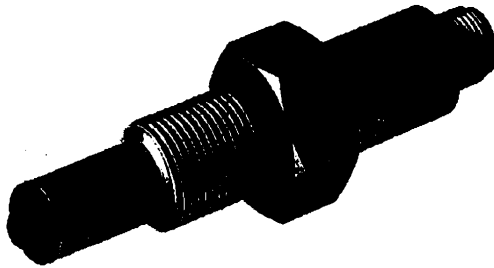

Features

- Solid-state reliability
- No moving parts
- TTL - compatible - 200 mA sinking output; fast response
- Stainless-steel housing for long life and ease of cleaning
- Quick-connect, industry standard cable assembly for easy installation
- Wide operating temperature range (-40°C to +125°C)
- Polysulphone sensor dome suitable for hygiene applications
- High pressure housing, rated up to 25 bars
- High degree of sealing-IP67


Description

LLN Series industrial liquid level sensors are designed for industrial environments exposed to extremes of temperature, pressure, vibration and shock. Standard devices feature rugged stainless steel housings and polysulphone domes.

The mode of operation is based on the same principal as the LL series.

An internal regulator enables a supply voltage in the range of 10-40Vdc to be used while the output is capable of sinking up to 200 mA.

Principle - In air

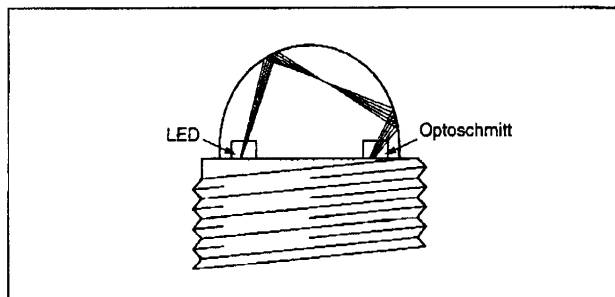

Typical Applications

- Industrial compressors
- Machine tools
- Material handling
- Processing and packaging equipment
- Heavy duty automotive

Technical information

Specifications	
Operation mode	User defined single on/off switch
Repeatability (mm)	±1
Hysteresis (mm)	1 (Dependent on liquid)
Response time	Rising liquid level - 50 µs Falling liquid level - 1s max. (in ethanol) Response in other liquids dependent on viscosity
Mechanical	
Mounting	Exterior mounting by 3/8" B.S.P. thread
Connector	3-pin integral Lumberg/Brad Harrison type connector Pin 1 supply (V _{cc}) Pin 3 0 V Pin 4 output A range of cable/connector assemblies is available
Material	Polysulphone dome; stainless steel housing (other materials available on request)
Dimensions	Dome 3.5 mm radius Thread 3/8" B.S.P. Hex 24 mm
Environmental	
Operating temperature (°C)	-40 to 125 (Sensing end only)
Storage temperature (°C)	-50 to +90
Humidity	No effect on operation, dependent upon catalogue listing
Vibration / shock	Qualification tested 100 to 5000 Hz at 30g to B.S.2011 part 2.1
Pressure range (bar)	0 - 25
Ambient light limit (mW/cm ²)	0.5 in operation
Electrical	
Supply Voltage (V _{cc})	10 to 40 Vdc Reverse voltage protection to 40 Vdc Short circuit protection to 40 Vdc
Supply current	Optoschmitt (I _s) 8mA Typical LED (I _{LED}) 15 to 50 mA, dependent upon catalogue listing
Output sink current (I _o)	200 mA max

FACSIMILE TRANSMITTAL MEMO

TO: ANDY JENKINS
COMPANY: FARNELL
FAX: 0113 279 4279
DATE: 14/9/00

NO. OF PAGES: 3
FROM: MIKE MOSS
COMPANY: HONEYWELL
FAX: 0118 981 7513
PHONE: 0118 906 2606


Ordering information

		LLN	1	2	3	4	5	6	-	7	8	9
1 Housing material												
8	Stainless-steel housed polysulphone dome, 3/8" B.S.P. thread											
2 Electrical												
6	Internal PCB for operation at 10 V to 40Vdc input											
3 Internal sensor type												
5	Type 5											
4 Temperature range												
1	-40°C to + 125°C											
5 Termination												
7	3 pin male connector Lumberg RKT 4, RKT 4/3 or Brad Harrison M.C. DC4 wire											
6 "O"-ring material												
2	Fluorocarbon (viton)											
7 Internal LED current + output function												
1	35 mA LED drive current, NPN output, high in air											
2	35 mA LED drive current, NPN output, low in air											
4	15 mA LED drive current, NPN output, high in air											
5	15 mA LED drive current, NPN output, low in air											
6	50 mA LED drive current, NPN output, high in air											
7	50 mA LED drive current, NPN output, low in air											
8, 9 Customer special												
Accessories												
HLC 131-020	2 m cable, 3 pin female connector assembly, straight head											
HLC 231-020	2 m cable, 3 pin female connector assembly, angled head											


Note:

In normal operation a sensor with LED drive current of 35 mA should be selected. In situations where extreme bubbling may occur, then the sensors with drive current 15 mA should be selected (i.e. LLN865172-4 and LLN865172-5). Where extreme condensation may be present, then the sensors with drive current 50mA should be selected. (For assistance on these points contact local sales office).


Electrical connections

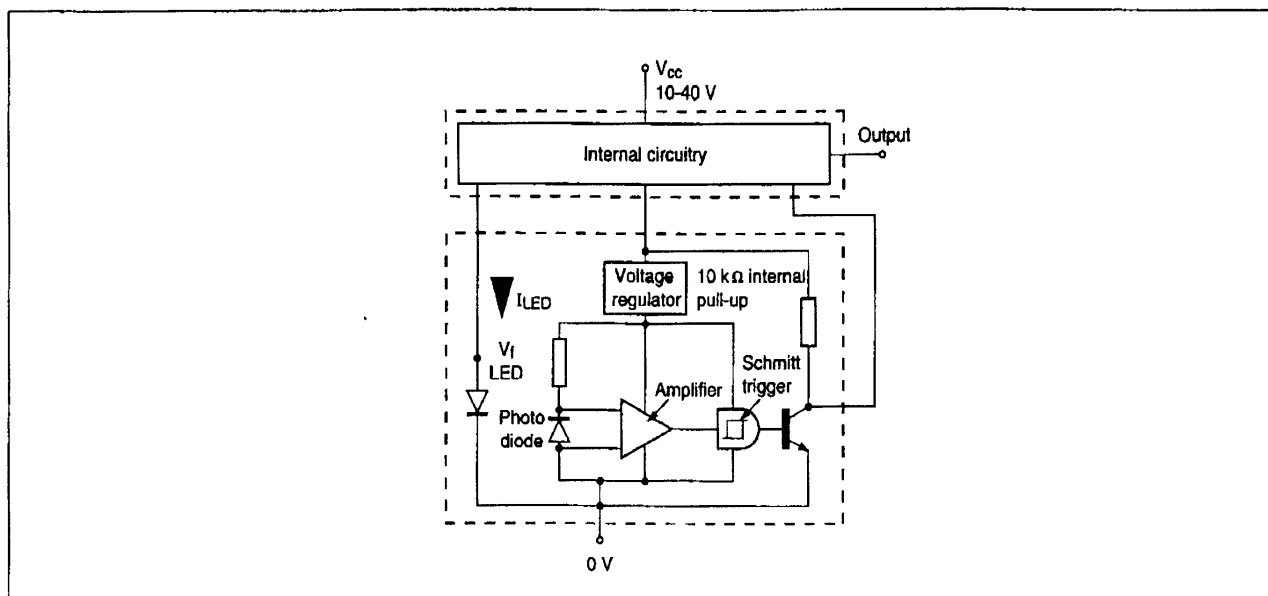

Mounting dimensions in mm (For reference only)

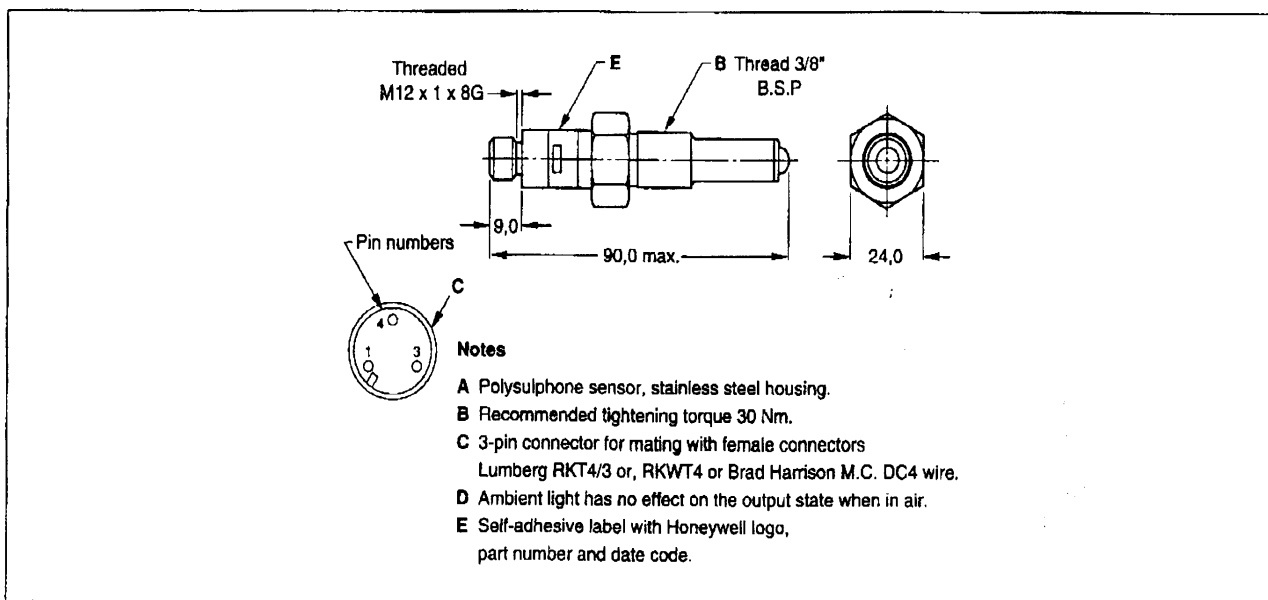

Connector drawings

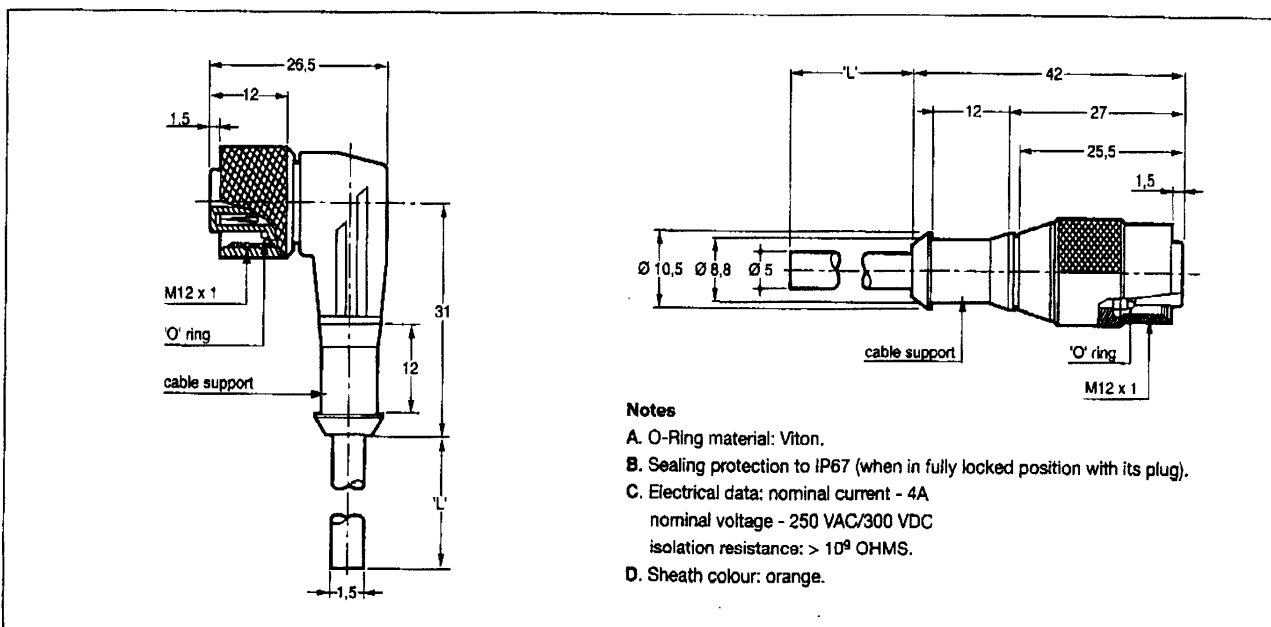



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331