


**VOIDLESS-HERMETICALLY-SEALED
HIGH VOLTAGE RECTIFIERS**

**ALSO
AVAILABLE IN
SURFACE
MOUNT**

DESCRIPTION

These "standard recovery" high voltage rectifier diode series are military qualified to MIL-PRF-19500/279 for the 1N3644 thru 1N3647. Others such as the 1N5181 thru 1N5184 meet or exceed requirements of MIL-PRF-19500/389. They are ideal for high-reliability where a failure cannot be tolerated for high voltage applications. These 0.10 and 0.25 Amp rated rectifiers at 55°C for working peak reverse voltages from 1000 to 10,000 volts are hermetically sealed with voidless-glass construction using an internal "Category I" metallurgical bond. Surface mount MELF package configurations are also available by adding "SM" suffix. Microsemi also offers numerous other rectifier products to meet higher and lower current ratings with various recovery time speed requirements including fast and ultrafast device types in both through-hole and surface mount packages.

APPEARANCE

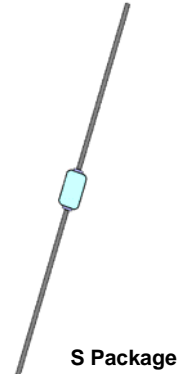

IMPORTANT: For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

FEATURES

- JEDEC registered 1N3643 thru 1N3647, 1N4254 thru 1N4257, and 1N5181 thru 1N5187 series
- Voidless Hermetically Sealed Glass Package
- Triple Layer Passivation
- Internal "Category I" Metallurgical bonds
- Lowest Reverse Leakage Available
- Lowest Thermal Resistance Available
- Absolute High Voltage / High Temperature Stability
- 1N5181 thru 1N5184 meet or exceed requirements of MIL-S-19500/389
- 1N3644 thru 1N3647 JAN, JANTX types available per MIL-S19500/279
- Surface mount equivalents also available in a square end-cap MELF configuration with "SM" suffix

APPLICATIONS / BENEFITS

- High voltage standard recovery rectifiers 1000 to 10,000 V
- Military and other high-reliability applications
- Applications include bridges, half-bridges, catch diodes, voltage multipliers, X-ray machines, power supplies, transmitters, and radar equipment
- High forward surge current capability
- Extremely robust construction
- Low thermal resistance
- Inherently radiation hard as described in Microsemi MicroNote 050

MAXIMUM RATINGS

- Junction & Storage Temperature: -65°C to +175°C
- Thermal Resistance: 38°C/W junction to lead at 3/8 inch (10 mm) lead length from body
- Average Rectified Forward Current (I_O):
 - 1N3643 thru 1N3647: 0.250 Amps @ $T_A = 55^\circ\text{C}$
0.150 Amps @ $T_A = 100^\circ\text{C}$
 - 1N4254 thru 1N4257: 0.250 Amps @ $T_A = 55^\circ\text{C}$
0.150 Amps @ $T_A = 100^\circ\text{C}$
 - 1N5181 thru 1N5184: 0.100 Amps @ $T_A = 55^\circ\text{C}$
0.060 Amps @ $T_A = 100^\circ\text{C}$
- Forward Surge Current: See Electrical Characteristics for surge at 8.3 ms half-sine wave
- Solder Temperatures: 260°C for 10 s (maximum)

MECHANICAL AND PACKAGING

- CASE: Hermetically sealed voidless hard glass with Tungsten slugs
- TERMINATIONS: Axial leads are copper with Tin/Lead (Sn/Pb) finish
- MARKING: Body paint and part number, etc.
- POLARITY: Cathode band
- TAPE & REEL option: Standard per EIA-296
- WEIGHT: 400 mg (approx)
- See package dimensions on last page

ELECTRICAL CHARACTERISTICS

TYPE	WORKING PEAK REVERSE VOLTAGE V_{RWM} VOLTS	AVERAGE RECTIFIED CURRENT I_o mA		MAXIMUM FORWARD VOLTAGE V_F (See Notes 1 & 2) VOLTS	REVERSE CURRENT (MAX.) $I_R @ V_{RWM}$ μA				MAXIMUM SURGE CURRENT @ 8.3 ms AMPS
		55°C	100°C		25°C	55°C	125°C	175°C	
1N3643	1000	250	150	5.0 (1)	5	-	-	-	14
JAN1N3644	1500	250	150	5.0 (1)	5	-	-	-	14
JAN1N3645	2000	250	150	5.0 (1)	5	-	-	-	14
JAN1N3646	2500	250	150	5.0 (1)	5	-	-	-	14
JAN1N3647	3000	250	150	5.0 (1)	5	-	-	-	14
1N4254	1500	250	150	3.5 (2)	1	-	20	-	10
1N4255	2000	250	150	3.5 (2)	1	-	20	-	10
1N4256	2500	250	150	3.5 (2)	1	-	20	-	10
1N4257	3000	250	150	3.5 (2)	1	-	20	-	10
1N5181	4000	100	60	10 (2)	-	5	-	1000	4
1N5182	5000	100	60	10 (2)	-	5	-	1000	4
1N5183	7500	100	60	10 (2)	-	5	-	1000	4
1N5184	10,000	100	60	10 (2)	-	5	-	1000	4

NOTE 1: $V_F @ 250mA$

NOTE 2: $V_F @ 100mA$

SYMBOLS & DEFINITIONS

Symbol	Definition
V_{BR}	Minimum Breakdown Voltage: The minimum voltage the device will exhibit at a specified current.
V_{RWM}	Working Peak Reverse Voltage: The maximum peak voltage that can be applied over the operating temperature range.
V_F	Maximum Forward Voltage: The maximum forward voltage the device will exhibit at a specified current.
I_R	Maximum Leakage Current: The maximum leakage current that will flow at the specified voltage and temperature.

GRAPHS

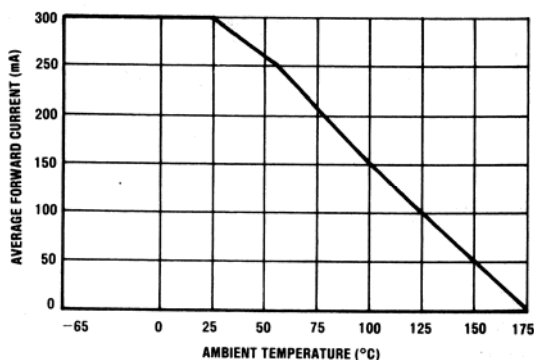


FIGURE 1
1N3643-47 and 1N4254-57


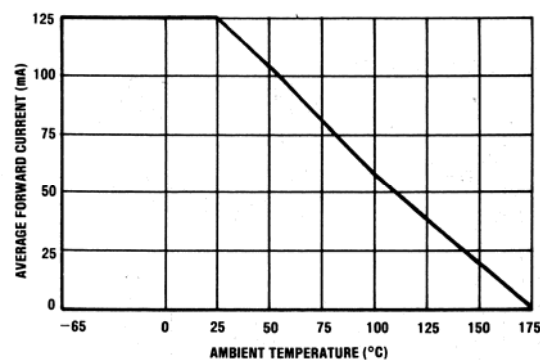


FIGURE 2
1N5181-84

PACKAGE DIMENSIONS

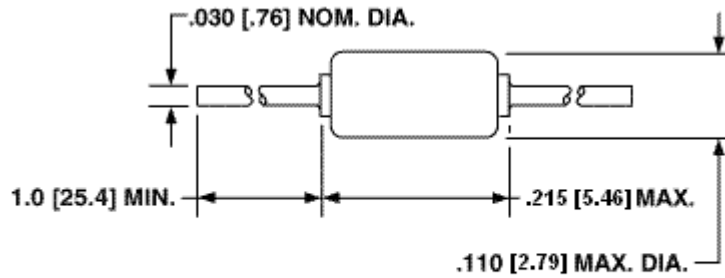

NOTE: DIMENSIONS IN INCHES [MM]

NOTE: Lead tolerance is +0.003/-0.001 inches



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331