

1MBI200S-120

IGBT Modules


IGBT MODULE (S series) 1200V / 200A / 1 in one package

■ Features

- High speed switching
- Voltage drive
- Low Inductance module structure

■ Applications

- Inverter for Motor Drive
- AC and DC Servo Drive Amplifier
- Uninterruptible Power Supply
- Industrial machines, such as Welding machines

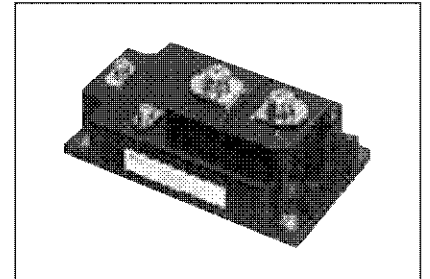

■ Maximum Ratings and Characteristics

● Absolute Maximum Ratings (at Tc=25°C unless otherwise specified)

Items	Symbols	Conditions	Maximum ratings	Units
Collector-Emitter voltage	V_{CES}		1200	V
Gate-Emitter voltage	V_{GES}		± 20	V
Collector current	I_C	Continuous	Tc=25°C Tc=80°C	A
			300 200	
	I_C pulse	1ms	Tc=25°C Tc=80°C	
			600 400	
	$-I_C$		200	
	$-I_C$ pulse	1ms	400	
Collector power dissipation	P_C	1 device	1500	W
Junction temperature	T_J		150	°C
Storage temperature	T_{stg}		-40 to +125	°C
Isolation voltage (*1)	V_{iso}	AC : 1min.	2500	V
Screw torque	Mounting (*2)		3.5	N·m
	Terminals (*2)		4.5	
	Terminals (*2)		1.7	

Note *1: All terminals should be connected together when isolation test will be done.

Note *2: Recommendable value : Mounting : 2.5+-3.5 N·m (M5 or M6), Terminal : 3.5+-4.5 N·m (M6), 1.3+-1.7 N·m (M4)

● Electrical characteristics (at Tj= 25°C unless otherwise specified)







Items	Symbols	Conditions	Characteristics			Units
			min.	typ.	max.	
Zero gate voltage collector current	I_{CES}	$V_{GE} = 0V, V_{CE} = 1200V$	-	-	4.0	mA
Gate-Emitter leakage current	I_{GES}	$V_{CE} = 0V, V_{GE} = \pm 20V$	-	-	0.8	μA
Gate-Emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = 20V, I_C = 200mA$	5.5	7.2	8.5	V
Collector-Emitter saturation voltage	$V_{CE(sat)}$	$V_{GE} = 15V$ $I_C = 200A$	Tj=25°C Tj=125°C	- 2.3 2.8	2.6 -	V
Input capacitance	C_{ies}	$V_{DS} = 0V$	-	24000	-	pF
Output capacitance	C_{oes}	$V_{CE} = 10V$	-	5000	-	
Reverse transfer capacitance	C_{res}	$f = 1MHz$	-	4400	-	
Turn-on time	t_{on}	$V_{CC} = 600V$ $I_C = 200A$	-	0.35	1.2	μs
	t_r		-	0.25	0.6	
	$t_r(i)$		-	0.1	-	
Turn-off time	t_{off}	$V_{GE} = \pm 15V$ $R_{\theta} = 4.7\Omega$	-	0.45	1.0	μs
	t_f		-	0.08	0.3	
Forward on voltage	V_F	$I_F = 200A$	Tj=25°C Tj=125°C	- 2.7 2.4	3.5 -	V
Reverse recovery time	t_{rr}	$I_F = 200A$	-	-	0.35	μs







● Thermal resistance characteristics


Items	Symbols	Conditions	Characteristics			Units
			min.	typ.	max.	
Thermal resistance (1device)	$R_{th(j-c)}$	IGBT	-	-	0.085	°C/W
		FWD	-	-	0.22	
Contact thermal resistance	$R_{th(c-f)}$	with Thermal Compound (*3)	-	0.0125	-	

Note *3: This is the value which is defined mounting on the additional cooling fin with thermal compound.


Characteristics (Representative)

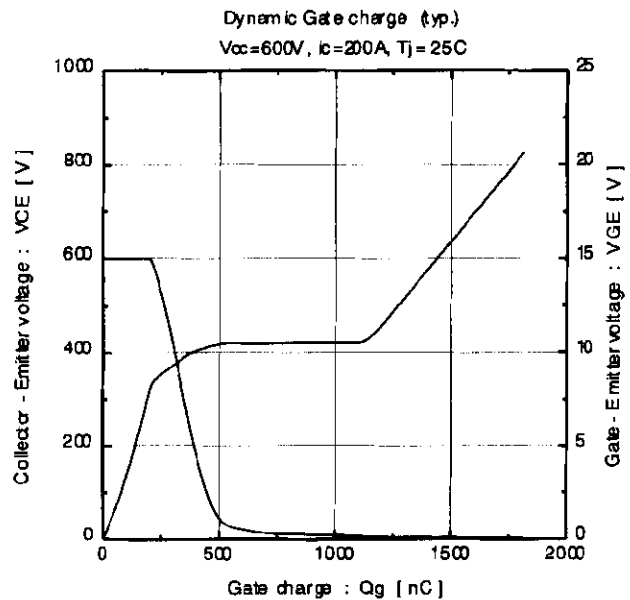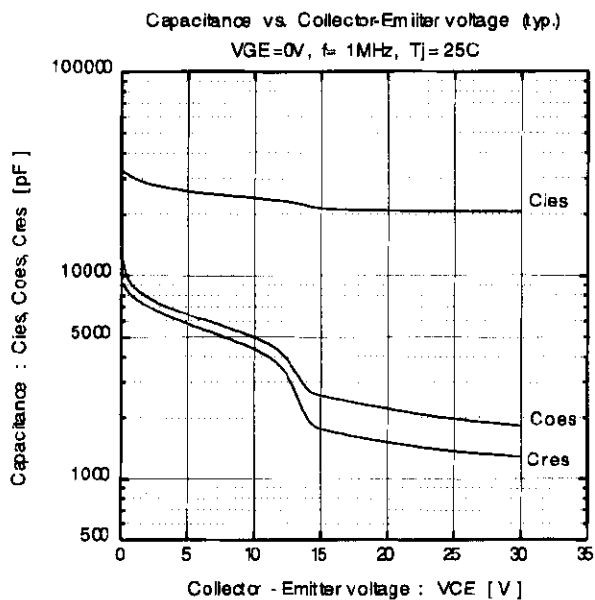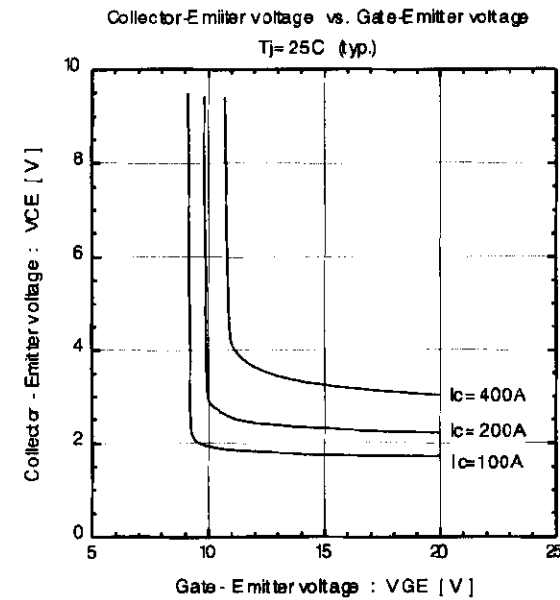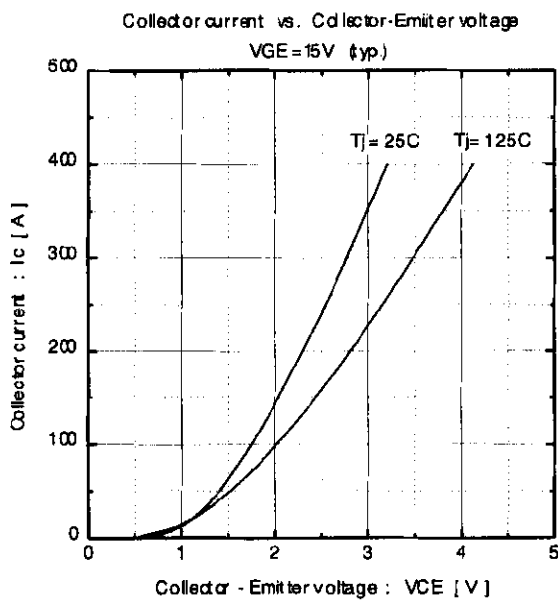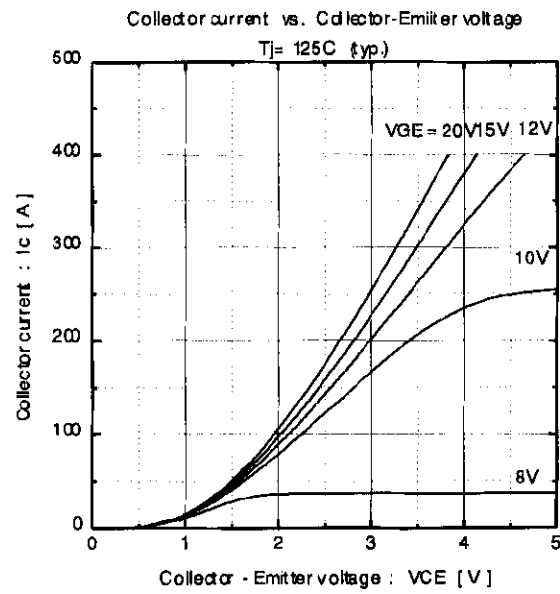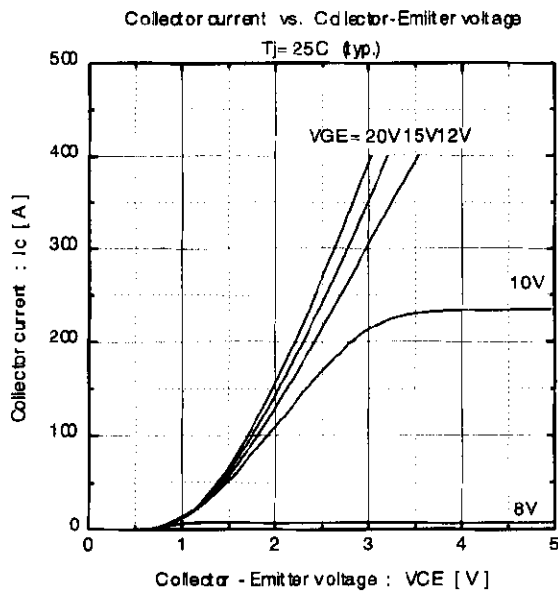

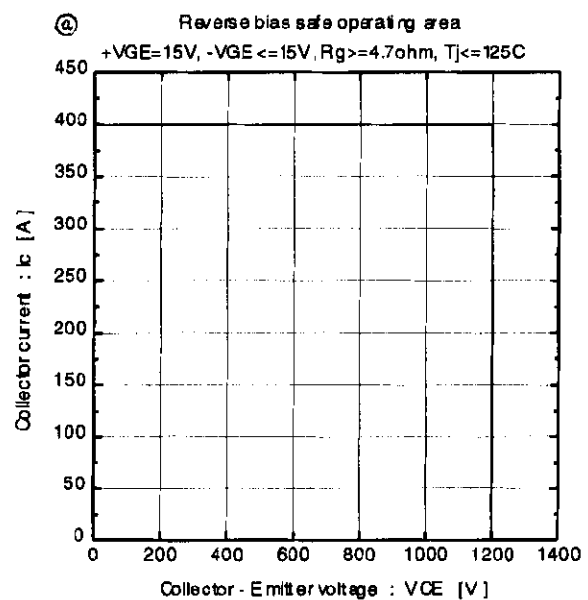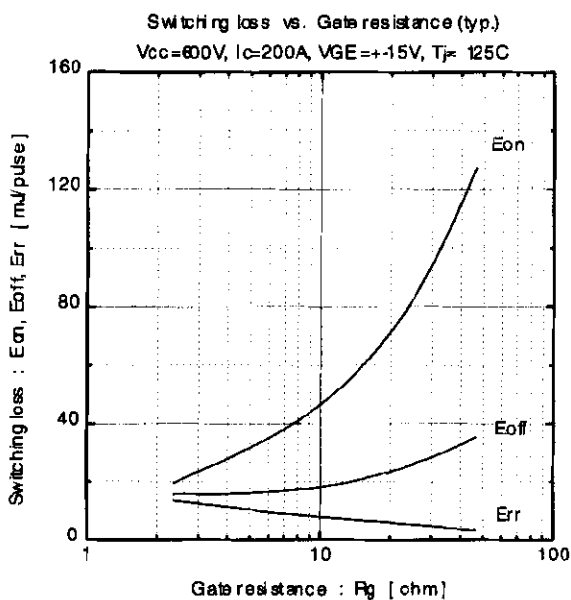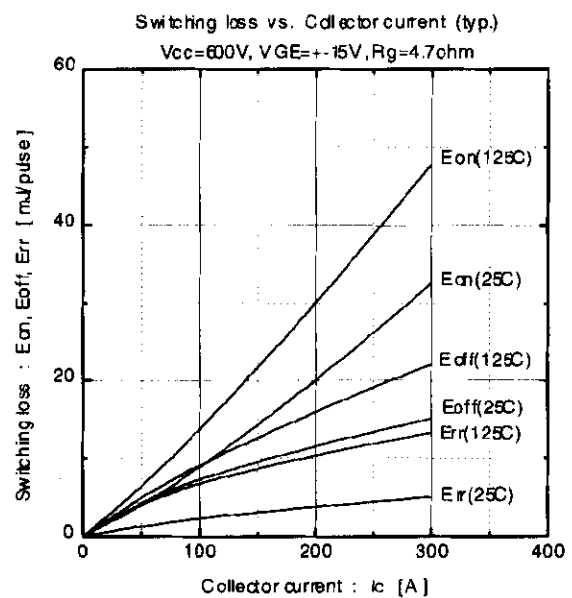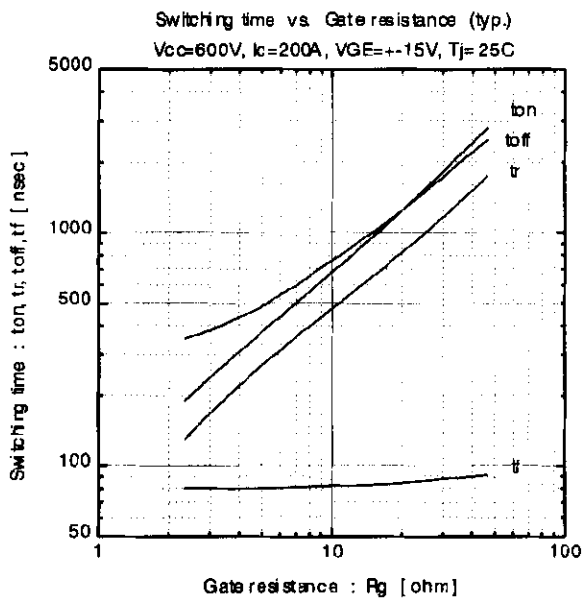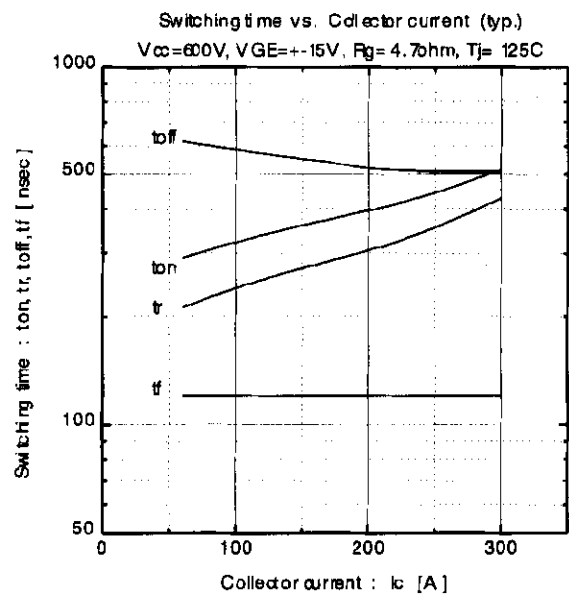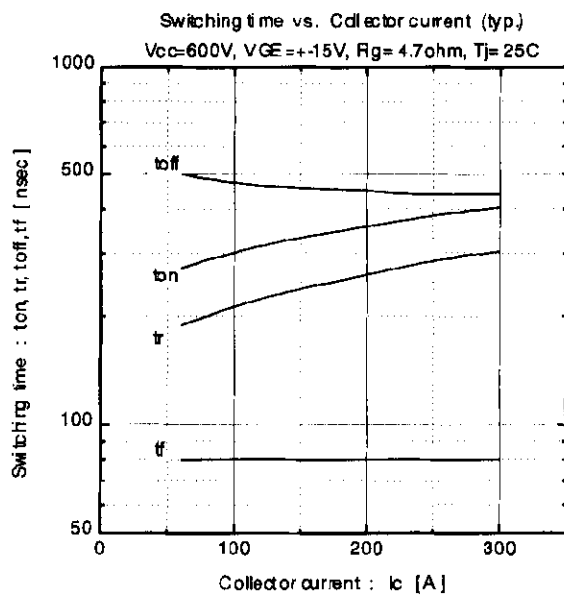


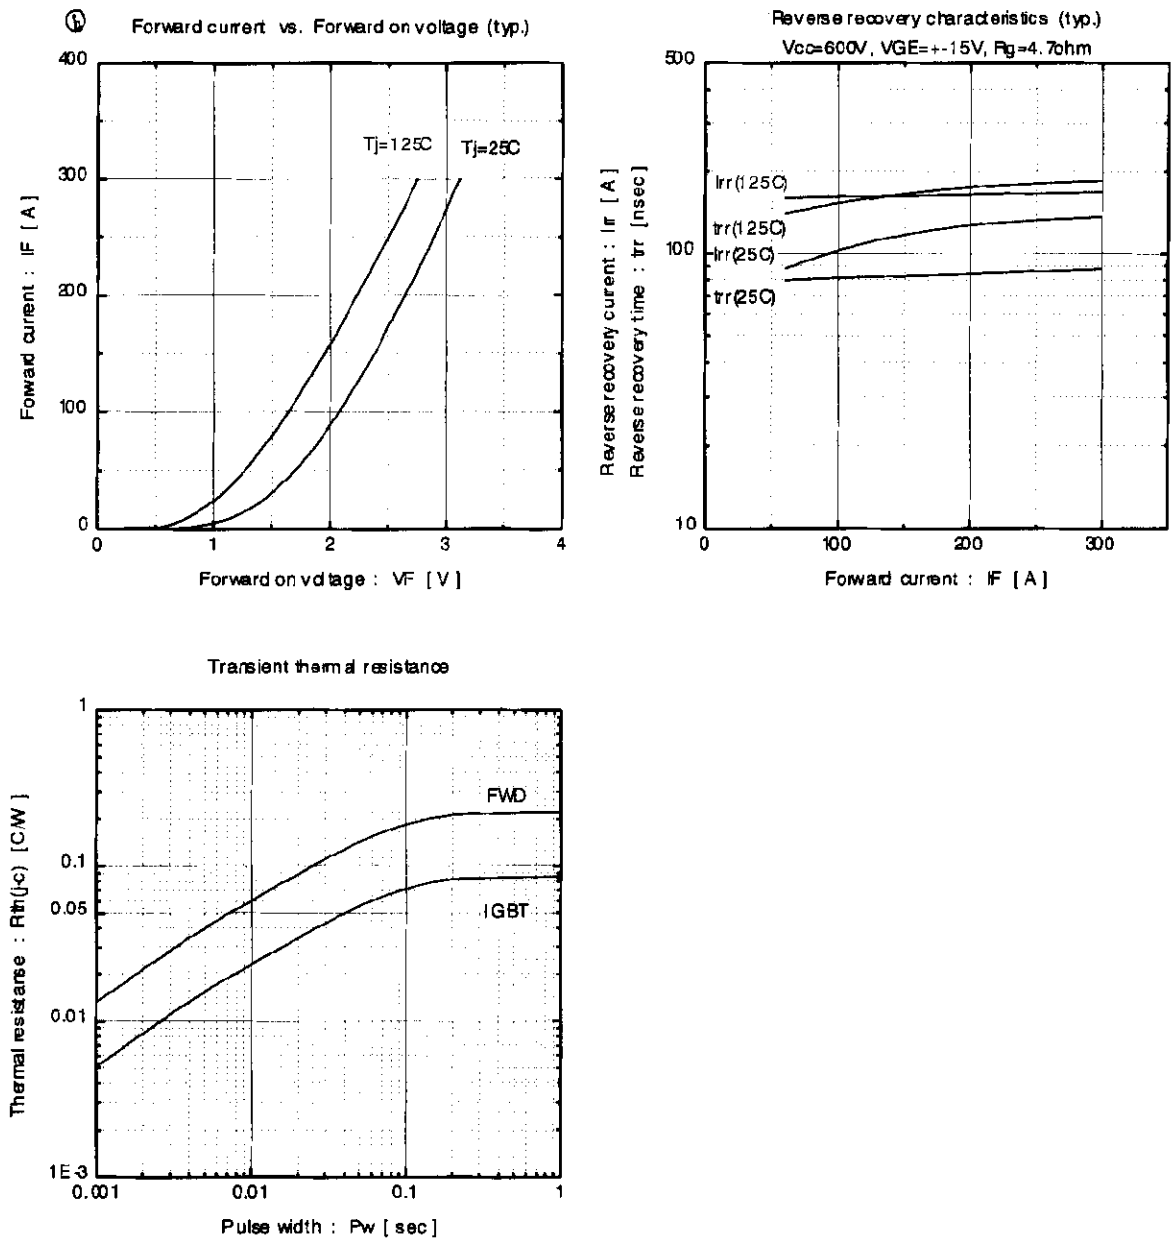

■ Outline Drawings, mm

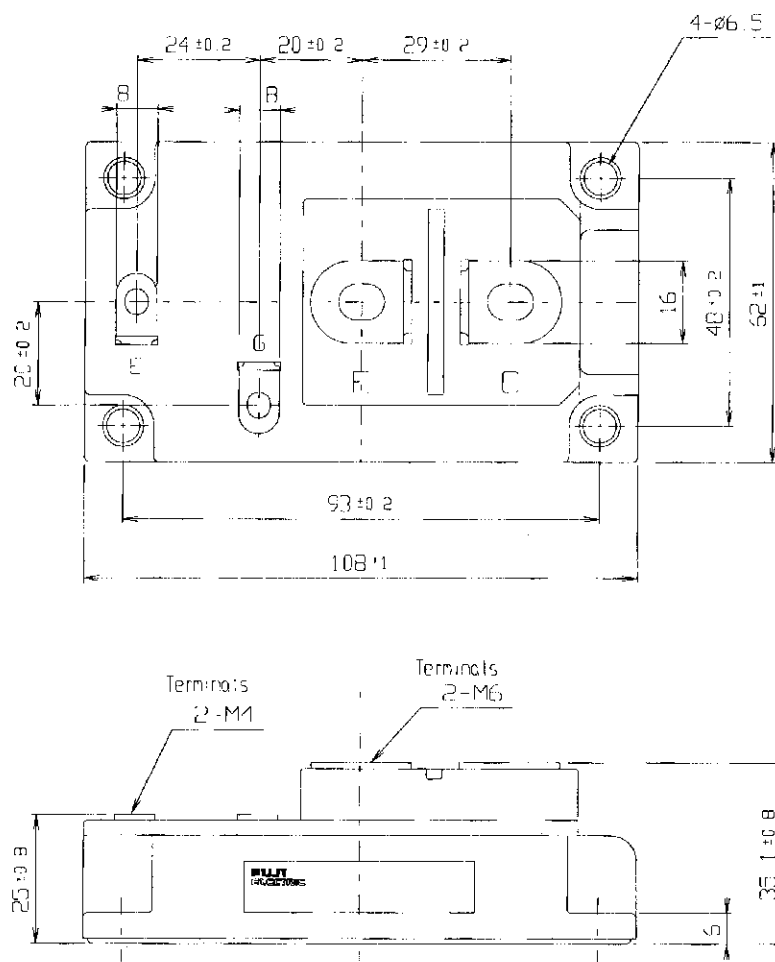

■ Equivalent Circuit Schematic

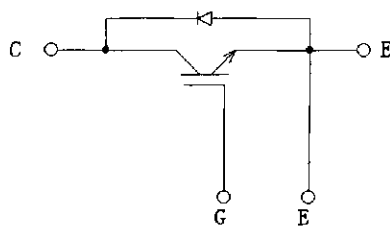

WARNING

1. This Catalog contains the product specifications, characteristics, data, materials, and structures as of October 2008.
The contents are subject to change without notice for specification changes or other reasons. When using a product listed in this Catalog, be sure to obtain the latest specifications.
2. All applications described in this Catalog exemplify the use of Fuji's products for your reference only. No right or license, either express or implied, under any patent, copyright, trade secret or other intellectual property right owned by Fuji Electric Device Technology Co., Ltd. is (or shall be deemed) granted. Fuji Electric Device Technology Co., Ltd. makes no representation or warranty, whether express or implied, relating to the infringement or alleged infringement of other's intellectual property rights which may arise from the use of the applications described herein.
3. Although Fuji Electric Device Technology Co., Ltd. is enhancing product quality and reliability, a small percentage of semiconductor products may become faulty. When using Fuji Electric semiconductor products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury, fire, or other problem if any of the products become faulty. It is recommended to make your design fail-safe, flame retardant, and free of malfunction.
4. The products introduced in this Catalog are intended for use in the following electronic and electrical equipment which has normal reliability requirements.

• Computers	• OA equipment	• Communications equipment (terminal devices)	• Measurement equipment
• Machine tools	• Audiovisual equipment	• Electrical home appliances	• Personal equipment
			• Industrial robots etc.
5. If you need to use a product in this Catalog for equipment requiring higher reliability than normal, such as for the equipment listed below, it is imperative to contact Fuji Electric Device Technology Co., Ltd. to obtain prior approval. When using these products for such equipment, take adequate measures such as a backup system to prevent the equipment from malfunctioning even if a Fuji's product incorporated in the equipment becomes faulty.

• Transportation equipment (mounted on cars and ships)	• Trunk communications equipment
• Traffic-signal control equipment	• Gas leakage detectors with an auto-shut-off feature
• Emergency equipment for responding to disasters and anti-burglary devices	• Safety devices
• Medical equipment	
6. Do not use products in this Catalog for the equipment requiring strict reliability such as the following and equivalents to strategic equipment (without limitation).

• Space equipment	• Aeronautic equipment	• Nuclear control equipment
• Submarine repeater equipment		
7. Copyright ©1996-2008 by Fuji Electric Device Technology Co., Ltd. All rights reserved.
No part of this Catalog may be reproduced in any form or by any means without the express permission of Fuji Electric Device Technology Co., Ltd.
8. If you have any question about any portion in this Catalog, ask Fuji Electric Device Technology Co., Ltd. or its sales agents before using the product.
Neither Fuji Electric Device Technology Co., Ltd. nor its agents shall be liable for any injury caused by any use of the products not in accordance with instructions set forth herein.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331