


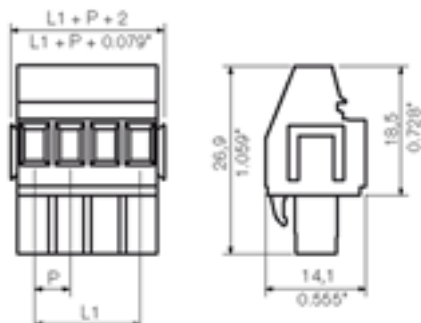

#### General ordering data

|                  |                                                                                                                                                                       |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Order No.        | 1638150000                                                                                                                                                            |
| Part designation | BLZ 5.00/13/270B SN OR                                                                                                                                                |
| Version          | PCB plug-in connector, Female connectors,<br>Clamping yoke connection, Clamping range, max.:<br>3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 13, 270°,<br>Box |
| EAN              | 4008190275419                                                                                                                                                         |
| Qty.             | 24 pc(s).                                                                                                                                                             |

#### System parameters

|                                           |                          |
|-------------------------------------------|--------------------------|
| Conductor connection system               | Clamping yoke connection |
| Outgoing direction of conductor           | 270°                     |
| Pitch                                     | 5 mm                     |
| Pitch in inch                             | 0.197 inch               |
| No. of poles                              | 13                       |
| No. of rows                               | 1                        |
| Screwdriver blade                         | 0.6 x 3.5                |
| Screwdriver blade standard                | DIN 5264                 |
| Tightening torque, min.                   | 0.4 Nm                   |
| Tightening torque, max.                   | 0.5 Nm                   |
| Clamping screw                            | M 2.5                    |
| Stripping length                          | 7 mm                     |
| L1 in mm                                  | 60 mm                    |
| L1 in inch                                | 2.362 inch               |
| Electric shock protection to DIN VDE 0470 | IP 20                    |
| Electric shock protection to DIN VDE 0470 | Safe from finger touch   |

#### Material data

|                           |                     |
|---------------------------|---------------------|
| Insulating material       | PBT                 |
| Colour                    | orange              |
| colour chart              | Similar to RAL 2000 |
| Insulating material group | IIIa                |
| Flammability class UL 94  | V-0                 |
| CTI                       | >= 200              |

#### Material data

|                       |              |
|-----------------------|--------------|
| Contact base material | Copper alloy |
| Contact surface       | tinned       |

#### Connectable conductors

|                                                   |                         |
|---------------------------------------------------|-------------------------|
| Clamping range, min.                              | 0.13 mm <sup>2</sup>    |
| Clamping range, max.                              | 3.31 mm <sup>2</sup>    |
| AWG, min.                                         | 26                      |
| AWG, max.                                         | 12                      |
| Solid, min. H05(07) V-U                           | 0.5 mm <sup>2</sup>     |
| Solid, max. H05(07) V-U                           | 2.5 mm <sup>2</sup>     |
| Flexible, min. H05(07) V-K                        | 0.5 mm <sup>2</sup>     |
| Flexible, max. H05(07) V-K                        | 2.5 mm <sup>2</sup>     |
| With wire end ferrule, acc. to DIN 46 228/1, min. | 0.5 mm <sup>2</sup>     |
| With wire end ferrule, acc. to DIN 46 228/1, max. | 2.5 mm <sup>2</sup>     |
| w. plastic collar ferrule, DIN 46228 pt 4, min.   | 0.5 mm <sup>2</sup>     |
| w. plastic collar ferrule, DIN 46228 pt 4, max.   | 2.5 mm <sup>2</sup>     |
| Gauge to EN 60999 a x b; ø                        | 2.8 mm x 2.0 mm; 2.4 mm |

#### DIN IEC rating data

|                                                                                |                   |
|--------------------------------------------------------------------------------|-------------------|
| Rated current, min. No. pins (Tu=20°C)                                         | 15 A              |
| Rated current, max. No. pins (Tu=20°C)                                         | 12 A              |
| Rated current, min. No. pins (Tu=40°C)                                         | 12 A              |
| Rated current, max. No. pins (Tu=40°C)                                         | 10 A              |
| Rated voltage for overvoltage class/pollution severity II/2                    | 400 V             |
| Rated voltage for overvoltage class/pollution severity III/2                   | 320 V             |
| Rated voltage for overvoltage class/pollution severity III/3                   | 250 V             |
| Rated impulse withstand voltage for overvoltage class/pollution severity II/2  | 4 kV              |
| Rated impulse withstand voltage for overvoltage class/pollution severity III/2 | 4 kV              |
| Rated impulse withstand voltage for overvoltage class/pollution severity III/3 | 4 kV              |
| Short-time withstand current resistance                                        | 3 x 1s with 120 A |

#### CSA rating data

|                                    |       |
|------------------------------------|-------|
| Rated voltage (Use group D)        | 300 V |
| Rated current (Use group D)        | 10 A  |
| AWG conductor (field wiring), min. | 26    |
| AWG conductor (field wiring), max. | 12    |

#### UL 1059 rating data

|                             |       |
|-----------------------------|-------|
| Rated voltage (Use group D) | 300 V |
| Rated current (Use group D) | 10 A  |
| AWG conductor, min.         | 26    |
| AWG conductor, max.         | 12    |

## Approvals

Approvals institutes



## Classifications

|            |             |
|------------|-------------|
| ETIM 2.0   | NK          |
| ETIM 3.0   | EC001284    |
| eClass 4.1 | 27-26-07-01 |
| eClass 5.0 | 27-26-07-01 |
| eClass 5.1 | 27-26-07-04 |

## Similar products

| Order No.  | Part designation      | Version                                                                                                                                                     |
|------------|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1638040000 | BLZ 5.00/2/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 2, 270°, Box |
| 1638270000 | BLZ 5.00/2/270B SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 2, 270°, Box |
| 1638050000 | BLZ 5.00/3/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 3, 270°, Box |
| 1638060000 | BLZ 5.00/4/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 4, 270°, Box |
| 1638290000 | BLZ 5.00/4/270B SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 4, 270°, Box |
| 1638070000 | BLZ 5.00/5/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 5, 270°, Box |
| 1638300000 | BLZ 5.00/5/270B SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 5, 270°, Box |
| 1638080000 | BLZ 5.00/6/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 6, 270°, Box |
| 1638310000 | BLZ 5.00/6/270B SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 6, 270°, Box |
| 1638090000 | BLZ 5.00/7/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 7, 270°, Box |
| 1638320000 | BLZ 5.00/7/270B SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 7, 270°, Box |

|            |                        |                                                                                                                                                              |
|------------|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1638100000 | BLZ 5.00/8/270B SN OR  | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 8, 270°, Box  |
| 1638330000 | BLZ 5.00/8/270B SN SW  | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 8, 270°, Box  |
| 1638110000 | BLZ 5.00/9/270B SN OR  | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 9, 270°, Box  |
| 1638340000 | BLZ 5.00/9/270B SN SW  | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 9, 270°, Box  |
| 1638120000 | BLZ 5.00/10/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 10, 270°, Box |
| 1638350000 | BLZ 5.00/10/270B SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 10, 270°, Box |
| 1638130000 | BLZ 5.00/11/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 11, 270°, Box |
| 1638360000 | BLZ 5.00/11/270B SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 11, 270°, Box |
| 1638140000 | BLZ 5.00/12/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 12, 270°, Box |
| 1638160000 | BLZ 5.00/14/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 14, 270°, Box |
| 1638170000 | BLZ 5.00/15/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 15, 270°, Box |
| 1638180000 | BLZ 5.00/16/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 16, 270°, Box |
| 1638190000 | BLZ 5.00/17/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 17, 270°, Box |
| 1638200000 | BLZ 5.00/18/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 18, 270°, Box |
| 1638210000 | BLZ 5.00/19/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 19, 270°, Box |
| 1638220000 | BLZ 5.00/20/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 20, 270°, Box |
| 1638230000 | BLZ 5.00/21/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 21, 270°, Box |

|            |                        |                                                                                                                                                              |
|------------|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1638240000 | BLZ 5.00/22/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 22, 270°, Box |
| 1638250000 | BLZ 5.00/23/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 23, 270°, Box |
| 1638260000 | BLZ 5.00/24/270B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 24, 270°, Box |



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331