

TOSHIBA Diode Silicon Epitaxial Planar Type

015AZ2.0~015AZ12

Constant Voltage Regulation Applications

- Small package
- Nominal voltage tolerance about  $\pm 2.5\%$   
(2.0V~12V)


Maximum Ratings (Ta = 25°C)

| Characteristics           | Symbol | Rating  | Unit |
|---------------------------|--------|---------|------|
| Power dissipation         | P*     | 150     | mW   |
| Junction temperature      | Tj     | 125     | °C   |
| Storage temperature range | Tstg   | -55~125 | °C   |

\* Mounted on a glass epoxy circuit board of 20 × 20mm,  
Pad dimension of 4 × 4mm.

Electrical Characteristics



(See Page 2~3)

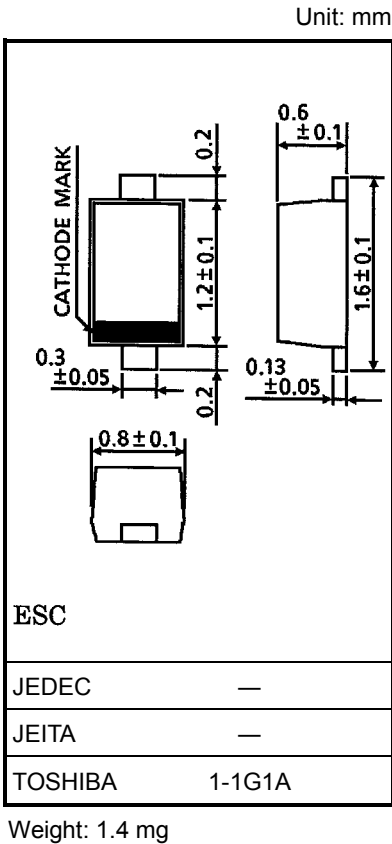


Marking

Example 1: 015AZ12- $\times$

Example 2: 015AZ12- $\times$



Pin Assignment (top view)



## Electrical Characteristics (Ta = 25°C)

| Type No.    |   | Zener Voltage        |      |                     | Dynamic Impedance  |                     | Knee Dynamic Impedance |                     | Reverse Current     |                    |
|-------------|---|----------------------|------|---------------------|--------------------|---------------------|------------------------|---------------------|---------------------|--------------------|
|             |   | * V <sub>Z</sub> (V) |      | I <sub>Z</sub> (mA) | Z <sub>Z</sub> (Ω) | I <sub>Z</sub> (mA) | Z <sub>ZK</sub> (Ω)    | I <sub>Z</sub> (mA) | I <sub>R</sub> (μA) | V <sub>R</sub> (V) |
|             |   | Min                  | Max  |                     | Max                |                     | Max                    |                     | Max                 |                    |
| 015AZ2.0 ** | X | 1.85                 | 2.05 | 5                   | 100                | 5                   | 1000                   | 0.5                 | 120                 | 0.5                |
|             | Z | 1.95                 | 2.15 |                     |                    |                     |                        |                     |                     |                    |
| 015AZ2.2 ** | X | 2.05                 | 2.26 | 5                   | 100                | 5                   | 1000                   | 0.5                 | 120                 | 1.0                |
|             | Z | 2.16                 | 2.38 |                     |                    |                     |                        |                     |                     |                    |
| 015AZ2.4    | X | 2.28                 | 2.50 | 5                   | 100                | 5                   | 1000                   | 0.5                 | 120                 | 1.0                |
|             | Z | 2.40                 | 2.60 |                     |                    |                     |                        |                     |                     |                    |
| 015AZ2.7    | X | 2.50                 | 2.75 | 5                   | 110                | 5                   | 1000                   | 0.5                 | 120                 | 1.0                |
|             | Z | 2.65                 | 2.90 |                     |                    |                     |                        |                     |                     |                    |
| 015AZ3.0    | X | 2.80                 | 3.05 | 5                   | 120                | 5                   | 1000                   | 0.5                 | 50                  | 1.0                |
|             | Z | 2.95                 | 3.20 |                     |                    |                     |                        |                     |                     |                    |
| 015AZ3.3    | X | 3.10                 | 3.35 | 5                   | 130                | 5                   | 1000                   | 0.5                 | 20                  | 1.0                |
|             | Z | 3.25                 | 3.50 |                     |                    |                     |                        |                     |                     |                    |
| 015AZ3.6    | X | 3.40                 | 3.65 | 5                   | 130                | 5                   | 1000                   | 0.5                 | 10                  | 1.0                |
|             | Z | 3.55                 | 3.80 |                     |                    |                     |                        |                     |                     |                    |
| 015AZ3.9    | X | 3.70                 | 3.97 | 5                   | 130                | 5                   | 1000                   | 0.5                 | 10                  | 1.0                |
|             | Z | 3.87                 | 4.10 |                     |                    |                     |                        |                     |                     |                    |
| 015AZ4.3    | X | 4.00                 | 4.23 | 5                   | 130                | 5                   | 1000                   | 0.5                 | 5                   | 1.0                |
|             | Y | 4.13                 | 4.35 |                     |                    |                     |                        |                     |                     |                    |
|             | Z | 4.25                 | 4.50 |                     |                    |                     |                        |                     |                     |                    |
| 015AZ4.7    | X | 4.40                 | 4.63 | 5                   | 120                | 5                   | 1000                   | 0.5                 | 5                   | 1.0                |
|             | Y | 4.53                 | 4.76 |                     |                    |                     |                        |                     |                     |                    |
|             | Z | 4.66                 | 4.90 |                     |                    |                     |                        |                     |                     |                    |
| 015AZ5.1    | X | 4.80                 | 5.07 | 5                   | 70                 | 5                   | 1000                   | 0.5                 | 1                   | 1.5                |
|             | Y | 4.97                 | 5.24 |                     |                    |                     |                        |                     |                     |                    |
|             | Z | 5.14                 | 5.40 |                     |                    |                     |                        |                     |                     |                    |
| 015AZ5.6    | X | 5.30                 | 5.63 | 5                   | 40                 | 5                   | 900                    | 0.5                 | 1                   | 2.5                |
|             | Y | 5.43                 | 5.81 |                     |                    |                     |                        |                     |                     |                    |
|             | Z | 5.61                 | 6.00 |                     |                    |                     |                        |                     |                     |                    |
| 015AZ6.2    | X | 5.80                 | 6.20 | 5                   | 30                 | 5                   | 500                    | 0.5                 | 1                   | 3.0                |
|             | Y | 6.00                 | 6.39 |                     |                    |                     |                        |                     |                     |                    |
|             | Z | 6.19                 | 6.60 |                     |                    |                     |                        |                     |                     |                    |
| 015AZ6.8    | X | 6.40                 | 6.80 | 5                   | 25                 | 5                   | 150                    | 0.5                 | 0.5                 | 5.0                |
|             | Y | 6.60                 | 7.02 |                     |                    |                     |                        |                     |                     |                    |
|             | Z | 6.82                 | 7.20 |                     |                    |                     |                        |                     |                     |                    |







\* : Test time: t = 30ms



\*\* : Product by order.

**Electrical Characteristics (Ta = 25°C)**

| Type No. |   | Zener Voltage        |       | I <sub>Z</sub> (mA) | Dynamic Impedance  |                     | Knee Dynamic Impedance |                     | Reverse Current     |                    |
|----------|---|----------------------|-------|---------------------|--------------------|---------------------|------------------------|---------------------|---------------------|--------------------|
|          |   | * V <sub>Z</sub> (V) |       |                     | Z <sub>Z</sub> (Ω) | I <sub>Z</sub> (mA) | Z <sub>ZK</sub> (Ω)    | I <sub>Z</sub> (mA) | I <sub>R</sub> (μA) | V <sub>R</sub> (V) |
|          |   | Min                  | Max   |                     | Max                |                     | Max                    |                     | Max                 |                    |
| 015AZ7.5 | X | 7.00                 | 7.43  | 5                   | 23                 | 5                   | 120                    | 0.5                 | 0.5                 | 6.0                |
|          | Y | 7.23                 | 7.66  |                     |                    |                     |                        |                     |                     |                    |
|          | Z | 7.46                 | 7.90  |                     |                    |                     |                        |                     |                     |                    |
| 015AZ8.2 | X | 7.70                 | 8.16  | 5                   | 20                 | 5                   | 120                    | 0.5                 | 0.5                 | 6.5                |
|          | Y | 7.96                 | 8.43  |                     |                    |                     |                        |                     |                     |                    |
|          | Z | 8.23                 | 8.70  |                     |                    |                     |                        |                     |                     |                    |
| 015AZ9.1 | X | 8.50                 | 9.00  | 5                   | 18                 | 5                   | 120                    | 0.5                 | 0.5                 | 7.0                |
|          | Y | 8.80                 | 9.30  |                     |                    |                     |                        |                     |                     |                    |
|          | Z | 9.10                 | 9.60  |                     |                    |                     |                        |                     |                     |                    |
| 015AZ10  | X | 9.40                 | 9.93  | 5                   | 15                 | 5                   | 120                    | 0.5                 | 0.5                 | 8.0                |
|          | Y | 9.73                 | 10.26 |                     |                    |                     |                        |                     |                     |                    |
|          | Z | 10.06                | 10.60 |                     |                    |                     |                        |                     |                     |                    |
| 015AZ11  | X | 10.40                | 10.98 | 5                   | 15                 | 5                   | 120                    | 0.5                 | 0.5                 | 8.5                |
|          | Y | 10.73                | 11.26 |                     |                    |                     |                        |                     |                     |                    |
|          | Z | 11.06                | 11.60 |                     |                    |                     |                        |                     |                     |                    |
| 015AZ12  | X | 11.40                | 11.93 | 5                   | 15                 | 5                   | 110                    | 0.5                 | 0.5                 | 9.0                |
|          | Y | 11.73                | 12.26 |                     |                    |                     |                        |                     |                     |                    |
|          | Z | 12.06                | 12.60 |                     |                    |                     |                        |                     |                     |                    |

\* : Test time: t = 30ms

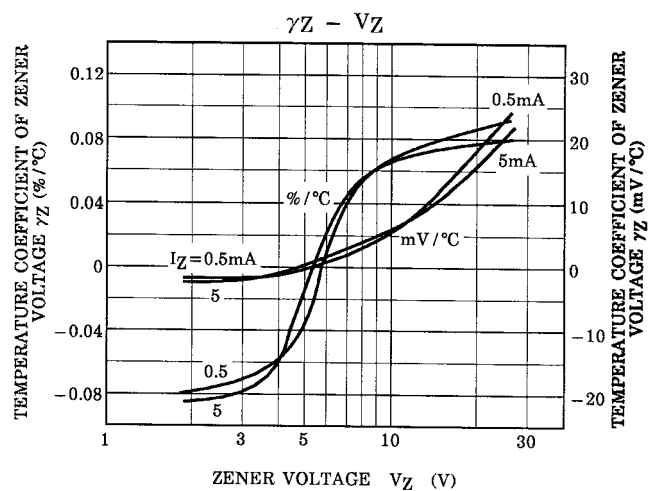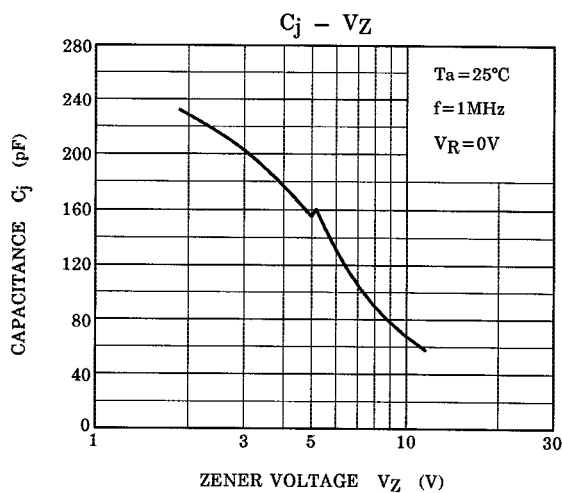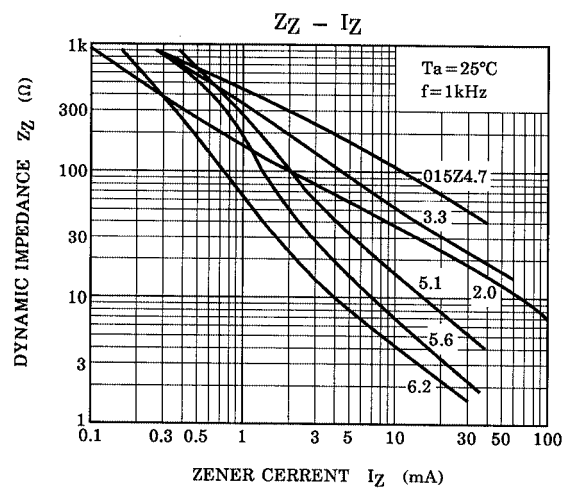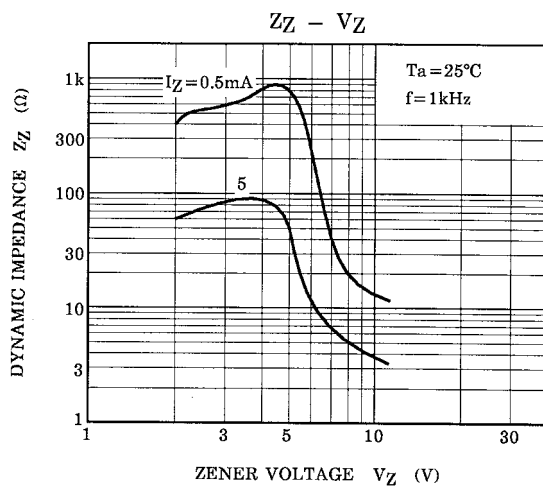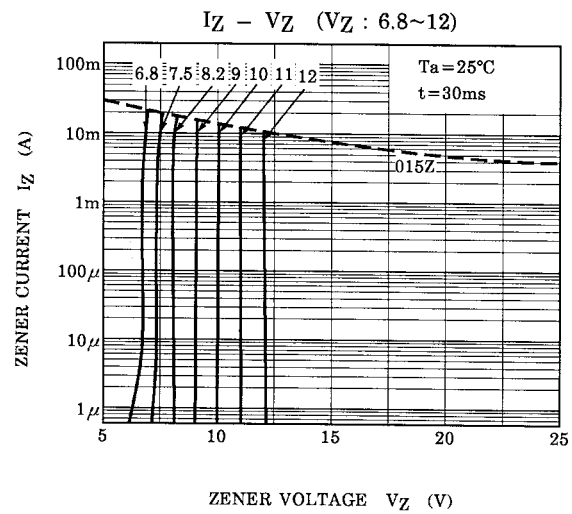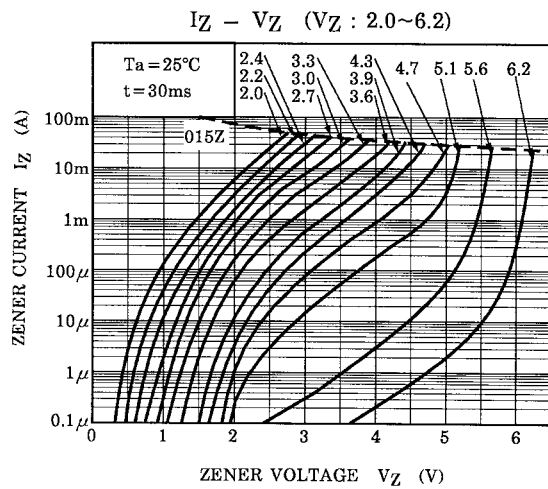

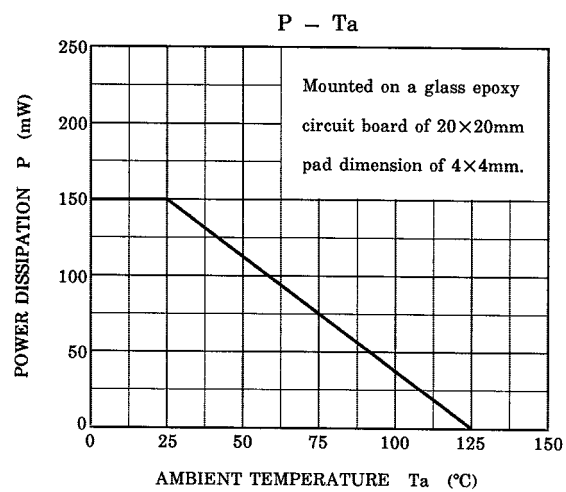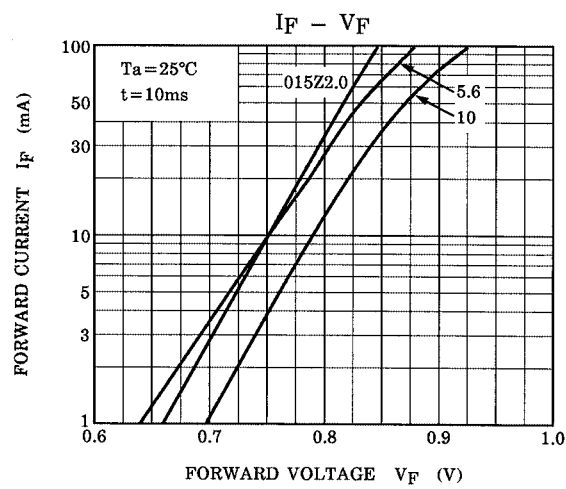

**RESTRICTIONS ON PRODUCT USE**

000707EAA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.  
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331