



Honeywell Zephyr™ Digital Airflow Sensors

HAF Series—High Accuracy
 ± 50 SCCM to ± 750 SCCM



Honeywell Zephyr™ Digital Airflow Sensors

HAF Series - High Accuracy

Honeywell Zephyr™ HAF Series sensors provide a digital interface for reading airflow over specified full-scale flow and compensated temperature ranges. The thermally isolated heater and temperature sensing elements help these sensors provide a fast response to air or gas flow.

Zephyr sensors are designed to measure mass flow of air and other non-corrosive gases. Standard flow ranges are available at ± 50 , ± 100 , ± 200 , ± 400 or ± 750 SCCM. Custom flow ranges are also available. The sensors are fully calibrated and temperature compensated with an onboard Application Specific Integrated Circuit (ASIC).

The HAF Series is compensated over the temperature range of 0 °C to 50 °C [32 °F to 122 °F] and operates across a temperature range of -20 °C to 70 °C [-4 °F to 158 °F]. The state-of-the-art ASIC-based compensation provides digital ($^{\circ}\text{C}$) outputs with a response time of 1 ms.

These sensors operate on the heat transfer principle to measure mass airflow. They consist of a microbridge Microelectronic and Microelectromechanical System (MEMS) with temperature-sensitive resistors deposited with thin films of platinum and silicon nitride. The MEMS sensing die is located in a precise and carefully-designed airflow channel to provide repeatable response to flow.

Zephyr sensors provide the customer with enhanced reliability, high accuracy, repeatable measurements and the ability to customize sensor options to meet many specific application needs. The combination of rugged housings with a stable substrate makes these products extremely robust. They are designed and manufactured according to ISO 9001 standards.

What makes our sensors better?

- ◉ **Fast response time**
- ◉ **Wide range of airflows**
- ◉ **Customizable flow ranges and configurable package styles**
- ◉ **Linear output**
- ◉ **High stability**
- ◉ **Low pressure drop**



TIGHT TOTAL ERROR BAND • FAST RESPONSE TIME • WIDE RANGE OF AIRFLOWS

Features and Benefits

TOTAL ERROR BAND (TEB) AS LOW AS 0.25%FSS*

Allows for precise airflow measurement, often ideal for demanding applications with high accuracy requirements.

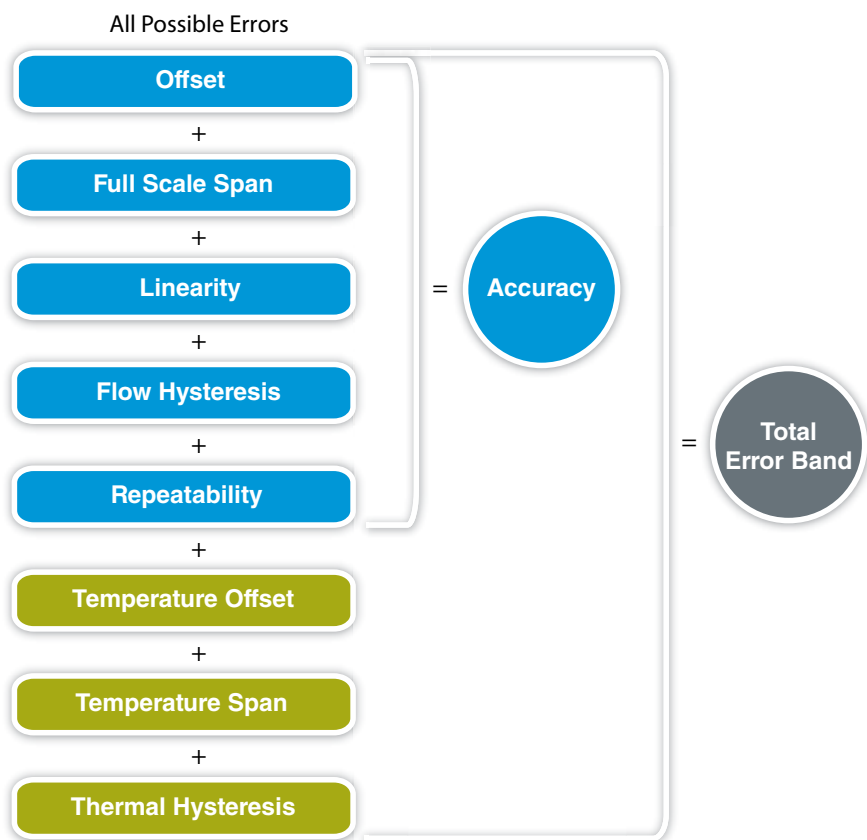


Figure 1. Total Error Band vs. Accuracy

Other airflow sensor manufacturers only report on accuracy, while Honeywell reports Total Error Band.

FAST RESPONSE TIME*

Allows a customer's application to respond quickly to airflow change, important in critical medical (e.g., anesthesia) and industrial (e.g., fume hood) applications.

WIDE RANGE OF AIRFLOWS*

Zephyr measures mass flow at standard flow ranges of ± 50 , ± 100 , ± 200 , ± 400 or ± 750 SCCM, or custom flow ranges, increasing the options for integrating the sensor into the application.

CUSTOMIZABLE FLOW RANGES AND CONFIGURABLE PACKAGE STYLES*

Meet specific end-user needs.

FULL CALIBRATION AND TEMPERATURE COMPENSATION

Typically allow customer to remove additional components associated with signal conditioning from the PCB, reducing PCB size as well as costs often associated with those components (e.g., acquisition, inventory, assembly).

Features and Benefits

LINEAR OUTPUT*

Provides more intuitive sensor signal than the raw output of basic airflow sensors, which can help reduce production costs, design, and implementation time.

LOW PRESSURE DROP*

Typically improves patient comfort in medical applications, and reduces noise and system wear on other components such as motors and pumps.

HIGH 12-BIT RESOLUTION

Increases ability to sense small airflow changes, allowing customers to more precisely control their application.

LOW 3.3 VDC OPERATING VOLTAGE OPTION AND LOW POWER CONSUMPTION

Allow for use in battery-driven and other portable applications.

ASIC-BASED I²C DIGITAL OUTPUT COMPATIBILITY

Eases integration to microprocessors or microcontrollers, reducing PCB complexity and component count.

INSENSITIVITY TO ALTITUDE

Eliminates customer-implemented altitude adjustments in the system, easing integration and reducing production costs by not having to purchase additional sensors for altitude adjustments.

SMALL SIZE

Occupies less space on PCB, allowing easier fit and potentially reducing production costs; PCB size may also be reduced for easier fit into space-constrained applications.

ROHS-COMPLIANT MATERIALS

Meet Directive 2002/95/EC.

A close-up, angled view of a medical device's control panel. The panel features several rows of white, cylindrical knobs and buttons. To the left of these controls, there are red digital displays showing numbers like '2.5' and '2.0'. The background is blurred, showing a person's arm and a white medical drape.

LAPAROSCOPY

HVAC FILTERS



Honeywell Zephyr™ Digital Airflow Sensors

HAF Series—High Accuracy

Table 1. Absolute Maximum Ratings¹

| Characteristic | Parameter |
|------------------------------|-------------------------------------|
| Supply voltage | -0.3 Vdc to 6.0 Vdc |
| Voltage on I/O output pin | -0.3 Vdc to Vsupply |
| Storage temperature range | -40 °C to 125 °C [-40 °F to 257 °F] |
| Maximum flow change | 5.0 SLPM/s |
| Maximum common mode pressure | 25 psi at 25 °C [77 °F] |
| Maximum flow | 10 SLPM |

¹Absolute maximum ratings are the extreme limits that the device will withstand without damage to the device. However, the electrical and mechanical characteristics are not guaranteed as the maximum limits (above recommended operating conditions) are approached, nor will the device necessarily operate at absolute maximum ratings.

CAUTION

IMPROPER USE

Do not use these products to sense liquid flow.

Failure to comply with these instructions may result in product damage.

CAUTION

PRODUCT DAMAGE

Do not disassemble these products.

Failure to comply with these instructions may result in product damage.

Table 2. Operating Specifications

| Characteristic | Parameter | Notes |
|--------------------------------------|---|-------|
| Supply voltage 3.3 Vdc 5.0 Vdc | 3.3 Vdc $\pm 10\%$ 5.0 Vdc $\pm 10\%$ | — |
| Power: 3.3 Vdc 5.0 Vdc | 40 mW max. 65 mW max. | 1 |
| Compensated temperature range | 0 °C to 50 °C [32 °F to 122 °F] | 2 |
| Operating temperature range | -20 °C to 70 °C [-4 °F to 158 °F] | — |
| Accuracy | See Table 3. | 3, 4 |
| Total Error Band (TEB) | See Table 3. | 4, 5 |
| Null accuracy | 0.1 %FSS | 4, 6 |
| Response time | 1 ms typ. | 7 |
| Resolution | 12 bit min. | — |
| Start-up time | 17 ms | 8 |
| Warm-up time | 30 ms | 9 |
| Calibration media | gaseous nitrogen | 10 |
| Bus standards | I ² C fast mode (up to 400 kHz) | 11 |
| Null stability | Null will not deviate beyond the specified TEB. | — |
| Reverse polarity protection | no | — |

¹Maximum Power: Is measured under the conditions of the highest supply voltage Vsupply + 10%, 70° C, full scale flow and with the minimum pull-up resistors for SDA and SCL according to the I²C specification.

²Custom and extended compensated temperature ranges are possible. Contact Honeywell for details.

³Accuracy: The maximum deviation from the nominal digital output over the compensated flow range at a reference temperature of 25 °C. Errors include offset, span, non-linearity, hysteresis and non-repeatability.

⁴Full Scale Span (FSS): The algebraic difference between the digital output at the forward Full Scale (FS) flow and the digital output at the reverse FS flow. Forward flow is defined as flow from P1 to P2 as shown in Figure 4. The references to mass flow (SCCM) refer to gas flows at the standard conditions of 0 °C and atmospheric pressure 760 (101.3 kPa).

⁵Total Error Band (TEB): The maximum deviation in output from ideal transfer function over the entire compensated temperature and flow range. Includes all errors due to offset, full scale span, flow hysteresis, flow repeatability, thermal effect on offset, thermal effect on span and thermal hysteresis.

⁶Null accuracy: The the maximum deviation in output at 0 SCCM from the ideal transfer function over the compensated temperature range. This includes offset errors, thermal airflow hysteresis and repeatability errors.

⁷Response time: The time to electrically respond to any mass flow change at the microbridge airflow transducer (response time of the transducer may be affected by the pneumatic interface).

⁸Start-up time: The time to first valid reading of serial number proceeding streaming 14-bit flow measurements.



⁹Warm-up time: The time to the first valid flow measurement after power is applied.

¹⁰Default calibration media is dry nitrogen gas. Please contact Honeywell for other calibration options.

¹¹Refer to the Technical Note "I²C Communications with Honeywell Digital Airflow Sensors" for I²C protocol information.

±50 SCCM to ±750 SCCM

Table 3. Bidirectional Forward Flow Optimization
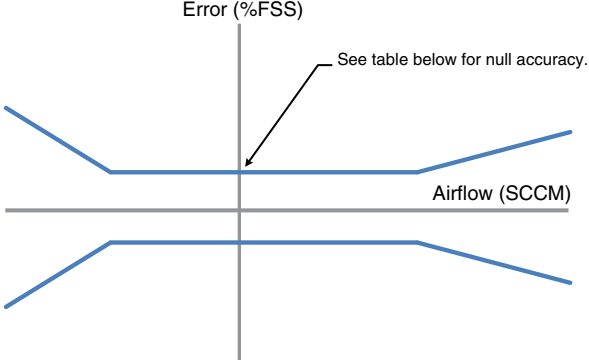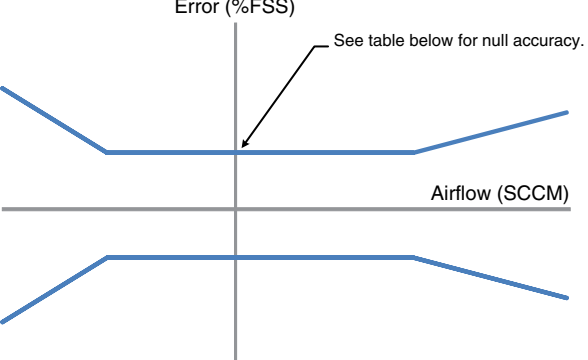
| Sensor Range (SCCM) | Accuracy Error Band | | Total Error Band | |
|---------------------|---|-----------------------|--|---------------|
| |  | |  | |
| | Applied Flow (SCCM) | Accuracy Error (%FSS) | Applied Flow (SCCM) | TEB (%FSS) |
| ±50 | -50 to -16.7 | ±6% reading | -50 to -14.3 | ±7% reading |
| | -16.7 to 0 | ±1 | -14.3 to 0 | ±1 |
| | 0 | ±0.16 | 0 | ±0.16 |
| | 0 to 20 | ±1 | 0 to 14.3 | ±1 |
| | 20 to 50 | ±5% reading | -14.3 to 50 | ±7% reading |
| ±100 | -100 to -14.3 | ±7% reading | -100 to -14.3 | ±7% reading |
| | -14.3 to 0 | ±0.5 | -14.3 to 0 | ±0.5 |
| | 0 | ±0.12 | 0 | ±0.12 |
| | 20 | ±0.5 | 0 to 16.7 | ±0.5 |
| | 20 to 100 | ±5% reading | 16.7 to 100 | ±6% reading |
| ±200 ¹ | -200 to -11.1 | ±9% reading | -200 to -11.1 | ±9% reading) |
| | -11.1 to -0 | ±0.25 | -11.1 to -0 | ±0.25 |
| | 0 | ±0.01 | 0 | ±0.1 |
| | 0 to 40 | ±0.25 | 0 to 22.2 | ±0.25 |
| | 40 to 200 | ±2.5% reading | 22.2 to 200 | ±4.5% reading |
| ±400 | -400 to -26.7 | ±9% reading | -400 to -32 | 10% reading |
| | -26.7 to -0 | ±0.3 | -32 to -0 | ±0.4 |
| | 0 | ±0.1 | 0 | ±0.1 |
| | 0 to 68.6 | ±0.3 | 0 to 71.1 | ±0.4 |
| | 68.6 to 400 | ±3.5% reading | 71.1 to 400 | ±4.5% reading |
| ±750 | -750 to -31.3 | ±12% reading | -750 to -31.25 | ±12% reading |
| | -31.3 to -0 | ±0.25 | -31.25 to -0 | ±0.25 |
| | 0 | ±0.1 | 0 | ±0.1 |
| | 0 to 68.2 | ±0.25 | 0 to 50 | ±0.25 |
| | 68.2 to 750 | ±5.5% reading | 50 to 750 | ±7.5 reading |

¹The short port sensors are only specified down to -100 SCCM.

Honeywell Zephyr™ Digital Airflow Sensors

HAF Series–High Accuracy

CAUTION

LARGE PARTICULATE DAMAGE

Use a 5-micron filter upstream of the sensor to keep media flow through the sensor free of condensing moisture and particulates. Large, high-velocity particles or conductive particles may damage the sensing element.

Failure to comply with these instructions may result in product damage.

Table 4. Environmental Characteristics

| Characteristic | Parameter |
|----------------|------------------------------|
| Humidity | 0% to 95% RH, non-condensing |
| Shock | 100 g, 11 ms |
| Vibration | 15 g at 20 Hz to 2000 Hz |
| ESD | Class 3B per MIL-STD 883G |


Table 5. Wetted Materials

| Characteristic | Parameter |
|-----------------------|--------------------------|
| Covers | high temperature polymer |
| Substrate | PCB |
| Adhesives | epoxy |
| Electronic components | silicon, gold |
| Compliance | RoHS, WEEE |

Table 6. Recommended Mounting and Implementation

| Characteristic | Parameter |
|--|--|
| Mounting screw: size torque | 5-40 0,68 N m [6 in-lb] |
| Silicon tubing for long port style | 70 durometer; size 0.125 in inside diameter, 0.250 in outside diameter silicone tubing |
| O-ring: for short port style for long port style | AS568A, Size 7, Silicone, Shore A 70 AS568A, Size 10, Silicone, Shore A 70 |
| Filter | 5-micron filter upstream of the sensor |

Figure 2. Nominal Digital Output

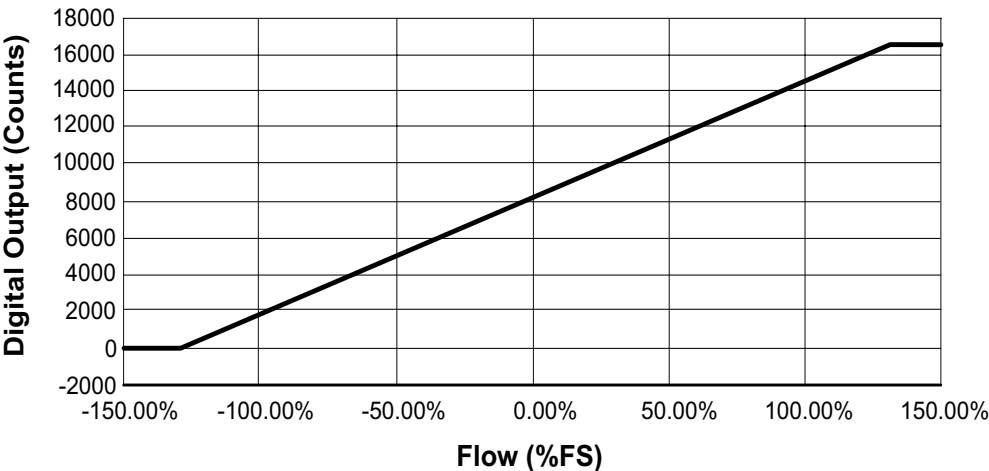

±50 SCCM to ±750 SCCM

Figure 3. ideal Transfer Function

Digital Output Code = 16384 * [0.5 + 0.4 * (Flow Applied/Full Scale Flow)]

Flow Applied = Full Scale Flow * [(Digital Output Code/16384) - 0.5]/0.4

Figure 4. Nomenclature and Order Guide

For example, a **HAFBLF0200C4AX5** part number defines a Honeywell Zephyr™ Digital Airflow Sensor, bidirectional forward flow optimized, long port, fastener mount, 200 SCCM, I²C output with address 0x49, 10% to 90% transfer function, 5.0 Vdc supply voltage.

| HAF | B | L | F | 0200 | C | 4 | A | X | 5 |
|--|---|---------------------|-------------------------|--------------------------------------|---------------|------------------------------------|--|-------------------------|------------------|
| Product Series | Flow Direction | Port Style | Housing Style | Flow Range² | Unit | Output Format | Transfer Function | Reserved for Future Use | Supply Voltage |
| HAF Series High Accuracy Airflow Sensor | B Bidirectional forward flow optimized | L Long port¹ | F Fastener mount | 0050 50 long port style only | C SCCM | 4 Digital I²C address: 0x49 | A 10% to 90% of Full Scale Output (FSO) | X XXXXX | 3 3.3 Vdc |
| | S Bidirectional symmetric | S Short port | S Snap mount¹ | 0100 100 long port style only | | 5 Digital I²C address: 0x59 | | | 5 5.0 Vdc |
| | | | | 0200 200 long or short port | | 6 Digital I²C address: 0x69 | | | |
| | | | | 0400 400 long port style only | | 7 Digital I²C address: 0x79 | | | |
| | | | | 0750 750 long port style only | | | | | |

¹The Long Port Port Style with the Snap Mount Housing Style is not a valid configuration.

²The 200 SCCM Flow Range is available in the Long and Short Port Styles.

Apart from the general configuration required, other customer-specific requirements are also possible. Please contact Honeywell.

Figure 5. All Available Standard Configurations

| LF: Long port, fastener mount | SF: Short port, fastener mount | SS: Short port, snap mount |
|---|---|---|
|  |  |  |

Honeywell Zephyr™ Digital Airflow Sensors

HAF Series–High Accuracy

Figure 6. Wave Solder Profile



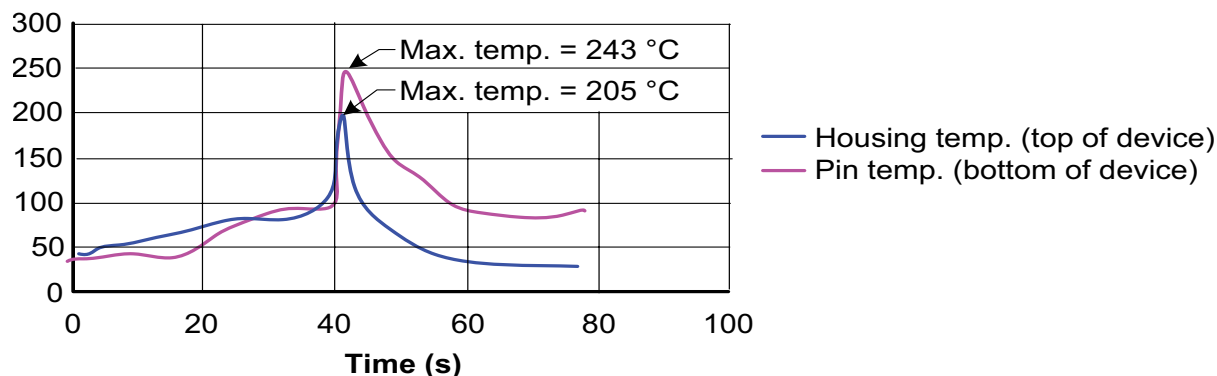


Figure 7. Long Port Style Flow vs Pressure

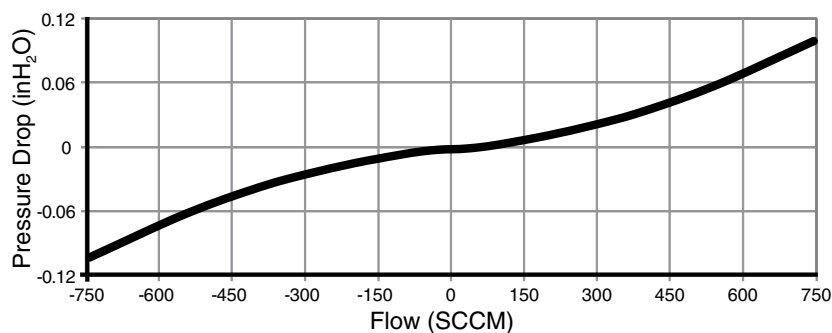

| Flow (SCCM) | Typical Pressure Drop | | |
|-------------|-----------------------|--------------------|--------|
| | mbar | inH ₂ O | Pa |
| -750 | -0.2517 | -0.1011 | -25.17 |
| -550 | -0.1499 | -0.0602 | -14.99 |
| -400 | -0.0891 | -0.0358 | -8.91 |
| -300 | -0.0578 | -0.0232 | -5.78 |
| -200 | -0.0321 | -0.0129 | -3.21 |
| -100 | -0.0114 | -0.0046 | -1.14 |
| -50 | -0.0035 | -0.0014 | -0.35 |
| -20 | -0.0007 | -0.0003 | -0.07 |
| 0 | 0.0000 | 0.0000 | 0.0000 |
| 20 | 0.0007 | 0.0003 | 0.07 |
| 50 | 0.0035 | 0.0014 | 0.35 |
| 100 | 0.0114 | 0.0046 | 1.14 |
| 200 | 0.0321 | 0.0129 | 3.21 |
| 300 | 0.0578 | 0.0232 | 5.78 |
| 400 | 0.0891 | 0.0358 | 8.91 |
| 550 | 0.1499 | 0.0602 | 14.99 |
| 750 | 0.2517 | 0.1011 | 25.17 |

Figure 8. Short Port Style Flow vs Pressure

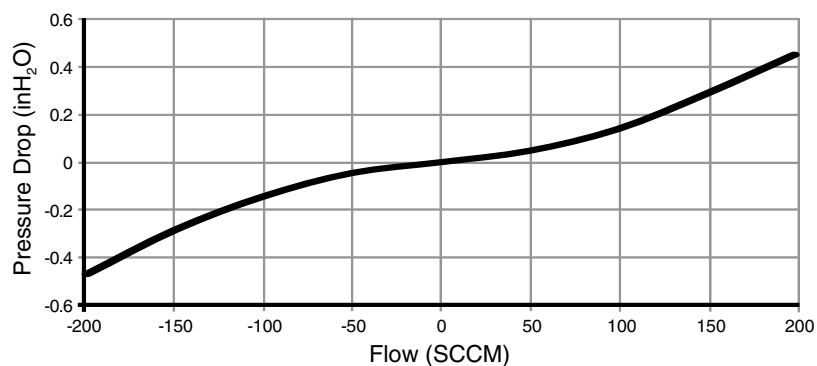

| Flow (SCCM) | Typical Pressure Drop | | |
|-------------|-----------------------|--------------------|---------|
| | mbar | inH ₂ O | Pa |
| -200 | -1.1707 | -0.470 | -117.07 |
| -150 | -0.7074 | -0.284 | -70.74 |
| -100 | -0.3562 | -0.143 | -35.62 |
| -50 | -0.1120 | -0.045 | -11.20 |
| 0 | 0.0000 | 0.000 | 0.0000 |
| 50 | 0.1196 | 0.048 | 11.96 |
| 100 | 0.3462 | 0.139 | 34.62 |
| 150 | 0.7149 | 0.287 | 71.49 |
| 200 | 1.2589 | 0.452 | 125.89 |



±50 SCCM to ±750 SCCM

Digital Interface

For additional details on the use of Zephyr with digital output see the Technical Note “I²C Communications with Honeywell Digital Airflow Sensors”.

The sensor uses the I²C standard for digital communication with a slave address specified in the Nomenclature and Order Guide in Figure 4. Following sensor power-up, each of the first two read sequences shown in Figure 9 will respond with 2 bytes of the unique 4-byte Serial Number. The first read after power-up will respond with the two most significant bytes of the Serial Number, while the second read will respond with the two least significant bytes of the Serial Number. For reliable performance, allow sensor to be powered for the sensor start-up time before performing the first read, then allow a 10 ms command response time before performing the second read.

Figure 9. Sensor I²C Read and Write Sequences

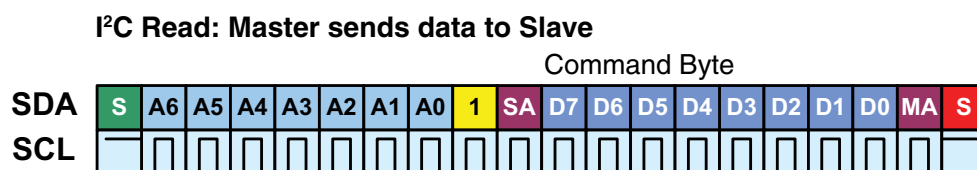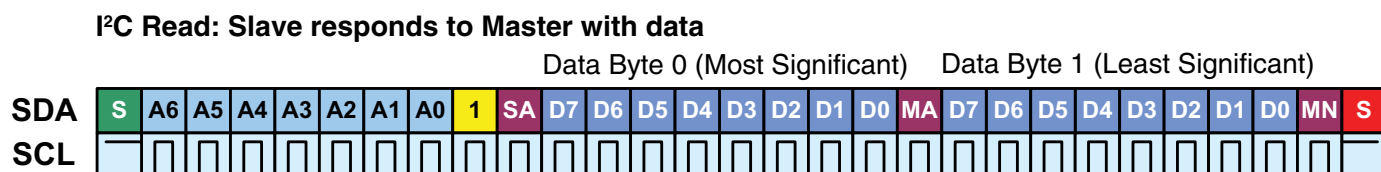

| Bit | Name | Description |
|-----|-----------------|--|
| S | Start condition | Master pulls SDA from high to low while SCL remains high |
| S | Stop condition | Master allows SDA to float from low to high while SCL remains high |
| A6 | Address bit | I ² C Slave Address is the 7 Most Significant Bits for the first transmitted byte |
| 1 | Read/write bit | Read = 1, Write = 0 |
| D7 | Data bit | |
| SA | Slave ACK | Slave pulls SDA low |
| MA | Master ACK | Master pulls SDA low |
| MN | Master NACK | Master allows SDA to float high |

After the power-up read sequence described above, the sensor will respond to each I²C read request with a 16-bit (2 byte) digital flow reading. Read requests taken faster than the Response Time (1 ms) are not guaranteed to return fresh data. The first two bits of each flow reading will be ‘00’.


The maximum sink current on SCL or SDA is 2 mA. Therefore, if the pull-up resistors are biased by V_{DD}, and if V_{DD} reaches the maximum supply voltage of 6 V, then the pull-up resistors for SCL and SDA must be greater than 3.0 kΩ to limit the sink current to 2 mA. The typical value for SCL and SDA pull-up resistors is 4.7 kΩ (this value depends on the bus capacitance and the bus speed).

Honeywell Zephyr™ Digital Airflow Sensors


HAF Series–High Accuracy

Figure 10. Mounting Dimensions (For reference only: mm [in.])


LF: Long port, fastener mount

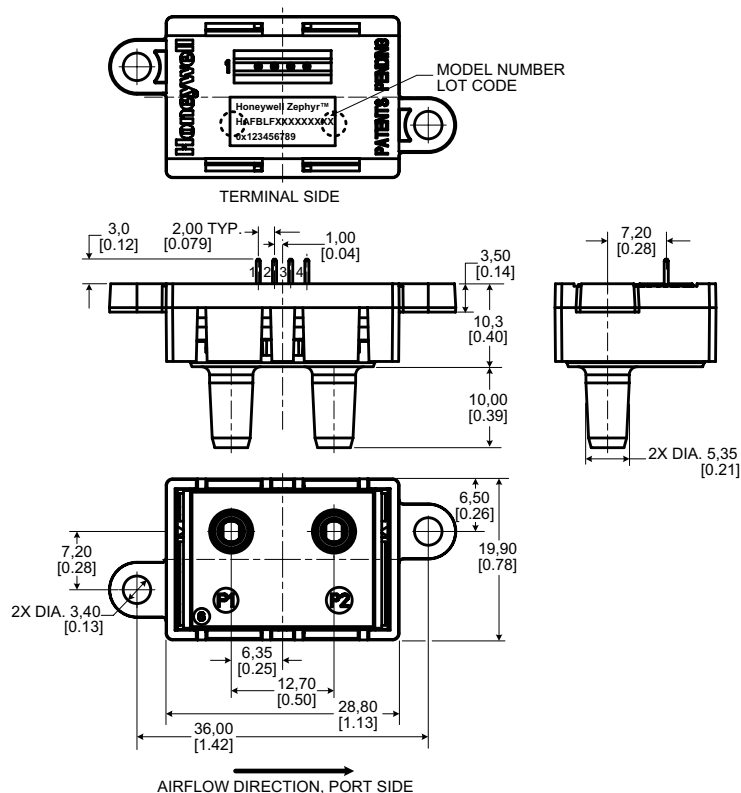


Mounting Footprint

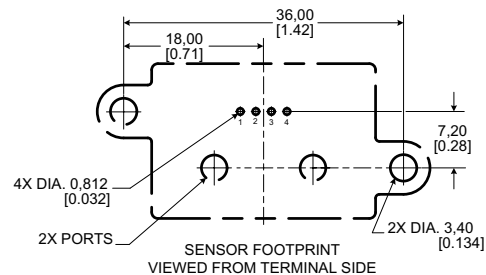

SF: Short port, fastener mount

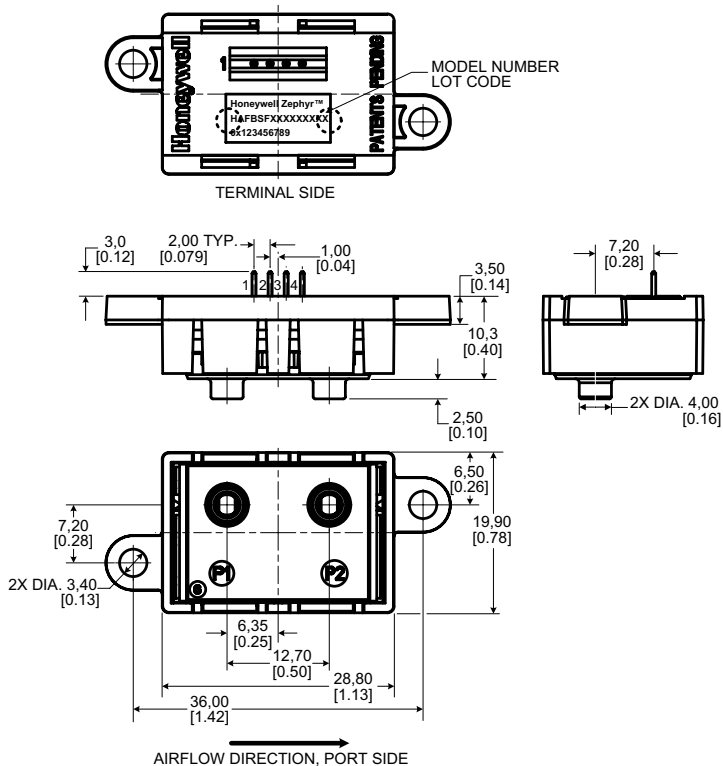

Mounting Footprint

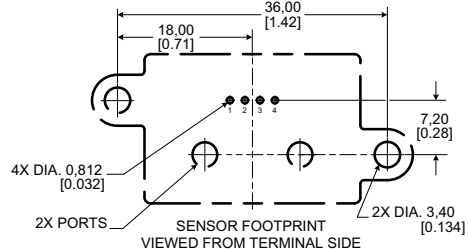

±50 SCCM to ±750 SCCM

Figure 10. Mounting Dimensions (For reference only: mm [in], continued.)

SS: Short port, snap mount

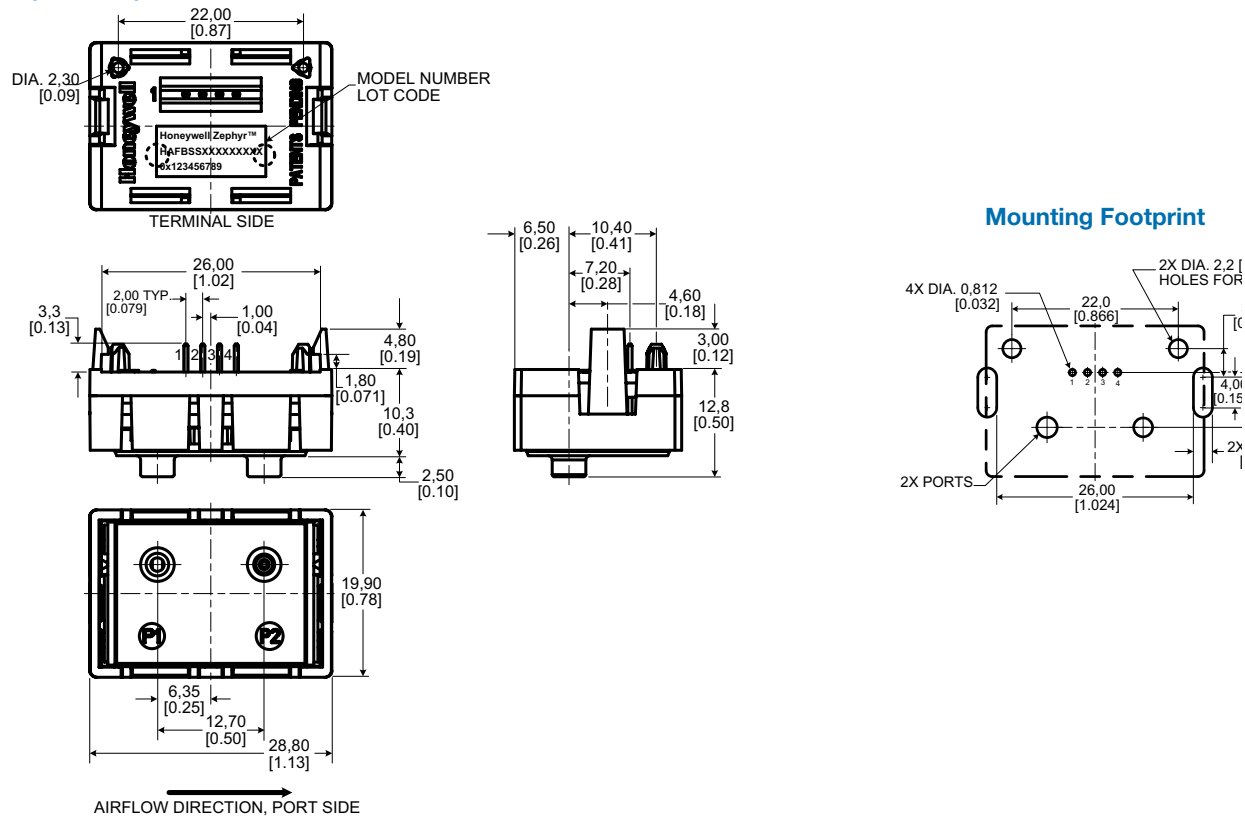


Table 8. Pinout

| Pin 1 | Pin 2 | Pin 3 | Pin 4 |
|-------|---------|--------|-------|
| SCL | Vsupply | ground | SDA |

ADDITIONAL INFORMATION

The following associated literature is available at sensing.honeywell.com:

- Product line guide
- Product part listing/nomenclature tree
- Product range guide
- Technical Information:
 - I²C Communications with Honeywell Digital Airflow Sensors
 - Gas Media Compatibility and Correction Factors
- Installation instructions
- Application-specific information

Find out more

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office.

To learn more about Honeywell's sensing and control products, call **+1-815-235-6847** or **1-800-537-6945**, visit **sensing.honeywell.com**, or e-mail inquiries to **info.sc@honeywell.com**

Sensing and Control
Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422
honeywell.com

WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell website, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

Honeywell



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331