


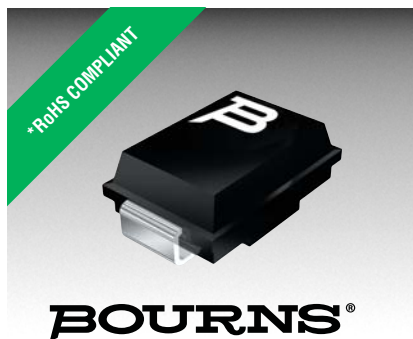

Features

- Fast switching
- Automatic reset
- SMB package
- Suitable for industrial lighting environments
- RoHS compliant*

Applications


- LED streetlights
- LCD backlighting
- Display lighting
- Intrinsically safe lighting

LSP Series LED Shunt Protector

General Information

Bourns® LSP Series protectors are electronic shunts that provide a current bypass when an LED element in an LED string fails open circuit. This ensures the remaining string of LEDs will continue to function. There are many cases where high reliability of the LED lighting must be maintained, such as LCD backlighting, transport lighting, avionics, intrinsically safe and low maintenance lighting.

The LSP Series is available in surface mount package DO-214AA (SMB) size format.



Absolute Maximum Ratings (@ $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

Rating		Symbol	Value	Unit
Repetitive peak off-state voltage	LSP0600	V_{DRM}	6	V
	LSP0900		9	
	LSP1300		13	
	LSP1800		18	
	LSP1800		18	
Average on-state current (Note 1)		I_T	350	mA
Operating junction temperature		T_J	-40 to +150	$^\circ\text{C}$
Storage temperature		T_S	-65 to +150	$^\circ\text{C}$
Lead temperature, soldering (10 s)			260	$^\circ\text{C}$

Notes:

1. Using 75 mm x 75 mm 4-Layer PCB (EIA/JESD51-7), $I_T = 1.0\text{ A}$

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

Parameter	Test Conditions		Min.	Nom.	Max.	Unit
I_{DRM} Repetitive peak off-state current	$V_D = V_{\text{DRM}}$				10	μA
$V_{(\text{BO})}$ Breakover voltage	$dv/dt = 750\text{ V/ms}$, $R_{\text{SOURCE}} = 300$	LSP0600	6		16	V
		LSP0900	9		18	
		LSP1300	13		26	
		LSP1800	18		33	
		LSP1800	18		33	
I_H Holding current	$I_T = 1\text{ A}$, $di/dt = 30\text{ mA/ms}$		5	30		mA
I_{BO} Breakover current	$di/dt = 0.8\text{ A/ms}$				75	mA
V_T On-state voltage	$I_T = 1\text{ A}$				1.2	V

Thermal Characteristics (@ $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

Parameter	Test Conditions		Min.	Nom.	Max.	Unit
Junction to free air thermal resistance	EIA/JESD51-3 PCB, $I_T = 350\text{ mA}$, $T_A = 25^\circ\text{C}$			170		$^\circ\text{C/W}$
Junction to free air thermal resistance	EIA/JESD51-7, 75 mm x 75 mm 4-Layer PCB, $I_T = 1.0\text{ A}$, $T_A = 25^\circ\text{C}$			90		$^\circ\text{C/W}$

JANUARY 2011

*RoHS Directive 2002/95/EC Jan 27, 2003 including Annex.


Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications.


LSP Series LED Shunt Protector

BOURNS®


V-I Characteristic

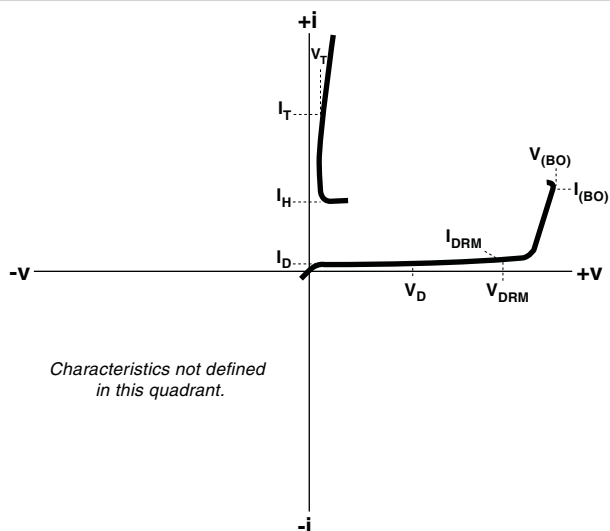


On-state Voltage vs. Junction Temperature

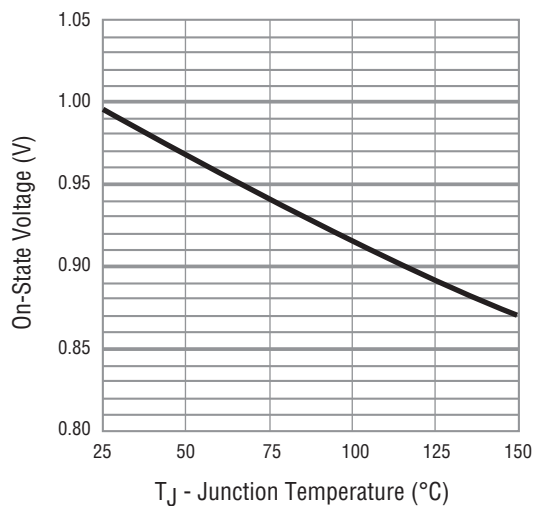

Normalized Breakover Voltage vs. Junction Temperature

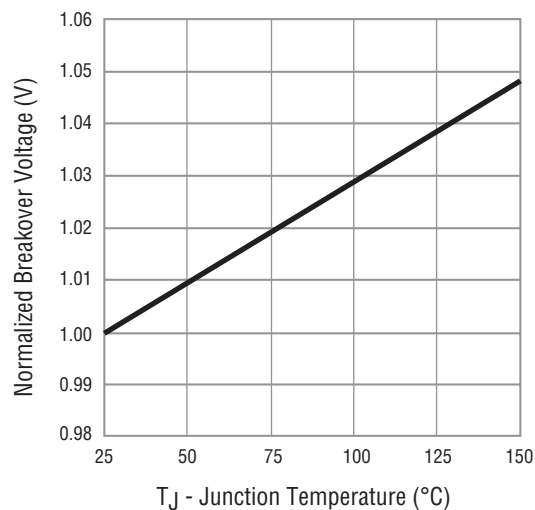

Typical Application

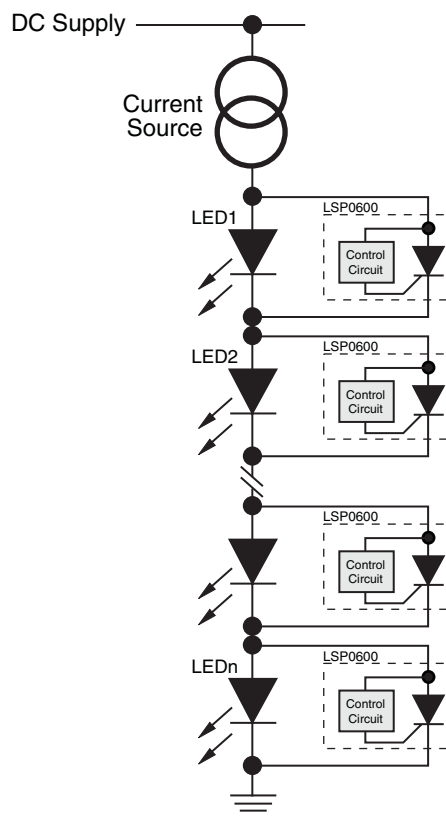

JANUARY 2011


Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications.

LSP Series LED Shunt Protector

BOURNS®

Product Specifications

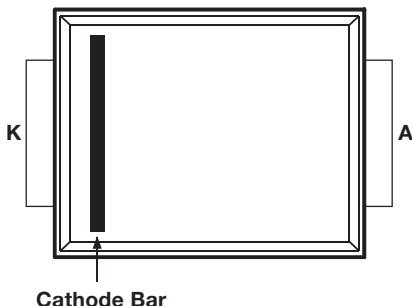

Unit Epoxy molded SMB D0-214AA package
 Mold Material.....UL94V-0
 Terminations100 % matte tin-plated over copper alloy
 Unit Weight..... 102 mg.

Packaging Specifications

Standard EIA-481-1
 Tape Width 12 mm (.472 in.)
 Reel Diameter.....330 mm (12.99 in.)
 Part Alignment.....Cathode bar adjacent to sprocket hole
 Quantity per Reel..... 3,000 pieces

Typical Part Marking

Top Side Marking

LSP0600BJR-S	LSP060
LSP0900BJR-S	LSP090
LSP1300BJR-S	LSP130
LSP1800BJR-S	LSP180

How to Order

	LSP 0600 BJ R - S
Model Series	
LED Shunt Protector	
Off-State Voltage	
0600 = 6 V	
0900 = 9 V	
1300 = 13 V	
1800 = 18 V	
Package	
BJ = SMB D0-214AA Package	
Standard Packaging	
R = Tape and Reel Packaging (3,000 pcs./reel)	
Termination	
S = Pb Free Termination (RoHS Compliant)	

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

Europe: Tel: +41-41 768 5555 • Fax: +41-41 768 5510

The Americas: Tel: +1-951 781-5500 • Fax: +1-951 781-5700

www.bourns.com

JANUARY 2011

Specifications are subject to change without notice.
 Customers should verify actual device performance in their specific applications.







SMB (DO-214AA)

Package Outline Dimensions

This surface mount two terminal package consists of a circuit mounted on a lead frame and encapsulated within a plastic compound. The compound is designed to withstand normal soldering temperatures with no deformation and circuit performance characteristics will remain stable when operated in most high humidity conditions. Terminals require no additional cleaning or processing when used in soldered assembly.

SMB (DO-214AA) Package

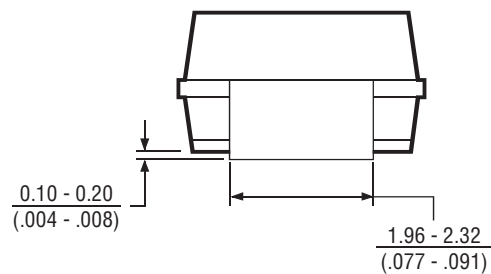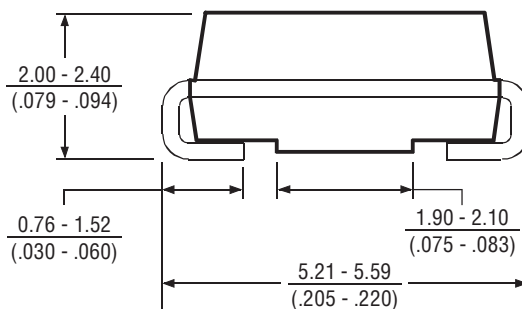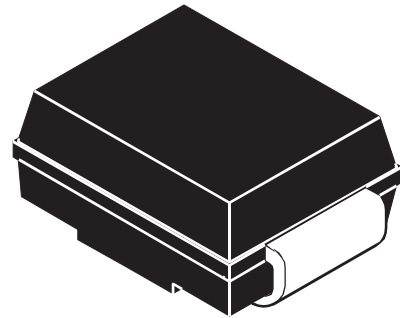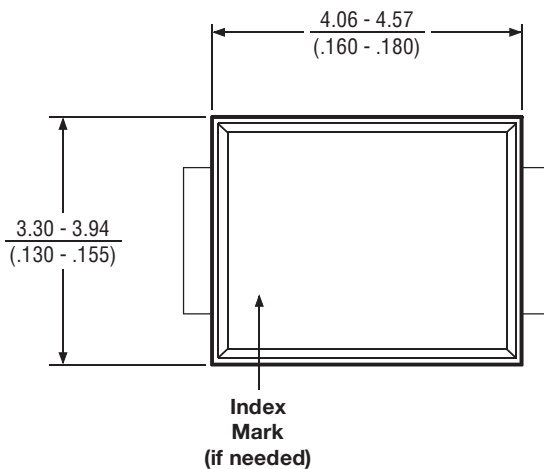


DIMENSIONS ARE : MILLIMETERS
(INCHES)

MD-SMB-001-a

Tape Dimensions

SMB (DO-214AA) Package Single-Sprocket Tape

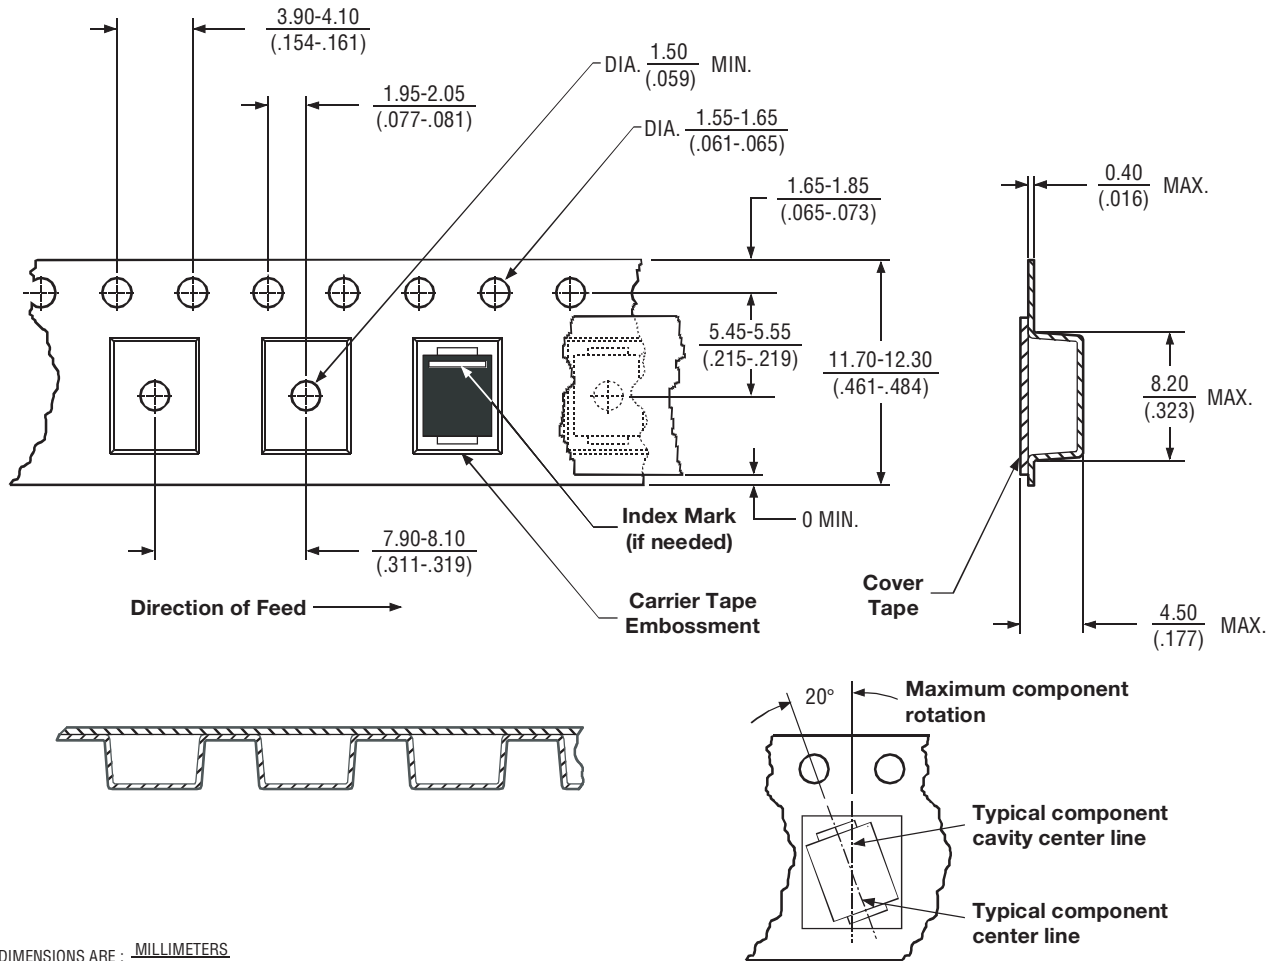

NOTES: A. The clearance between the component and the cavity must be within 0.05 mm (.002 in) MIN. to 0.65 mm (.026 in) MAX. so that the component cannot rotate more than 20° within the determined cavity.

B. Taped devices are supplied on a reel of the following dimensions:-

Reel diameter: 330 mm ± 3.0 mm (12.99 in ± 1.18 in)
 Reel hub diameter: 75 mm (2.95 in) MIN.
 Reel axial hole: 13.0 mm ± 0.5 mm (.512 in ± 0.020 in)

C. 3000 devices are on a reel.


MD-SMB-002-a

AUGUST 2003

Specifications are subject to change without notice.
 Customers should verify actual device performance in their specific applications.

Recommended Printed Wiring Land Pattern Dimensions

SMB (DO-214AA) Land Pattern

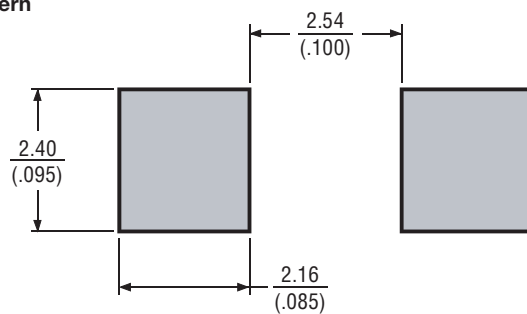

DIMENSIONS ARE: $\frac{\text{MILLIMETERS}}{(\text{INCHES})}$

MD-SMB-003-a



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331